

UNR1211/1212/1213/1214/1215/1216/1217/1218/1219/1210/ 121D/121E/121F/121K/121L

(UN1211/1212/1213/1214/1215/1216/1217/1218/1219/1210/ 121D/121E/121F/121K/121L)

Silicon NPN epitaxial planer transistor

For digital circuits

Features

- Costs can be reduced through downsizing of the equipment and reduction of the number of parts.
- M type package allowing easy automatic and manual insertion as well as stand-alone fixing to the printed circuit board.


Resistance by Part Number

	(R ₁)	(R ₂)
• UNR1211	10kΩ	10kΩ
• UNR1212	22kΩ	22kΩ
• UNR1213	47kΩ	47kΩ
• UNR1214	10kΩ	47kΩ
• UNR1215	10kΩ	—
• UNR1216	4.7kΩ	—
• UNR1217	22kΩ	—
• UNR1218	0.51kΩ	5.1kΩ
• UNR1219	1kΩ	10kΩ
• UNR1210	47kΩ	—
• UNR121D	47kΩ	10kΩ
• UNR121E	47kΩ	22kΩ
• UNR121F	4.7kΩ	10kΩ
• UNR121K	10kΩ	4.7kΩ
• UNR121L	4.7kΩ	4.7kΩ


Absolute Maximum Ratings (Ta=25°C)

Parameter	Symbol	Ratings	Unit
Collector to base voltage	V _{CBO}	50	V
Collector to emitter voltage	V _{CEO}	50	V
Collector current	I _C	100	mA
Total power dissipation	P _T	400	mW
Junction temperature	T _j	150	°C
Storage temperature	T _{stg}	–55 to +150	°C

Note) The part numbers in the parenthesis show conventional part number.

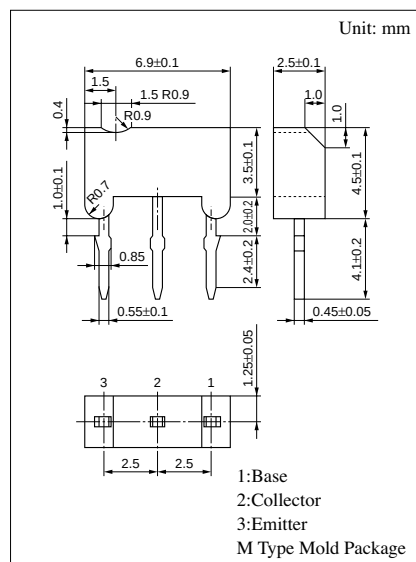

Internal Connection

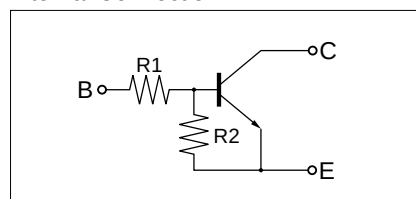

**UNR1211/1212/1213/1214/1215/1216/1217/1218/
Transistors with built-in Resistor 1219/1210/121D/121E/121F/121K/121L**


Electrical Characteristics (T_a=25°C)

Parameter		Symbol	Conditions	min	typ	max	Unit	
Collector cutoff current		I _{CBO}	V _{CB} = 50V, I _E = 0			0.1	μA	
		I _{CEO}	V _{CE} = 50V, I _B = 0			0.5	μA	
Emitter cutoff current	UNR1211	I _{EBO}	V _{EB} = 6V, I _C = 0			0.5	mA	
	UNR1212/1214/121E/121D					0.2		
	UNR1213					0.1		
	UNR1215/1216/1217/1210					0.01		
	UNR121F/121K					1.0		
	UNR1219					1.5		
	UNR1218/121L					2.0		
Collector to base voltage		V _{CBO}	I _C = 10μA, I _E = 0	50			V	
Collector to emitter voltage		V _{CEO}	I _C = 2mA, I _B = 0	50			V	
Forward current transfer ratio	UNR1211	h _{FE}	V _{CE} = 10V, I _C = 5mA	35				
	UNR1212/121E			60				
	UNR1213/1214			80				
	UNR1215*/1216*/1217*/1210*			160		460		
	UNR121F/121D/1219			30				
	UNR1218/121K/121L			20				
Collector to emitter saturation voltage		V _{CE(sat)}	I _C = 10mA, I _B = 0.3mA			0.25	V	
Output voltage high level		V _{OH}	V _{CC} = 5V, V _B = 0.5V, R _L = 1kΩ	4.9			V	
Output voltage low level		V _{OL}	V _{CC} = 5V, V _B = 2.5V, R _L = 1kΩ			0.2	V	
			UNR1213/121K	V _{CC} = 5V, V _B = 3.5V, R _L = 1kΩ				0.2
			UNR121D	V _{CC} = 5V, V _B = 10V, R _L = 1kΩ				0.2
			UNR121E	V _{CC} = 5V, V _B = 6V, R _L = 1kΩ				0.2
Transition frequency		f _T	V _{CB} = 10V, I _E = −2mA, f = 200MHz		80		MHz	
Input resistance	UNR1211/1214/1215/121K	R _i		(−30%)	10	(+30%)	kΩ	
	UNR1212/1217				22			
	UNR1213/121D/121E/1210				47			
	UNR1216/121F/121L				4.7			
	UNR1218				0.51			
	UNR1219				1			
Resistance ratio	UNR1211/1212/1213/121L	R _i /R ₂		0.8	1.0	1.2		
	UNR1214			0.17	0.21	0.25		
	UNR1218/1219			0.08	0.1	0.12		
	UNR121D				4.7			
	UNR121E				2.14			
	UNR121F				0.47			
	UNR121K				2.13			







* h_{FE} rank classification (UNR1215/1216/1217/1210)

Rank	Q	R	S
h _{FE}	160 to 260	210 to 340	290 to 460


Common characteristics chart

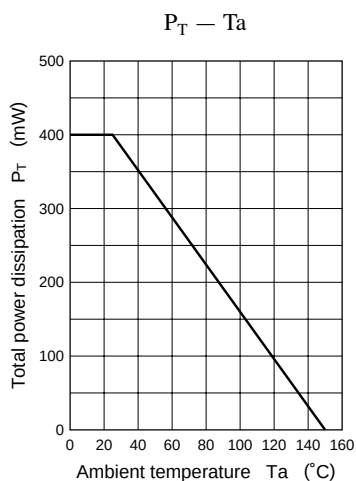


Characteristics charts of UNR1211

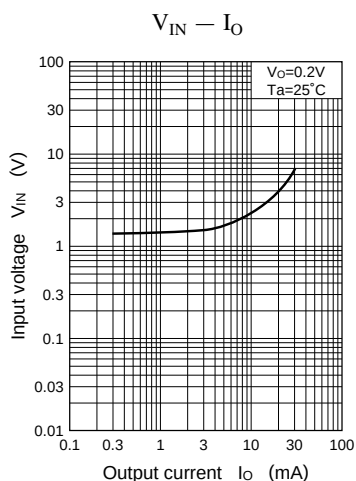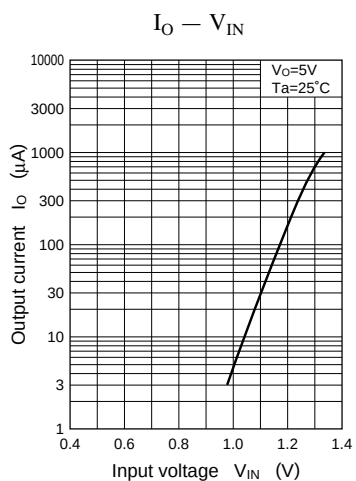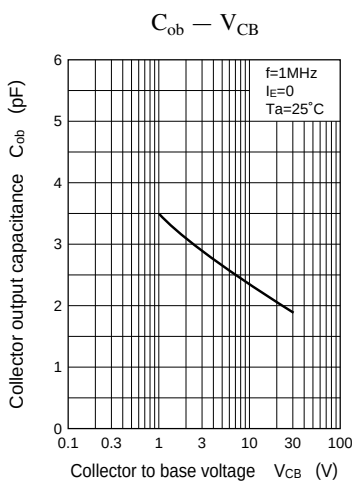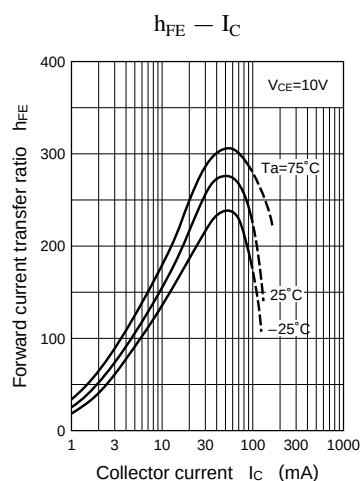
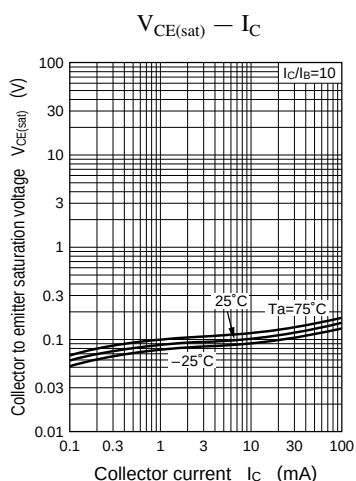
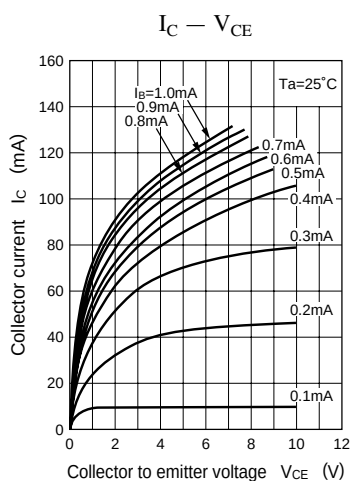


Characteristics charts of UNR1212






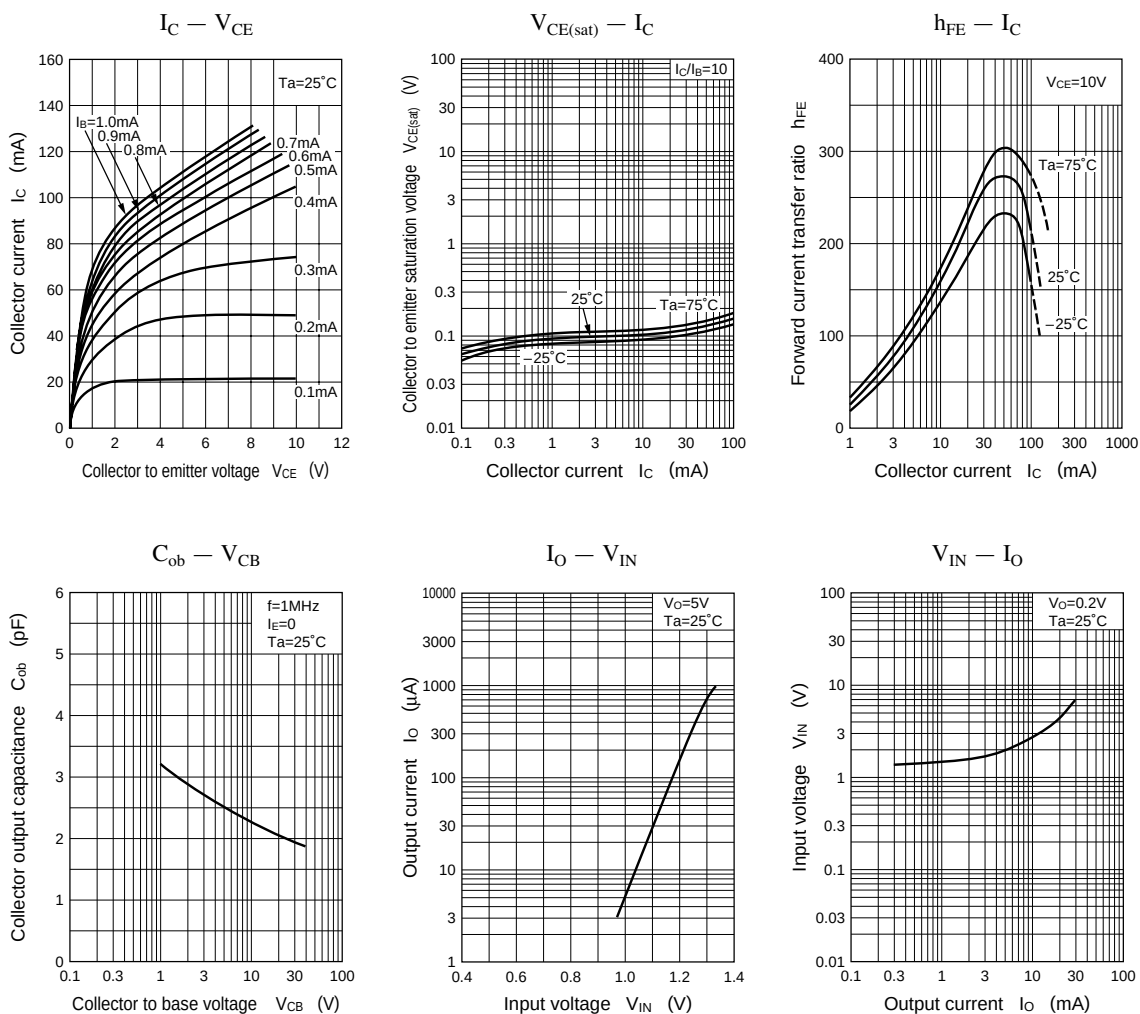


Characteristics charts of UNR1213

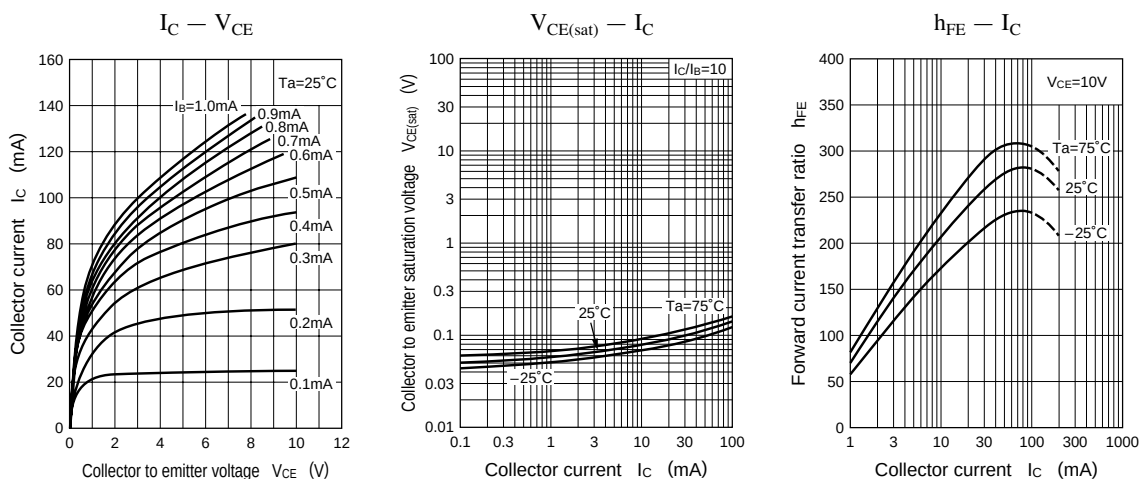


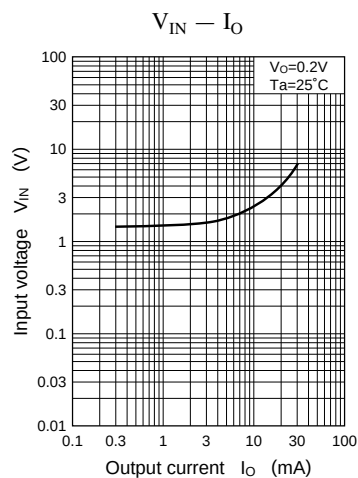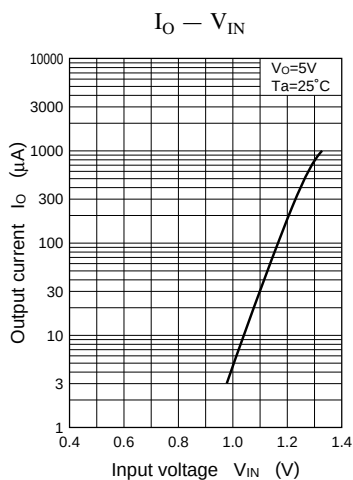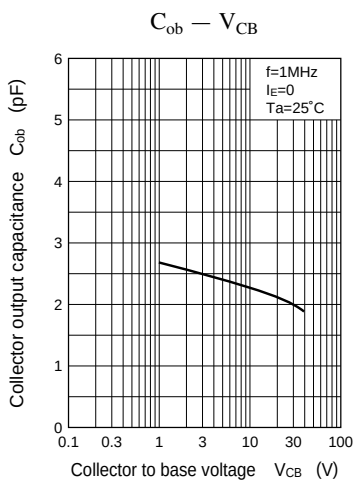


Characteristics charts of UNR1214

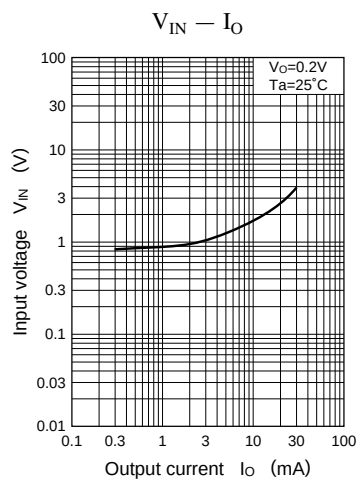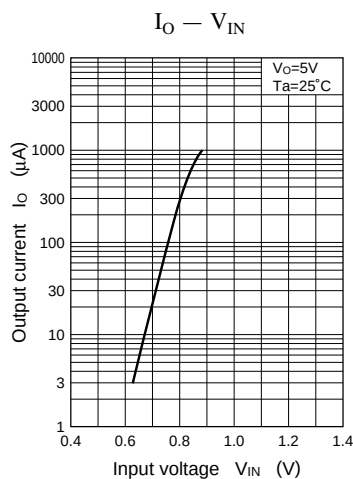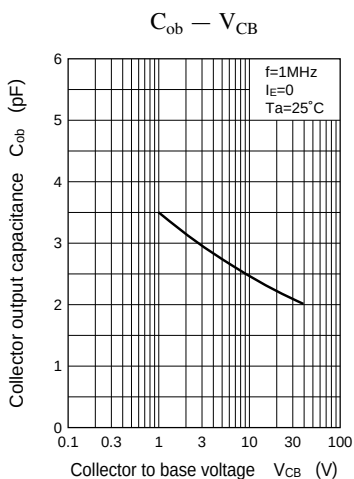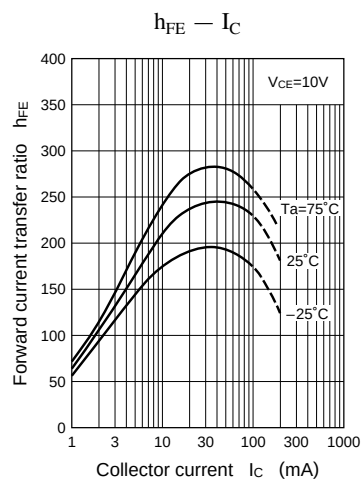
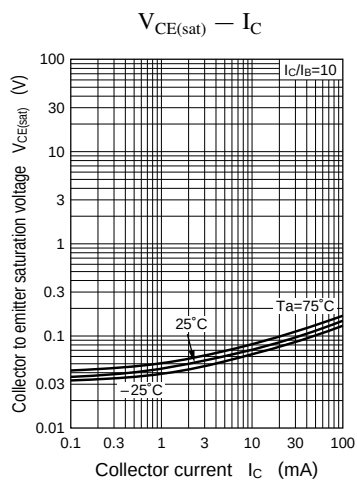
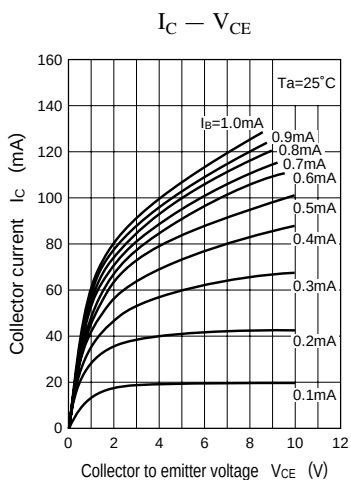


Characteristics charts of UNR1215






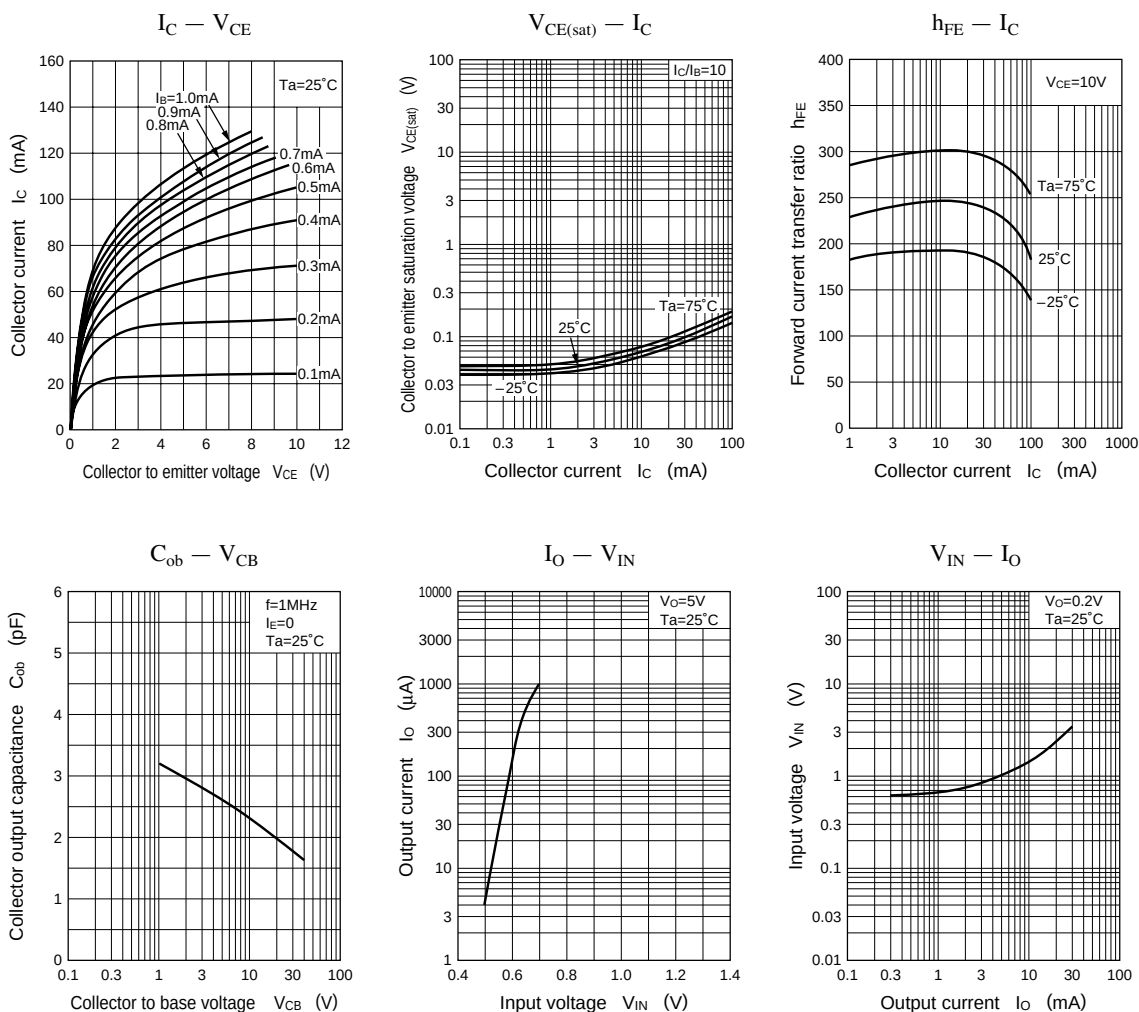


Characteristics charts of UNR1216

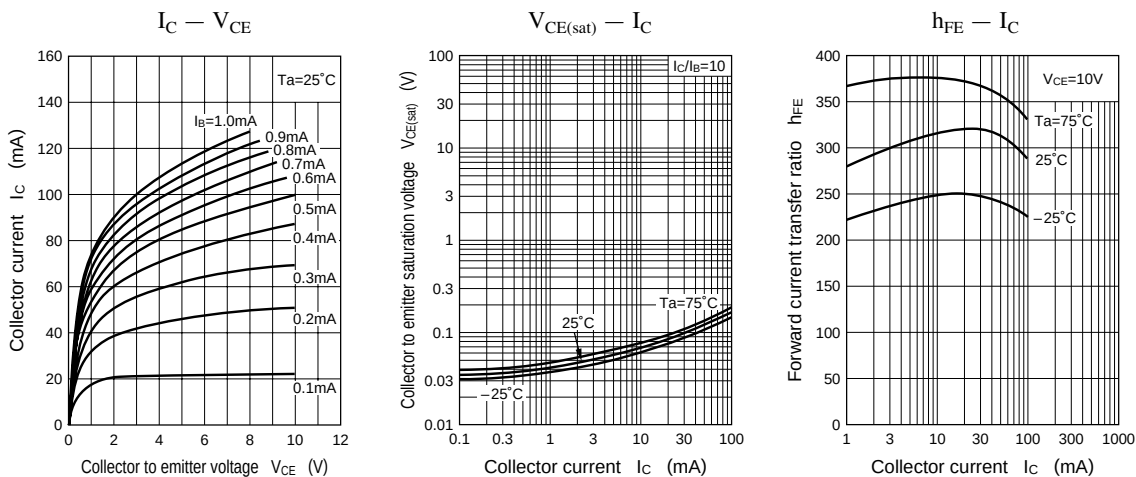


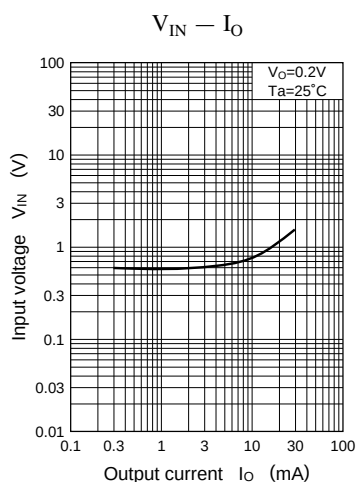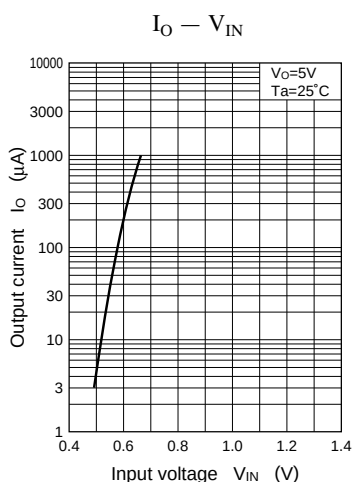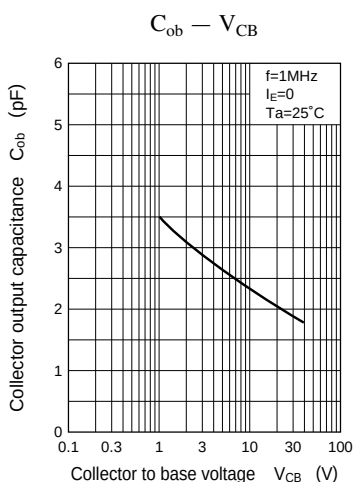


Characteristics charts of UNR1217

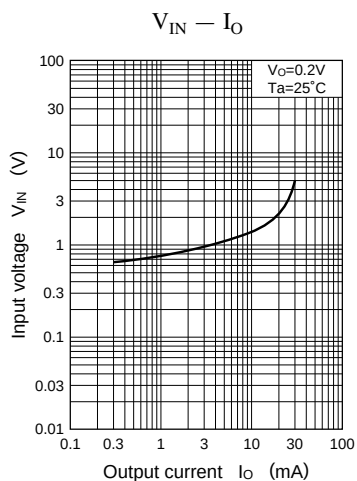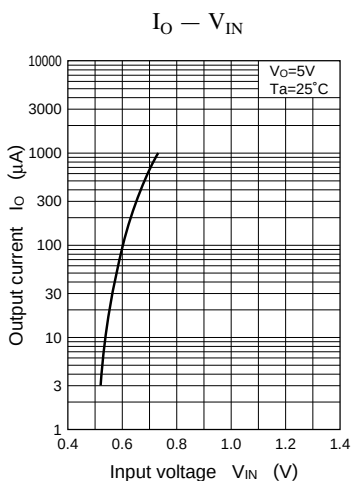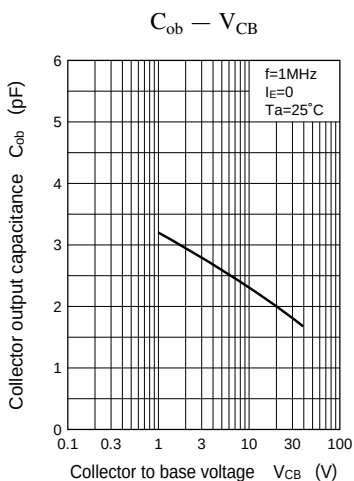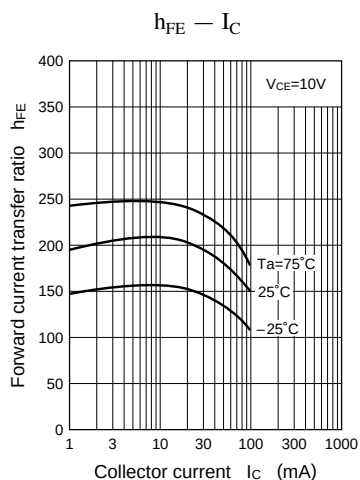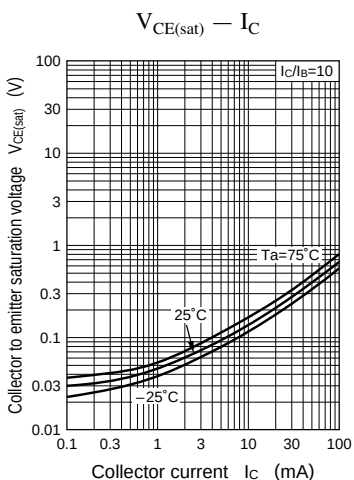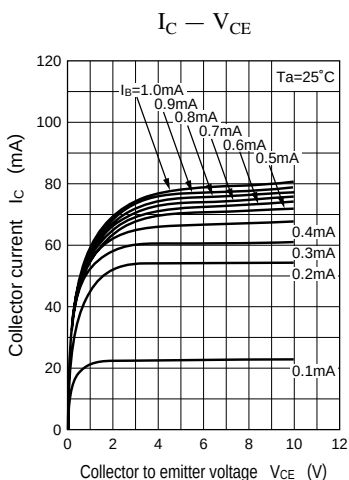




Characteristics charts of UNR1218

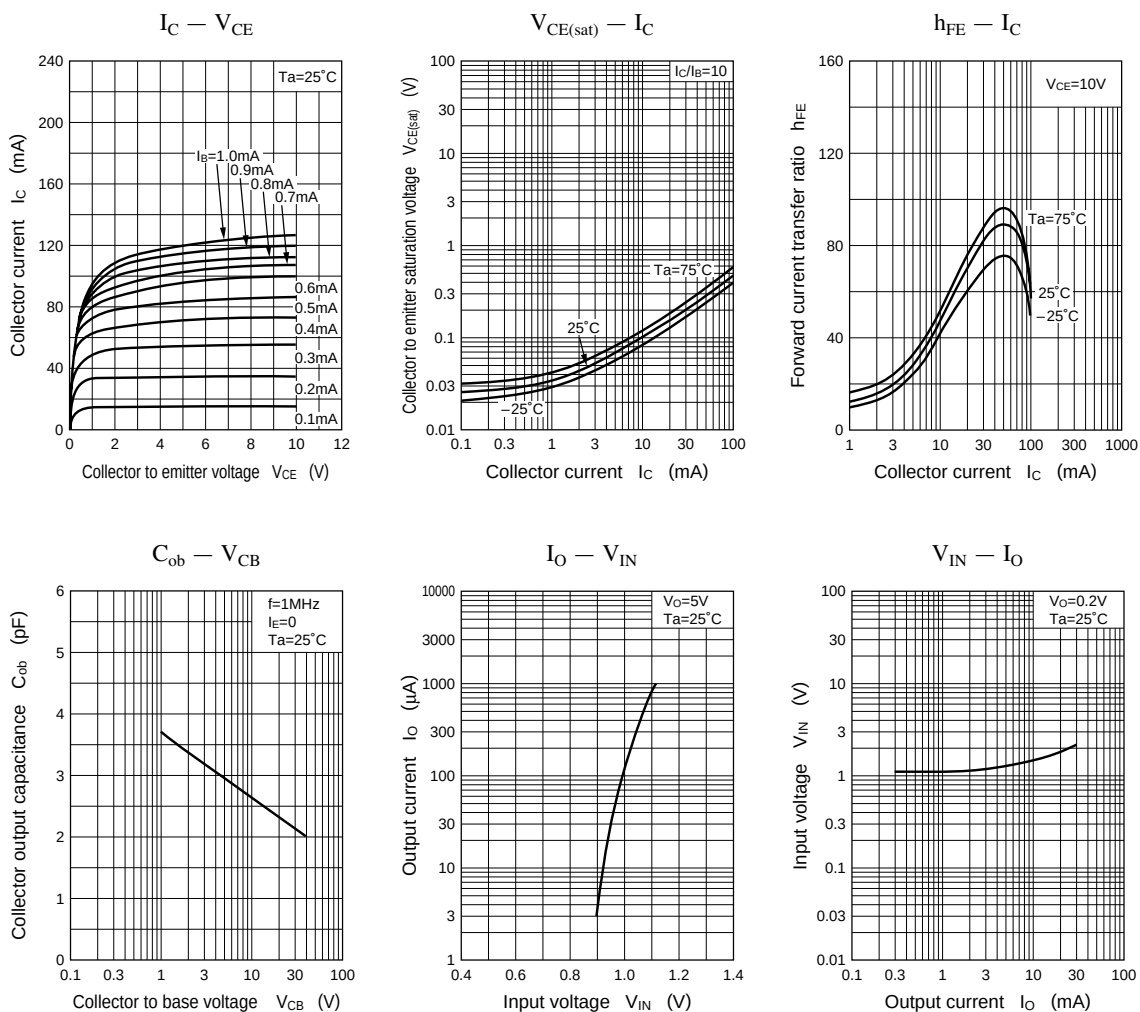







Characteristics charts of UNR1219

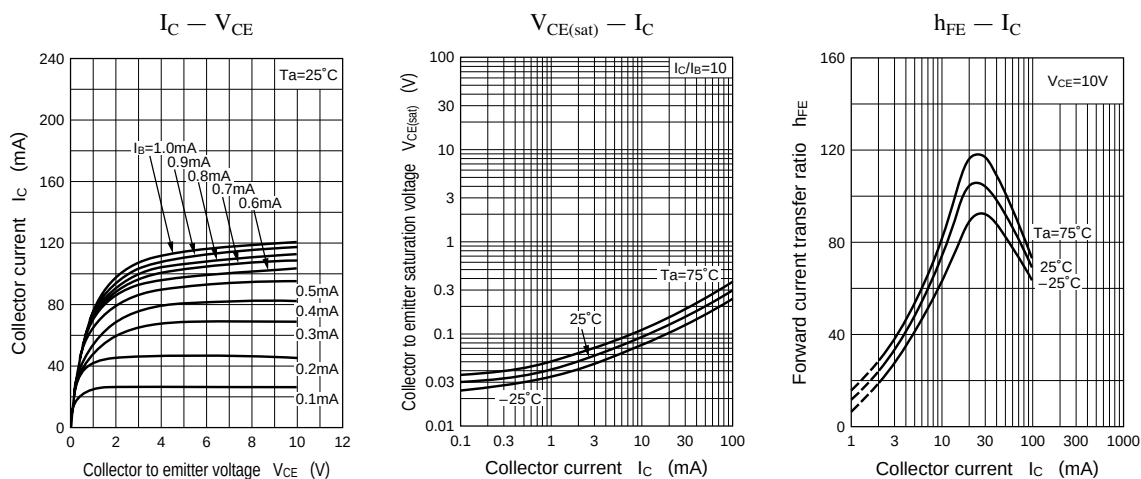


UNR1211/1212/1213/1214/1215/1216/1217/1218/ Transistors with built-in Resistor 1219/1210/121D/121E/121F/121K/121L

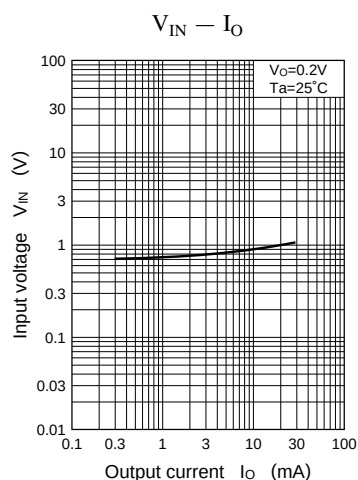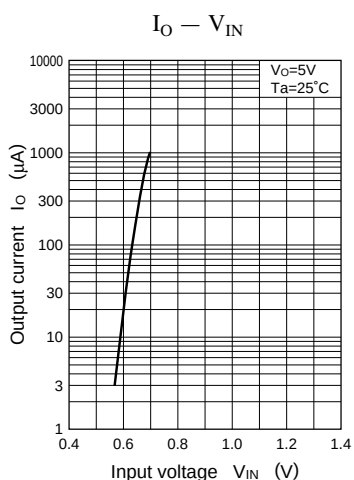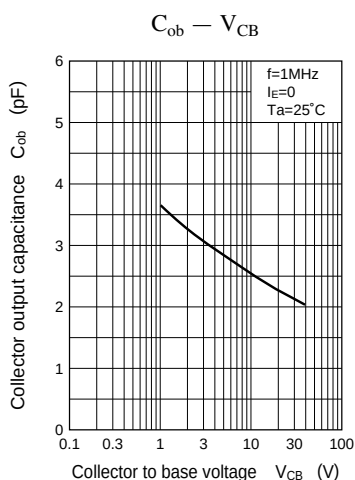


Characteristics charts of UNR1210

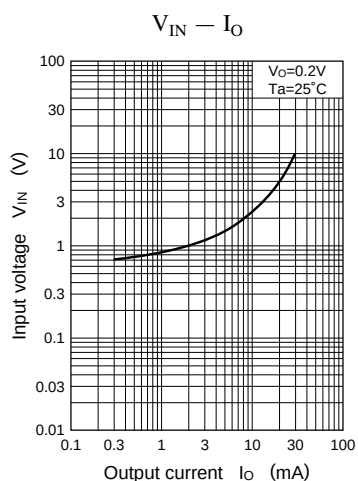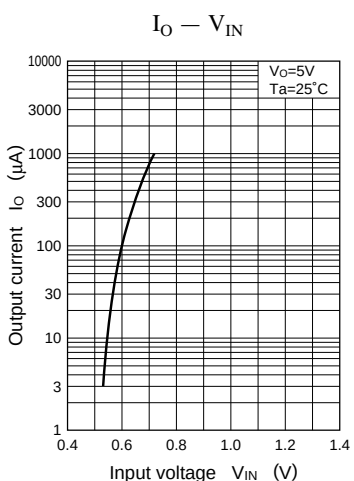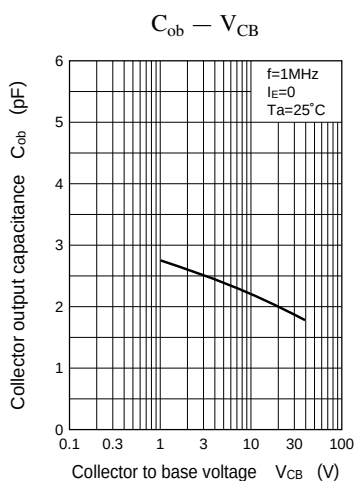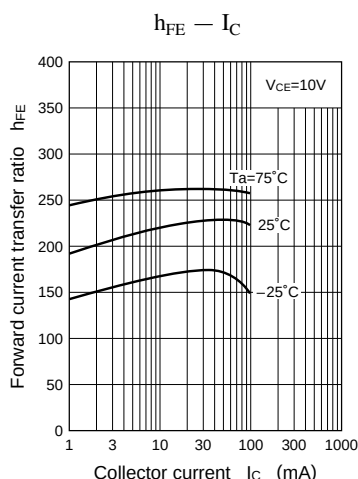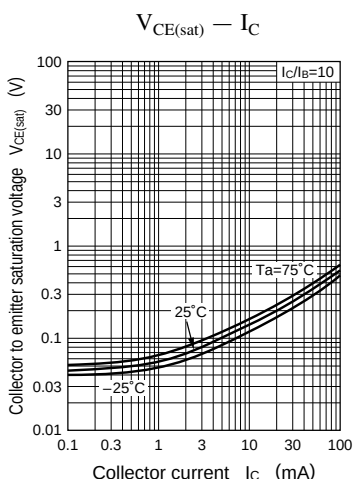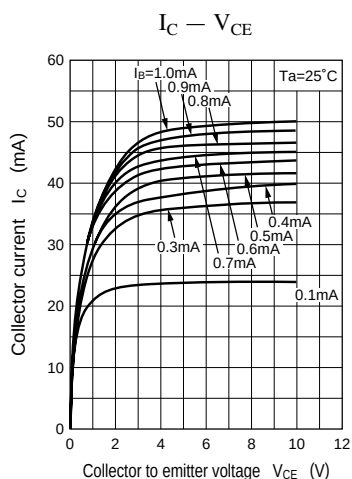

Characteristics charts of UNR121D



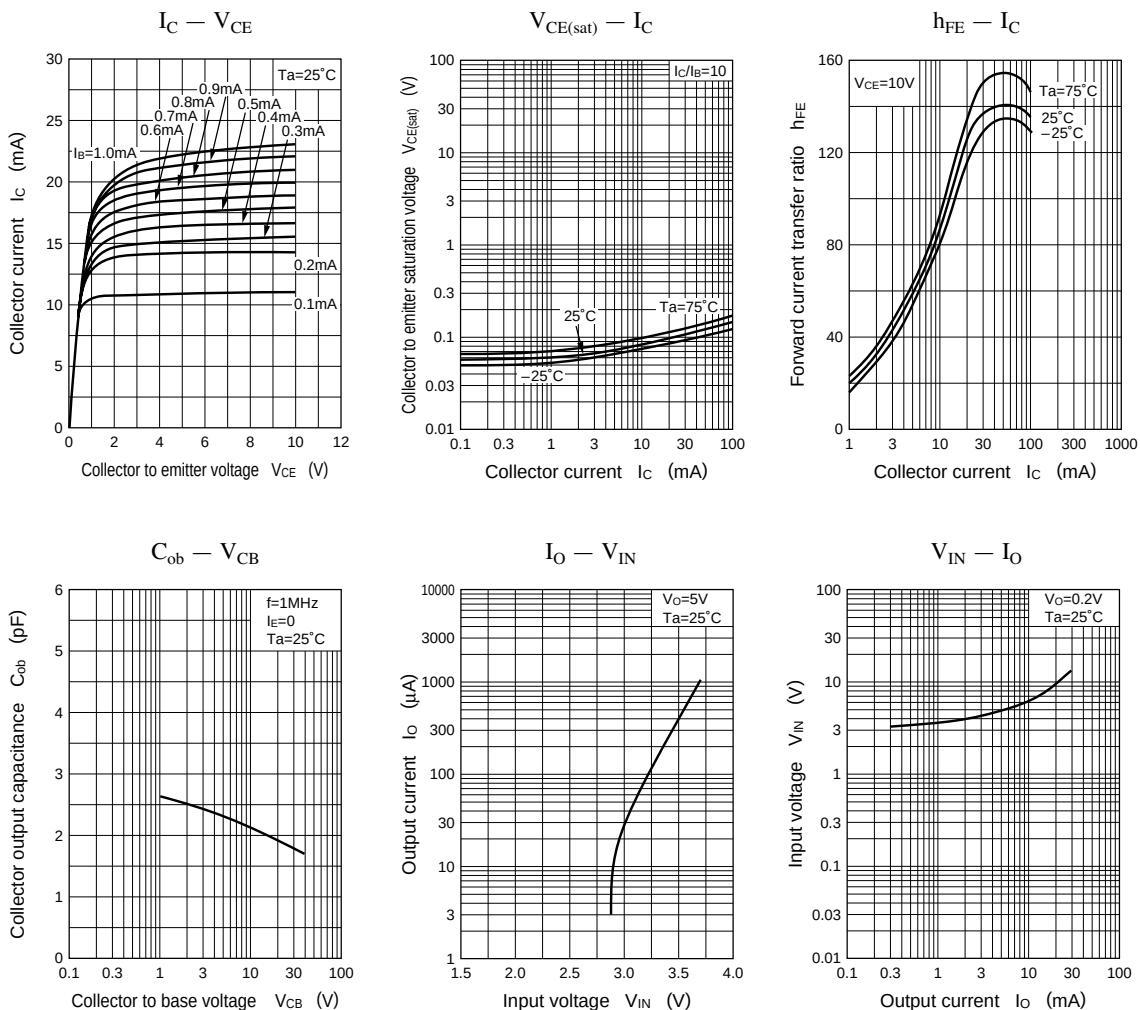


Characteristics charts of UNR121E






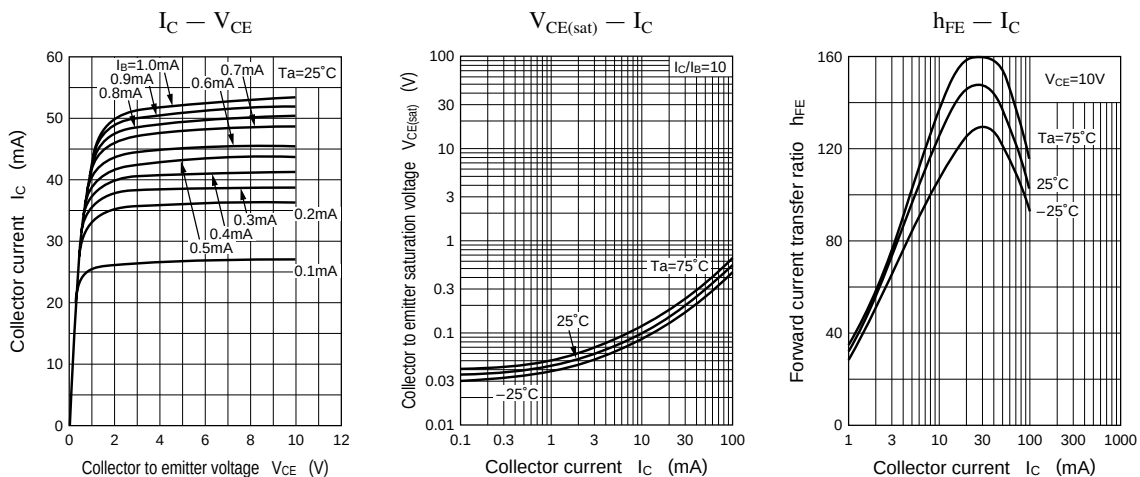


UNR1211/1212/1213/1214/1215/1216/1217/1218/ Transistors with built-in Resistor


1219/1210/121D/121E/121F/121K/121L

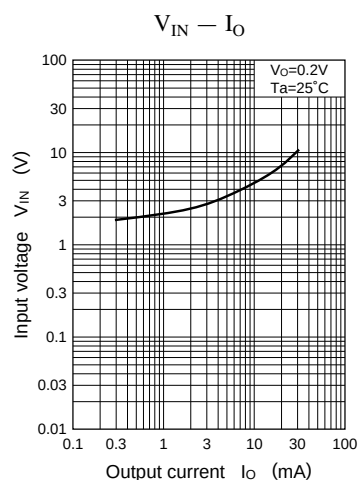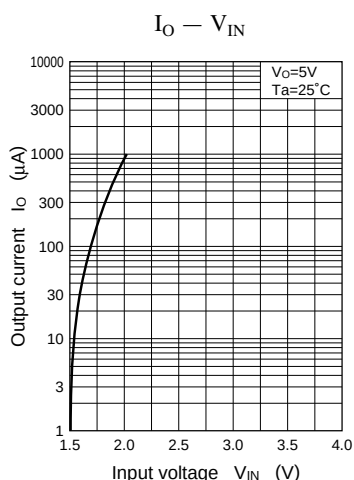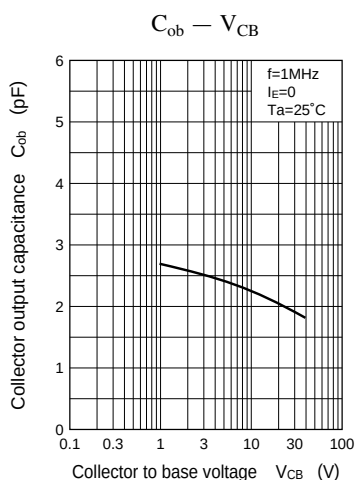


Characteristics charts of UNR121F

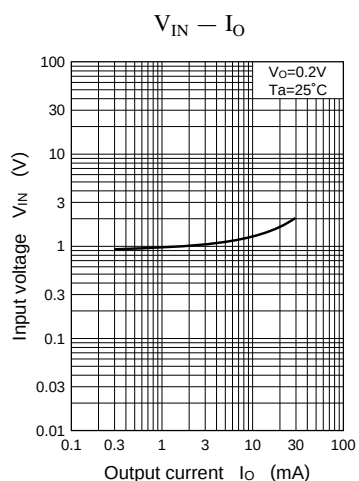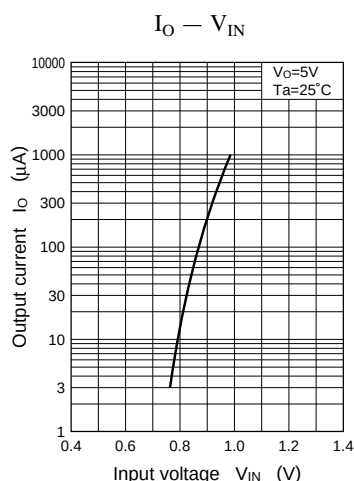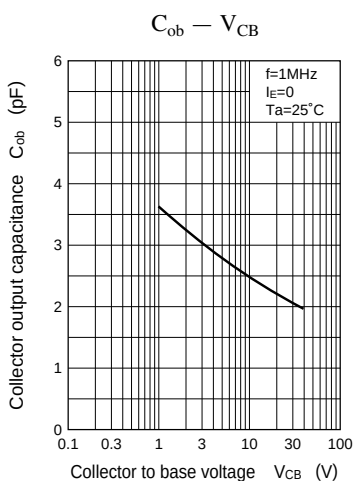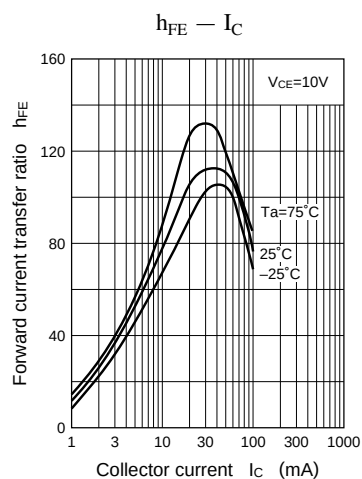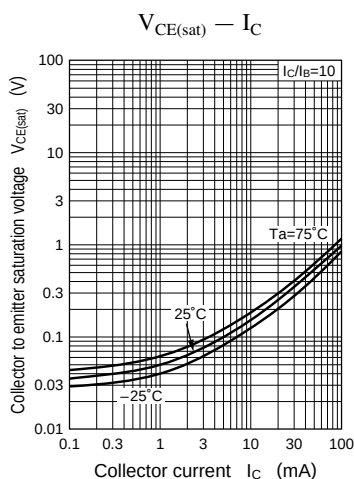
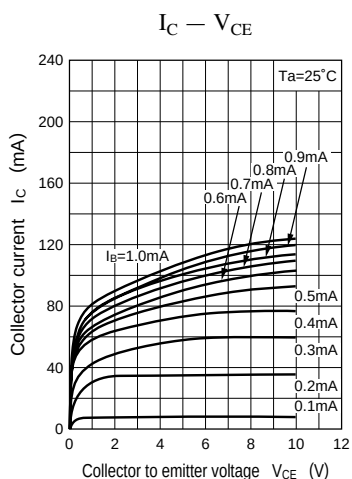


Characteristics charts of UNR121K

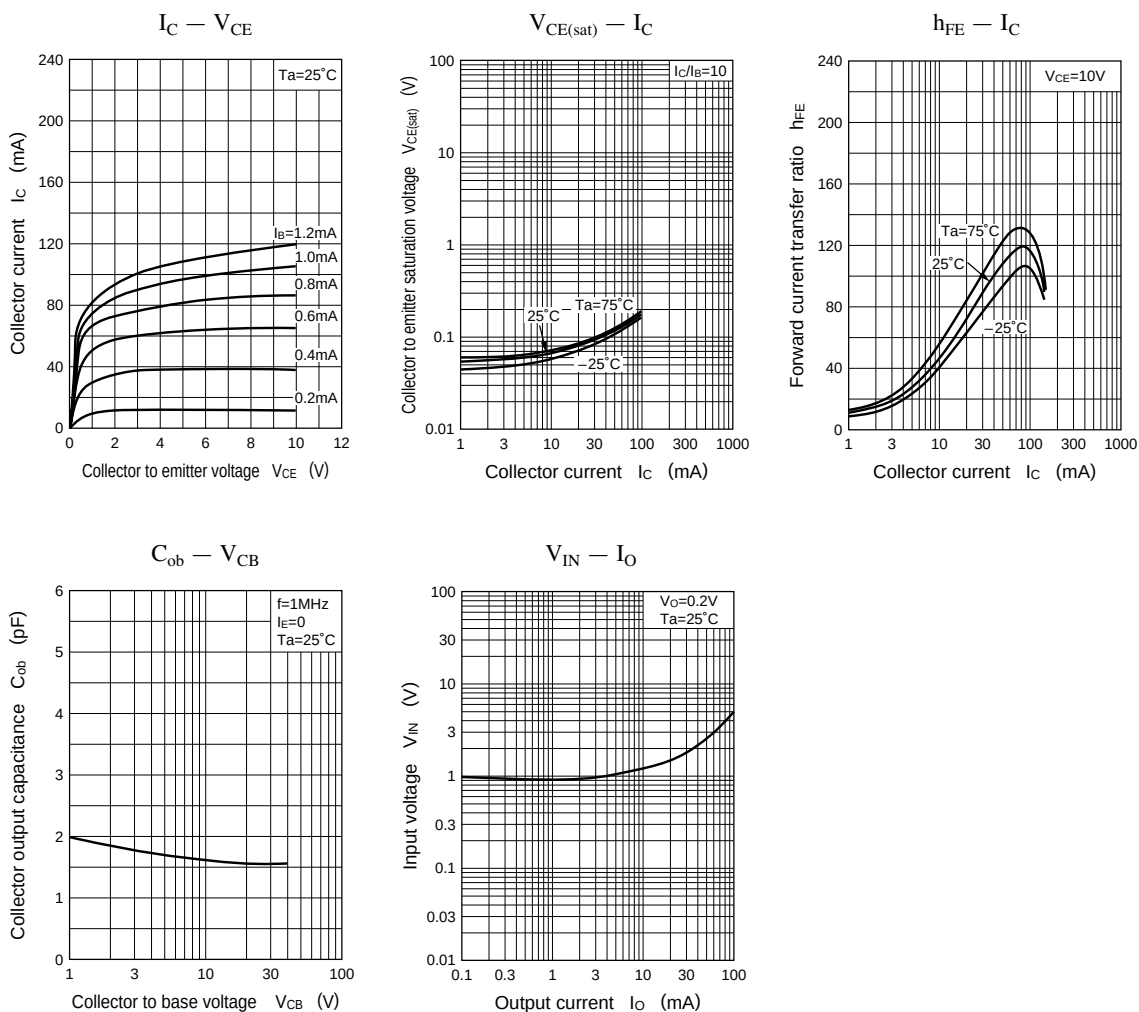

Characteristics charts of UNR121L

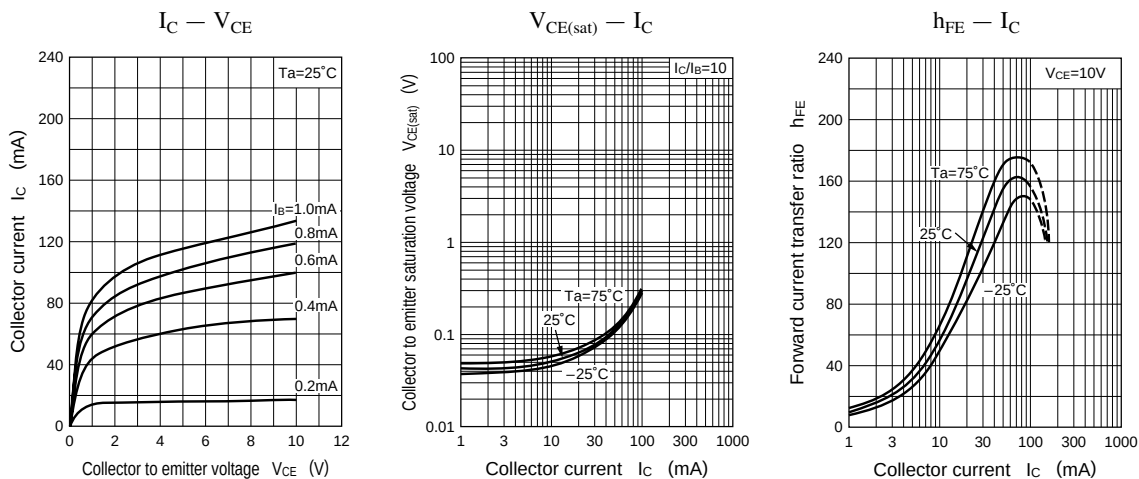

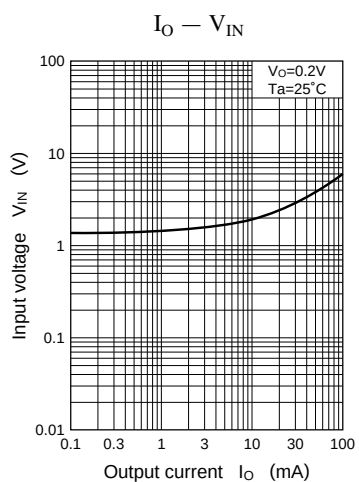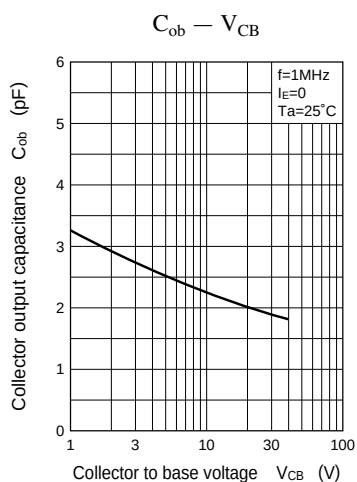

Request for your special attention and precautions in using the technical information and semiconductors described in this material

- (1) An export permit needs to be obtained from the competent authorities of the Japanese Government if any of the products or technologies described in this material and controlled under the "Foreign Exchange and Foreign Trade Law" is to be exported or taken out of Japan.
- (2) The technical information described in this material is limited to showing representative characteristics and applied circuit examples of the products. It does not constitute the warranting of industrial property, the granting of relative rights, or the granting of any license.
- (3) The products described in this material are intended to be used for standard applications or general electronic equipment (such as office equipment, communications equipment, measuring instruments and household appliances).
Consult our sales staff in advance for information on the following applications:
 - Special applications (such as for airplanes, aerospace, automobiles, traffic control equipment, combustion equipment, life support systems and safety devices) in which exceptional quality and reliability are required, or if the failure or malfunction of the products may directly jeopardize life or harm the human body.
 - Any applications other than the standard applications intended.
- (4) The products and product specifications described in this material are subject to change without notice for reasons of modification and/or improvement. At the final stage of your design, purchasing, or use of the products, therefore, ask for the most up-to-date Product Standards in advance to make sure that the latest specifications satisfy your requirements.
- (5) When designing your equipment, comply with the guaranteed values, in particular those of maximum rating, the range of operating power supply voltage and heat radiation characteristics. Otherwise, we will not be liable for any defect which may arise later in your equipment.
Even when the products are used within the guaranteed values, redundant design is recommended, so that such equipment may not violate relevant laws or regulations because of the function of our products.
- (6) When using products for which dry packing is required, observe the conditions (including shelf life and after-unpacking standby time) agreed upon when specification sheets are individually exchanged.
- (7) No part of this material may be reprinted or reproduced by any means without written permission from our company.

Please read the following notes before using the datasheets

- A. These materials are intended as a reference to assist customers with the selection of Panasonic semiconductor products best suited to their applications.
Due to modification or other reasons, any information contained in this material, such as available product types, technical data, and so on, is subject to change without notice.
Customers are advised to contact our semiconductor sales office and obtain the latest information before starting precise technical research and/or purchasing activities.
- B. Panasonic is endeavoring to continually improve the quality and reliability of these materials but there is always the possibility that further rectifications will be required in the future. Therefore, Panasonic will not assume any liability for any damages arising from any errors etc. that may appear in this material.
- C. These materials are solely intended for a customer's individual use.
Therefore, without the prior written approval of Panasonic, any other use such as reproducing, selling, or distributing this material to a third party, via the Internet or in any other way, is prohibited.