




REVISIONS

DOC. NO. SPC-F004 * Effective: 7/8/02 * DCP No: 1398

DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
430	A	RELEASED	JWM	1/21/02	HO	1/23/02	DJC	1/23/02
1453	B	Title block updated	JWM	2/11/03	JC	2/11/03	JC	2/11/03

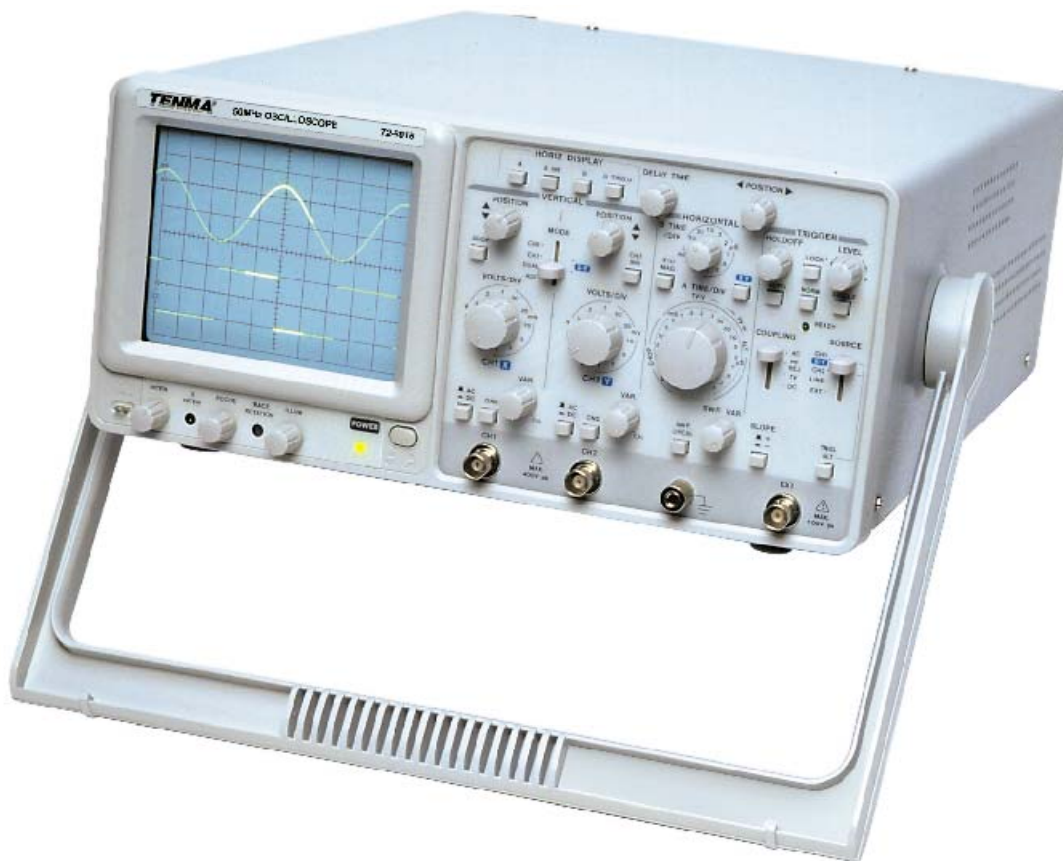

FEATURES:

- 50MHz, Dual Channel
- Delayed Sweep
- Built-In Delay Line
- TV Synchronization
- Z Axis Input
- ALT Triggering Function
- Hold Off Function
- Trigger Level Lock Function
- CH1 Output
- Includes: Powercord, Instruction Manual, 2 Probes (10:1/1:1)

SPC-F004.DWG

TOLERANCES: UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.	DRAWN BY:	DATE:	DRAWING TITLE:			
	Jeff McVicker	1/21/02	50MHz, Dual Channel Oscilloscope			
	CHECKED BY:	DATE:	SIZE	DWG. NO.	ELECTRONIC FILE	REV
	Hisham Odish	1/23/02	A	72-6815	18C2260.dwg	B
	APPROVED BY:	DATE:	SCALE: NTS		U.O.M.: Millimeters	SHEET: 1 OF 2
	Daniel Carey	1/23/02				

ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY. DISCLAIMER: ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.

Specifications

CRT	Type	6-inch rectangular type with internal graticule; 0%, 10%, 90% and 100% markers, 8 x 10 DIV (1 DIV=1 cm)
	Phosphor	P31
	Accelerating Potential	12kV
	Illumination	Continuously adjustable
	Z-Axis Input	Input Impedance: Approx. 5 k Ω Sensitivity: Above 3Vp-p Bandwidth: DC ~ 5MHz
Vertical System	Sensitivity	5mV/DIV ~ 5V/DIV $\pm$ 3%, 1mV ~ 2mV/DIV $\pm$ 5%
	Bandwidth	DC ~ 50MHz
		DC ~ 15MHz at 1 ~ 2mV/DIV
	Rise Time	7ns (23.3nS for 1~ 2mV/DIV)
	Signal Delay	Leading edge can be monitored
	Input Impedance	Approx. 1M Ω
	Input Coupling	AC, DC, GND
Horizontal System	Vertical	CH1, CH2, DUAL, ADD, CH2 INV (Dual automatic switching ALT and CHOP)
	A (main) Sweep Time	0.1 μ S ~ 0.5S/DIV $\pm$ 3%
		100nS ~ 50mS/DIV $\pm$ 5% (x 10MAG), 10nS~50nS $\pm$ 8% (x10 MAG)
	B (delay) Sweep Time	0.1 μ S ~ 0.5mS/DIV $\pm$ 3%
		100nS ~ 50 μ S/DIV $\pm$ 5% (x 10MAG), 10nS ~ 50nS/DIV $\pm$ 8% (x10 MAG)
Trigger	Delay Time	1 μ S ~ 5mS, $\pm$ 5%
	Delay Time Jitter	Better than 1:10000
	Trigger Mode	AUTO, NORM, SINGLE
	Trigger Source	CH1, CH2, ALT, LINE, EXT.
X-Y Operation	Trigger Coupling	AC, DC, HF, REJ, TV
	Trigger Slope	"+" or "-"
	Sensitivity	5mV ~ 5V/DIV $\pm$ 4%
	X-axis Bandwidth	DC ~ 2MHz
Output Signal	Phase Error	3° or less from DC ~ 100kHz
	Trigger Signal Output	Voltage: approx. 50mV/DIV into 50 Ω
	Calibrator Output	1 kHz Squarewave, 2 Vp-p $\pm$ 2%
Power Source		AC 100V/120V/220V/230V $\pm$ 10%, 50Hz/60Hz
Dimensions & Weight		310(W) x 150(H) x 455(D)mm; Approx. 8kg