

Customer Information Sheet

DRAWING No.: S70-22010X045R


IF IN DOUBT - ASK

©



NOT TO SCALE

THIRD ANGLE PROJECTION

ALL DIMENSIONS IN mm

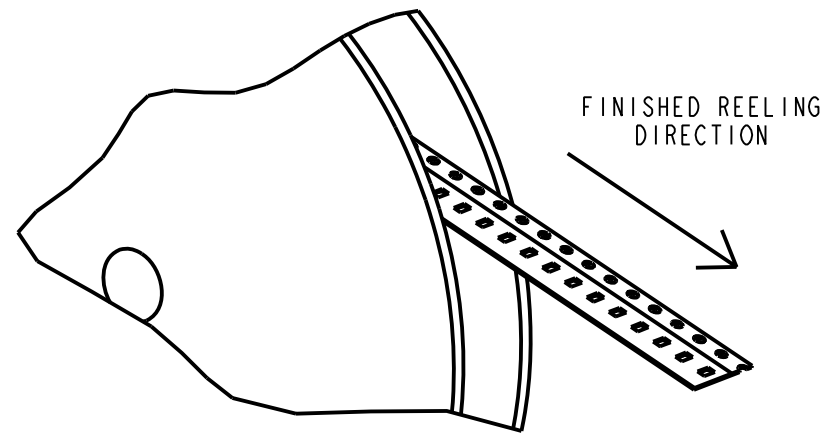

COMPONENT DETAILS

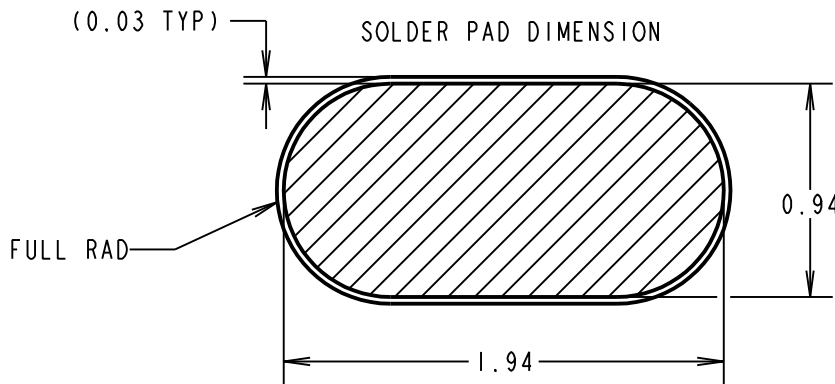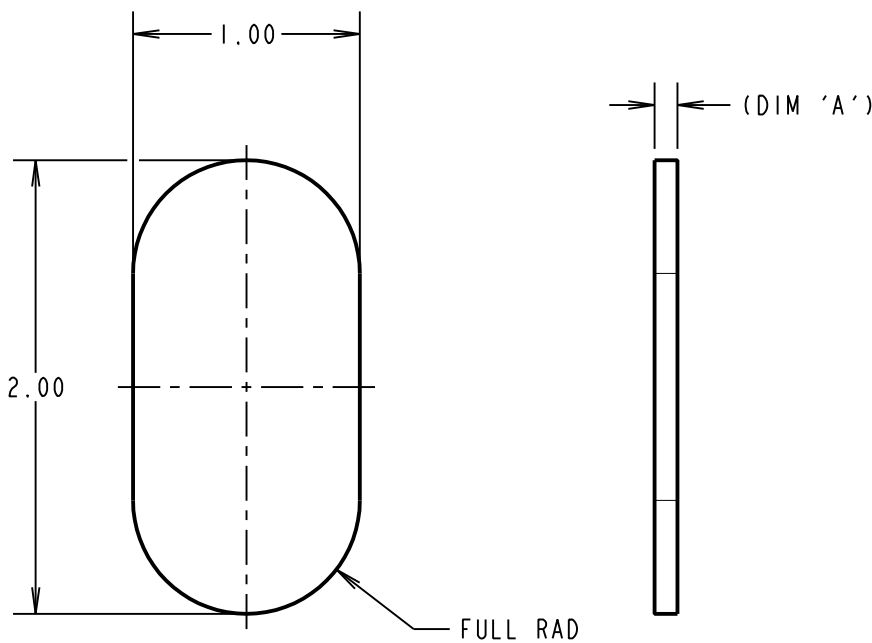

PART	DIM 'A'
S70-220101045R	0.10
S70-220102045R	0.20

ORDER CODE:

S70-22010XX45R

SIZE:

LENGTH _____

WIDTH _____

DIM 'A' = THICKNESS _____

HARWIN

www.harwin.com

technical@harwin.com

THIS DRAWING AND ANY INFORMATION OR DESCRIPTIVE MATTER SET OUT HEREON ARE CONFIDENTIAL AND COPYRIGHT PROPERTY OF THE HARWIN GROUP AND MUST NOT BE DISCLOSED, LOANED, COPIED OR USED FOR MANUFACTURING, TENDERING OR FOR ANY OTHER PURPOSE WITHOUT THEIR WRITTEN PERMISSION.

TOLERANCES

X. = $\pm 1\text{mm}$

X.X = $\pm 0.50\text{mm}$

X.XX = $\pm 0.10\text{mm}$

X.XXX = $\pm 0.01\text{mm}$

ANGLES = $\pm 5^\circ$

UNLESS STATED

MATERIAL:

BERYLLIUM COPPER

FINISH: CLEAN

S/AREA: mm²


TITLE:

SMT POGO PIN CONTACT PAD


DRAWING NUMBER:

S70-22010XX45R


SHT 2 OF 2

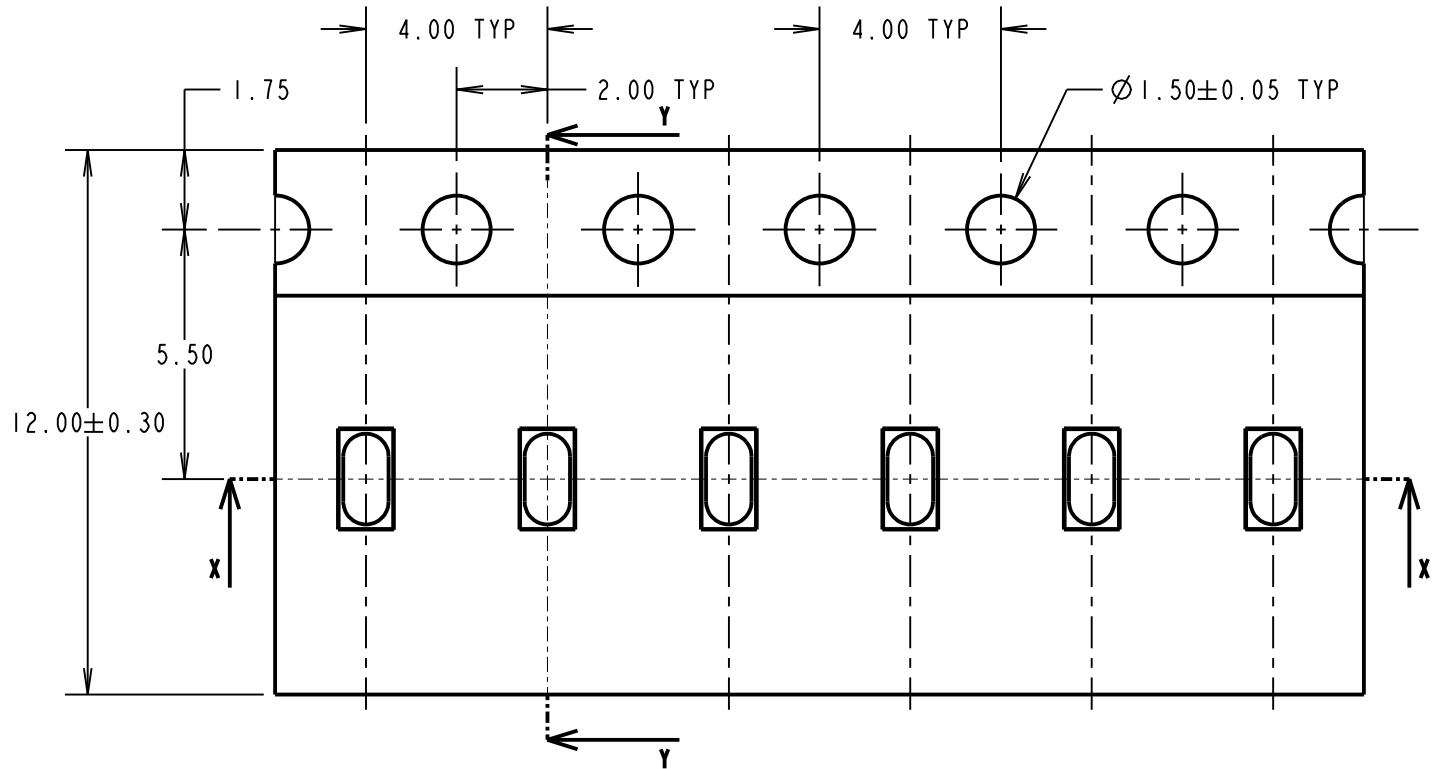


SECTION X-X

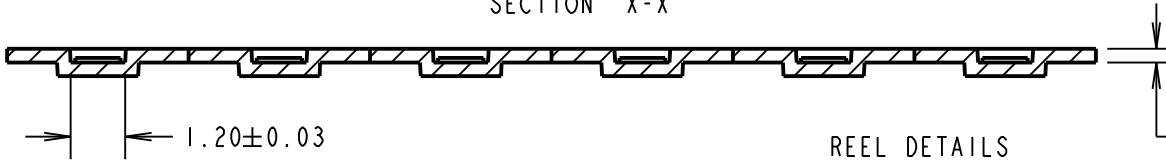

REEL DETAILS

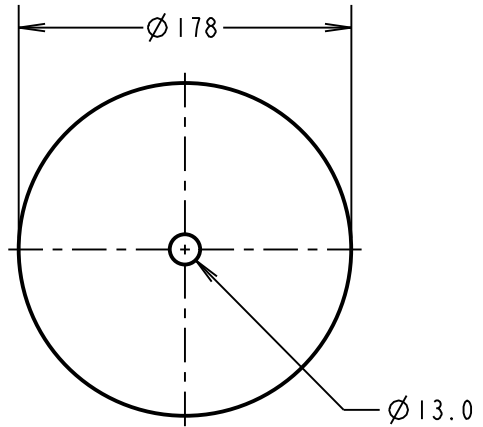

SECTION Y-Y

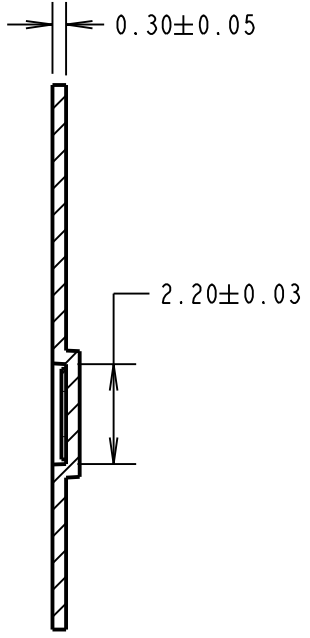

SPECIFICATIONS:

FINISH:

0.025 - 0.075µ GOLD OVER 1.50 - 3µ NICKEL

ELECTRICAL:

CURRENT RATING = 6.0A

CONTACT RESISTANCE = 0.15mΩ

ENVIRONMENTAL:

OPERATING TEMPERATURE = -40°C TO +85°C

NOTES:

1. QUANTITY OF COMPONENTS PER REEL = 9000.

2. PRODUCT IS TAPE AND REELED IN GENERAL ACCORDANCE WITH EIA-481 (ELECTRONIC INDUSTRIES ASSOCIATION).

MSP	3	21.08.17	20727
NAME	ISS.	DATE	C/NOTE
APPROVED: M.PERREN			
CHECKED: M.PLESTED			
DRAWN: M.PERREN			
CUSTOMER REF.:			
ASSEMBLY DRG:			