

Coaxial

Power Splitter/Combiner

ZFSC-8375

8 Way-0° 75Ω

50 to 90 MHz


Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	1W max.
Internal Dissipation	0.62W max.

Coaxial Connections

SUM PORT	S (COM)
PORT 1,2,3,4,5,6,7,8	1,2,3,4,5,6,7,8

Outline Drawing

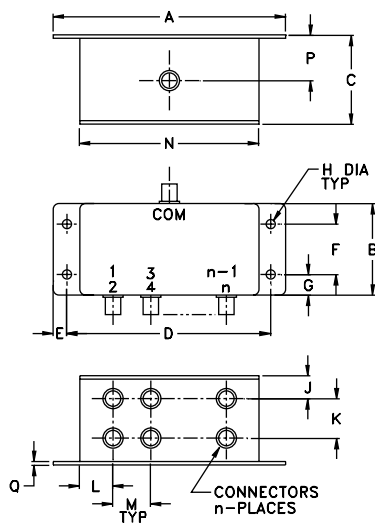

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H
4.06	1.60	1.50	3.56	.24	.88	.36	.160
103.12	40.64	38.10	90.42	6.10	22.35	9.14	4.06
J	K	L	M	N	P	Q	wt.
.40	.69	.58	.66	3.13	.80	.06	grams
10.16	17.53	14.73	16.76	79.50	20.32	1.52	300

Features

- good isolation, 30 dB typ.
- excellent amplitude unbalance, 0.1 dB typ.
- excellent phase unbalance, 1° typ.
- excellent VSWR, 1.15 typ
- rugged shielded case

Applications

- VHF
- radio communications



BNC version shown

CASE STYLE: R29




Connectors	Model	Price	Qty.
BNC	ZFSC-8375	\$119.95	(1-9)

Splitter Electrical Specifications

FREQ. RANGE (MHz)	ISOLATION (dB)	INSERTION LOSS (dB) ABOVE 9 dB	PHASE UNBALANCE (Degrees)	AMPLITUDE UNBALANCE (dB)
f_L - f_U	Typ. Min.	Typ. Max.	Max.	Max.
50-90	30 25	1.0 1.3	2.0	0.2

Typical Performance Data

Frequency (MHz)	Insertion Loss (dB)						Amplitude Unbalance (dB)	Isolation (dB)				Phase Unbal. (deg.)	VSWR S	VSWR 1	VSWR 8
	S-1	S-2	S-3	S-4	S-6	S-8		1-2	1-7	3-4	5-7				
50.00	9.44	9.45	9.43	9.45	9.35	9.35	0.10	33.25	50.24	30.97	30.95	0.50	1.14	1.08	1.07
52.00	9.44	9.45	9.44	9.44	9.35	9.35	0.10	33.23	50.49	30.97	30.94	0.52	1.14	1.08	1.07
54.00	9.44	9.45	9.44	9.45	9.36	9.36	0.09	33.26	50.10	31.00	30.98	0.50	1.14	1.08	1.07
57.00	9.44	9.45	9.45	9.44	9.37	9.37	0.08	33.31	50.24	31.00	30.96	0.42	1.14	1.08	1.07
60.00	9.45	9.45	9.45	9.45	9.37	9.38	0.08	33.27	50.09	31.01	30.96	0.38	1.15	1.08	1.07
63.00	9.45	9.44	9.44	9.44	9.38	9.38	0.07	33.27	49.96	31.04	30.99	0.37	1.15	1.08	1.08
66.00	9.45	9.45	9.45	9.45	9.38	9.38	0.07	33.25	49.85	31.08	31.04	0.35	1.15	1.08	1.08
69.00	9.46	9.46	9.45	9.46	9.40	9.40	0.07	33.28	49.76	31.13	31.04	0.36	1.15	1.08	1.08
72.00	9.46	9.46	9.46	9.46	9.40	9.40	0.06	33.32	49.94	31.14	31.08	0.38	1.15	1.08	1.08
75.00	9.46	9.46	9.46	9.47	9.41	9.41	0.06	33.32	50.15	31.19	31.13	0.36	1.15	1.08	1.08
79.00	9.46	9.47	9.45	9.47	9.41	9.42	0.06	33.32	49.84	31.26	31.13	0.40	1.15	1.09	1.08
83.00	9.46	9.46	9.46	9.47	9.42	9.42	0.05	33.36	49.93	31.29	31.20	0.44	1.15	1.09	1.08
86.00	9.47	9.47	9.46	9.47	9.42	9.42	0.05	33.37	49.56	31.34	31.26	0.45	1.15	1.09	1.08
88.00	9.47	9.46	9.46	9.47	9.42	9.42	0.05	33.41	49.63	31.39	31.25	0.49	1.15	1.09	1.08
90.00	9.46	9.46	9.46	9.46	9.42	9.42	0.05	33.41	49.55	31.42	31.30	0.49	1.15	1.09	1.08

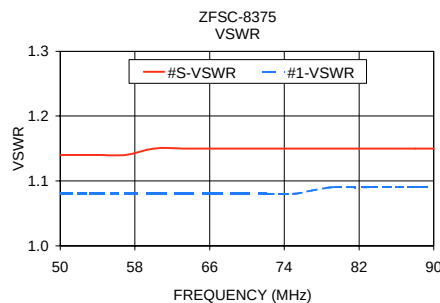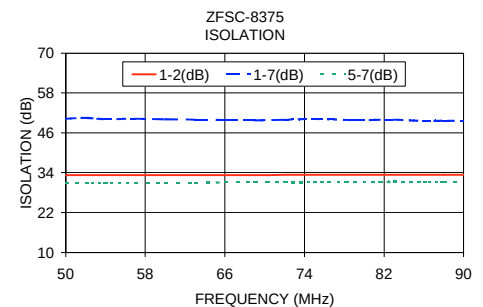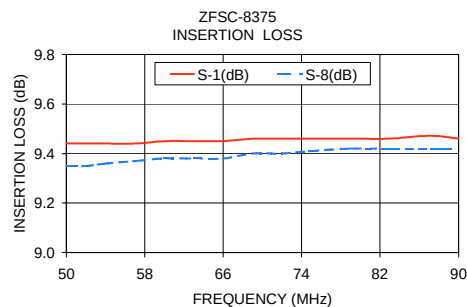

electrical schematic



INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified

 REV. OR
M94964
ZFSC-8375
HY/TD/CP
060310