



Thermally-Enhanced High Power RF LDMOS FETs 90 W, 28 V, 920 – 960 MHz

Description

The PTFB090901EA and PTFB090901FA are 90-watt LDMOS FETs intended for use in multi-standard cellular power amplifier applications in the 920 to 960 MHz frequency band. Features include input and output matching, high gain and thermally-enhanced packages. Manufactured with Infineon's advanced LDMOS process, these devices provide excellent thermal performance and superior reliability.

PTFB090901EA
Package H-36265-2

PTFB090901FA
Package H-37265-2

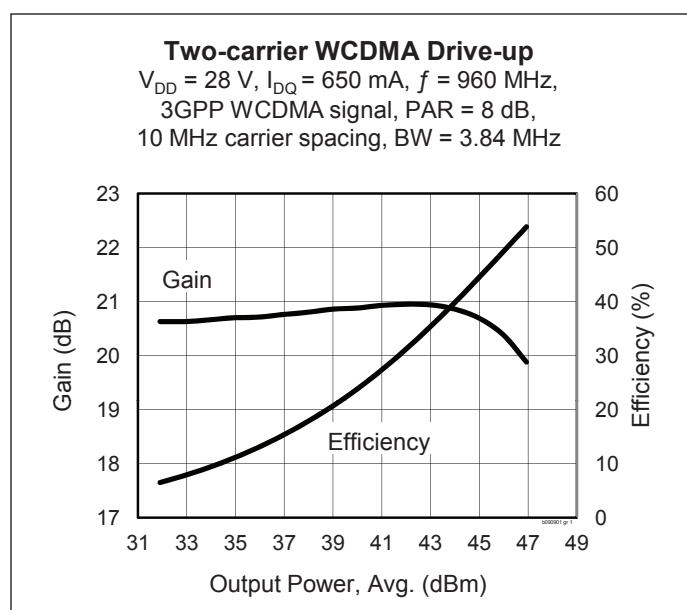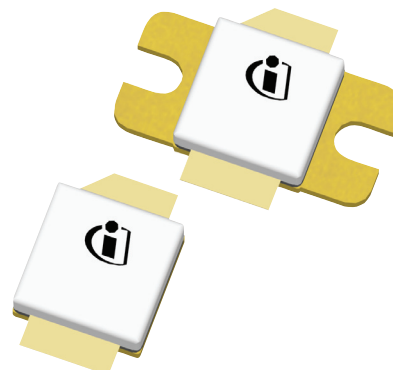

Features

- Input and output internal matching
- Typical CW performance, 960 MHz, 28 V
 - Output power at $P_{1dB} = 90\text{ W}$
 - Efficiency = 65%
- Typical two-carrier WCDMA performance, 960 MHz, 28 V
 - Average output power = 20 W
 - Linear Gain = 20.8 dB
 - Efficiency = 35%
 - Intermodulation distortion = -35 dBc
- Integrated ESD protection
- Low thermal resistance
- Pb-free and RoHS-compliant
- Capable of handling 10:1 VSWR @ 28 V, 90 W (CW) output power

RF Characteristics

Single-carrier WCDMA Specifications (tested in Infineon test fixture)

$V_{DD} = 28\text{ V}$, $I_{DQ} = 650\text{ mA}$, $P_{OUT} = 25\text{ W}$ average, $f = 960\text{ MHz}$
 3GPP signal, PAR = 10 dB @ 0.01% CCDF probability, channel bandwidth = 3.84 MHz

Characteristic	Symbol	Min	Typ	Max	Unit
Gain	G_{ps}	19	19.5	—	dB
Drain Efficiency	η_D	36	40	—	%
Adjacent Channel Power Ratio	ACPR	—	-35	-31.5	dBc

All published data at $T_{CASE} = 25^\circ\text{C}$ unless otherwise indicated

ESD: Electrostatic discharge sensitive device—observe handling precautions!

RF Characteristics (cont.)

Two-tone Specifications (not subject to production test—verified by design/characterization in Infineon test fixture)
 $V_{DD} = 28\text{ V}$, $I_{DQ} = 650\text{ mA}$, $P_{OUT} = 70\text{ W PEP}$, $f = 960\text{ MHz}$, tone spacing = 1 MHz

Characteristic	Symbol	Min	Typ	Max	Unit
Gain	G_{ps}	—	19.5	—	dB
Drain Efficiency	η_D	—	48	—	%
Intermodulation Distortion	IMD	—	−30	—	dBc

DC Characteristics

Characteristic	Conditions	Symbol	Min	Typ	Max	Unit
Drain-source Breakdown Voltage	$V_{GS} = 0\text{ V}$, $I_{DS} = 10\text{ mA}$	$V_{(BR)DSS}$	65	—	—	V
Drain Leakage Current	$V_{DS} = 28\text{ V}$, $V_{GS} = 0\text{ V}$	I_{DSS}	—	—	1.0	μA
	$V_{DS} = 63\text{ V}$, $V_{GS} = 0\text{ V}$	I_{DSS}	—	—	10.0	μA
On-state Resistance	$V_{GS} = 10\text{ V}$, $V_{DS} = 0.1\text{ V}$	$R_{DS(on)}$	—	0.123	—	Ω
Operating Gate Voltage	$V_{DS} = 28\text{ V}$, $I_{DQ} = 650\text{ mA}$	V_{GS}	—	3.8	—	V
Gate Leakage Current	$V_{GS} = 10\text{ V}$, $V_{DS} = 0\text{ V}$	I_{GSS}	—	—	1.0	μA

Maximum Ratings

Parameter	Symbol	Value	Unit
Drain-source Voltage	V_{DSS}	65	V
Gate-source Voltage	V_{GS}	−6 to +10	V
Junction Temperature	T_J	200	$^{\circ}\text{C}$
Storage Temperature Range	T_{STG}	−40 to +150	$^{\circ}\text{C}$
Thermal Resistance ($T_{CASE} = 70^{\circ}\text{C}$, 85 W CW)	$R_{\theta JC}$	0.73	$^{\circ}\text{C/W}$


Ordering Information

Type and Version	Order Code	Package	Package Description	Shipping
PTFB090901EA V2 R0	PTFB090901EAV2R0XTMA1	H-36265-2	Ceramic open-cavity, bolt-down	Tape & Reel, 50 pcs
PTFB090901EA V2 R250	PTFB090901EAV2R250XTMA1	H-36265-2	Ceramic open-cavity, bolt-down	Tape & Reel, 250 pcs
PTFB090901FA V2 R0	PTFB090901FAV2R0XTMA1	H-37265-2	Ceramic open-cavity, earless	Tape & Reel, 50 pcs
PTFB090901FA V2 R250	PTFB090901FAV2R250XTMA1	H-37265-2	Ceramic open-cavity, earless	Tape & Reel, 250 pcs

Typical Performance (data taken in a production test fixture)


Two-carrier WCDMA Drive-up

$V_{DD} = 28\text{ V}$, $I_{DQ} = 650\text{ mA}$, $f = 960\text{ MHz}$,
3GPP WCDMA signal, PAR = 8 dB,
10 MHz carrier spacing, BW = 3.84 MHz

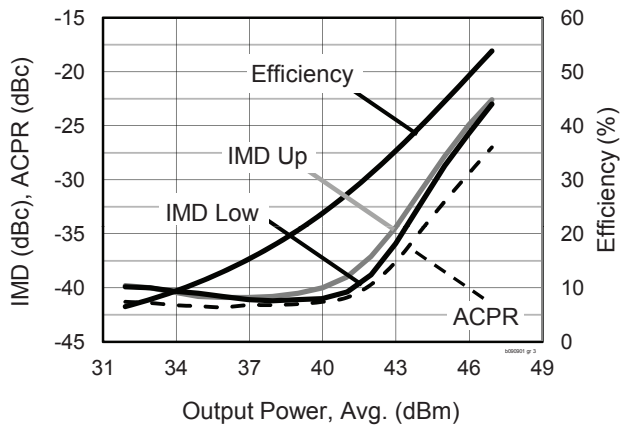


Two-carrier WCDMA Drive-up

$V_{DD} = 28\text{ V}$, $I_{DQ} = 650\text{ mA}$,
3GPP WCDMA signal, PAR = 8 dB,
10 MHz carrier spacing, 3.84 MHz BW

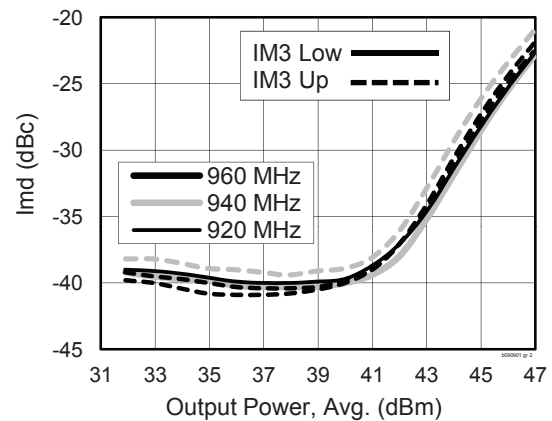


Single-carrier WCDMA Drive-up

$V_{DD} = 28\text{ V}$, $I_{DQ} = 650\text{ mA}$, $f = 960\text{ MHz}$,
3GPP WCDMA signal, TM1 w/64 DPCH,
43% clipping, PAR = 7.5 dB, 3.84 MHz BW

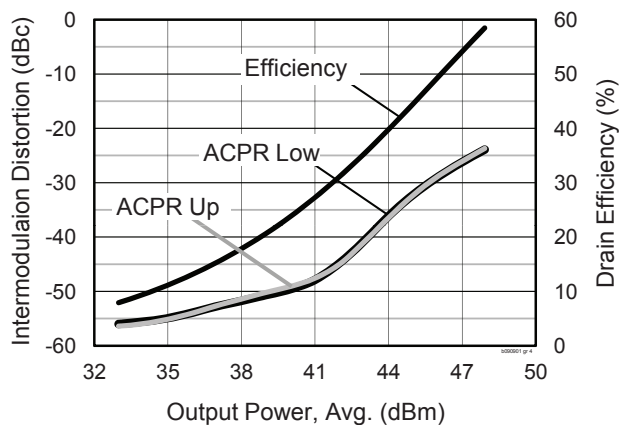

Single-carrier WCDMA Drive-up


$V_{DD} = 28\text{ V}$, $I_{DQ} = 650\text{ mA}$, $f = 960\text{ MHz}$,
3GPP WCDMA signal, TM1 w/64 DPCH,
100% clipping, PAR = 10 dB, 3.84 MHz BW

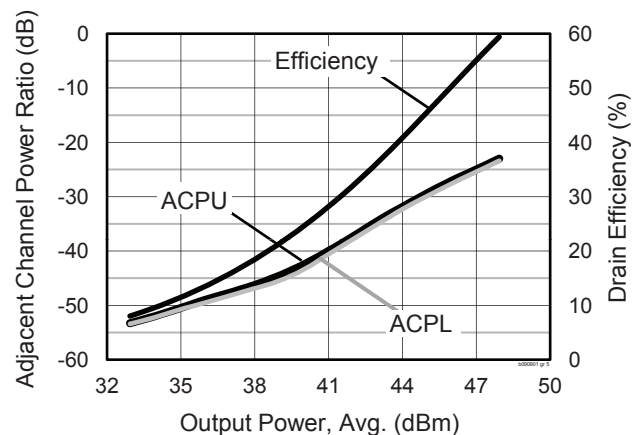

Typical Performance (cont.)


Single-carrier WCDMA Broadband

$V_{DD} = 28\text{ V}$, $I_{DQ} = 620\text{ mA}$, $P_{OUT} = 28\text{ W}$,
3GPP WCDMA signal

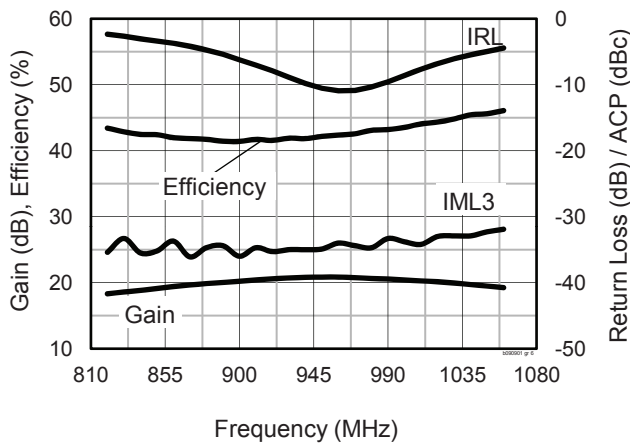


CW Power Sweep

$V_{DD} = 30\text{ V}$, $I_{DQ} = 650\text{ mA}$, $f = 960\text{ MHz}$

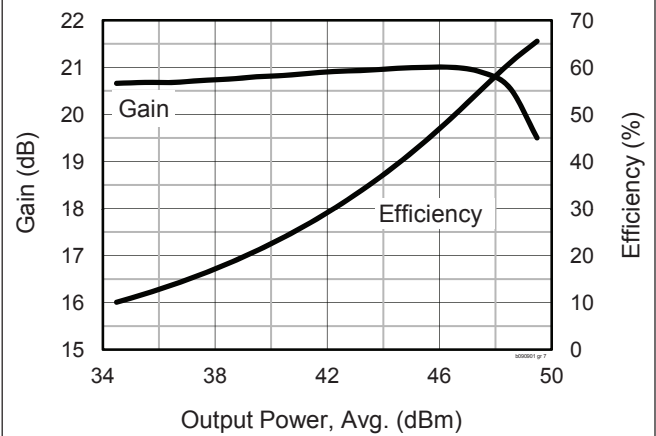


Two-tone Drive-up

$V_{DD} = 28\text{ V}$, $I_{DQ} = 650\text{ mA}$,
 $f_1 = 960\text{ MHz}$, $f_2 = 959\text{ MHz}$

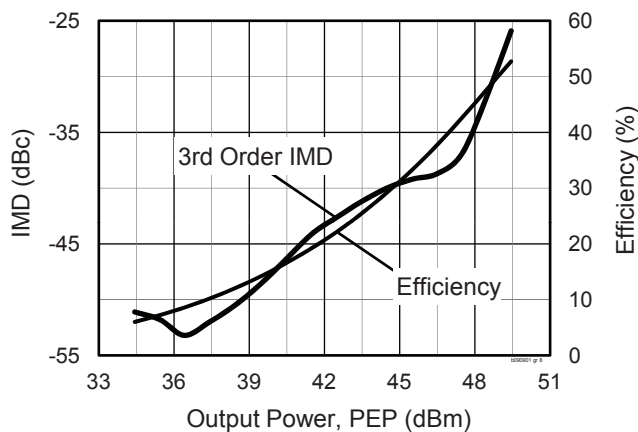

Two-tone Drive-up


$V_{DD} = 30\text{ V}$, $I_{DQ} = 650\text{ mA}$,
 $f_1 = 960\text{ MHz}$, $f_2 = 959\text{ MHz}$

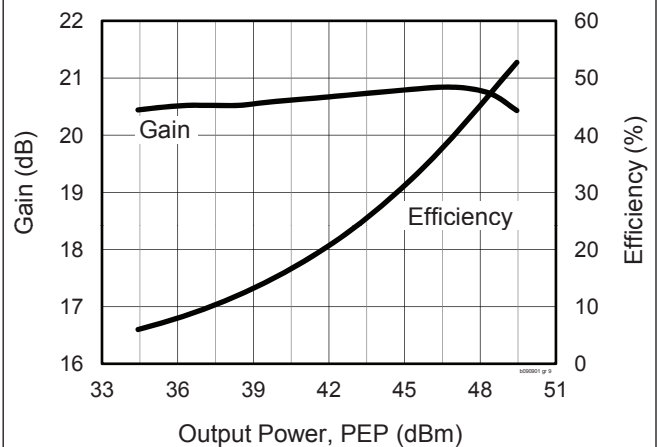

Typical Performance (cont.)


Two-tone Drive-up at selected frequencies

$V_{DD} = 28\text{ V}$, $I_{DQ} = 650\text{ mA}$, 1 MHz tone spacing

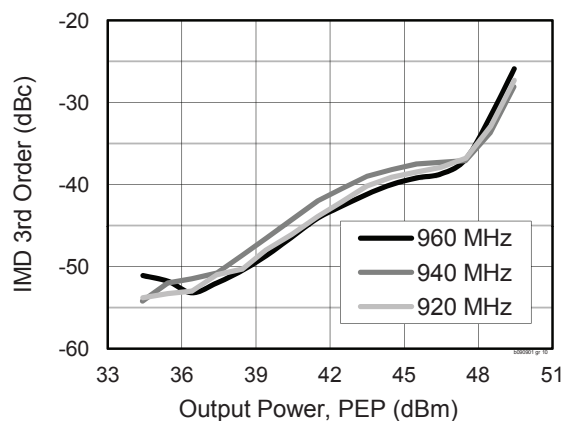


Two-tone Intermodulation Distortion vs. Output Power

$V_{DD} = 28\text{ V}$, $I_{DQ} = 650\text{ mA}$,
 $f_1 = 960\text{ MHz}$, $f_2 = 959\text{ MHz}$

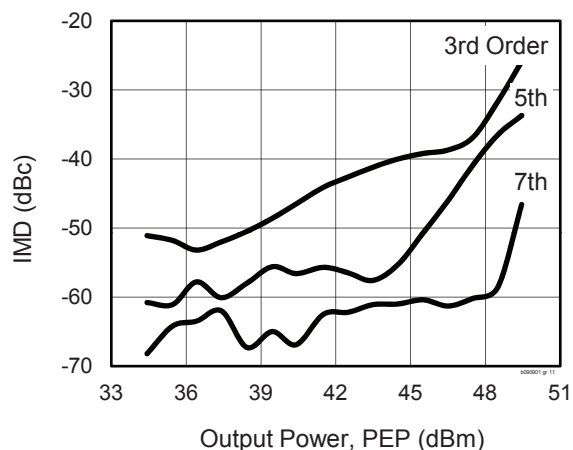


CW Drive-up (over temperature)

$V_{DD} = 28\text{ V}$, $I_{DQ} = 650\text{ mA}$,
 $f = 960\text{ MHz}$

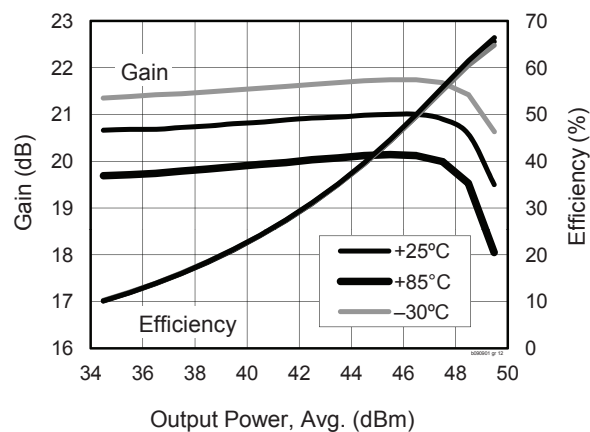


CW Drive-up

$V_{DD} = 28\text{ V}$, $f = 960\text{ MHz}$

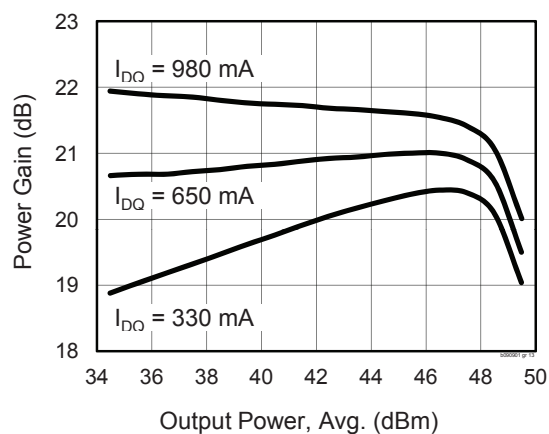


Broadband Circuit Impedance

Frequency MHz	Z Source Ω		Z Load Ω	
	R	jX	R	jX
900	2.3	-6.4	3.8	-2.6
920	2.2	-6.2	3.6	-2.3
940	2.1	-6.0	3.5	-2.1
960	1.9	-5.8	3.4	-1.8
980	1.8	-5.6	3.3	-1.6

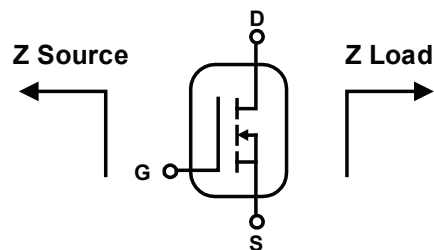


See next page for reference circuit information

Reference Circuit

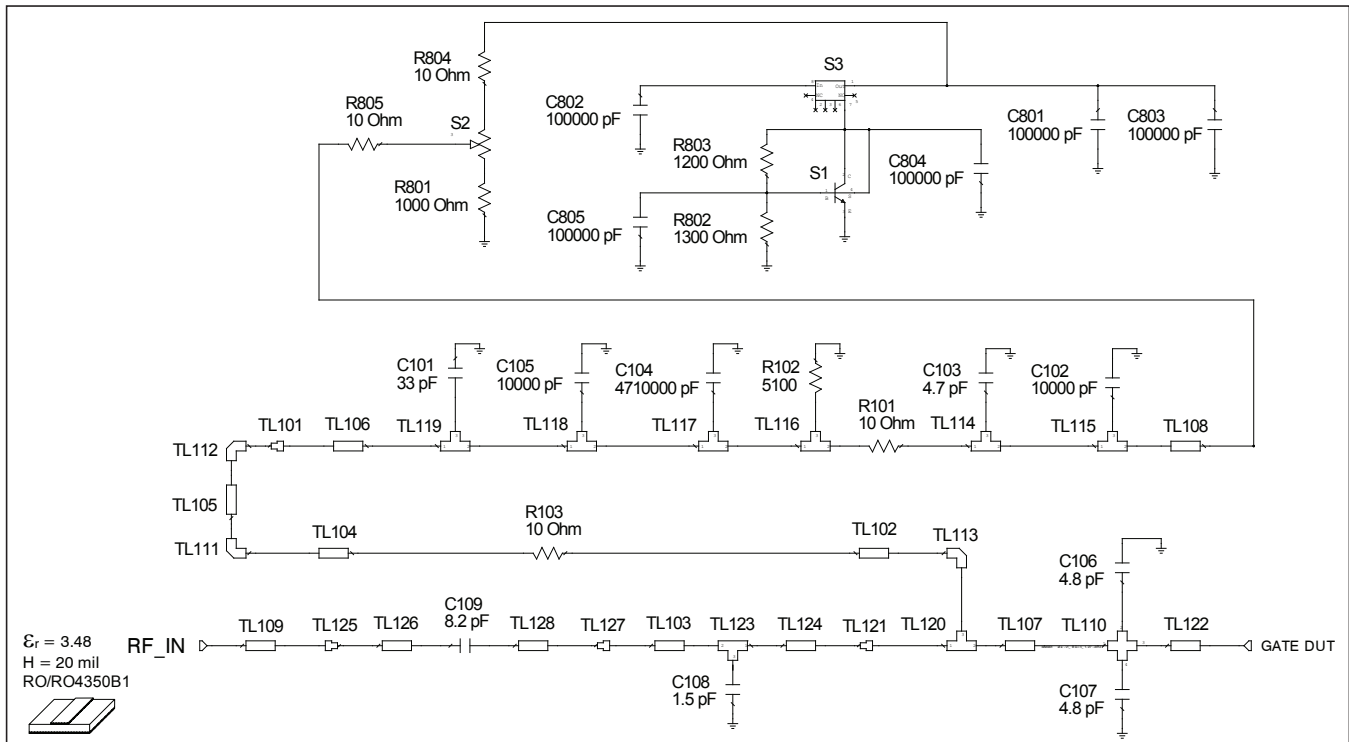

Reference circuit input schematic for $f = 960$ MHz

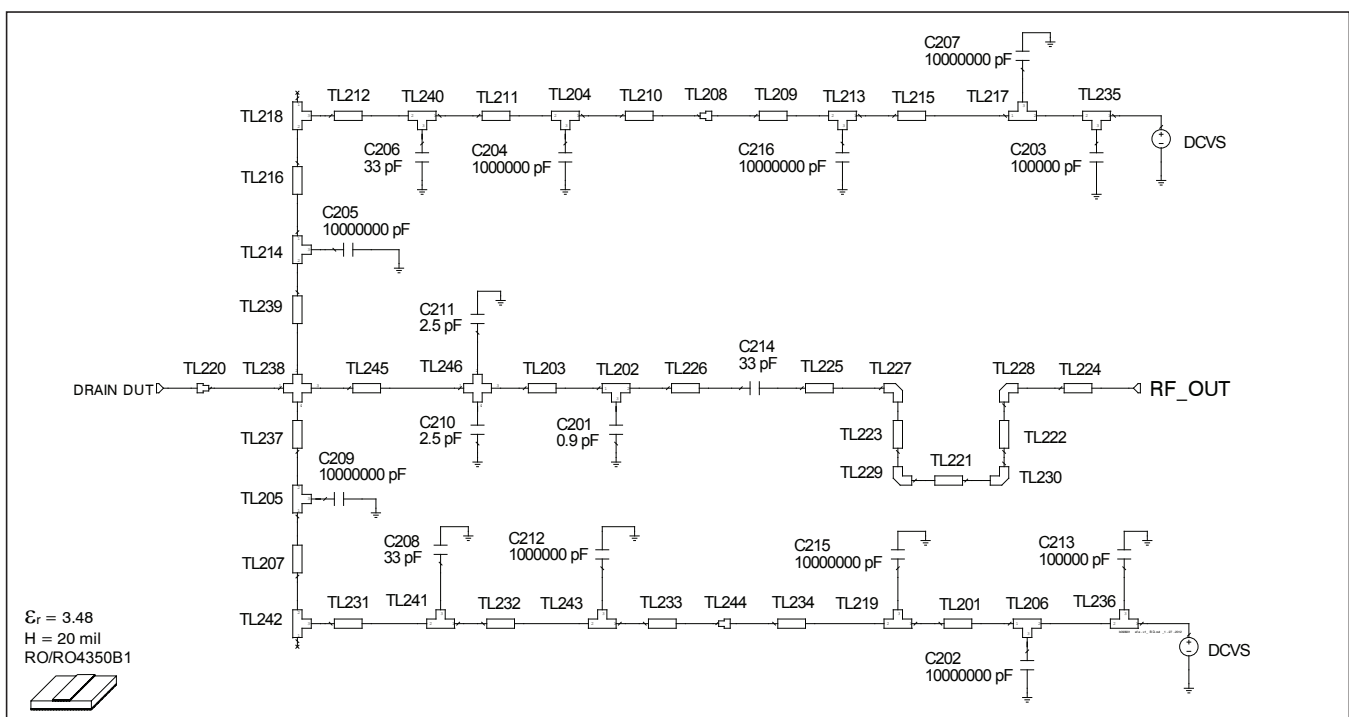

Reference circuit output schematic for $f = 960$ MHz

Reference Circuit (cont.)

Reference Circuit Assembly

DUT	PTFB090901EA or PTFB090901FA		
Reference Circuit Part No.	LTN/PTFB090901EA (PTFB090901EA)		LTN/PTFB090901FA (PTFB090901FA)
PCB	Rogers RO4350, 0.508 mm [0.020"] thick, 2 oz. copper, $\epsilon_r = 3.48$		
Find Gerber files for this test fixture on the Infineon Web site at http://www.infineon.com/rfpower			

Electrical Characteristics at 960 MHz


Transmission Line	Electrical Characteristics	Dimensions: mm	Dimensions: mils
Input			
TL102	0.0064λ , 69.6 Ω	$W = 0.65$, $L = 1.23$	$W = 25$, $L = 48$
TL103	0.1238λ , 51.53 Ω	$W = 1.1$, $L = 23.38$	$W = 43$, $L = 921$
TL104	0.1658λ , 69.6 Ω	$W = 0.65$, $L = 31.91$	$W = 25$, $L = 1256$
TL105	0.0205λ , 69.6 Ω	$W = 0.65$, $L = 3.94$	$W = 25$, $L = 155$
TL106	0.0014λ , 26.81 Ω	$W = 2.79$, $L = 0.25$	$W = 110$, $L = 10$
TL107	0.0195λ , 7.47 Ω	$W = 12.37$, $L = 3.37$	$W = 487$, $L = 133$
TL108	0.0014λ , 26.81 Ω	$W = 2.79$, $L = 0.25$	$W = 110$, $L = 10$
TL109	0.0369λ , 51.53 Ω	$W = 1.1$, $L = 6.97$	$W = 43$, $L = 275$
TL114, TL115, TL116, TL117, TL118, TL119	0.014λ , 26.81 Ω	$W1 = 2.79$, $W2 = 2.79$, $W3 = 2.54$	$W1 = 110$, $W2 = 110$, $W3 = 100$
TL120	0.0037λ , 7.47 Ω	$W1 = 12.37$, $W2 = 12.37$, $W3 = 0.65$	$W1 = 487$, $W2 = 487$, $W3 = 25$
TL122	0.0294λ , 7.47 Ω	$W = 12.37$, $L = 5.08$	$W = 487$, $L = 200$
TL123	0.0094λ , 51.53 Ω	$W1 = 1.1$, $W2 = 1.1$, $W3 = 1.78$	$W1 = 43$, $W2 = 43$, $W3 = 70$
TL124	0.0183λ , 51.53 Ω	$W = 1.1$, $L = 3.45$	$W = 43$, $L = 136$
TL126, TL128	0.0055λ , 34.08 Ω	$W = 2.03$, $L = 1.02$	$W = 80$, $L = 40$

Reference Circuit (cont.)

Electrical Characteristics at 960 MHz (cont.)

Transmission Line	Electrical Characteristics	Dimensions: mm	Dimensions: mils
Output			
TL201	0.055λ , 9.74Ω	$W = 9.25$, $L = 9.65$	$W = 364$, $L = 380$
TL202	0.010λ , 11.08Ω	$W1 = 8$, $W2 = 8$, $W3 = 1.78$	$W1 = 315$, $W2 = 315$, $W3 = 70$
TL203	0.081λ , 11.08Ω	$W = 8$, $L = 14.2$	$W = 315$, $L = 559$
TL204, TL243	0.008λ , 47.12Ω	$W1 = 1.27$, $W2 = 1.27$, $W3 = 1.52$	$W1 = 50$, $W2 = 50$, $W3 = 60$
TL205, TL214	0.011λ , 47.12Ω	$W1 = 1.27$, $W2 = 1.27$, $W3 = 2.03$	$W1 = 50$, $W2 = 50$, $W3 = 80$
TL206, TL213, TL217, TL219	0.009λ , 9.74Ω	$W1 = 9.25$, $W2 = 9.25$, $W3 = 1.52$	$W1 = 364$, $W2 = 364$, $W3 = 60$
TL207	0.007λ , 47.12Ω	$W = 1.27$, $L = 1.4$	$W = 50$, $L = 55$
TL209	0.030λ , 9.74Ω	$W = 9.25$, $L = 5.21$	$W = 364$, $L = 205$
TL210	0.075λ , 47.12Ω	$W = 1.27$, $L = 14.05$	$W = 50$, $L = 553$
TL211, TL232	0.002λ , 47.12Ω	$W = 1.27$, $L = 0.38$	$W = 50$, $L = 15$
TL212	0.060λ , 47.12Ω	$W = 1.27$, $L = 11.2$	$W = 50$, $L = 441$
TL215	0.055λ , 9.74Ω	$W = 9.25$, $L = 9.65$	$W = 364$, $L = 380$
TL216	0.007λ , 47.12Ω	$W = 1.27$, $L = 1.4$	$W = 50$, $L = 55$
TL218	0.007λ , 47.12Ω	$W1 = 1.27$, $W2 = 1.27$, $W3 = 1.27$	$W1 = 50$, $W2 = 50$, $W3 = 50$
TL221	0.006λ , 38.69Ω	$W = 1.7$, $L = 1.14$	$W = 67$, $L = 45$
TL222, TL223	0.061λ , 38.69Ω	$W = 1.7$, $L = 11.3$	$W = 67$, $L = 445$
TL224	0.030λ , 51.46Ω	$W = 1.1$, $L = 5.69$	$W = 43$, $L = 224$
TL225	0.012λ , 38.69Ω	$W = 1.7$, $L = 2.22$	$W = 67$, $L = 87$
TL226	0.073λ , 11.08Ω	$W = 8$, $L = 12.7$	$W = 315$, $L = 500$
TL231	0.060λ , 47.12Ω	$W = 1.27$, $L = 11.2$	$W = 50$, $L = 441$
TL233	0.075λ , 47.12Ω	$W = 1.27$, $L = 14.05$	$W = 50$, $L = 553$
TL234	0.030λ , 9.74Ω	$W = 9.25$, $L = 5.21$	$W = 364$, $L = 205$
TL235, TL236	0.014λ , 9.74Ω	$W1 = 9.25$, $W2 = 9.25$, $W3 = 2.36$	$W1 = 364$, $W2 = 364$, $W3 = 93$
TL237, TL239	0.082λ , 47.12Ω	$W = 1.27$, $L = 15.35$	$W = 50$, $L = 604$
TL240, TL241	0.009λ , 47.12Ω	$W1 = 1.27$, $W2 = 1.27$, $W3 = 1.78$	$W1 = 50$, $W2 = 50$, $W3 = 70$
TL242	0.007λ , 47.12Ω	$W1 = 1.27$, $W2 = 1.27$, $W3 = 1.27$	$W1 = 50$, $W2 = 50$, $W3 = 50$
TL245	0.017λ , 11.08Ω	$W = 8$, $L = 2.92$	$W = 315$, $L = 115$

Reference Circuit (cont.)

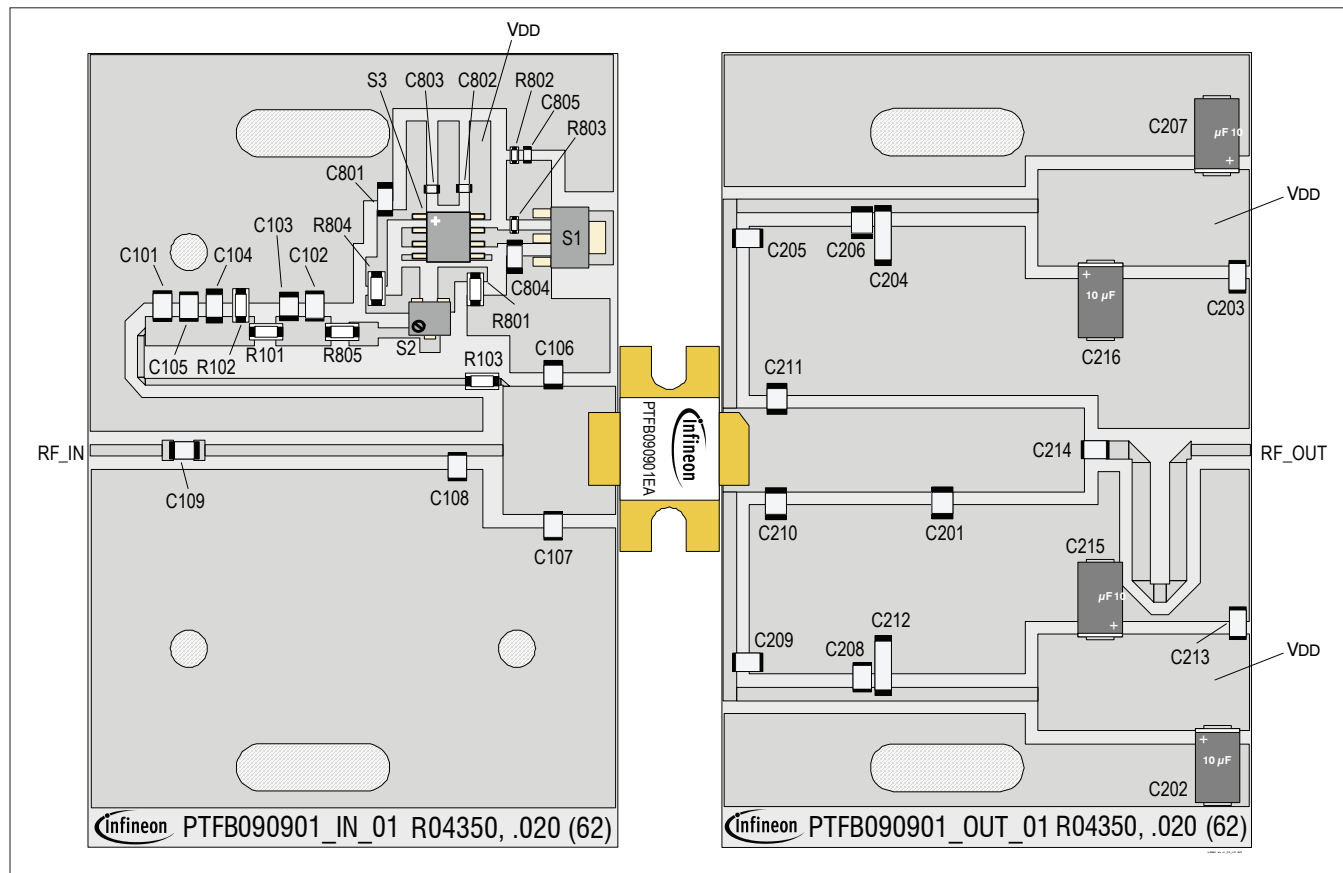

Reference circuit assembly diagram (not to scale)

Component ID	Description	Manufacturer	P/N
Input			
C101	Chip capacitor, 33 pF	ATC	100B330FW500XB
C102	Chip capacitor, 10000 pF	ATC	200B103MW
C103	Chip capacitor, 4.7 pF	ATC	100B4R7BW500XB
C104	Chip capacitor, 4.7 μ F	Nichicon	F931C475MAA
C105	Chip capacitor, 10000 pF	ATC	200B103MW
C106, C107	Chip capacitor, 4.8 pF	ATC	100B4R8BW500XB
C108	Chip capacitor, 1.5 pF	ATC	100B1R5BW500XB
C109	Chip capacitor, 8.2 pF	ATC	100B8R2BW500XB
C801, C804	Chip capacitor, 0.1 μ F	Panasonic Electronic Components	ECJ-3VB1H104K
C802, C803, C805	Chip capacitor, 1,000 pF	Panasonic Electronic Components	ECJ-1VB1H102K
R801	Resistor, 1.0k Ω	Panasonic Electronic Components	ERJ-8GEYJ102V
R802	Resistor, 1.3k Ω	Panasonic Electronic Components	ERJ-8GEYJ132V
R803	Resistor, 1.2k Ω	Panasonic Electronic Components	ERJ-8GEYJ122V
R804, R805	Resistor, 10 Ω	Panasonic Electronic Components	ERJ-8GEYJ100V

table cont. next page

Reference Circuit (cont.)

Component ID	Description	Manufacturer	P/N
Input (cont.)			
S1	Transistor	Fairchild Semiconductor	BCP56
S2	Potentiometer, 2k Ω	Bourns Inc.	3224W-1-202E
S3	Voltage Regulator	National Semiconductor	LM7805
Output			
C201	Chip capacitor, 1 pF	ATC	100B0R9BW500XB
C202, C207, C215, C216	Chip capacitor, 1.0 μ F	ATC	281M5002106K
C203, C213	Chip capacitor, 0.1 μ F	Panasonic Electronic Components	ECJ-3VB1H104K
C204, C212	Chip capacitor, 1 μ F	AVX Corporation	2225PC105KAT1A
C205, C209	Capacitor, 10 μ F	Taiyo Yuden	UMK325C7106MM-T
C206, C208	Chip capacitor, 33 pF	ATC	100B330JW500XB
C210, C211	Chip capacitor, 3 pF	ATC	100B2R5BW500XB
C214	Chip capacitor, 33 pF	ATC	100B330FW500XB

See next page for package outline

Package Outline Specifications

Package H-36265-2

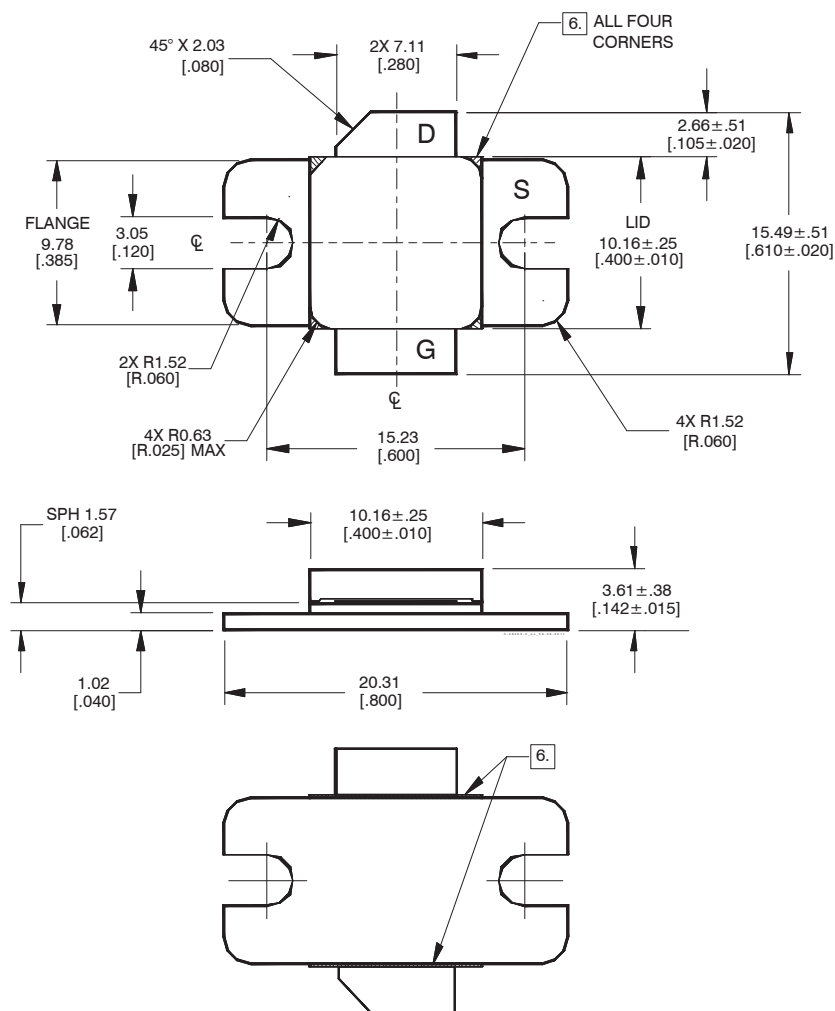


Diagram Notes—unless otherwise specified:

1. Interpret dimensions and tolerances per ASME Y14.5M-1994.
2. Primary dimensions are mm. Alternate dimensions are inches.
3. All tolerances ± 0.127 [0.005] unless specified otherwise.
4. Pins: D – drain, S – source, G – gate.
5. Lead thickness: $0.10 +0.051/-0.025$ [.004 +.002/-.001].
6. Exposed metal plane on top and bottom of ceramic insulator.
7. Gold plating thickness: 1.14 ± 0.38 micron [45 ± 15 microinch].

Package Outline Specifications (cont.)

Package H-37265-2

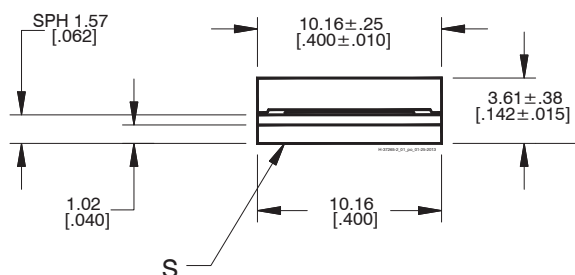
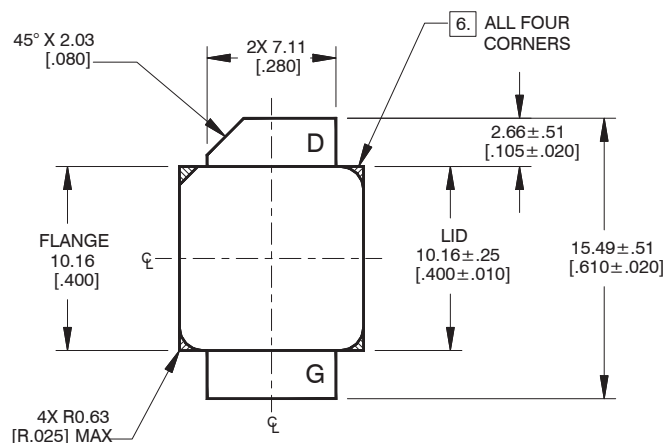


Diagram Notes—unless otherwise specified:

1. Interpret dimensions and tolerances per ASME Y14.5M-1994.
2. Primary dimensions are mm. Alternate dimensions are inches.
3. All tolerances ± 0.127 [.005] unless specified otherwise.
4. Pins: D – drain, G – gate, S – source.
5. Lead thickness: 0.10 +0.051/–0.025 [.004 +.002/–.001].
6. Exposed metal plane on top of ceramic insulator.
7. Gold plating thickness: 1.14 ± 0.38 micron [45 ± 15 microinch].

Find the latest and most complete information about products and packaging at the Infineon Internet page
<http://www.infineon.com/rfpower>

Revision History

Revision	Date	Data Sheet	Page	Subjects (major changes in comparison with previous revision)
01	2010-09-02	Advance	All	New product PTFB090801FA, proposed only.
02	2010-11-05	Advance	All	Product number revised.
03	2011-09-08	Advance	All	Added eared package H-36265-2
04	2012-02-23	Production	All	Products released to production: specifications finalized, circuit information added.
05	2013-01-23	Production	All	Version 2 (V2) products will replace previous Version 1 (V1) products. No change to form, fit or function.
05.1	2014-07-08	Production	7 10-11	Correct label for output schematic. Identify component manufacturer and part number.
05.2	2016-06-09	Production	2	Updated ordering code to R0

We Listen to Your Comments

Any information within this document that you feel is wrong, unclear or missing at all?
Your feedback will help us to continuously improve the quality of this document.
Please send your proposal (including a reference to this document) to:

highpowerRF@infineon.com

To request other information, contact us at:
+1 877 465 3667 (1-877-GO-LDMOS) USA
or +1 408 776 0600 International



Edition 2016-06-09

Published by
Infineon Technologies AG
85579 Neubiberg, Germany

© 2010 Infineon Technologies AG
All Rights Reserved.

Legal Disclaimer

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics. With respect to any examples or hints given herein, any typical values stated herein and/or any information regarding the application of the device, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation, warranties of non-infringement of intellectual property rights of any third party.

Information

For further information on technology, delivery terms and conditions and prices, please contact the nearest Infineon Technologies Office (www.infineon.com/rfpower).

Warnings

Due to technical requirements, components may contain dangerous substances. For information on the types in question, please contact the nearest Infineon Technologies Office.

Infineon Technologies components may be used in life-support devices or systems only with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support device or system or to affect the safety or effectiveness of that device or system. Life support devices or systems are intended to be implanted in the human body or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.