

100 Watt HEW Single Series DC/DC Converters



Description

The 4:1 Input Voltage 100 W single HEW Series of DC/DC converters provide precisely regulated dc outputs. The output voltage is fully isolated from the input, allowing the output to be positive or negative polarity and with various ground connections. The HEW Series meets the most rigorous performance standards in an industry standard case size for data communications and process control applications.

The 4:1 Input Voltage 100 Watt HEW Series includes remote sensing, output trim, and remote on/off. Threaded-through holes are provided to allow easy mounting or add a heat sink for extended temperature use.

Features

- 4:1 input voltage range
- High power density
- Small size 2.4"x2.28"x0.55"
- Excellent thermal performance with metal baseplate
- Volt-seconds clamp and fast over voltage protection
- Pulse-by-pulse current limiting, short circuit frequency foldback, dead short shut down
- Over-temperature protection
- Auto-softstart
- Low noise
- Industry-standard pinout
- Constant frequency for normal operation
- Remote Sense
- Remote ON/OFF
- Super energy saving, 2 mA input idle current
- Output trim with very low temperature coefficient
- Water Washable, wide humidity applications
- Good shock & vibration damping

Selection Chart

Model	Input Range VDC		I in ADC	V out VDC	I out ADC
	Min	Max	Typ		
24S3.25HEW	9	36	4.24	3.3	25
24S5.20HEW	9	36	4.91	5	20
24S12.8HEW	9	36	4.85	12	8.33
24S15.7HEW	9	36	4.79	15	6.67
24S24.4HEW	9	36	4.79	24	4.13
48S3.25HEW	18	75	2.10	3.3	25
48S5.20HEW	18	75	2.42	5	20
48S12.8HEW	18	75	2.39	12	8.33
48S15.7HEW	18	75	2.37	15	6.67
48S24.4HEW	18	75	2.37	24	4.13

Default ON/OFF logic is positive.

Add -N to the model number to order negative ON/OFF logic.

100 Watt HEW Single Series DC/DC Converters

Unless otherwise stated, these specifications apply for ambient temperature $T_A=23 \pm 2^\circ\text{C}$, nominal input voltage, and rated full load. (1)

Input Parameters							
Model		24S3.25HEW	24S5.20HEW	24S12.8HEW	24S15.7HEW	24S24.4HEW	Units
Voltage Range	MIN	9					VDC
	TYP	24					
	MAX	36					
Input Overvoltage 100 mSec	MAX	50					VDC
Input Ripple Rejection (120Hz)	TYP	60					dB
Undervoltage Lockout		Yes					
Input Reverse Voltage Protection		Yes					
Input Current No Load 100% Load	TYP	12	12	12	12	12	mA
	TYP	4.24	4.91	4.85	4.79	4.79	A
Inrush Current	MAX	0.5					A ² S
Reflected Ripple, 12μH Source Impedance (3)	TYP	30					mA P-P
Efficiency	TYP	79	85	86	83	87	%
Switching Frequency	TYP	325					kHz
Recommended Fuse		(2)					AMPS

Input Parameters							
Model		48S3.25HEW	48S5.20HEW	48S12.8HEW	48S15.7HEW	48S24.4HEW	Units
Voltage Range	MIN	18					VDC
	TYP	48					
	MAX	75					
Input Overvoltage 100 mSec	MAX	80					VDC
Input Ripple Rejection (120Hz)	TYP	60					dB
Undervoltage Lockout		Yes					
Input Reverse Voltage Protection		Yes					
Input Current No Load 100% Load	TYP	12	12	12	12	12	mA
	TYP	2.10	2.42	2.39	2.37	2.37	A
Inrush Current	MAX	0.5					A ² S
Reflected Ripple, 12μH Source Impedance (3)	TYP	30					mA P-P
Efficiency	TYP	82	86	87	88	88	%
Switching Frequency	TYP	325					kHz
Recommended Fuse		(2)					AMPS

* Absolute Maximum Ratings. Caution: Stresses in excess of the Absolute Maximum Ratings can cause permanent damage to the device (see Note 1).

100 Watt HEW Single Series DC/DC Converters

Unless otherwise stated, these specifications apply for ambient temperature $T_A = 23 \pm 2^\circ\text{C}$, nominal input voltage, and rated full load. (1)


Output Parameters							
Model		24S3.25HEW 48S3.25HEW	24S5.20HEW 48S5.20HEW	24S12.8HEW 48S12.8HEW	24S15.7HEW 48S15.7HEW	24S24.4HEW 48S24.4HEW	Units
Output Voltage		3.3	5	12	15	24	VDC
Output Voltage Setpoint Accuracy	MAX	± 1					%
Turn On Overshoot	TYP	0					%
Temperature Coefficient	TYP MAX	0.005 0.01	0.003 0.005				%/ $^\circ\text{C}$
Noise (8)	TYP TYP	75 20	75 20	150 60	150 60	250 100	mV P-P mV RMS
Load Current (4)	MIN MAX	2.5 25	2 20	.833 8.33	.667 6.67	.413 4.13	ADC
Load Transient Overshoot (7)	TYP	3					%
Load Transient Recovery Time (6)	TYP	200					μSec
Load Regulation (5)	TYP MAX	0.02 0.2					%
Line Regulation $V_{in} = \text{Min-Max}$	TYP MAX	0.01 0.1					%
Overvoltage Protection (OVP) Threshold	MIN MAX	115 135					%
OVP Type - Non-latching Open Loop Overvoltage Clamp							
Output Current Limit $V_{out} = 90\%$ of $V_{out-nom}$	TYP	120					%
Output Short Circuit Current $V_{out} = 0.25 \text{ V}$	TYP MAX	140 150					%

NOTES:

- Refer to the CALEX Application Notes for the definition of terms, measurement circuits, and other information.
- Refer to the CALEX Application Notes for information on fusing. For inrush current, refer to the specifications above.
- 33 μF capacitor connected to two "Input" pins. Then place current sensor in series with 1.0 μH inductor between 33 μF and the source. The reflected ripple current is measured over a 5 Hz to 20 MHz bandwidth.(current sensor is located between the converter input pin and the 1.0 μH inductor)
- Optimum performance is obtained when this power supply is operated within the minimum to maximum load specifications. No damage to the module will occur when the output is operated at less than minimum load, however the output voltage may contain a low frequency component that may exceed output noise specifications.
- Load regulation is defined as the output voltage change when changing load current from maximum to minimum.
- Load Transient Recovery Time is defined as the time for the output to settle from a 50 to 75% step load change to a 1% error band (rise time of step = $2\mu\text{Sec}$).
- Load Transient Overshoot is defined as the peak overshoot during a transient as defined in the Note 6 above.
- Noise is measured per the CALEX Application Notes. Output noise is measured with a 10 μF tantalum capacitor in parallel with a 0.1 μF ceramic capacitor connected across the output to CMN. Measurement bandwidth is 0-20 MHz.
- When an external On/Off switch is used, such as open collector switch, logic high requires the switch to be high-impedance. Switch leakage currents greater than 10 μA may be sufficient to trigger the On/Off to the logic-low state.
- Most switches would be suitable for logic On/Off control. In case there is a problem, you can make following estimations and then leave some margin.
When open collector is used for logic high, "Open Circuit Voltage at On/Off Pin", "Output Resistance" and "External Leakage Current Allowed for Logic High" are used to estimate the high impedance requirement of open collector.
When switch is used for logic low, "Open Circuit Voltage at On/Off Pin", "Output Resistance" and "LOW Logic Level" are used to estimate the low impedance requirement of switch.
- Thermal impedance is tested with the converter mounted vertically and facing another printed circuit board 1/2 inch away. If converter is mounted horizontally with no obstructions, thermal impedance is approximately 8°C/W .
- Water Washability - Calex DC/DC converters are designed to withstand most solder/wash processes. Careful attention should be used when assessing the applicability in your specific manufacturing process. Converters are not hermetically sealed.
- Torque fasteners into threaded mounting inserts at 12 in. oz. or less. Greater torque may result in damage to unit and void the warranty.
- Input impedance on these units needs to be kept to a minimum. The 9-36Vdc DC units need a maximum input impedance of 0.2 Ohms and the 18-75Vdc DC units need a maximum input impedance of 0.8 Ohms. In order to support this requirement, the 9-36Vdc DC units need 25 μFarads of capacitance (low ESR) for every 1.0 μHenry of inductance between the power source and the DC-DC converter. The 18-75 Vdc DC units need 1.7 μFarads of capacitance (low ESR) for every 1.0 μHenry of inductance between the power source and the DC-DC converter. Inductance includes all sources and should take into account input power lines.

100 Watt HEW Single Series DC/DC Converters

General Specifications			
All Models			Units
Remote ON/OFF Function			
HIGH Logic Level or Leave ON/OFF Open	MIN	3.0	VDC
External Leakage Current Allowed for Logic High (9)	MAX	10	μA
Input Diode Protection Voltage	MAX	50	VDC
LOW Logic Level or Tie ON/OFF Pin to -Input	MAX	1.0	VDC
Sinking Current for Logic Low	MAX	500	μA
Open Circuit Voltage at Primary On/Off Pin (10)			
Positive Logic	TYP	2.3	VDC
Negative Logic	TYP	1.5	VDC
Output Resistance (10)	TYP	3	k Ohm
Idle Current (Module is OFF)	TYP	2	mADC
Turn-on Time to 1% error	TYP	20	mSec
Positive Logic Option	HIGH - Module ON LOW - Module OFF		
Negative Logic Option	HIGH - Module OFF LOW - Module ON		
Output Voltage Remote Sensing			
Maximum Voltage Drops on Leads	MAX	10	%
Line Regulation under remote sensing	TYP	0.02	%
Load Regulation under remote sensing	MAX	0.1	%
Line Regulation under remote sensing	TYP	0.05	%
Load Regulation under remote sensing	MAX	0.2	%
Output Voltage Trim			
Trim Range	MIN MAX	-10 +10	% of Vout
Input Resistance	TYP	10	k Ohm
Open Circuit Voltage	TYP	2.5	V
Trim Limit			
Maximum Output Voltage	MAX	110	% of Vout
Isolation			
Input to Output Isolation 10μA Leakage			
Vnom = 24V	MAX	700	VDC
Vnom = 48V	MAX	1544	VDC
Input to Output Resistance	MIN	10	Mohm
Input to Output Capacitance	TYP	1800	pF
Environmental			
Calculated MTBF, Bellcore Method 1, Case 1		>1,000,000	Hr
Baseplate Operating Temperature Range	MIN MAX	-40 100	°C
Storage Temperature	MIN MAX	-40 120	°C
Thermal Impedance (11)	TYP	7	°C/W
Thermal Shutdown Baseplate Temperature (Auto Restart)	MIN TYP	100 110	°C
General			
Unit Weight	TYP	4.6/114	oz/g
Case Dimension		2.4" x 2.28" x 0.55"	
Torque on Mounting Inserts	MAX	12 in. oz.	
Agency Approvals			
UL, TUV	Pending for UL60950, EN60950 (TUV)		
Chassis Mounting Kit	MS21		

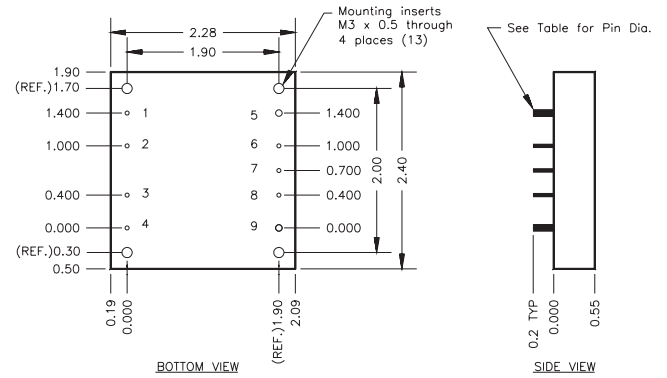

Mechanical tolerances unless otherwise noted:

X.XX dimensions: ±0.020 inches

X.XXX dimensions: ±0.005 inches

Pin	Function	9-36 VDC pin dia.	18-75 VDC pin dia.
1	- INPUT	0.08"	0.04"
2	CASE	0.04"	0.04"
3	ON/OFF	0.04"	0.04"
4	+INPUT	0.08"	0.04"
5	- OUTPUT	0.08"	0.08"
6	- SENSE	0.04"	0.04"
7	TRIM	0.04"	0.04"
8	+SENSE	0.04"	0.04"
9	+OUTPUT	0.08"	0.08"