



Single Darlington Transistor Module 200 Amperes/600 Volts

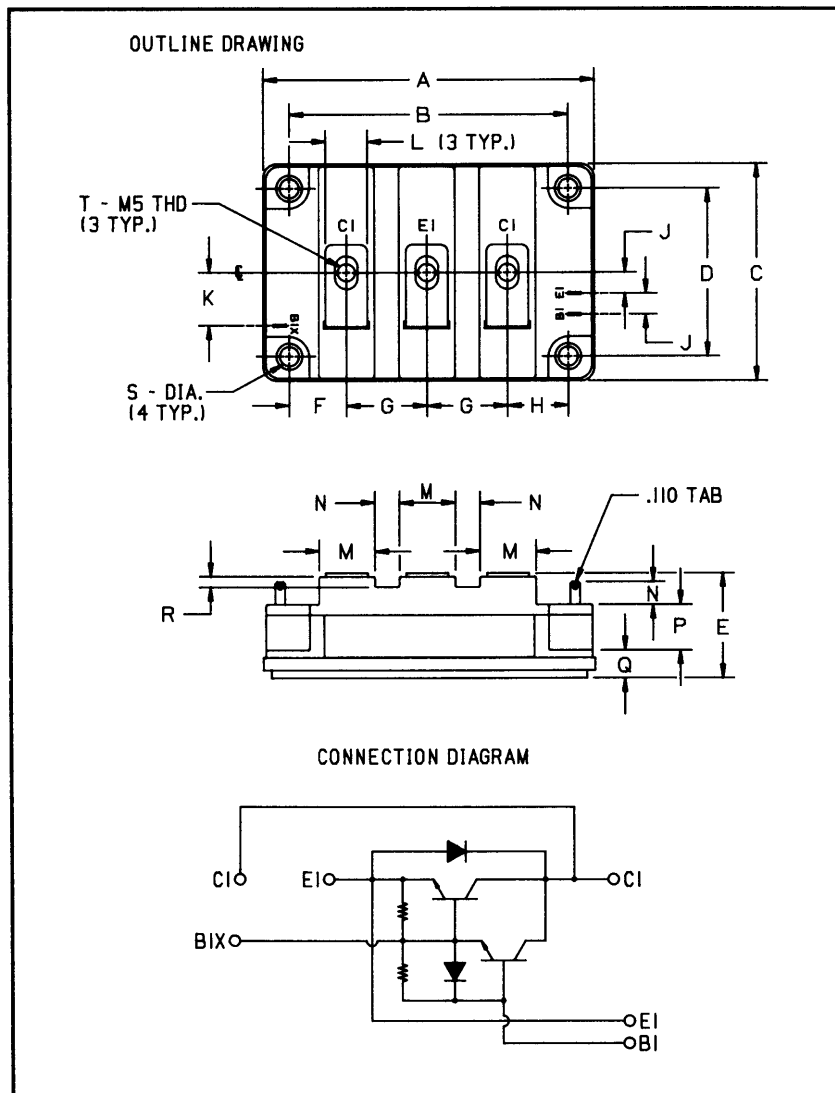

Outline Drawing

Dimensions	Inches	Millimeters
A	3.740 Max.	95 Max.
B	3.150 ± 0.010	80 ± 0.25
C	2.441 Max.	62 Max.
D	1.890 ± 0.010	48 ± 0.25
E	1.181 Max.	30 Max.
F	0.650	16.5
G	0.906	23
H	0.689	17.5
J	0.236	6

Dimensions	Inches	Millimeters
K	0.596	15
L	0.472	12
M	0.630	16
N	0.276	7
P	0.512	13
Q	0.315	8
R	0.118	3
S	0.216 Dia.	5.5 Dia.
T	M5 Metric	M5

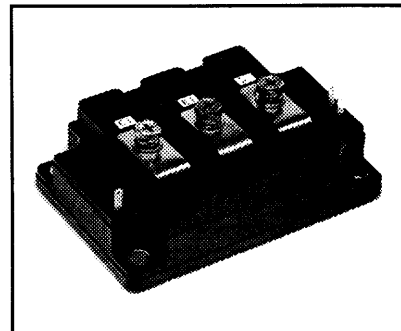

Description:

The Powerex Single Darlington Transistor Modules are high power devices designed for use in switching applications. The modules are isolated, consisting of one Darlington Transistor with a reverse parallel connected high-speed diode and base-to-emitter speed-up diode.

Features:

- ☐ Isolated Mounting
- ☐ Planar Chips
- ☐ Discrete Fast Recovery Feedback Diode
- ☐ High Gain (h_{FE})
- ☐ TAB Quick-Connect Terminals
- ☐ Base-Emitter Speed-up Diode

Applications:

- ☐ Inverters
- ☐ DC Motor Control
- ☐ Switching Power Supplies
- ☐ AC Motor Control

Ordering Information:

Example: Select the complete eight digit module part number you desire from the table - i.e. KS324520 is a 450 $V_{CE0(sus)}$ (600 V_{CEV}), 200 Ampere Single Darlington Module.

Type	$V_{CE0(sus)}$ Volts (X 10)	Current Rating Amperes (X 10)
KS32	45	20



Powerex, Inc., 200 Hillis Street, Youngwood, Pennsylvania 15697-1800 (412) 925-7272

KS324520
Single Darlington Transistor Module
 200 Amperes/600 Volts

Absolute Maximum Ratings, $T_j = 25^\circ\text{C}$ unless otherwise specified

Ratings	Symbol	KS324520	Units
Junction Temperature	T_j	-40 to 150	$^\circ\text{C}$
Storage Temperature	T_{stg}	-40 to 125	$^\circ\text{C}$
Collector-Emitter Sustaining Voltage	$V_{\text{CEO(sus)}}$	450	Volts
Collector-Emitter Sustaining Voltage, $V_{\text{BE}} = -2\text{V}$	$V_{\text{CEV(sus)}}$	600	Volts
Collector-Base Voltage	V_{CBO}	600	Volts
Emitter-Base Voltage	V_{EBO}	7	Volts
Collector-Emitter Voltage	V_{CEV}	600	Volts
Continuous Collector Current	I_C	200	Amperes
Diode Forward Current	I_{FM}	200	Amperes
Continuous Base Current	I_B	12	Amperes
Diode Surge Current	I_{FSM}	2000	Amperes
Power Dissipation	P_t	1250	Watts
Max. Mounting Torque M5 Terminal Screws	—	17	in.-lb.
Max. Mounting Torque M5 Mounting Screws	—	17	in.-lb.
Module Weight (Typical)	—	420	Grams
V Isolation	V_{RMS}	2500	Volts










Electrical Characteristics, $T_j = 25^\circ\text{C}$ unless otherwise specified

Characteristics	Symbol	Test Conditions	Min.	Typ.	Max.	Units
Collector Cutoff Current	I_{CEV}	$V_{\text{CE}} = 600\text{V}, V_{\text{BE}} = -2\text{V}$	—	—	4	mA
		$V_{\text{CE}} = 600\text{V}, V_{\text{BE}} = -2\text{V}, T_C = 125^\circ\text{C}$	—	—	30	mA
Emitter Cutoff Current	I_{EBO}	$V_{\text{EB}} = 7\text{V}$	—	—	800	mA
DC Current Gain	h_{FE}	$I_C = 200\text{A}, V_{\text{CE}} = 2\text{V}$	75	—	—	—
		$I_C = 200\text{A}, V_{\text{CE}} = 5\text{V}$	100	—	—	—
Diode Forward Voltage	V_{FM}	$I_{\text{FM}} = 200\text{A}$	—	—	1.75	Volts
Collector-Emitter Saturation Voltage	$V_{\text{CE(sat)}}$	$I_C = 200\text{A}, I_B = 2.6\text{A}$	—	—	2.0	Volts
Base-Emitter Saturation Voltage	$V_{\text{BE(sat)}}$	$I_C = 200\text{A}, I_B = 2.6\text{A}$	—	—	2.5	Volts
Resistive Turn-on	t_{on}	$V_{\text{CC}} = 300\text{V}$	—	—	2.0	μs
Load Storage Time	t_s	$I_C = 200\text{A}$	—	—	12	μs
Switch Times Fall Time	t_f	$I_{\text{B1}} = 4\text{A}, I_{\text{B2}} = -4\text{A}$	—	—	3.0	μs

Thermal and Mechanical Characteristics, $T_j = 25^\circ\text{C}$ unless otherwise specified

Characteristics	Symbol	Test Conditions	Min.	Typ.	Max.	Units
Thermal Resistance, Case-to-Sink	$R_{\theta(\text{c-s})}$	—	—	—	0.05	$^\circ\text{C/W}$
Thermal Resistance, Junction-to-Case	$R_{\theta(\text{j-c})}$	Transistor Part	—	—	0.1	$^\circ\text{C/W}$
Thermal Resistance, Junction-to-Case	$R_{\theta(\text{j-c})}$	Diode Part	—	—	0.38	$^\circ\text{C/W}$

KS324520
Single Darlington Transistor Module
200 Amperes/600 Volts

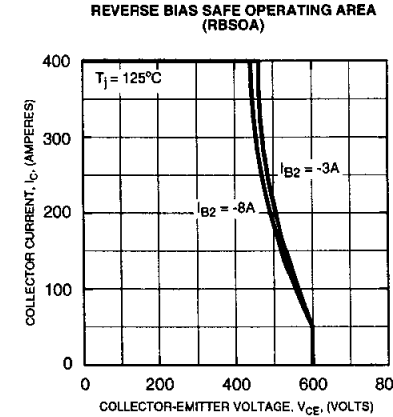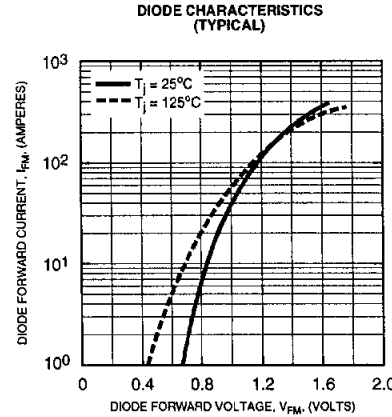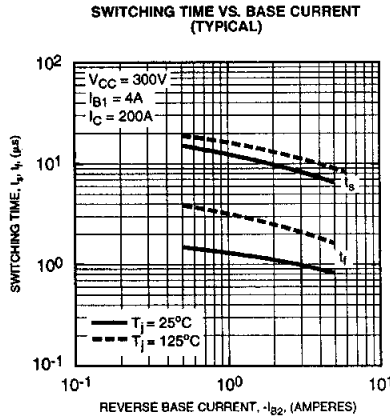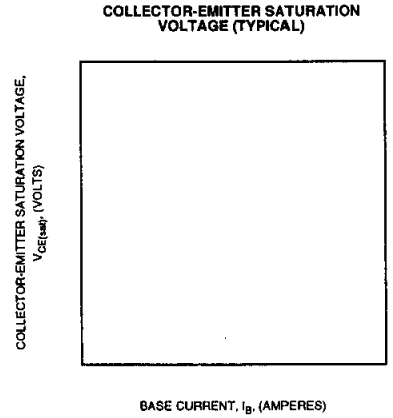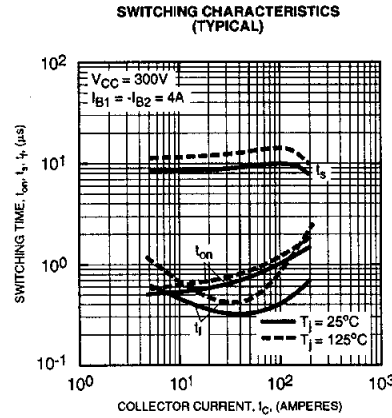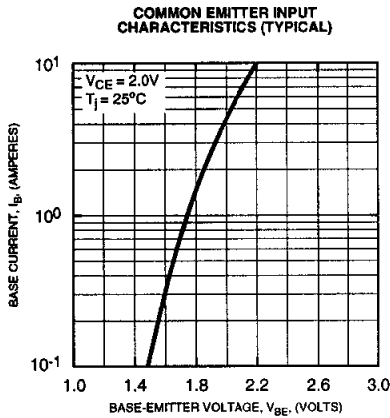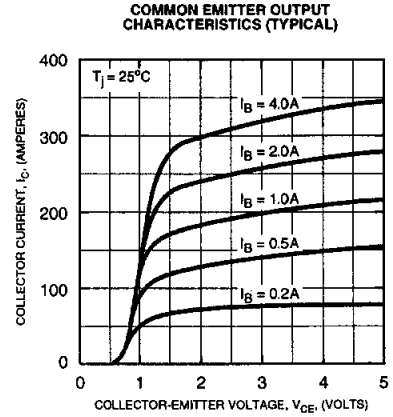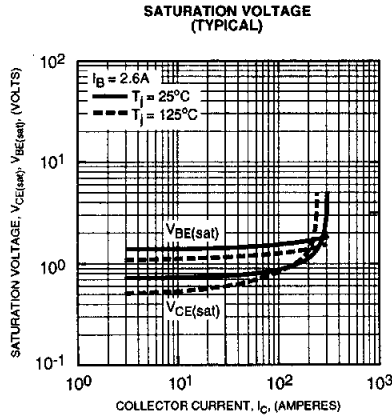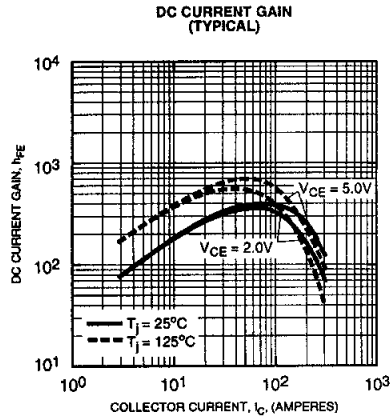

KS324520
Single Darlington Transistor Module
 200 Amperes/600 Volts

