


Technical Data



CORROSION INHIBITOR **ANTI-CORROSION TREATMENT**

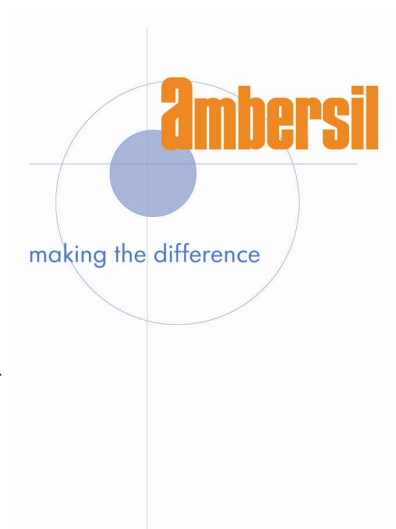

CORROSION INHIBITOR is a protective coating that provides long lasting protection against rust and corrosion.

Corrosion Inhibitor is designed to provide good short to medium term protection of metallic parts and components. Principally designed for indoor use, corrosion inhibitor will also provide a degree of short-term protection to

components stored outdoors.

ADVANTAGES

Soft, flexible film	:	Will not harden or crack, total protection assured.
Displaces moisture	:	No need to use separate de-watering fluid
Film allows subsequent handling	:	Resists acid finger marking
Resists the effects of high humidity	:	Versatile in use

TECHNICAL DATA

Appearance	:	Opaque, brown liquid
Protection against corrosion	:	Meets requirements of MIL-PRF-16173E (Class I, Grade 2)
Water displacing	:	Passes IP 178, Method B
Salt spray test	:	250 Hours minimum protection (ASTM B117) @ 18 µm film thickness
Film forming properties	:	A continuous, homogenous film remains after 20 minutes
Solubility	:	Soluble in solvents, insoluble in water
Flammability	:	Classified as extremely flammable under Current EC Regulations
Flashpoint	:	Not applicable in sealed aerosol
Packaging	:	400 ml aerosol (12 per carton)

STORAGE

The product may be stored at normal ambient temperatures and has a shelf life of not less than 72 months with correct storage. Aerosols should always be stored below 50°C, away from direct heat and naked flame.

HEALTH AND SAFETY

Health and Safety sheet available separately.

TECHNICAL SERVICE

CRC Industries UK Ltd provides a technical support service and maintains a constant programme of research and development. We are able to assist customers by specific product development to meet particular requirements.

MISREPRESENTATION ACT 1967 TRADE DESCRIPTIONS ACT 1968

The information given in this publication is based on our experience and reports from customers. There are many factors outside our control and knowledge which affect the use and performance of our products and for which reason no warranty is given, express or implied. Users should make their own tests to determine the applicability of such information or the suitability of any products for their own particular purposes. Statements concerning the use of the products described herein are not to be construed as recommending the infringement of any patent and no liability for infringement arising out of any such use is to be assumed.

CRC Industries UK, Wylds Road, Bridgwater, Somerset, TA6 4DD, UK.

Tel: +44 (0) 1278 727200

Fax: +44 (0) 1278 425644

Web: www.ambersil.com

E-mail: sales.uk@crcind.com