



### Features

- Triple Outputs (Independently Regulated)
- Input Voltage Range: 36V to 75V, 80V Surge
- 1500VDC Isolation
- Dual Logic On/Off Control
- Short-Circuit Protection (All Outputs)
- Fixed Frequency Operation
- Over-Temperature Shutdown
- Under-Voltage Lockout
- Space Saving Package: 1.3 sq. in. PCB Area (suffix N)
- Solderable Copper Case
- Safety Approvals:
  - UL60950
  - CSA 22.2 950
  - VDE EN60950

### Description

The PT4820 Excalibur™ power modules are a series of isolated triple-output DC/DC converters that operate from a standard (–48V) central office supply. Rated for up to 35W, these regulators are ideal for powering many mixed logic applications. The triple-output voltage combination allows for a compact multiple-output power supply in a single low-profile DC/DC module.

The available output voltage options include a low-voltage power bus for a DSP or ASIC core, and two additional standard logic supply voltages.

The PT4820 series incorporates many features to simplify system integration. These include a flexible On/Off enable control, an input under-voltage lock-out, and over-temperature protection. All outputs have short-circuit protection and are internally sequenced to meet the power-up and power-down requirements of popular DSP ICs.

The PT4820 series is housed in a space-saving solderable case. The module requires no external heat sink and can occupy as little as 1.3 in<sup>2</sup> of PCB area.

### Ordering Information

PT4821□ = +3.3/+2.5/+1.5V  
 PT4822□ = +3.3/+1.8/+1.5V  
 PT4823□ = +3.3/+2.5/+1.2V  
 PT4824□ = +3.3/+1.8/+1.2V  
 PT4825□ = +3.3/+1.5/+1.2V  
 PT4826□ = +5.0/+3.3/+1.8V  
 PT4827□ = +3.3/+2.5/+1.8V  
 PT4828□ = +5.0/+2.5/+1.5V  
 PT4829□ = +5.0/+1.8/+1.5V  
 PT4831□ = +5.0/+3.3/+1.5V  
 PT4832□ = +5.0/+3.3/+2.5V  
 \* PT4833□ = +3.3/+2.0/+1.5V

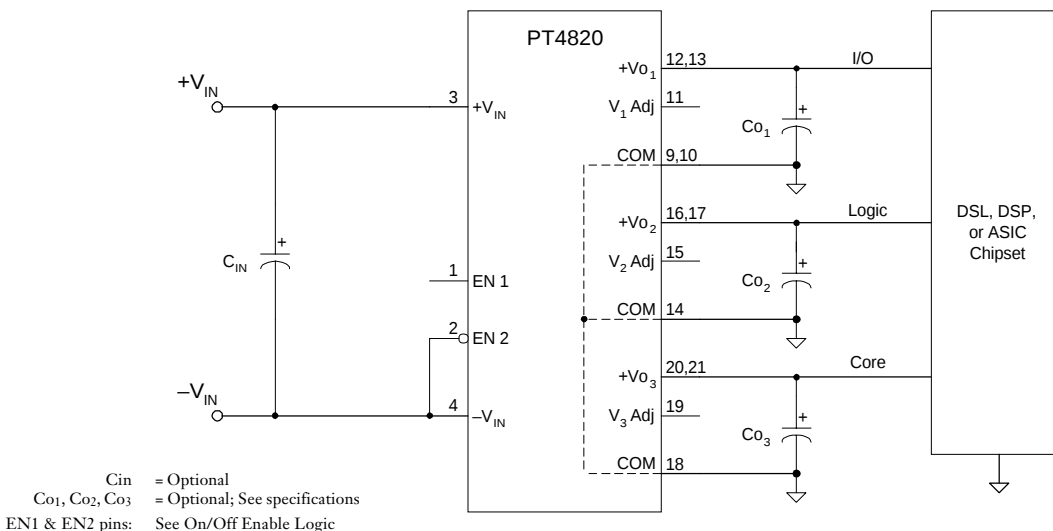
\* The PT4833 is not included in the VDE safety certification.

### PT Series Suffix (PT1234x)

| Case/Pin Configuration | Order Suffix | Package Code |
|------------------------|--------------|--------------|
| Vertical               | N            | (ENM)        |
| Horizontal             | A            | (ENN)        |
| SMD                    | C            | (ENP)        |

(Reference the applicable package code drawing for the dimensions and PC layout)

### Typical Application



## Environmental Specifications

| Characteristics           | Symbols             | Conditions                                                 | Min | Typ                 | Max                 | Units |
|---------------------------|---------------------|------------------------------------------------------------|-----|---------------------|---------------------|-------|
| Ambient Temperature Range | T <sub>a</sub>      | Over V <sub>in</sub> Range                                 | -40 | —                   | +85 <sup>(i)</sup>  | °C    |
| Case Temperature          | T <sub>c</sub>      | Measured at center of case                                 | —   | —                   | +100                | °C    |
| Shutdown Temperature      | OTP                 |                                                            |     | 115                 | 125                 | °C    |
| Solder Reflow Temperature | T <sub>reflow</sub> | Surface temperature of module pins or case                 | —   | —                   | 215 <sup>(ii)</sup> | °C    |
| Storage Temperature       | T <sub>s</sub>      | —                                                          | -40 | —                   | +125                | °C    |
| Mechanical Shock          |                     | Per Mil-STD-883D, Method 2002.3<br>1 msec, ½ Sine, mounted | —   | 500                 | —                   | G's   |
| Mechanical Vibration      |                     | Mil-STD-883D, Method 2007.2<br>20-2000 Hz                  | —   | 20 <sup>(iii)</sup> | —                   | G's   |
| Weight                    | —                   | Vertical/Horizontal                                        | —   | 50                  | —                   | grams |
| Flammability              | —                   | Meets UL 94V-O                                             |     |                     |                     |       |

**Notes:** (i) See SOA curves or consult factory for appropriate derating.

(ii) During solder reflow of SMD package version, do not elevate the module case, pins, or internal component temperatures above a peak of 215°C. For further guidance refer to the application note, "Reflow Soldering Requirements for Plug-in Power Surface Mount Products," (SLTA051).

(iii) The case pins on through-hole pin configurations (N & A) must be soldered. For more information see the applicable package outline drawing.

## Pin Configuration

| Pin | Function        | Pin | Function   |
|-----|-----------------|-----|------------|
| 1   | EN 1            | 12  | Vo1        |
| 2   | EN 2            | 13  | Vo1        |
| 3   | +Vin            | 14  | COM        |
| 4   | -Vin            | 15  | Vo2 adjust |
| 5   | Do Not Connect  | 16  | +Vo2       |
| 6   | Pin Not Present | 17  | +Vo2       |
| 7   | Pin Not Present | 18  | COM        |
| 8   | Pin Not Present | 19  | Vo3 adjust |
| 9   | COM             | 20  | +Vo3       |
| 10  | COM             | 21  | +Vo3       |
| 11  | Vo1 Adjust      |     |            |

Note: Shaded functions indicates those pins that are at primary-side potential. All other pins are referenced to the secondary.

## On/Off Enable Logic

| Pin 1 | Pin 2 | Output Status |
|-------|-------|---------------|
| ×     | 1     | Off           |
| 1     | 0     | On            |
| 0     | ×     | Off           |

**Notes:**

Logic 1 = Open collector

Logic 0 = -Vin (pin 2) potential

For positive Enable function, connect pin 2 to pin 4 and use pin 1.

For negative Enable function, leave pin 1 open and use pin 2.

For automatic power-up connect pin 2 to pin 4 and leave pin 1 open.

## Pin Descriptions

**+Vin:** The positive input supply for the module with respect to -Vin. When powering the module from a -48V telecom central office supply, this input is connected to the primary system ground.

**-Vin:** The negative input supply for the module, and the 0VDC reference for the EN 1, and EN 2 inputs. When powering the module from a +48V supply, this input is connected to the 48V(Return).

**EN 1:** The positive logic input that activates the module output. If not used, this pin should be left open circuit. Connecting this input to -Vin disables the module's outputs.

**EN 2:** The negative logic input that activates the module output. This pin must be connected to -Vin to enable the module's outputs. A high impedance disables the module's outputs.

**Vo 1:** The highest regulated output voltage, which is referenced to the COM node.

**Vo 2:** The regulated output that is designed to power logic circuitry. It is referenced to the COM node.

**Vo 3:** The low-voltage regulated output that provides power for a  $\mu$ -processor or DSP core, and is referenced to the COM node.

**COM:** The secondary return reference for the module's three regulated output voltages. It is DC isolated from the input supply pins.

**Vo1 Adjust:** Using a single resistor, this pin allows Vo1 to be adjusted higher or lower than the preset value. If not used, this pin should be left open circuit.

**Vo2 Adjust:** Using a single resistor, this pin allows Vo2 to be adjusted higher or lower than the preset value. If not used, this pin should be left open circuit.

**Vo3 Adjust:** Using a single resistor, this pin allows Vo3 to be adjusted higher or lower than the preset value. If not used, this pin should be left open circuit.

**PT4821 Electrical Specifications**(Unless otherwise stated, the operating conditions are:  $T_a = 25^\circ\text{C}$ ,  $V_{in} = 48\text{V}$ , and  $I_o = 0.5I_{o\text{max}}$ )

| Characteristics                                                                                               | Symbols                                                  | Conditions                                                                         | PT4821                                                                     |                                |                   |                                     |                         |
|---------------------------------------------------------------------------------------------------------------|----------------------------------------------------------|------------------------------------------------------------------------------------|----------------------------------------------------------------------------|--------------------------------|-------------------|-------------------------------------|-------------------------|
|                                                                                                               |                                                          |                                                                                    | Min                                                                        | Typ                            | Max               | Units                               |                         |
| Output Current                                                                                                | I <sub>o</sub>                                           | Each output                                                                        | I <sub>O1</sub> (3.3V)<br>I <sub>O2</sub> (2.5V)<br>I <sub>O3</sub> (1.5V) | 0.25 (1)<br>0.1 (1)<br>0.1 (1) | —<br>—<br>—       | 8 (2)<br>6 (2)<br>6 (2)             | A                       |
|                                                                                                               |                                                          | Total (I <sub>O1</sub> + I <sub>O2</sub> + I <sub>O3</sub> )                       |                                                                            | —                              | —                 | 12 (2)                              | A                       |
|                                                                                                               |                                                          | Input Voltage Range                                                                | V <sub>in</sub>                                                            | Continuous<br>Surge (1 minute) | 36<br>—           | —<br>—                              | 75<br>80                |
| Set-Point Voltage                                                                                             | V <sub>o</sub>                                           |                                                                                    | V <sub>O1</sub><br>V <sub>O2</sub><br>V <sub>O3</sub>                      | 3.24<br>2.45<br>1.47           | 3.3<br>2.5<br>1.5 | 3.36<br>2.55<br>1.53                | V                       |
| Temperature Variation                                                                                         | Reg <sub>temp</sub>                                      | −40°C ≤ T <sub>a</sub> ≤ +85°C, I <sub>o</sub> = I <sub>o</sub> min                | V <sub>O1</sub><br>V <sub>O2</sub> /V <sub>O3</sub>                        | —<br>—                         | ±0.5<br>±0.5      | —<br>—                              | % V <sub>o</sub>        |
| Line Regulation                                                                                               | Reg <sub>line</sub>                                      | All outputs, Over V <sub>in</sub> range                                            |                                                                            | —                              | ±0.1              | ±0.5                                | %V <sub>o</sub>         |
| Load Regulation                                                                                               | Reg <sub>load</sub>                                      | All outputs, 0 ≤ I <sub>o</sub> ≤ I <sub>o</sub> max                               |                                                                            | —                              | ±0.1              | ±0.5                                | %V <sub>o</sub>         |
| Total Output Voltage Variation                                                                                | ΔV <sub>o</sub> tol                                      | Includes set-point, line, load,<br>−40°C ≤ T <sub>a</sub> ≤ +85°C                  | V <sub>O1</sub><br>V <sub>O2</sub> /V <sub>O3</sub>                        | —<br>—                         | —<br>—            | ±3 (3)<br>±3 (3)                    | %V <sub>o</sub>         |
| Efficiency                                                                                                    | η                                                        | I <sub>O1</sub> =6A, I <sub>O2</sub> =2A, I <sub>O3</sub> =2A                      |                                                                            | —                              | 87                | —                                   | %                       |
| V <sub>o</sub> Ripple/Noise<br>(0 to 20MHz bandwidth)                                                         | V <sub>n</sub>                                           |                                                                                    | V <sub>O1</sub><br>V <sub>O2</sub><br>V <sub>O3</sub>                      | —<br>—<br>—                    | 40<br>35<br>25    | —<br>—<br>—                         | mV <sub>pp</sub>        |
| Transient Response                                                                                            | t <sub>TR</sub><br>V <sub>OS</sub>                       | 0.1A/μs load step, 50% to 75% I <sub>o</sub> max<br>V <sub>o</sub> over/undershoot |                                                                            | —<br>—                         | 200<br>3          | —<br>—                              | μSec<br>%V <sub>o</sub> |
| Output Adjust Range                                                                                           | V <sub>o</sub> adj                                       |                                                                                    | V <sub>O1</sub> /V <sub>O2</sub> /V <sub>O3</sub>                          | —                              | ±10               | —                                   | %V <sub>o</sub>         |
| Over-Current Threshold                                                                                        | I <sub>TRIP</sub>                                        | Total, all outputs. Reset with auto-recovery                                       |                                                                            | —                              | 14                | —                                   | A                       |
| Switching Frequency                                                                                           | f <sub>s</sub>                                           | Over V <sub>in</sub> and I <sub>o</sub> ranges                                     |                                                                            | 350                            | 400               | 450                                 | kHz                     |
| Under Voltage Lockout                                                                                         | V <sub>on</sub><br>V <sub>off</sub>                      | V <sub>in</sub> increasing<br>V <sub>in</sub> decreasing                           |                                                                            | —<br>—                         | 35.5<br>34        | —<br>—                              | V                       |
| Turn-On Time                                                                                                  | t <sub>on</sub>                                          | V <sub>in</sub> =48V step                                                          |                                                                            | —                              | 140 (4)           | —                                   | ms                      |
| Enable Control (pins 1 & 2)<br>High-Level Input Voltage<br>Low-Level Input Voltage<br>Low-Level Input Current | V <sub>IH</sub><br>V <sub>IL</sub><br>I <sub>IL</sub>    | Referenced to −V <sub>in</sub> (pin 4)                                             |                                                                            | 4<br>−0.2<br>—                 | —<br>—<br>1       | 15 (5)<br>0.8<br>2                  | V<br><br>mA             |
| Standby Input Current                                                                                         | I <sub>in</sub> standby                                  | pins 1 & 2 open circuit                                                            |                                                                            | —                              | 1                 | 5                                   | mA                      |
| Internal Input Capacitance                                                                                    | C <sub>int</sub>                                         |                                                                                    |                                                                            | —                              | 1.14              | —                                   | μF                      |
| External Output Capacitance                                                                                   | C <sub>O1</sub><br>C <sub>O2</sub><br>C <sub>O3</sub>    |                                                                                    |                                                                            | 0<br>0<br>0                    | 220<br>220<br>220 | 1,000 (6)<br>1,000 (6)<br>1,000 (6) | μF                      |
| Primary/Secondary Isolation                                                                                   | V <sub>iso</sub><br>C <sub>iso</sub><br>R <sub>iso</sub> |                                                                                    |                                                                            | 1500<br>—<br>10                | —<br>2,200<br>—   | —<br>—<br>—                         | V<br>pF<br>MΩ           |

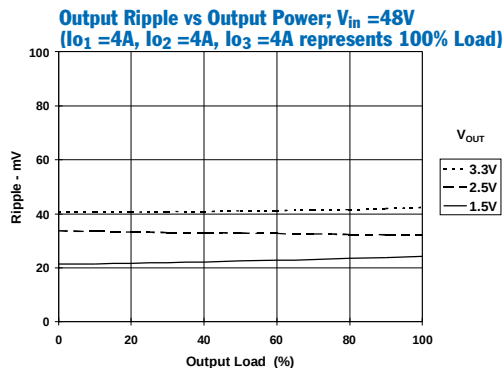
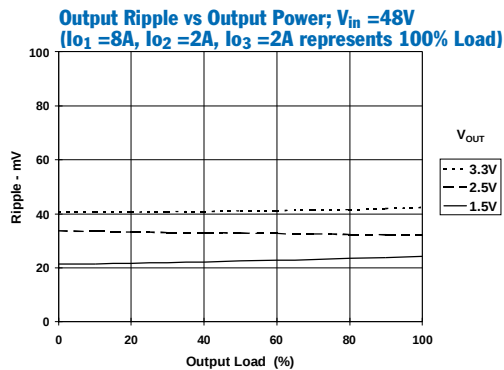
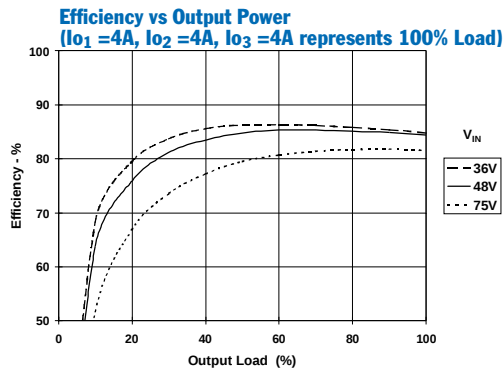
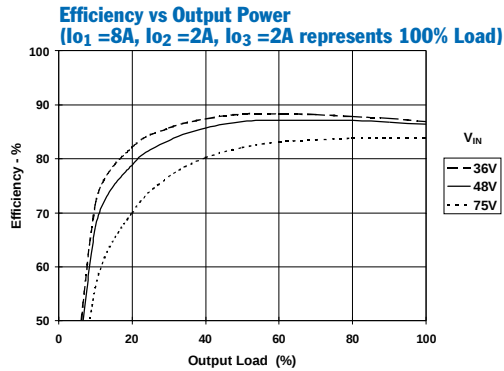
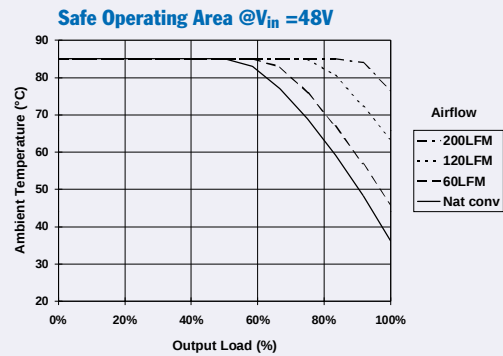
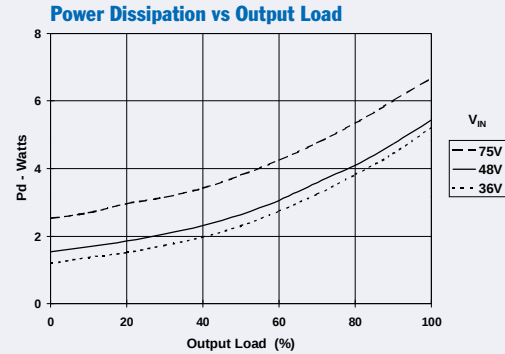
**Notes:** (1) The converter will operate down to no load with reduced specifications.(2) The sum-total current from outputs  $V_{o1}$ ,  $V_{o2}$ , and  $V_{o3}$  not to exceed 12ADC.

(3) Limits are specified by design.

(4) Measured from the application of the input voltage to the instance that all outputs are in regulation.

(5) The Enable inputs (pins 1 & 2) have internal pull-ups. Leaving pin 1 open-circuit and connecting pin 2 to  $-V_{in}$  allows the the converter to operate when input power is applied. The maximum open-circuit voltage is 4V.

(6) Ultra-low ESR capacitors, such as organic or polymer aluminum electrolytic types, may cause instability. Consult the factory before using.

**PT4821 Performance Characteristics** (See Notes A, B)**PT4821 Thermal Performance** (See Note C)  
( $I_{O1} + I_{O2} + I_{O3} = 12A$ , represents 100% Load)

**Note A:** All Characteristic data in the above graphs has been developed from actual products tested at 25°C. This data is considered typical data for the ISR.

**Note B:** Output Load (%) represents the percent drawn from each output of the stated 100% load condition.

**Note C:** SOA curves represent operating conditions at which the internal components are at or below the manufacturer's maximum rated operating temperatures.

**PT4822 Electrical Specifications**(Unless otherwise stated, the operating conditions are:  $T_a = 25^\circ\text{C}$ ,  $V_{in} = 48\text{V}$ , and  $I_o = 0.5I_{o\text{max}}$ )

| Characteristics                                                                    | Symbols                    | Conditions                                                                             | PT4822                                                |                                                                 |                        | Units                                                      |
|------------------------------------------------------------------------------------|----------------------------|----------------------------------------------------------------------------------------|-------------------------------------------------------|-----------------------------------------------------------------|------------------------|------------------------------------------------------------|
|                                                                                    |                            |                                                                                        | Min                                                   | Typ                                                             | Max                    |                                                            |
| Output Current                                                                     | $I_o$                      | Each output                                                                            | $I_{o1}$ (3.3V)<br>$I_{o2}$ (1.8V)<br>$I_{o3}$ (1.5V) | 0.25 <sup>(1)</sup><br>0.1 <sup>(1)</sup><br>0.1 <sup>(1)</sup> | —<br>—<br>—            | 8 <sup>(2)</sup><br>6 <sup>(2)</sup><br>6 <sup>(2)</sup> A |
|                                                                                    |                            | Total ( $I_{o1} + I_{o2} + I_{o3}$ )                                                   | —                                                     | —                                                               | 12 <sup>(2)</sup>      | A                                                          |
| Input Voltage Range                                                                | $V_{in}$                   | Continuous<br>Surge (1 minute)                                                         | 36<br>—                                               | —<br>—                                                          | 75<br>80               | V                                                          |
| Set-Point Voltage                                                                  | $V_o$                      | $V_{o1}$<br>$V_{o2}$<br>$V_{o3}$                                                       | 3.24<br>1.76<br>1.47                                  | 3.3<br>1.8<br>1.5                                               | 3.36<br>1.84<br>1.53   | V                                                          |
|                                                                                    |                            |                                                                                        | —                                                     | —                                                               | —                      |                                                            |
|                                                                                    |                            |                                                                                        | —                                                     | —                                                               | —                      |                                                            |
| Temperature Variation                                                              | $\text{Reg}_{\text{temp}}$ | $-40^\circ\text{C} \leq T_a \leq +85^\circ\text{C}$ , $I_o = I_{o\text{min}}$          | $V_{o1}$<br>$V_{o2}/V_{o3}$                           | $\pm 0.5$<br>$\pm 0.5$                                          | —<br>—                 | $\%V_o$                                                    |
| Line Regulation                                                                    | $\text{Reg}_{\text{line}}$ | All outputs, Over $V_{in}$ range                                                       | —                                                     | $\pm 0.1$                                                       | $\pm 0.5$              | $\%V_o$                                                    |
| Load Regulation                                                                    | $\text{Reg}_{\text{load}}$ | All outputs, $0 \leq I_o \leq I_{o\text{max}}$                                         | —                                                     | $\pm 0.1$                                                       | $\pm 0.5$              | $\%V_o$                                                    |
| Total Output Voltage Variation                                                     | $\Delta V_o, \text{tol}$   | Includes set-point, line, load,<br>$-40^\circ\text{C} \leq T_a \leq +85^\circ\text{C}$ | $V_{o1}$                                              | —                                                               | $\pm 3$ <sup>(3)</sup> | $\%V_o$                                                    |
|                                                                                    |                            |                                                                                        | $V_{o2}/V_{o3}$                                       | —                                                               | $\pm 3$ <sup>(3)</sup> |                                                            |
| Efficiency                                                                         | $\eta$                     | $I_{o1} = 6\text{A}$ , $I_{o2} = 2\text{A}$ , $I_{o3} = 2\text{A}$                     | —                                                     | 86                                                              | —                      | %                                                          |
| $V_o$ Ripple/Noise<br>(0 to 20MHz bandwidth)                                       | $V_n$                      | $V_{o1}$<br>$V_{o2}$<br>$V_{o3}$                                                       | —                                                     | 40                                                              | —                      | mV <sub>pp</sub>                                           |
|                                                                                    |                            |                                                                                        | —                                                     | 25                                                              | —                      |                                                            |
|                                                                                    |                            |                                                                                        | —                                                     | 25                                                              | —                      |                                                            |
| Transient Response                                                                 | $t_{tr}$                   | 0.1A/ $\mu\text{s}$ load step, 50% to 75% $I_{o\text{max}}$                            | —                                                     | 200                                                             | —                      | $\mu\text{Sec}$                                            |
|                                                                                    | $V_{os}$                   | $V_o$ over/undershoot                                                                  | —                                                     | 3                                                               | —                      |                                                            |
| Output Adjust Range                                                                | $V_{o\text{adj}}$          | $V_{o1}/V_{o2}/V_{o3}$                                                                 | —                                                     | $\pm 10$                                                        | —                      | $\%V_o$                                                    |
| Over-Current Threshold                                                             | $I_{\text{TRIP}}$          | Total, all outputs. Reset with auto-recovery                                           | —                                                     | 14                                                              | —                      | A                                                          |
| Switching Frequency                                                                | $f_s$                      | Over $V_{in}$ and $I_o$ ranges                                                         | 350                                                   | 400                                                             | 450                    | kHz                                                        |
| Under Voltage Lockout                                                              | $V_{on}$                   | $V_{in}$ increasing                                                                    | —                                                     | 35.5                                                            | —                      | V                                                          |
|                                                                                    | $V_{off}$                  | $V_{in}$ decreasing                                                                    | —                                                     | 34                                                              | —                      |                                                            |
| Turn-On Time                                                                       | $t_{on}$                   | $V_{in} = 48\text{V}$ step                                                             | —                                                     | 140 <sup>(4)</sup>                                              | —                      | ms                                                         |
| Enable Control (pins 1 & 2)<br>High-Level Input Voltage<br>Low-Level Input Voltage | $V_{IH}$                   | Referenced to $-V_{in}$ (pin 4)                                                        | 4                                                     | —                                                               | 15 <sup>(5)</sup>      | V                                                          |
|                                                                                    | $V_{IL}$                   |                                                                                        | -0.2                                                  | —                                                               | 0.8                    |                                                            |
| Low-Level Input Current                                                            | $I_{IL}$                   |                                                                                        | —                                                     | 1                                                               | 2                      | mA                                                         |
| Standby Input Current                                                              | $I_{in \text{ standby}}$   | pins 1 & 2 open circuit                                                                | —                                                     | 1                                                               | 5                      | mA                                                         |
| Internal Input Capacitance                                                         | $C_{int}$                  |                                                                                        | —                                                     | 1.14                                                            | —                      | $\mu\text{F}$                                              |
| External Output Capacitance                                                        | $C_{o1}$                   |                                                                                        | 0                                                     | 220                                                             | 1,000 <sup>(6)</sup>   | $\mu\text{F}$                                              |
|                                                                                    | $C_{o2}$                   |                                                                                        | 0                                                     | 220                                                             | 1,000 <sup>(6)</sup>   |                                                            |
|                                                                                    | $C_{o3}$                   |                                                                                        | 0                                                     | 220                                                             | 1,000 <sup>(6)</sup>   |                                                            |
| Primary/Secondary Isolation                                                        | $V_{iso}$                  |                                                                                        | 1500                                                  | —                                                               | —                      | V                                                          |
|                                                                                    | $C_{iso}$                  |                                                                                        | —                                                     | 2,200                                                           | —                      |                                                            |
|                                                                                    | $R_{iso}$                  |                                                                                        | 10                                                    | —                                                               | —                      |                                                            |

**Notes:** (1) The converter will operate down to no load with reduced specifications.(2) The sum-total current from outputs  $V_{o1}$ ,  $V_{o2}$ , and  $V_{o3}$  cannot exceed 12ADC.

(3) Limits are specified by design.

(4) Measured from the application of the input voltage to the instance that all outputs are in regulation.

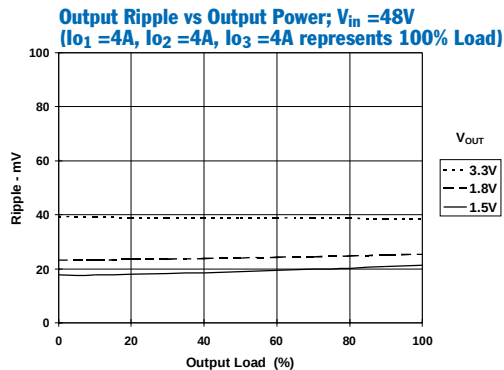
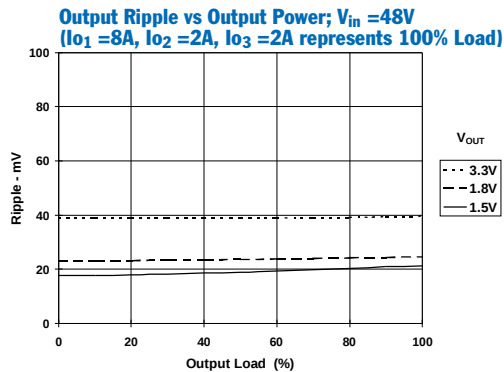
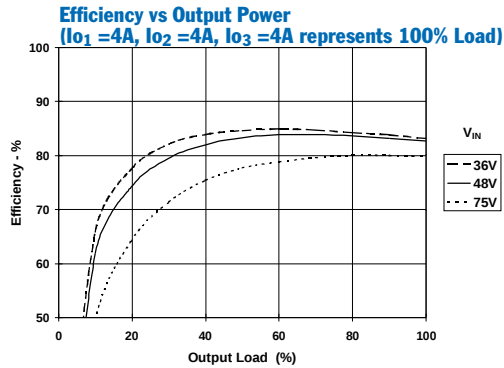
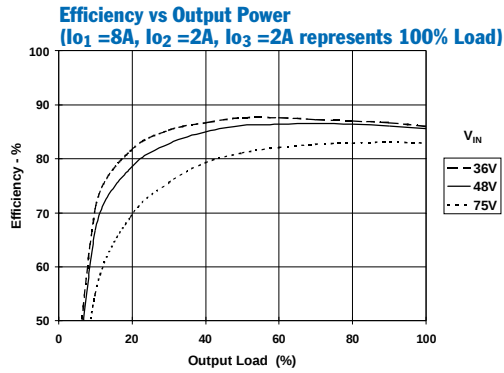
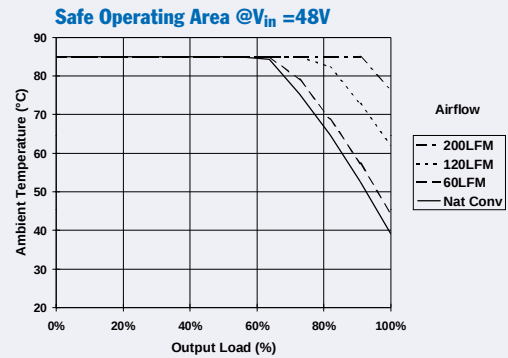
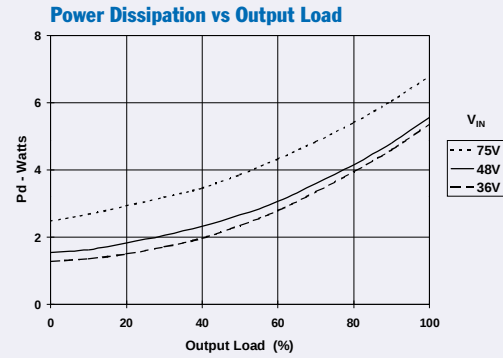
(5) The Enable inputs (pins 1 & 2) have internal pull-ups. Leaving pin 1 open-circuit and connecting pin 2 to  $-V_{in}$  allows the the converter to operate when input power is applied. The maximum open-circuit voltage is 4V.

(6) Ultra-low ESR capacitors, such as organic or polymer aluminum electrolytic types, may cause instability. Consult the factory before using.

## 35-W Triple Output Isolated DC/DC Converter for Logic Applications

SLTS165E - FEBRUARY 2002 - REVISED MARCH 2003

## PT4822 Performance Characteristics (See Note A, B)

PT4822 Thermal Performance (See Note C)  
( $I_{O1} + I_{O2} + I_{O3} = 12A$ , represents 100% Load)**Note A:** All Characteristic data in the above graphs has been developed from actual products tested at 25°C. This data is considered typical data for the ISR.**Note B:** Output Load (%) represents the percent drawn from each output of the stated 100% load condition.**Note C:** SOA curves represent operating conditions at which the internal components are at or below the manufacturer's maximum rated operating temperatures.

**PT4823 Electrical Specifications**(Unless otherwise stated, the operating conditions are:  $T_a = 25^\circ\text{C}$ ,  $V_{in} = 48\text{V}$ , and  $I_o = 0.5I_{o\text{max}}$ )

| Characteristics                                                                    | Symbols                             | Conditions                                                                             | PT4823                                                |                                                                 |                                                                      | Units                                                      |
|------------------------------------------------------------------------------------|-------------------------------------|----------------------------------------------------------------------------------------|-------------------------------------------------------|-----------------------------------------------------------------|----------------------------------------------------------------------|------------------------------------------------------------|
|                                                                                    |                                     |                                                                                        | Min                                                   | Typ                                                             | Max                                                                  |                                                            |
| Output Current                                                                     | $I_o$                               | Each output                                                                            | $I_{o1}$ (3.3V)<br>$I_{o2}$ (2.5V)<br>$I_{o3}$ (1.2V) | 0.25 <sup>(1)</sup><br>0.1 <sup>(1)</sup><br>0.1 <sup>(1)</sup> | —<br>—<br>—                                                          | 8 <sup>(2)</sup><br>6 <sup>(2)</sup><br>6 <sup>(2)</sup> A |
|                                                                                    |                                     | Total ( $I_{o1} + I_{o2} + I_{o3}$ )                                                   | —                                                     | —                                                               | 12 <sup>(2)</sup>                                                    | A                                                          |
| Input Voltage Range                                                                | $V_{in}$                            | Continuous<br>Surge (1 minute)                                                         | 36<br>—                                               | —<br>—                                                          | 75<br>80                                                             | V                                                          |
| Set-Point Voltage                                                                  | $V_o$                               |                                                                                        | $V_{o1}$<br>$V_{o2}$<br>$V_{o3}$                      | 3.24<br>2.45<br>1.17                                            | 3.3<br>2.5<br>1.2                                                    | 3.36<br>2.55<br>1.23 V                                     |
| Temperature Variation                                                              | $\text{Reg}_{\text{temp}}$          | $-40^\circ\text{C} \leq T_a \leq +85^\circ\text{C}$ , $I_o = I_{o\text{min}}$          | $V_{o1}$<br>$V_{o2}/V_{o3}$                           | —<br>—                                                          | $\pm 0.5$<br>$\pm 0.5$                                               | —<br>— % $V_o$                                             |
| Line Regulation                                                                    | $\text{Reg}_{\text{line}}$          | All outputs, Over $V_{in}$ range                                                       | —                                                     | $\pm 0.1$                                                       | $\pm 0.5$                                                            | % $V_o$                                                    |
| Load Regulation                                                                    | $\text{Reg}_{\text{load}}$          | All outputs, $0 \leq I_o \leq I_{o\text{max}}$                                         | —                                                     | $\pm 0.1$                                                       | $\pm 0.5$                                                            | % $V_o$                                                    |
| Total Output Voltage Variation                                                     | $\Delta V_o, \text{tol}$            | Includes set-point, line, load,<br>$-40^\circ\text{C} \leq T_a \leq +85^\circ\text{C}$ | $V_{o1}$<br>$V_{o2}/V_{o3}$                           | —<br>—                                                          | $\pm 3$ <sup>(3)</sup><br>$\pm 3$ <sup>(3)</sup>                     | —<br>— % $V_o$                                             |
| Efficiency                                                                         | $\eta$                              | $I_{o1} = 6\text{A}$ , $I_{o2} = 2\text{A}$ , $I_{o3} = 2\text{A}$                     | —                                                     | 85.6                                                            | —                                                                    | %                                                          |
| $V_o$ Ripple/Noise<br>(0 to 20MHz bandwidth)                                       | $V_n$                               |                                                                                        | $V_{o1}$<br>$V_{o2}$<br>$V_{o3}$                      | —<br>—<br>—                                                     | 35<br>25<br>25                                                       | —<br>—<br>— mV <sub>pp</sub>                               |
| Transient Response                                                                 | $t_{tr}$<br>$V_{os}$                | 0.1A/ $\mu\text{s}$ load step, 50% to 75% $I_{o\text{max}}$<br>$V_o$ over/undershoot   | —<br>—                                                | 200<br>3                                                        | —<br>—                                                               | $\mu\text{Sec}$<br>% $V_o$                                 |
| Output Adjust Range                                                                | $V_{o\text{adj}}$                   |                                                                                        | $V_{o1}/V_{o2}/V_{o3}$                                | —                                                               | $\pm 10$                                                             | — % $V_o$                                                  |
| Over-Current Threshold                                                             | $I_{\text{TRIP}}$                   | Total, all outputs. Reset with auto-recovery                                           | —                                                     | 14                                                              | —                                                                    | A                                                          |
| Switching Frequency                                                                | $f_s$                               | Over $V_{in}$ and $I_o$ ranges                                                         | 350                                                   | 400                                                             | 450                                                                  | kHz                                                        |
| Under Voltage Lockout                                                              | $V_{on}$<br>$V_{off}$               | $V_{in}$ increasing<br>$V_{in}$ decreasing                                             | —<br>—                                                | 35.5<br>34                                                      | —<br>—                                                               | V                                                          |
| Turn-On Time                                                                       | $t_{on}$                            | $V_{in} = 48\text{V}$ step                                                             | —                                                     | 140 <sup>(4)</sup>                                              | —                                                                    | ms                                                         |
| Enable Control (pins 1 & 2)<br>High-Level Input Voltage<br>Low-Level Input Voltage | $V_{IH}$<br>$V_{IL}$                | Referenced to $-V_{in}$ (pin 4)                                                        | 4<br>-0.2                                             | —<br>—                                                          | 15 <sup>(5)</sup><br>0.8                                             | V                                                          |
| Low-Level Input Current                                                            | $I_{IL}$                            |                                                                                        | —                                                     | 1                                                               | 2                                                                    | mA                                                         |
| Standby Input Current                                                              | $I_{in \text{ standby}}$            | pins 1 & 2 open circuit                                                                | —                                                     | 1                                                               | 5                                                                    | mA                                                         |
| Internal Input Capacitance                                                         | $C_{int}$                           |                                                                                        | —                                                     | 1.14                                                            | —                                                                    | $\mu\text{F}$                                              |
| External Output Capacitance                                                        | $C_{o1}$<br>$C_{o2}$<br>$C_{o3}$    |                                                                                        | 0<br>0<br>0                                           | 220<br>220<br>220                                               | 1,000 <sup>(6)</sup><br>1,000 <sup>(6)</sup><br>1,000 <sup>(6)</sup> | $\mu\text{F}$                                              |
| Primary/Secondary Isolation                                                        | $V_{iso}$<br>$C_{iso}$<br>$R_{iso}$ |                                                                                        | 1500<br>—<br>10                                       | —<br>2,200<br>—                                                 | —<br>—<br>—                                                          | V<br>pF<br>M $\Omega$                                      |

**Notes:** (1) The converter will operate down to no load with reduced specifications.(2) The sum-total current from outputs  $V_{o1}$ ,  $V_{o2}$ , and  $V_{o3}$  cannot exceed 12ADC.

(3) Limits are specified by design.

(4) Measured from the application of the input voltage to the instance that all outputs are in regulation.

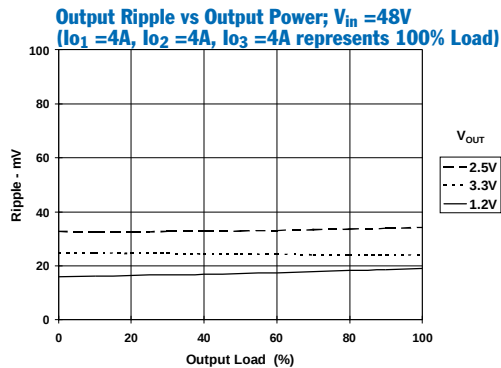
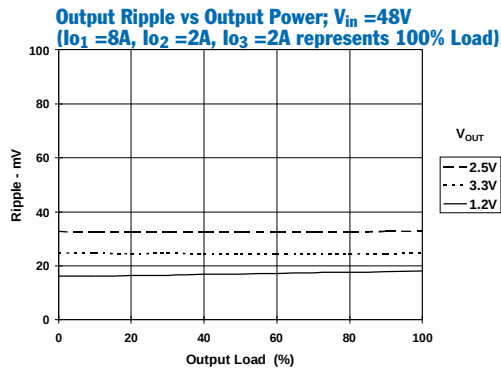
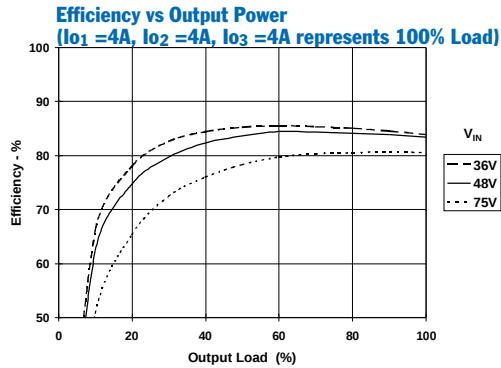
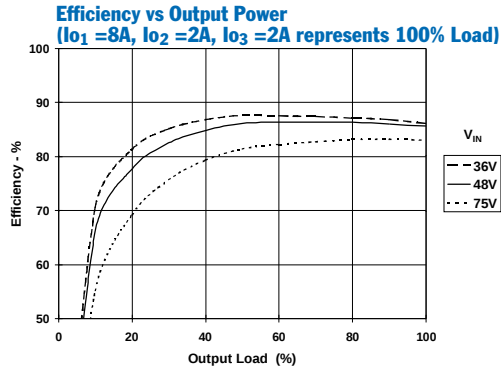
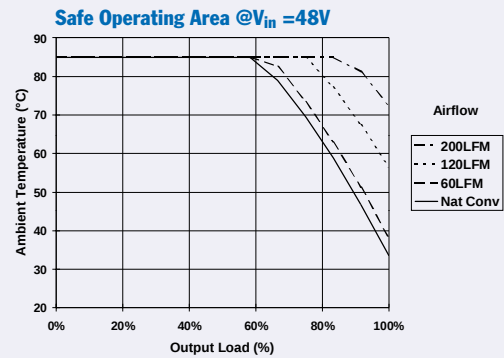
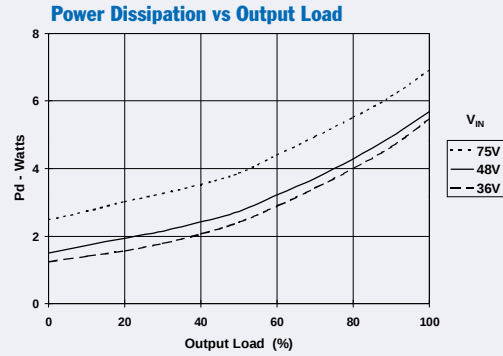
(5) The Enable inputs (pins 1 & 2) have internal pull-ups. Leaving pin 1 open-circuit and connecting pin 2 to  $-V_{in}$  allows the the converter to operate when input power is applied. The maximum open-circuit voltage is 4V.

(6) Ultra-low ESR capacitors, such as organic or polymer aluminum electrolytic types, may cause instability. Consult the factory before using.

## 35-W Triple Output Isolated DC/DC Converter for Logic Applications

SLTS165E - FEBRUARY 2002 - REVISED MARCH 2003

## PT4823 Performance Characteristics (See Notes A, B)

PT4823 Thermal Performance (See Note C)  
( $I_{O1} + I_{O2} + I_{O3} = 12A$ , represents 100% Load)**Note A:** All Characteristic data in the above graphs has been developed from actual products tested at 25°C. This data is considered typical data for the ISR.**Note B:** Output Load (%) represents the percent drawn from each output of the stated 100% load condition.**Note C:** SOA curves represent operating conditions at which the internal components are at or below the manufacturer's maximum rated operating temperatures.

**PT4824 Electrical Specifications** (Unless otherwise stated, the operating conditions are:  $T_a = 25^\circ\text{C}$ ,  $V_{in} = 48\text{V}$ , and  $I_o = 0.5I_{o\text{max}}$ )

| Characteristics                | Symbols                             | Conditions                                                                           | PT4824                                                |                                                                 |                                                                      | Units                                                      |
|--------------------------------|-------------------------------------|--------------------------------------------------------------------------------------|-------------------------------------------------------|-----------------------------------------------------------------|----------------------------------------------------------------------|------------------------------------------------------------|
|                                |                                     |                                                                                      | Min                                                   | Typ                                                             | Max                                                                  |                                                            |
| Output Current                 | $I_o$                               | Each output                                                                          | $I_{o1}$ (3.3V)<br>$I_{o2}$ (1.8V)<br>$I_{o3}$ (1.2V) | 0.25 <sup>(1)</sup><br>0.1 <sup>(1)</sup><br>0.1 <sup>(1)</sup> | —<br>—<br>—                                                          | 8 <sup>(2)</sup><br>6 <sup>(2)</sup><br>6 <sup>(2)</sup> A |
|                                |                                     | Total ( $I_{o1} + I_{o2} + I_{o3}$ )                                                 | —                                                     | —                                                               | 12 <sup>(2)</sup>                                                    | A                                                          |
| Input Voltage Range            | $V_{in}$                            | Continuous<br>Surge (1 minute)                                                       | 36<br>—                                               | —<br>—                                                          | 75<br>80                                                             | V                                                          |
| Set-Point Voltage              | $V_o$                               |                                                                                      | $V_{o1}$<br>$V_{o2}$<br>$V_{o3}$                      | 3.24<br>1.76<br>1.17                                            | 3.3<br>1.8<br>1.2                                                    | 3.36<br>1.84<br>1.23 V                                     |
|                                |                                     | Temperature Variation                                                                | $\text{Reg}_{\text{temp}}$                            | —<br>—                                                          | $\pm 0.5$<br>$\pm 0.5$                                               | —<br>— % $V_o$                                             |
|                                |                                     | Line Regulation                                                                      | $\text{Reg}_{\text{line}}$                            | —                                                               | $\pm 0.1$                                                            | $\pm 0.5$ % $V_o$                                          |
| Load Regulation                | $\text{Reg}_{\text{load}}$          | All outputs, Over $V_{in}$ range                                                     | —                                                     | $\pm 0.1$                                                       | $\pm 0.5$                                                            | % $V_o$                                                    |
| Total Output Voltage Variation | $\Delta V_o$ , tol                  | All outputs, $0 \leq I_o \leq I_{o\text{max}}$                                       | —                                                     | —                                                               | $\pm 0.5$                                                            | % $V_o$                                                    |
| Efficiency                     | $\eta$                              | $I_{o1} = 6\text{A}$ , $I_{o2} = 2\text{A}$ , $I_{o3} = 2\text{A}$                   |                                                       | —                                                               | 85                                                                   | — %                                                        |
|                                |                                     |                                                                                      | $V_{o1}$<br>$V_{o2}$<br>$V_{o3}$                      | —<br>—<br>—                                                     | 30<br>25<br>25                                                       | — mV <sub>pp</sub>                                         |
|                                |                                     |                                                                                      |                                                       | —                                                               | 25                                                                   | —                                                          |
| Transient Response             | $t_{tr}$<br>$V_{os}$                | 0.1A/ $\mu\text{s}$ load step, 50% to 75% $I_{o\text{max}}$<br>$V_o$ over/undershoot |                                                       | —                                                               | 200<br>3                                                             | —<br>— $\mu\text{Sec}$<br>— % $V_o$                        |
|                                |                                     |                                                                                      | $V_{o1}/V_{o2}/V_{o3}$                                | —                                                               | $\pm 10$                                                             | — % $V_o$                                                  |
|                                |                                     |                                                                                      |                                                       | —                                                               | 14                                                                   | — A                                                        |
| Output Adjust Range            | $V_{o\text{adj}}$                   | Total, all outputs. Reset with auto-recovery                                         | —                                                     | 14                                                              | —                                                                    | A                                                          |
| Over-Current Threshold         | $I_{TRIP}$                          | Over $V_{in}$ and $I_o$ ranges                                                       | 350                                                   | 400                                                             | 450                                                                  | kHz                                                        |
| Switching Frequency            | $f_s$                               | $V_{in}$ increasing<br>$V_{in}$ decreasing                                           | —<br>—                                                | 35.5<br>34                                                      | —<br>—                                                               | V                                                          |
| Under Voltage Lockout          | $V_{on}$<br>$V_{off}$               | $V_{in} = 48\text{V}$ step                                                           | —                                                     | 140 <sup>(4)</sup>                                              | —                                                                    | ms                                                         |
| Turn-On Time                   | $t_{on}$                            | Referenced to $-V_{in}$ (pin 4)                                                      | 4<br>—0.2                                             | —<br>—                                                          | 15 <sup>(5)</sup><br>0.8                                             | V                                                          |
| Enable Control (pins 1 & 2)    | $V_{IH}$<br>$V_{IL}$                |                                                                                      | —                                                     | 1                                                               | 2                                                                    | mA                                                         |
| High-Level Input Voltage       | $I_{IL}$                            |                                                                                      | —                                                     | 1                                                               | 2                                                                    | mA                                                         |
| Low-Level Input Voltage        | $I_{in\text{ standby}}$             | pins 1 & 2 open circuit                                                              | —                                                     | 1                                                               | 5                                                                    | mA                                                         |
| Low-Level Input Current        | $C_{int}$                           |                                                                                      | —                                                     | 1.14                                                            | —                                                                    | $\mu\text{F}$                                              |
| Standby Input Current          | $C_{o1}$<br>$C_{o2}$<br>$C_{o3}$    |                                                                                      | 0<br>0<br>0                                           | 220<br>220<br>220                                               | 1,000 <sup>(6)</sup><br>1,000 <sup>(6)</sup><br>1,000 <sup>(6)</sup> | $\mu\text{F}$                                              |
| External Output Capacitance    | $V_{iso}$<br>$C_{iso}$<br>$R_{iso}$ |                                                                                      | 1500<br>—<br>10                                       | —<br>2,200<br>—                                                 | —<br>—<br>—                                                          | V<br>pF<br>M $\Omega$                                      |
| Primary/Secondary Isolation    |                                     |                                                                                      |                                                       |                                                                 |                                                                      |                                                            |

**Notes:** (1) The converter will operate down to no load with reduced specifications.(2) The sum-total current from outputs  $V_{o1}$ ,  $V_{o2}$ , and  $V_{o3}$  cannot exceed 12ADC.

(3) Limits are specified by design.

(4) Measured from the application of the input voltage to the instance that all outputs are in regulation.

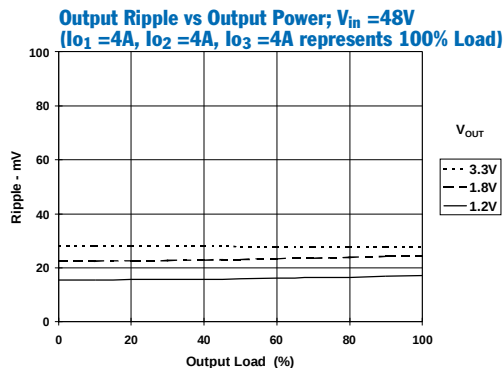
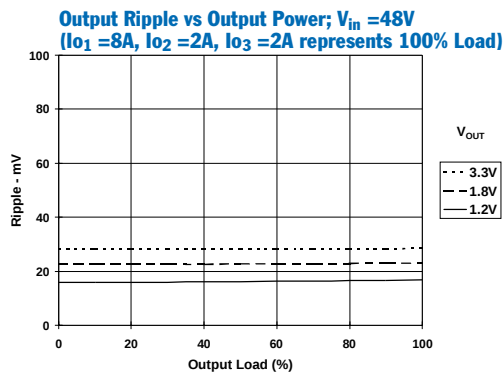
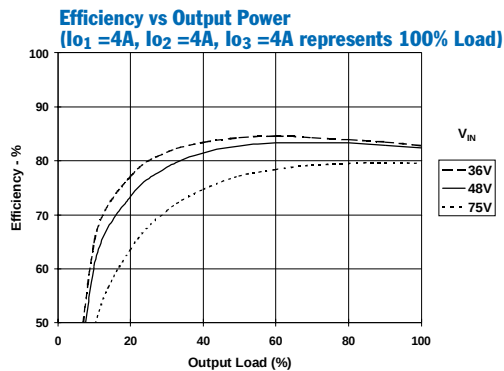
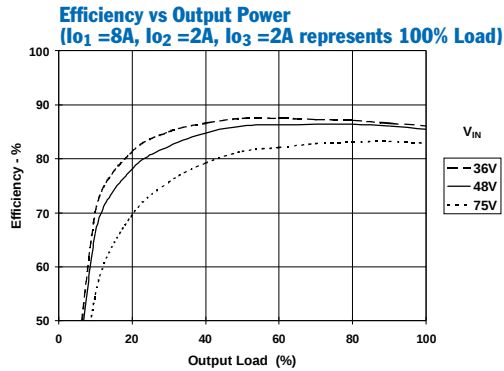
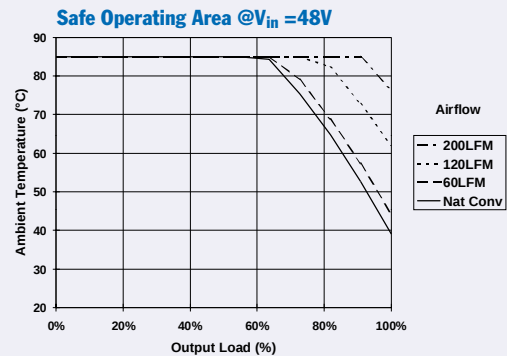
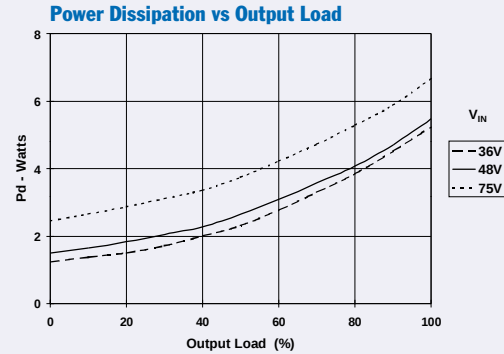
(5) The Enable inputs (pins 1 & 2) have internal pull-ups. Leaving pin 1 open-circuit and connecting pin 2 to  $-V_{in}$  allows the the converter to operate when input power is applied. The maximum open-circuit voltage is 4V.

(6) Ultra-low ESR capacitors, such as organic or polymer aluminum electrolytic types, may cause instability. Consult the factory before using.

## 35-W Triple Output Isolated DC/DC Converter for Logic Applications

SLTS165E - FEBRUARY 2002 - REVISED MARCH 2003

## PT4824 Performance Characteristics (See Notes A, B)

PT4824 Thermal Performance (See Note C)  
( $I_{O1} + I_{O2} + I_{O3} = 12A$ , represents 100% Load)**Note A:** All Characteristic data in the above graphs has been developed from actual products tested at 25°C. This data is considered typical data for the ISR.**Note B:** Output Load (%) represents the percent drawn from each output of the stated 100% load condition.**Note C:** SOA curves represent operating conditions at which the internal components are at or below the manufacturer's maximum rated operating temperatures.

**PT4825 Electrical Specifications**(Unless otherwise stated, the operating conditions are:  $T_a = 25^\circ\text{C}$ ,  $V_{in} = 48\text{V}$ , and  $I_o = 0.5I_{o\text{max}}$ )

| Characteristics                                                                    | Symbols                             | Conditions                                                                             | PT4825                                                |                                                                 |                                                                      | Units                                                      |
|------------------------------------------------------------------------------------|-------------------------------------|----------------------------------------------------------------------------------------|-------------------------------------------------------|-----------------------------------------------------------------|----------------------------------------------------------------------|------------------------------------------------------------|
|                                                                                    |                                     |                                                                                        | Min                                                   | Typ                                                             | Max                                                                  |                                                            |
| Output Current                                                                     | $I_o$                               | Each output                                                                            | $I_{o1}$ (3.3V)<br>$I_{o2}$ (1.5V)<br>$I_{o3}$ (1.2V) | 0.25 <sup>(1)</sup><br>0.1 <sup>(1)</sup><br>0.1 <sup>(1)</sup> | —<br>—<br>—                                                          | 8 <sup>(2)</sup><br>6 <sup>(2)</sup><br>6 <sup>(2)</sup> A |
|                                                                                    |                                     | Total ( $I_{o1} + I_{o2} + I_{o3}$ )                                                   | —                                                     | —                                                               | 12 <sup>(2)</sup>                                                    | A                                                          |
| Input Voltage Range                                                                | $V_{in}$                            | Continuous<br>Surge (1 minute)                                                         | 36<br>—                                               | —<br>—                                                          | 75<br>80                                                             | V                                                          |
| Set-Point Voltage                                                                  | $V_o$                               |                                                                                        | $V_{o1}$<br>$V_{o2}$<br>$V_{o3}$                      | 3.24<br>1.47<br>1.2                                             | 3.3<br>1.5<br>1.23                                                   | 3.36<br>1.53<br>1.23 V                                     |
| Temperature Variation                                                              | $\text{Reg}_{\text{temp}}$          | $-40^\circ\text{C} \leq T_a \leq +85^\circ\text{C}$ , $I_o = I_{o\text{min}}$          | $V_{o1}$<br>$V_{o2}/V_{o3}$                           | —<br>—                                                          | $\pm 0.5$<br>$\pm 0.5$                                               | —<br>— % $V_o$                                             |
| Line Regulation                                                                    | $\text{Reg}_{\text{line}}$          | All outputs, Over $V_{in}$ range                                                       | —                                                     | $\pm 0.1$                                                       | $\pm 0.5$                                                            | % $V_o$                                                    |
| Load Regulation                                                                    | $\text{Reg}_{\text{load}}$          | All outputs, $0 \leq I_o \leq I_{o\text{max}}$                                         | —                                                     | $\pm 0.1$                                                       | $\pm 0.5$                                                            | % $V_o$                                                    |
| Total Output Voltage Variation                                                     | $\Delta V_o, \text{tol}$            | Includes set-point, line, load,<br>$-40^\circ\text{C} \leq T_a \leq +85^\circ\text{C}$ | $V_{o1}$<br>$V_{o2}/V_{o3}$                           | —<br>—                                                          | $\pm 3$ <sup>(3)</sup><br>$\pm 3$ <sup>(3)</sup>                     | $\pm 3$ <sup>(3)</sup> % $V_o$                             |
| Efficiency                                                                         | $\eta$                              | $I_{o1} = 6\text{A}$ , $I_{o2} = 2\text{A}$ , $I_{o3} = 2\text{A}$                     | —                                                     | 86                                                              | —                                                                    | %                                                          |
| $V_o$ Ripple/Noise<br>(0 to 20MHz bandwidth)                                       | $V_n$                               |                                                                                        | $V_{o1}$<br>$V_{o2}$<br>$V_{o3}$                      | —<br>—<br>—                                                     | 35<br>25<br>25                                                       | —<br>—<br>— mV <sub>pp</sub>                               |
| Transient Response                                                                 | $t_{tr}$<br>$V_{os}$                | 0.1A/ $\mu\text{s}$ load step, 50% to 75% $I_{o\text{max}}$<br>$V_o$ over/undershoot   | —<br>—                                                | 200<br>3                                                        | —<br>—                                                               | $\mu\text{Sec}$<br>% $V_o$                                 |
| Output Adjust Range                                                                | $V_{o\text{adj}}$                   |                                                                                        | $V_{o1}/V_{o2}/V_{o3}$                                | —                                                               | $\pm 10$                                                             | — % $V_o$                                                  |
| Over-Current Threshold                                                             | $I_{\text{TRIP}}$                   | Total, all outputs. Reset with auto-recovery                                           | —                                                     | 14                                                              | —                                                                    | A                                                          |
| Switching Frequency                                                                | $f_s$                               | Over $V_{in}$ and $I_o$ ranges                                                         | 350                                                   | 400                                                             | 450                                                                  | kHz                                                        |
| Under Voltage Lockout                                                              | $V_{on}$<br>$V_{off}$               | $V_{in}$ increasing<br>$V_{in}$ decreasing                                             | —<br>—                                                | 35.5<br>34                                                      | —<br>—                                                               | V                                                          |
| Turn-On Time                                                                       | $t_{on}$                            | $V_{in} = 48\text{V}$ step                                                             | —                                                     | 140 <sup>(4)</sup>                                              | —                                                                    | ms                                                         |
| Enable Control (pins 1 & 2)<br>High-Level Input Voltage<br>Low-Level Input Voltage | $V_{IH}$<br>$V_{IL}$                | Referenced to $-V_{in}$ (pin 4)                                                        | 4<br>-0.2                                             | —<br>—                                                          | 15 <sup>(5)</sup><br>0.8                                             | V                                                          |
| Low-Level Input Current                                                            | $I_{IL}$                            |                                                                                        | —                                                     | 1                                                               | 2                                                                    | mA                                                         |
| Standby Input Current                                                              | $I_{in \text{ standby}}$            | pins 1 & 2 open circuit                                                                | —                                                     | 1                                                               | 5                                                                    | mA                                                         |
| Internal Input Capacitance                                                         | $C_{int}$                           |                                                                                        | —                                                     | 1.14                                                            | —                                                                    | $\mu\text{F}$                                              |
| External Output Capacitance                                                        | $C_{o1}$<br>$C_{o2}$<br>$C_{o3}$    |                                                                                        | 0<br>0<br>0                                           | 220<br>220<br>220                                               | 1,000 <sup>(6)</sup><br>1,000 <sup>(6)</sup><br>1,000 <sup>(6)</sup> | $\mu\text{F}$                                              |
| Primary/Secondary Isolation                                                        | $V_{iso}$<br>$C_{iso}$<br>$R_{iso}$ |                                                                                        | 1500<br>—<br>10                                       | —<br>2,200<br>—                                                 | —<br>—<br>—                                                          | V<br>pF<br>M $\Omega$                                      |

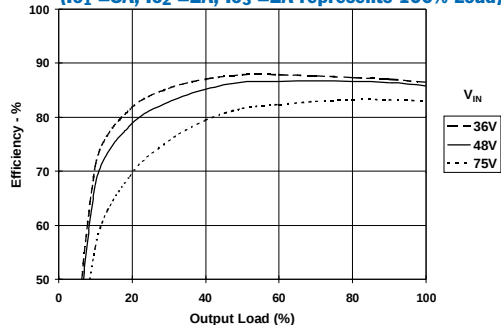
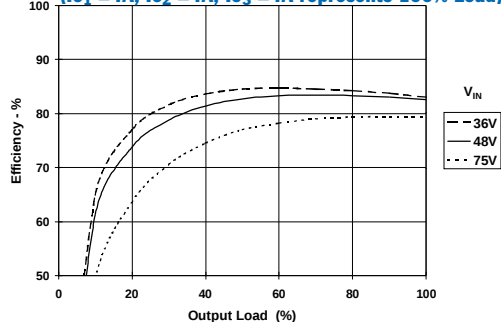
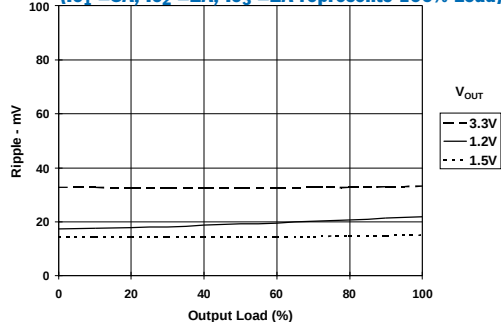
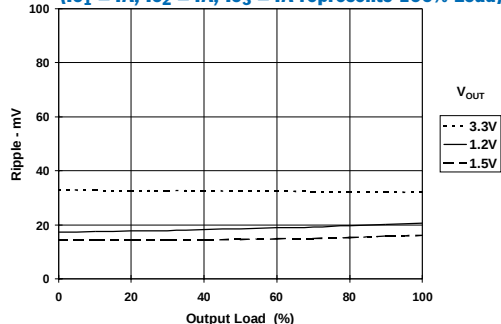
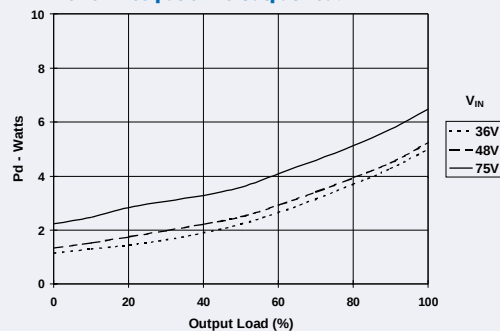
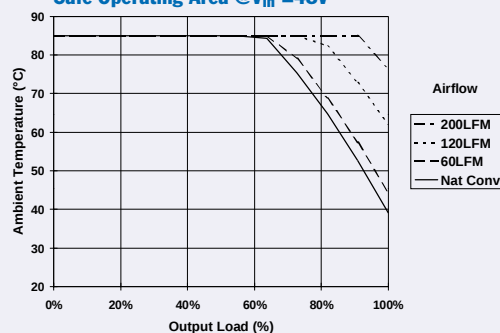
**Notes:** (1) The converter will operate down to no load with reduced specifications.(2) The sum-total current from outputs  $V_{o1}$ ,  $V_{o2}$ , and  $V_{o3}$  not to exceed 12ADC.

(3) Limits are specified by design.

(4) Measured from the application of the input voltage to the instance that all outputs are in regulation.

(5) The Enable inputs (pins 1 & 2) have internal pull-ups. Leaving pin 1 open-circuit and connecting pin 2 to  $-V_{in}$  allows the the converter to operate when input power is applied. The maximum open-circuit voltage is 4V.

(6) Ultra-low ESR capacitors, such as organic or polymer aluminum electrolytic types, may cause instability. Consult the factory before using.

**PT4825 Performance Characteristics** (See Notes A, B)**Efficiency vs Output Power**  
( $I_{O1} = 8A$ ,  $I_{O2} = 2A$ ,  $I_{O3} = 2A$  represents 100% Load)**Efficiency vs Output Power**  
( $I_{O1} = 4A$ ,  $I_{O2} = 4A$ ,  $I_{O3} = 4A$  represents 100% Load)**Output Ripple vs Output Power;  $V_{IN} = 48V$**   
( $I_{O1} = 8A$ ,  $I_{O2} = 2A$ ,  $I_{O3} = 2A$  represents 100% Load)**Output Ripple vs Output Power;  $V_{IN} = 48V$**   
( $I_{O1} = 4A$ ,  $I_{O2} = 4A$ ,  $I_{O3} = 4A$  represents 100% Load)**PT4825 Thermal Performance** (See Note C)  
( $I_{O1} + I_{O2} + I_{O3} = 12A$ , represents 100% Load)**Power Dissipation vs Output Load****Safe Operating Area @  $V_{IN} = 48V$** **Note A:** All Characteristic data in the above graphs has been developed from actual products tested at 25°C. This data is considered typical data for the ISR.**Note B:** Output Load (%) represents the percent drawn from each output of the stated 100% load condition.**Note C:** SOA curves represent operating conditions at which the internal components are at or below the manufacturer's maximum rated operating temperatures.

**PT4826 Electrical Specifications**(Unless otherwise stated, the operating conditions are:  $T_a = 25^\circ\text{C}$ ,  $V_{in} = 48\text{V}$ , and  $I_o = 0.5I_{o\text{max}}$ )

| Characteristics                              | Symbols                             | Conditions                                                                             | PT4826                                                  |                        |                                     | Units                      |
|----------------------------------------------|-------------------------------------|----------------------------------------------------------------------------------------|---------------------------------------------------------|------------------------|-------------------------------------|----------------------------|
|                                              |                                     |                                                                                        | Min                                                     | Typ                    | Max                                 |                            |
| Output Current                               | $I_o$                               | Each output                                                                            | $I_{o1} (5.0\text{V})$<br>0.25 (1)                      | —                      | 5.0 (2)                             | A                          |
|                                              |                                     |                                                                                        | $I_{o2} (3.3\text{V})$<br>0.1 (1)                       | —                      | 5.5 (2)                             |                            |
|                                              |                                     |                                                                                        | $I_{o3} (1.8\text{V})$<br>0.1 (1)                       | —                      | 5.5 (2)                             |                            |
|                                              |                                     | Total ( $I_{o1} + I_{o2} + I_{o3}$ )                                                   | —                                                       | —                      | 9 (2)                               | A                          |
| Input Voltage Range                          | $V_{in}$                            | Continuous<br>Surge (1 minute)                                                         | 36<br>—                                                 | —<br>—                 | 75<br>80                            | V                          |
| Set-Point Voltage                            | $V_o$                               |                                                                                        | $V_{o1}$<br>4.9<br>$V_{o2}$<br>3.24<br>$V_{o3}$<br>1.76 | 5.0<br>3.3<br>1.8      | 5.1<br>3.36<br>1.84                 | V                          |
| Temperature Variation                        | $\text{Reg}_{\text{temp}}$          | $-40^\circ\text{C} \leq T_a \leq +85^\circ\text{C}$ , $I_o = I_{o\text{min}}$          | $V_{o1}$<br>—<br>$V_{o2}/V_{o3}$<br>—                   | $\pm 0.5$<br>$\pm 0.5$ | —<br>—                              | % $V_o$                    |
| Line Regulation                              | $\text{Reg}_{\text{line}}$          | All outputs, Over $V_{in}$ range                                                       | —                                                       | $\pm 0.1$              | $\pm 0.5$                           | % $V_o$                    |
| Load Regulation                              | $\text{Reg}_{\text{load}}$          | All outputs, $0 \leq I_o \leq I_{o\text{max}}$                                         | —                                                       | $\pm 0.1$              | $\pm 0.5$                           | % $V_o$                    |
| Total Output Voltage Variation               | $\Delta V_o \text{ tol}$            | Includes set-point, line, load,<br>$-40^\circ\text{C} \leq T_a \leq +85^\circ\text{C}$ | $V_{o1}$<br>—<br>$V_{o2}/V_{o3}$<br>—                   | —<br>—                 | $\pm 3$ (3)<br>$\pm 3$ (3)          | % $V_o$                    |
| Efficiency                                   | $\eta$                              | $I_{o1} = 5\text{A}$ , $I_{o2} = 2\text{A}$ , $I_{o3} = 2\text{A}$                     | —                                                       | 87                     | —                                   | %                          |
| $V_o$ Ripple/Noise<br>(0 to 20MHz bandwidth) | $V_n$                               |                                                                                        | $V_{o1}$<br>—<br>$V_{o2}$<br>—<br>$V_{o3}$<br>—         | 40<br>35<br>25         | —<br>—                              | mV <sub>pp</sub>           |
| Transient Response                           | $t_{tr}$<br>$V_{os}$                | 0.1A/ $\mu\text{s}$ load step, 50% to 75% $I_{o\text{max}}$<br>$V_o$ over/undershoot   | —<br>—                                                  | 200<br>5               | —<br>—                              | $\mu\text{Sec}$<br>% $V_o$ |
| Output Adjust Range                          | $V_{o\text{adj}}$                   |                                                                                        | $V_{o1}/V_{o2}/V_{o3}$<br>—                             | $\pm 10$               | —                                   | % $V_o$                    |
| Over-Current Threshold                       | $I_{\text{TRIP}}$                   | Total, all outputs. Reset with auto-recovery                                           | —                                                       | 11                     | —                                   | A                          |
| Switching Frequency                          | $f_s$                               | Over $V_{in}$ and $I_o$ ranges                                                         | 350                                                     | 400                    | 450                                 | kHz                        |
| Under Voltage Lockout                        | $V_{on}$<br>$V_{off}$               | $V_{in}$ increasing<br>$V_{in}$ decreasing                                             | —<br>—                                                  | 35.5<br>34             | —<br>—                              | V                          |
| Turn-On Time                                 | $t_{on}$                            | $V_{in} = 48\text{V}$ step                                                             | —                                                       | 140 (4)                | —                                   | ms                         |
| Enable Control (pins 1 & 2)                  |                                     | Referenced to $-V_{in}$ (pin 4)                                                        |                                                         |                        |                                     |                            |
| High-Level Input Voltage                     | $V_{IH}$                            |                                                                                        | 4                                                       | —                      | 15 (5)                              | V                          |
| Low-Level Input Voltage                      | $V_{IL}$                            |                                                                                        | -0.2                                                    | —                      | 0.8                                 |                            |
| Low-Level Input Current                      | $I_{IL}$                            |                                                                                        | —                                                       | 1                      | 2                                   | mA                         |
| Standby Input Current                        | $I_{in \text{ standby}}$            | pins 1 & 2 open circuit                                                                | —                                                       | 1                      | 5                                   | mA                         |
| Internal Input Capacitance                   | $C_{int}$                           |                                                                                        | —                                                       | 1.14                   | —                                   | $\mu\text{F}$              |
| External Output Capacitance                  | $C_{o1}$<br>$C_{o2}$<br>$C_{o3}$    |                                                                                        | 0<br>0<br>0                                             | 220<br>220<br>220      | 1,000 (6)<br>1,000 (6)<br>1,000 (6) | $\mu\text{F}$              |
| Primary/Secondary Isolation                  | $V_{iso}$<br>$C_{iso}$<br>$R_{iso}$ |                                                                                        | 1500<br>—<br>10                                         | —<br>2,200<br>—        | —<br>—                              | V<br>pF<br>M $\Omega$      |

**Notes:** (1) The converter will operate down to no load with reduced specifications.(2) The sum-total current from outputs  $V_{o1}$ ,  $V_{o2}$ , and  $V_{o3}$  cannot exceed 9ADC.

(3) Limits are specified by design.

(4) Measured from the application of the input voltage to the instance that all outputs are in regulation.

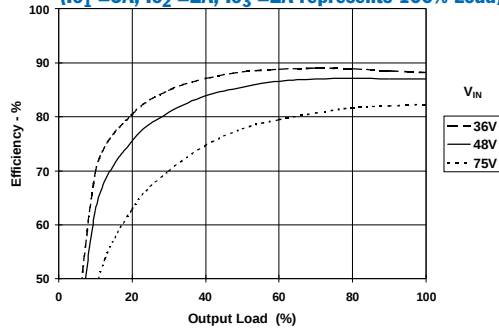
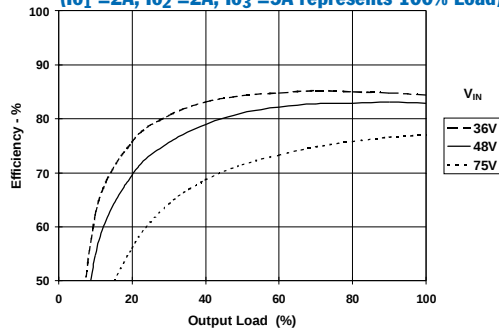
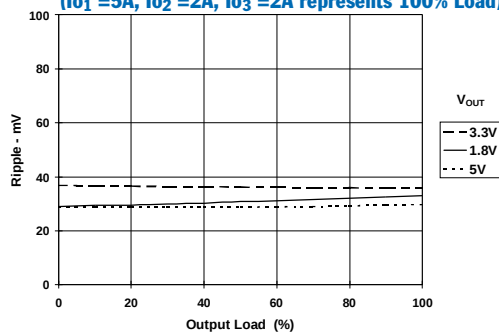
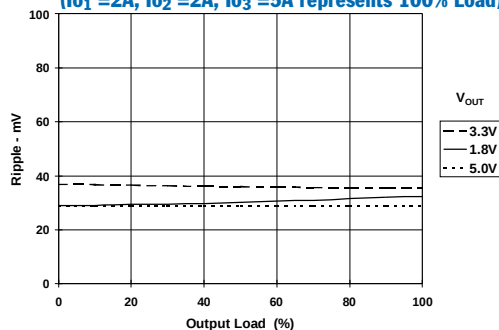
(5) The Enable inputs (pins 1 & 2) have internal pull-ups. Leaving pin 1 open-circuit and connecting pin 2 to  $-V_{in}$  allows the converter to operate when input power is applied. The maximum open-circuit voltage is 4V.

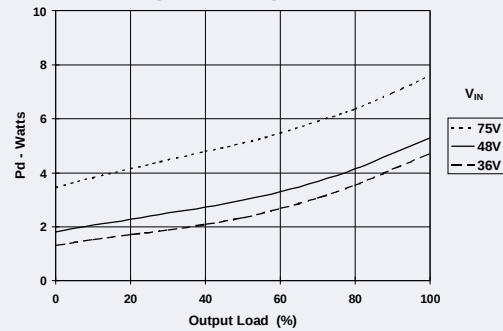
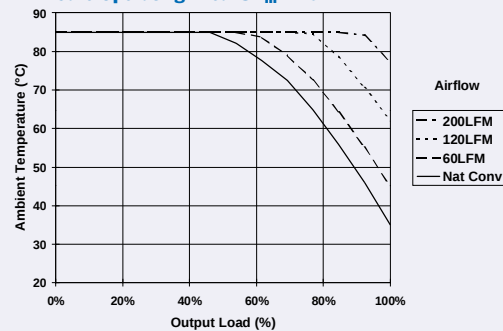
(6) Ultra-low ESR capacitors, such as organic or polymer aluminum electrolytic types, may cause instability. Consult the factory before using.

## 35-W Triple Output Isolated DC/DC Converter for Logic Applications

SLTS165E - FEBRUARY 2002 - REVISED MARCH 2003

## PT4826 Performance Characteristics (See Notes A, B)

**Efficiency vs Output Power**  
 ( $I_{O1} = 5A$ ,  $I_{O2} = 2A$ ,  $I_{O3} = 2A$  represents 100% Load)

**Efficiency vs Output Power**  
 ( $I_{O1} = 2A$ ,  $I_{O2} = 2A$ ,  $I_{O3} = 5A$  represents 100% Load)

**Output Ripple vs Output Power;  $V_{in} = 48V$**   
 ( $I_{O1} = 5A$ ,  $I_{O2} = 2A$ ,  $I_{O3} = 2A$  represents 100% Load)

**Output Ripple vs Output Power;  $V_{in} = 48V$**   
 ( $I_{O1} = 2A$ ,  $I_{O2} = 2A$ ,  $I_{O3} = 5A$  represents 100% Load)

**PT4826 Thermal Performance** (See Note C)  
 ( $I_{O1} + I_{O2} + I_{O3} = 9A$ , represents 100% Load)

**Power Dissipation vs Output Load**

**Safe Operating Area @  $V_{in} = 48V$** 


**Note A:** All Characteristic data in the above graphs has been developed from actual products tested at 25°C. This data is considered typical data for the ISR.

**Note B:** Output Load (%) represents the percent drawn from each output of the stated 100% load condition.

**Note C:** SOA curves represent operating conditions at which the internal components are at or below the manufacturer's maximum rated operating temperatures.

**PT4827 Electrical Specifications**(Unless otherwise stated, the operating conditions are:  $T_a = 25^\circ\text{C}$ ,  $V_{in} = 48\text{V}$ , and  $I_o = 0.5I_{o\text{max}}$ )

| Characteristics                                                                    | Symbols                             | Conditions                                                                             | PT4827                                                |                                                                 |                                                                      | Units                                                      |
|------------------------------------------------------------------------------------|-------------------------------------|----------------------------------------------------------------------------------------|-------------------------------------------------------|-----------------------------------------------------------------|----------------------------------------------------------------------|------------------------------------------------------------|
|                                                                                    |                                     |                                                                                        | Min                                                   | Typ                                                             | Max                                                                  |                                                            |
| Output Current                                                                     | $I_o$                               | Each output                                                                            | $I_{o1}$ (3.3V)<br>$I_{o2}$ (2.5V)<br>$I_{o3}$ (1.8V) | 0.25 <sup>(1)</sup><br>0.1 <sup>(1)</sup><br>0.1 <sup>(1)</sup> | —<br>—<br>—                                                          | 8 <sup>(2)</sup><br>6 <sup>(2)</sup><br>6 <sup>(2)</sup> A |
|                                                                                    |                                     | Total ( $I_{o1} + I_{o2} + I_{o3}$ )                                                   | —                                                     | —                                                               | 12 <sup>(2)</sup>                                                    | A                                                          |
| Input Voltage Range                                                                | $V_{in}$                            | Continuous<br>Surge (1 minute)                                                         | 36<br>—                                               | —<br>—                                                          | 75<br>80                                                             | V                                                          |
| Set-Point Voltage                                                                  | $V_o$                               |                                                                                        | $V_{o1}$<br>$V_{o2}$<br>$V_{o3}$                      | 3.24<br>2.45<br>1.76                                            | 3.3<br>2.5<br>1.8                                                    | 3.36<br>2.55<br>1.84 V                                     |
| Temperature Variation                                                              | $\text{Reg}_{\text{temp}}$          | $-40^\circ\text{C} \leq T_a \leq +85^\circ\text{C}$ , $I_o = I_{o\text{min}}$          | $V_{o1}$<br>$V_{o2}/V_{o3}$                           | —<br>—                                                          | $\pm 0.5$<br>$\pm 0.5$                                               | —<br>— % $V_o$                                             |
| Line Regulation                                                                    | $\text{Reg}_{\text{line}}$          | All outputs, Over $V_{in}$ range                                                       | —                                                     | $\pm 0.1$                                                       | $\pm 0.5$                                                            | % $V_o$                                                    |
| Load Regulation                                                                    | $\text{Reg}_{\text{load}}$          | All outputs, $0 \leq I_o \leq I_{o\text{max}}$                                         | —                                                     | $\pm 0.1$                                                       | $\pm 0.5$                                                            | % $V_o$                                                    |
| Total Output Voltage Variation                                                     | $\Delta V_o, \text{tol}$            | Includes set-point, line, load,<br>$-40^\circ\text{C} \leq T_a \leq +85^\circ\text{C}$ | $V_{o1}$<br>$V_{o2}/V_{o3}$                           | —<br>—                                                          | $\pm 3$ <sup>(3)</sup><br>$\pm 3$ <sup>(3)</sup>                     | —<br>— % $V_o$                                             |
| Efficiency                                                                         | $\eta$                              | $I_{o1} = 6\text{A}$ , $I_{o2} = 2\text{A}$ , $I_{o3} = 2\text{A}$                     | —                                                     | 86                                                              | —                                                                    | %                                                          |
| $V_o$ Ripple/Noise<br>(0 to 20MHz bandwidth)                                       | $V_n$                               |                                                                                        | $V_{o1}$<br>$V_{o2}$<br>$V_{o3}$                      | —<br>—<br>—                                                     | 40<br>35<br>25                                                       | —<br>—<br>— mV <sub>pp</sub>                               |
| Transient Response                                                                 | $t_{tr}$<br>$V_{os}$                | 0.1A/ $\mu\text{s}$ load step, 50% to 75% $I_{o\text{max}}$<br>$V_o$ over/undershoot   | —<br>—                                                | 200<br>3                                                        | —<br>—                                                               | $\mu\text{Sec}$<br>% $V_o$                                 |
| Output Adjust Range                                                                | $V_{o\text{adj}}$                   |                                                                                        | $V_{o1}/V_{o2}/V_{o3}$                                | —                                                               | $\pm 10$                                                             | — % $V_o$                                                  |
| Over-Current Threshold                                                             | $I_{\text{TRIP}}$                   | Total, all outputs. Reset with auto-recovery                                           | —                                                     | 14                                                              | —                                                                    | A                                                          |
| Switching Frequency                                                                | $f_s$                               | Over $V_{in}$ and $I_o$ ranges                                                         | 350                                                   | 400                                                             | 450                                                                  | kHz                                                        |
| Under Voltage Lockout                                                              | $V_{on}$<br>$V_{off}$               | $V_{in}$ increasing<br>$V_{in}$ decreasing                                             | —<br>—                                                | 35.5<br>34                                                      | —<br>—                                                               | V                                                          |
| Turn-On Time                                                                       | $t_{on}$                            | $V_{in} = 48\text{V}$ step                                                             | —                                                     | 140 <sup>(4)</sup>                                              | —                                                                    | ms                                                         |
| Enable Control (pins 1 & 2)<br>High-Level Input Voltage<br>Low-Level Input Voltage | $V_{IH}$<br>$V_{IL}$                | Referenced to $-V_{in}$ (pin 4)                                                        | 4<br>-0.2                                             | —<br>—                                                          | 15 <sup>(5)</sup><br>0.8                                             | V                                                          |
| Low-Level Input Current                                                            | $I_{IL}$                            |                                                                                        | —                                                     | 1                                                               | 2                                                                    | mA                                                         |
| Standby Input Current                                                              | $I_{in \text{ standby}}$            | pins 1 & 2 open circuit                                                                | —                                                     | 1                                                               | 5                                                                    | mA                                                         |
| Internal Input Capacitance                                                         | $C_{int}$                           |                                                                                        | —                                                     | 1.14                                                            | —                                                                    | $\mu\text{F}$                                              |
| External Output Capacitance                                                        | $C_{o1}$<br>$C_{o2}$<br>$C_{o3}$    |                                                                                        | 0<br>0<br>0                                           | 220<br>220<br>220                                               | 1,000 <sup>(6)</sup><br>1,000 <sup>(6)</sup><br>1,000 <sup>(6)</sup> | $\mu\text{F}$                                              |
| Primary/Secondary Isolation                                                        | $V_{iso}$<br>$C_{iso}$<br>$R_{iso}$ |                                                                                        | 1500<br>—<br>10                                       | —<br>2,200<br>—                                                 | —<br>—<br>—                                                          | V<br>pF<br>M $\Omega$                                      |

**Notes:** (1) The converter will operate down to no load with reduced specifications.(2) The sum-total current from outputs  $V_{o1}$ ,  $V_{o2}$ , and  $V_{o3}$  cannot exceed 12ADC.

(3) Limits are specified by design.

(4) Measured from the application of the input voltage to the instance that all outputs are in regulation.

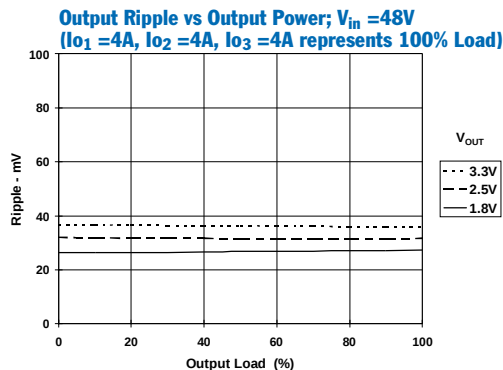
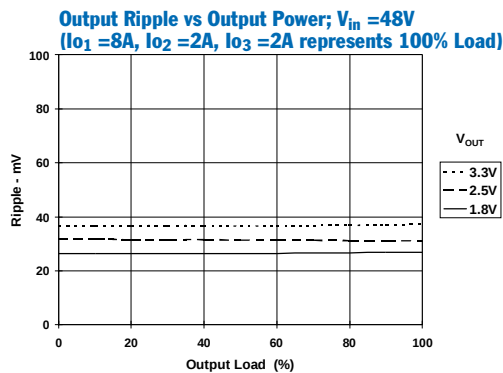
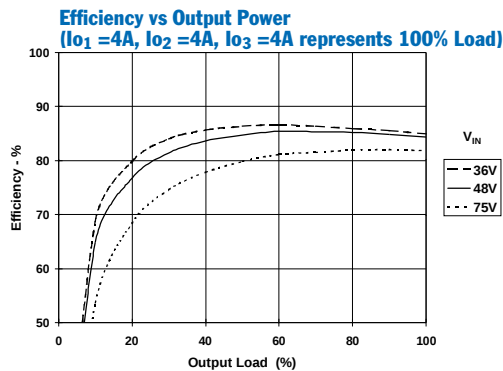
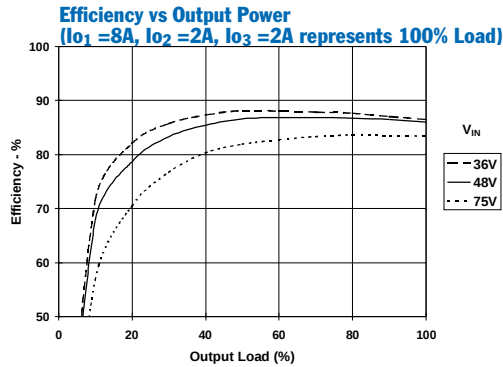
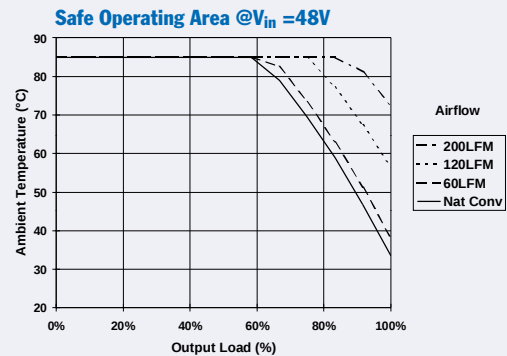
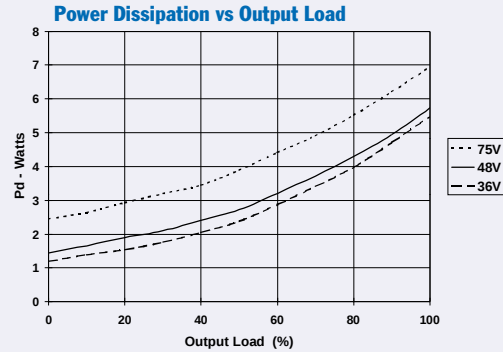
(5) The Enable inputs (pins 1 & 2) have internal pull-ups. Leaving pin 1 open-circuit and connecting pin 2 to  $-V_{in}$  allows the the converter to operate when input power is applied. The maximum open-circuit voltage is 4V.

(6) Ultra-low ESR capacitors, such as organic or polymer aluminum electrolytic types, may cause instability. Consult the factory before using.

## 35-W Triple Output Isolated DC/DC Converter for Logic Applications

SLTS165E - FEBRUARY 2002 - REVISED MARCH 2003

## PT4827 Performance Characteristics (See Notes A, B)

PT4827 Thermal Performance (See Note C)  
( $I_{O1} + I_{O2} + I_{O3} = 12A$ , represents 100% Load)**Note A:** All Characteristic data in the above graphs has been developed from actual products tested at 25°C. This data is considered typical data for the ISR.**Note B:** Output Load (%) represents the percent drawn from each output of the stated 100% load condition.**Note C:** SOA curves represent operating conditions at which the internal components are at or below the manufacturer's maximum rated operating temperatures.

## PT4828 Electrical Specifications

(Unless otherwise stated, the operating conditions are:  $T_a = 25^\circ\text{C}$ ,  $V_{in} = 48\text{V}$ , and  $I_o = 0.5I_{o\text{max}}$ )

| Characteristics                              | Symbols                             | Conditions                                                                             | PT4828                                                  |                        |                                     | Units                      |
|----------------------------------------------|-------------------------------------|----------------------------------------------------------------------------------------|---------------------------------------------------------|------------------------|-------------------------------------|----------------------------|
|                                              |                                     |                                                                                        | Min                                                     | Typ                    | Max                                 |                            |
| Output Current                               | $I_o$                               | Each output                                                                            | $I_{o1} (5.0\text{V})$<br>0.25 (1)                      | —                      | 5.0 (2)                             | A                          |
|                                              |                                     |                                                                                        | $I_{o2} (2.5\text{V})$<br>0.1 (1)                       | —                      | 5.5 (2)                             |                            |
|                                              |                                     |                                                                                        | $I_{o3} (1.5\text{V})$<br>0.1 (1)                       | —                      | 5.5 (2)                             |                            |
|                                              |                                     | Total ( $I_{o1} + I_{o2} + I_{o3}$ )                                                   | —                                                       | —                      | 9 (2)                               | A                          |
| Input Voltage Range                          | $V_{in}$                            | Continuous<br>Surge (1 minute)                                                         | 36<br>—                                                 | —<br>—                 | 75<br>80                            | V                          |
| Set-Point Voltage                            | $V_o$                               |                                                                                        | $V_{o1}$<br>4.9<br>$V_{o2}$<br>2.45<br>$V_{o3}$<br>1.47 | 5.0<br>2.5<br>1.5      | 5.1<br>2.55<br>1.53                 | V                          |
| Temperature Variation                        | $\text{Reg}_{\text{temp}}$          | $-40^\circ\text{C} \leq T_a \leq +85^\circ\text{C}$ , $I_o = I_{o\text{min}}$          | $V_{o1}$<br>—<br>$V_{o2}/V_{o3}$<br>—                   | $\pm 0.5$<br>$\pm 0.5$ | —<br>—                              | % $V_o$                    |
| Line Regulation                              | $\text{Reg}_{\text{line}}$          | All outputs, Over $V_{in}$ range                                                       | —                                                       | $\pm 0.1$              | $\pm 0.5$                           | % $V_o$                    |
| Load Regulation                              | $\text{Reg}_{\text{load}}$          | All outputs, $0 \leq I_o \leq I_{o\text{max}}$                                         | —                                                       | $\pm 0.1$              | $\pm 0.5$                           | % $V_o$                    |
| Total Output Voltage Variation               | $\Delta V_o \text{ tol}$            | Includes set-point, line, load,<br>$-40^\circ\text{C} \leq T_a \leq +85^\circ\text{C}$ | $V_{o1}$<br>—<br>$V_{o2}/V_{o3}$<br>—                   | —<br>—                 | $\pm 3$ (3)<br>$\pm 3$ (3)          | % $V_o$                    |
| Efficiency                                   | $\eta$                              | $I_{o1} = 5\text{A}$ , $I_{o2} = 2\text{A}$ , $I_{o3} = 2\text{A}$                     | —                                                       | 86.5                   | —                                   | %                          |
| $V_o$ Ripple/Noise<br>(0 to 20MHz bandwidth) | $V_n$                               |                                                                                        | $V_{o1}$<br>—<br>$V_{o2}$<br>—<br>$V_{o3}$<br>—         | 30<br>30<br>25         | —<br>—                              | mV <sub>pp</sub>           |
| Transient Response                           | $t_{tr}$<br>$V_{os}$                | 0.1A/ $\mu\text{s}$ load step, 50% to 75% $I_{o\text{max}}$<br>$V_o$ over/undershoot   | —<br>—                                                  | 200<br>5               | —<br>—                              | $\mu\text{Sec}$<br>% $V_o$ |
| Output Adjust Range                          | $V_{o\text{adj}}$                   |                                                                                        | $V_{o1}/V_{o2}/V_{o3}$<br>—                             | $\pm 10$               | —                                   | % $V_o$                    |
| Over-Current Threshold                       | $I_{\text{TRIP}}$                   | Total, all outputs. Reset with auto-recovery                                           | —                                                       | 11                     | —                                   | A                          |
| Switching Frequency                          | $f_s$                               | Over $V_{in}$ and $I_o$ ranges                                                         | 350                                                     | 400                    | 450                                 | kHz                        |
| Under Voltage Lockout                        | $V_{on}$<br>$V_{off}$               | $V_{in}$ increasing<br>$V_{in}$ decreasing                                             | —<br>—                                                  | 35.5<br>34             | —<br>—                              | V                          |
| Turn-On Time                                 | $t_{on}$                            | $V_{in} = 48\text{V}$ step                                                             | —                                                       | 140 (4)                | —                                   | ms                         |
| Enable Control (pins 1 & 2)                  |                                     | Referenced to $-V_{in}$ (pin 4)                                                        |                                                         |                        |                                     |                            |
| High-Level Input Voltage                     | $V_{IH}$                            |                                                                                        | 4                                                       | —                      | 15 (5)                              | V                          |
| Low-Level Input Voltage                      | $V_{IL}$                            |                                                                                        | -0.2                                                    | —                      | 0.8                                 |                            |
| Low-Level Input Current                      | $I_{IL}$                            |                                                                                        | —                                                       | 1                      | 2                                   | mA                         |
| Standby Input Current                        | $I_{in \text{ standby}}$            | pins 1 & 2 open circuit                                                                | —                                                       | 1                      | 5                                   | mA                         |
| Internal Input Capacitance                   | $C_{int}$                           |                                                                                        | —                                                       | 1.14                   | —                                   | $\mu\text{F}$              |
| External Output Capacitance                  | $C_{o1}$<br>$C_{o2}$<br>$C_{o3}$    |                                                                                        | 0<br>0<br>0                                             | 220<br>220<br>220      | 1,000 (6)<br>1,000 (6)<br>1,000 (6) | $\mu\text{F}$              |
| Primary/Secondary Isolation                  | $V_{iso}$<br>$C_{iso}$<br>$R_{iso}$ |                                                                                        | 1500<br>—<br>10                                         | —<br>2,200<br>—        | —<br>—                              | V<br>pF<br>M $\Omega$      |

**Notes:** (1) The converter will operate down to no load with reduced specifications.(2) The sum-total current from outputs  $V_{o2}$ , and  $V_{o3}$  cannot exceed 9ADC.

(3) Limits are specified by design.

(4) Measured from the application of the input voltage to the instance that all outputs are in regulation.

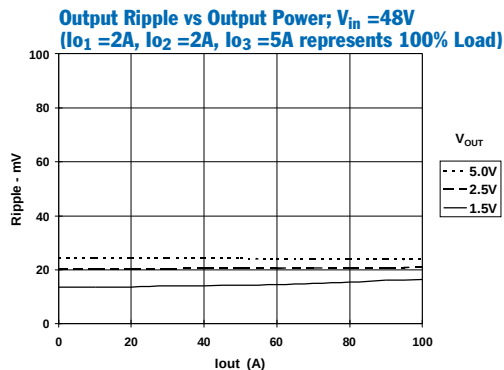
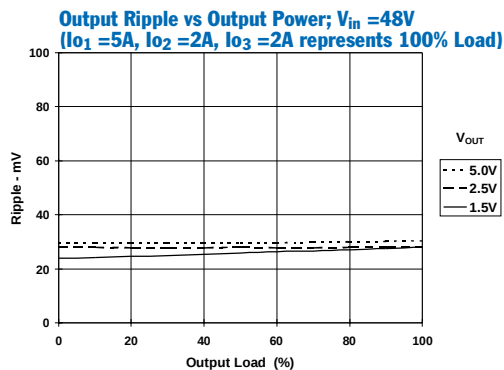
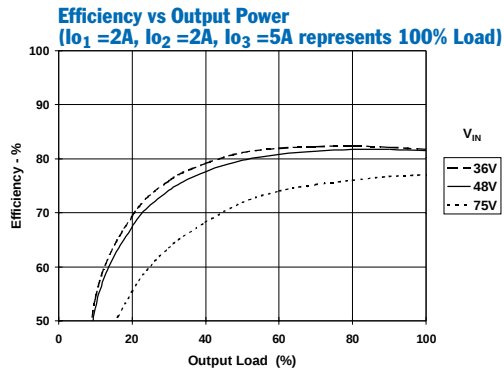
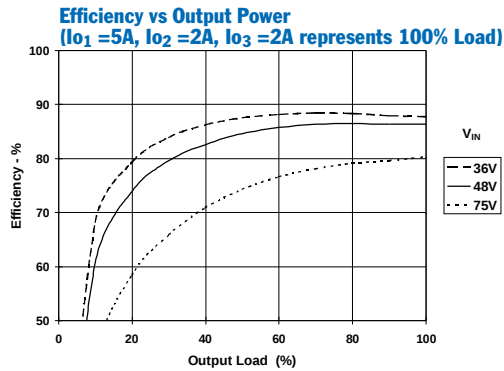
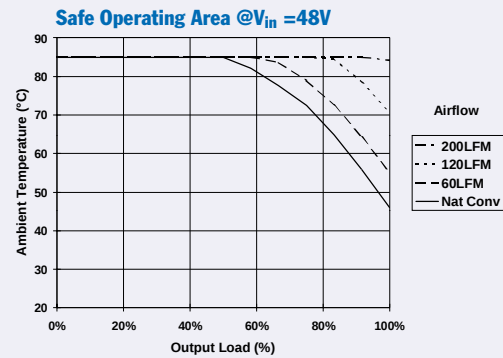
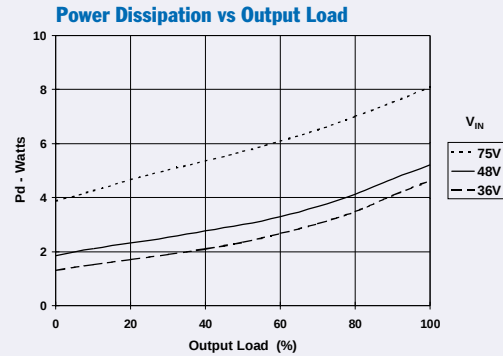
(5) The Enable inputs (pins 1 & 2) have internal pull-ups. Leaving pin 1 open-circuit and connecting pin 2 to  $-V_{in}$  allows the the converter to operate when input power is applied. The maximum open-circuit voltage is 4V.

(6) Ultra-low ESR capacitors, such as organic or polymer aluminum electrolytic types, may cause instability. Consult the factory before using.

## 35-W Triple Output Isolated DC/DC Converter for Logic Applications

SLTS165E - FEBRUARY 2002 - REVISED MARCH 2003

## PT4828 Performance Characteristics (See Notes A, B)

PT4828 Thermal Performance (See Note C)  
( $I_{O1} + I_{O2} + I_{O3} = 9A$ , represents 100% Load)

**Note A:** All Characteristic data in the above graphs has been developed from actual products tested at 25°C. This data is considered typical data for the ISR.

**Note B:** Output Load (%) represents the percent drawn from each output of the stated 100% load condition.

**Note C:** SOA curves represent operating conditions at which the internal components are at or below the manufacturer's maximum rated operating temperatures.

**PT4829 Electrical Specifications**(Unless otherwise stated, the operating conditions are:  $T_a = 25^\circ\text{C}$ ,  $V_{in} = 48\text{V}$ , and  $I_o = 0.5I_{o\text{max}}$ )

| Characteristics                                                                    | Symbols                                                  | Conditions                                                                         | PT4829                                                                     |                                                                 |                    | Units                                                                |                         |
|------------------------------------------------------------------------------------|----------------------------------------------------------|------------------------------------------------------------------------------------|----------------------------------------------------------------------------|-----------------------------------------------------------------|--------------------|----------------------------------------------------------------------|-------------------------|
|                                                                                    |                                                          |                                                                                    | Min                                                                        | Typ                                                             | Max                |                                                                      |                         |
| Output Current                                                                     | I <sub>o</sub>                                           | Each output                                                                        | I <sub>O1</sub> (5.0V)<br>I <sub>O2</sub> (1.8V)<br>I <sub>O3</sub> (1.5V) | 0.25 <sup>(1)</sup><br>0.1 <sup>(1)</sup><br>0.1 <sup>(1)</sup> | —<br>—<br>—        | 5.0 <sup>(2)</sup><br>5.5 <sup>(2)</sup><br>5.5 <sup>(2)</sup>       | A                       |
|                                                                                    |                                                          | Total (I <sub>O1</sub> + I <sub>O2</sub> + I <sub>O3</sub> )                       |                                                                            | —                                                               | —                  | 9 <sup>(2)</sup>                                                     | A                       |
|                                                                                    |                                                          | Input Voltage Range                                                                | V <sub>in</sub>                                                            | Continuous<br>Surge (1 minute)                                  | 36<br>—            | —<br>—                                                               | 75<br>80                |
| Set-Point Voltage                                                                  | V <sub>o</sub>                                           |                                                                                    | V <sub>O1</sub><br>V <sub>O2</sub><br>V <sub>O3</sub>                      | 4.9<br>1.76<br>1.47                                             | 5.0<br>1.8<br>1.5  | 5.1<br>1.84<br>1.53                                                  | V                       |
| Temperature Variation                                                              | Reg <sub>temp</sub>                                      | −40°C ≤ T <sub>a</sub> ≤ +85°C, I <sub>o</sub> = I <sub>o</sub> min                | V <sub>O1</sub><br>V <sub>O2</sub> /V <sub>O3</sub>                        | —<br>—                                                          | ±0.5<br>±0.5       | —<br>—                                                               | % V <sub>o</sub>        |
| Line Regulation                                                                    | Reg <sub>line</sub>                                      | All outputs, Over V <sub>in</sub> range                                            |                                                                            | —                                                               | ±0.1               | ±0.5                                                                 | %V <sub>o</sub>         |
| Load Regulation                                                                    | Reg <sub>load</sub>                                      | All outputs, 0 ≤ I <sub>o</sub> ≤ I <sub>o</sub> max                               |                                                                            | —                                                               | ±0.1               | ±0.5                                                                 | %V <sub>o</sub>         |
| Total Output Voltage Variation                                                     | ΔV <sub>o</sub> tol                                      | Includes set-point, line, load,<br>−40°C ≤ T <sub>a</sub> ≤ +85°C                  | V <sub>O1</sub><br>V <sub>O2</sub> /V <sub>O3</sub>                        | —<br>—                                                          | —<br>—             | ±3 <sup>(3)</sup><br>±3 <sup>(3)</sup>                               | %V <sub>o</sub>         |
| Efficiency                                                                         | η                                                        | I <sub>O1</sub> = 5A, I <sub>O2</sub> = 2A, I <sub>O3</sub> = 2A                   |                                                                            | —                                                               | 86.2               | —                                                                    | %                       |
| V <sub>o</sub> Ripple/Noise<br>(0 to 20MHz bandwidth)                              | V <sub>n</sub>                                           |                                                                                    | V <sub>O1</sub><br>V <sub>O2</sub><br>V <sub>O3</sub>                      | —<br>—<br>—                                                     | 35<br>25<br>25     | —<br>—<br>—                                                          | mV <sub>pp</sub>        |
| Transient Response                                                                 | t <sub>TR</sub><br>V <sub>OS</sub>                       | 0.1A/μs load step, 50% to 75% I <sub>o</sub> max<br>V <sub>o</sub> over/undershoot |                                                                            | —<br>—                                                          | 200<br>5           | —<br>—                                                               | μSec<br>%V <sub>o</sub> |
| Output Adjust Range                                                                | V <sub>o</sub> adj                                       |                                                                                    | V <sub>O1</sub> /V <sub>O2</sub> /V <sub>O3</sub>                          | —                                                               | ±10                | —                                                                    | %V <sub>o</sub>         |
| Over-Current Threshold                                                             | I <sub>TRIP</sub>                                        | Total, all outputs. Reset with auto-recovery                                       |                                                                            | —                                                               | 11                 | —                                                                    | A                       |
| Switching Frequency                                                                | f <sub>s</sub>                                           | Over V <sub>in</sub> and I <sub>o</sub> ranges                                     |                                                                            | 350                                                             | 400                | 450                                                                  | kHz                     |
| Under Voltage Lockout                                                              | V <sub>on</sub><br>V <sub>off</sub>                      | V <sub>in</sub> increasing<br>V <sub>in</sub> decreasing                           |                                                                            | —<br>—                                                          | 35.5<br>34         | —<br>—                                                               | V                       |
| Turn-On Time                                                                       | t <sub>on</sub>                                          | V <sub>in</sub> = 48V step                                                         |                                                                            | —                                                               | 140 <sup>(4)</sup> | —                                                                    | ms                      |
| Enable Control (pins 1 & 2)<br>High-Level Input Voltage<br>Low-Level Input Voltage | V <sub>IHI</sub><br>V <sub>IL</sub>                      | Referenced to −V <sub>in</sub> (pin 4)                                             |                                                                            | 4<br>−0.2                                                       | —<br>—             | 15 <sup>(5)</sup><br>0.8                                             | V                       |
| Low-Level Input Current                                                            | I <sub>IL</sub>                                          |                                                                                    |                                                                            | —                                                               | 1                  | 2                                                                    | mA                      |
| Standby Input Current                                                              | I <sub>in</sub> standby                                  | pins 1 & 2 open circuit                                                            |                                                                            | —                                                               | 1                  | 5                                                                    | mA                      |
| Internal Input Capacitance                                                         | C <sub>int</sub>                                         |                                                                                    |                                                                            | —                                                               | 1.14               | —                                                                    | μF                      |
| External Output Capacitance                                                        | C <sub>O1</sub><br>C <sub>O2</sub><br>C <sub>O3</sub>    |                                                                                    |                                                                            | 0<br>0<br>0                                                     | 220<br>220<br>220  | 1,000 <sup>(6)</sup><br>1,000 <sup>(6)</sup><br>1,000 <sup>(6)</sup> | μF                      |
| Primary/Secondary Isolation                                                        | V <sub>iso</sub><br>C <sub>iso</sub><br>R <sub>iso</sub> |                                                                                    |                                                                            | 1500<br>—<br>10                                                 | —<br>2,200<br>—    | —<br>—<br>—                                                          | V<br>pF<br>MΩ           |

**Notes:** (1) The converter will operate down to no load with reduced specifications.(2) The sum-total current from outputs  $V_{o2}$ , and  $V_{o3}$  cannot exceed 9ADC.

(3) Limits are specified by design.

(4) Measured from the application of the input voltage to the instance that all outputs are in regulation.

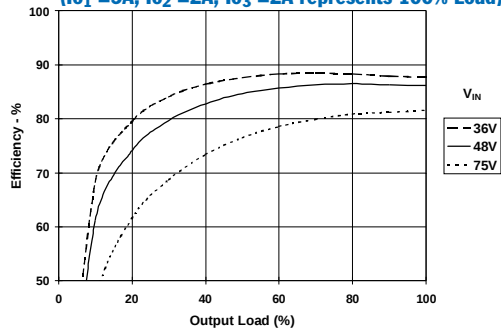
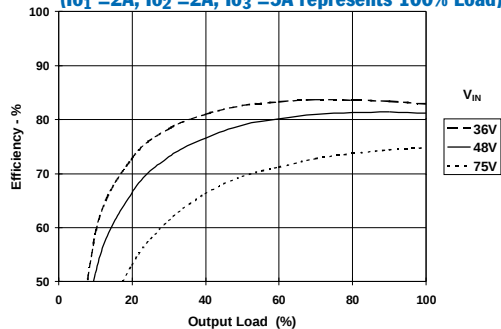
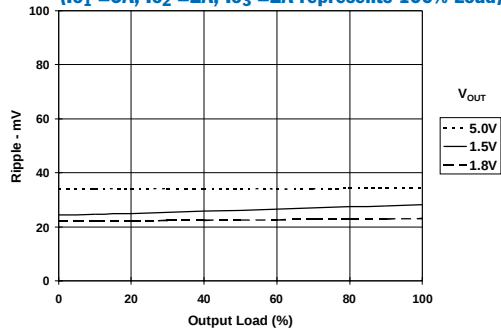
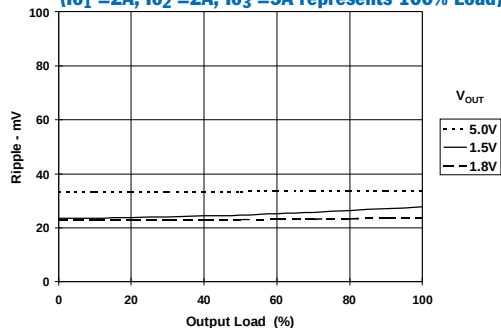
(5) The Enable inputs (pins 1 & 2) have internal pull-ups. Leaving pin 1 open-circuit and connecting pin 2 to  $-V_{in}$  allows the the converter to operate when input power is applied. The maximum open-circuit voltage is 4V.

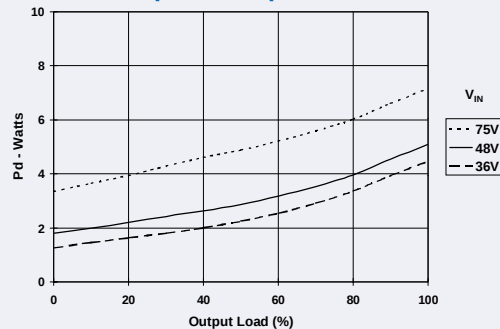
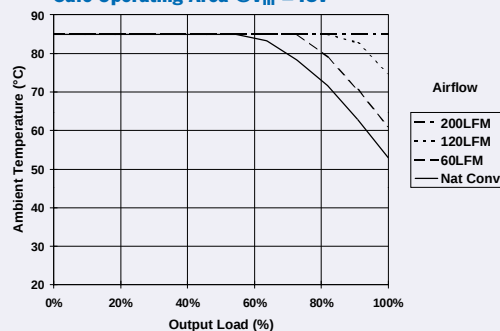
(6) Ultra-low ESR capacitors, such as organic or polymer aluminum electrolytic types, may cause instability. Consult the factory before using.

## 35-W Triple Output Isolated DC/DC Converter for Logic Applications

SLTS165E - FEBRUARY 2002 - REVISED MARCH 2003

## PT4829 Performance Characteristics (See Notes A, B)

**Efficiency vs Output Power**  
 ( $I_{O1} = 5A$ ,  $I_{O2} = 2A$ ,  $I_{O3} = 2A$  represents 100% Load)

**Efficiency vs Output Power**  
 ( $I_{O1} = 2A$ ,  $I_{O2} = 2A$ ,  $I_{O3} = 5A$  represents 100% Load)

**Output Ripple vs Output Power;  $V_{in} = 48V$**   
 ( $I_{O1} = 5A$ ,  $I_{O2} = 2A$ ,  $I_{O3} = 2A$  represents 100% Load)

**Output Ripple vs Output Power;  $V_{in} = 48V$**   
 ( $I_{O1} = 2A$ ,  $I_{O2} = 2A$ ,  $I_{O3} = 5A$  represents 100% Load)

**PT4829 Thermal Performance** (See Note C)  
 ( $I_{O1} + I_{O2} + I_{O3} = 9A$ , represents 100% Load)

**Power Dissipation vs Output Power**

**Safe Operating Area @  $V_{in} = 48V$** 


**Note A:** All Characteristic data in the above graphs has been developed from actual products tested at 25°C. This data is considered typical data for the ISR.

**Note B:** Output Load (%) represents the percent drawn from each output of the stated 100% load condition.

**Note C:** SOA curves represent operating conditions at which the internal components are at or below the manufacturer's maximum rated operating temperatures.

**PT4831 Electrical Specifications**(Unless otherwise stated, the operating conditions are:  $T_a = 25^\circ\text{C}$ ,  $V_{in} = 48\text{V}$ , and  $I_o = 0.5I_{o\text{max}}$ )

| Characteristics                                                                    | Symbols                                                  | Conditions                                                                         | PT4831                                                                     |                                |                                     | Units                         |                         |
|------------------------------------------------------------------------------------|----------------------------------------------------------|------------------------------------------------------------------------------------|----------------------------------------------------------------------------|--------------------------------|-------------------------------------|-------------------------------|-------------------------|
|                                                                                    |                                                          |                                                                                    | Min                                                                        | Typ                            | Max                                 |                               |                         |
| Output Current                                                                     | I <sub>o</sub>                                           | Each output                                                                        | I <sub>O1</sub> (5.0V)<br>I <sub>O2</sub> (3.3V)<br>I <sub>O3</sub> (1.5V) | 0.25 (1)<br>0.1 (1)<br>0.1 (1) | —<br>—<br>—                         | 5.0 (2)<br>5.5 (2)<br>5.5 (2) | A                       |
|                                                                                    |                                                          | Total (I <sub>O1</sub> + I <sub>O2</sub> + I <sub>O3</sub> )                       |                                                                            | —                              | —                                   | 9 (2)                         | A                       |
|                                                                                    |                                                          |                                                                                    |                                                                            |                                |                                     |                               |                         |
| Input Voltage Range                                                                | V <sub>in</sub>                                          | Continuous<br>Surge (1 minute)                                                     | 36<br>—                                                                    | —<br>—                         | 75<br>80                            |                               | V                       |
| Set-Point Voltage                                                                  | V <sub>o</sub>                                           |                                                                                    | V <sub>O1</sub><br>V <sub>O2</sub><br>V <sub>O3</sub>                      | 4.9<br>3.24<br>1.47            | 5.0<br>3.3<br>1.5                   | 5.1<br>3.36<br>1.53           | V                       |
| Temperature Variation                                                              | Reg <sub>temp</sub>                                      | −40°C ≤ T <sub>a</sub> ≤ +85°C, I <sub>o</sub> = I <sub>o</sub> min                | V <sub>O1</sub><br>V <sub>O2</sub> /V <sub>O3</sub>                        | —<br>—                         | ±0.5<br>±0.5                        | —                             | % V <sub>o</sub>        |
| Line Regulation                                                                    | Reg <sub>line</sub>                                      | All outputs, Over V <sub>in</sub> range                                            | —                                                                          | ±0.1                           | ±0.5                                |                               | %V <sub>o</sub>         |
| Load Regulation                                                                    | Reg <sub>load</sub>                                      | All outputs, 0 ≤ I <sub>o</sub> ≤ I <sub>o</sub> max                               | —                                                                          | ±0.1                           | ±0.5                                |                               | %V <sub>o</sub>         |
| Total Output Voltage Variation                                                     | ΔV <sub>o</sub> tol                                      | Includes set-point, line, load,<br>−40°C ≤ T <sub>a</sub> ≤ +85°C                  | V <sub>O1</sub><br>V <sub>O2</sub> /V <sub>O3</sub>                        | —<br>—                         | ±3 (3)<br>±3 (3)                    |                               | %V <sub>o</sub>         |
| Efficiency                                                                         | η                                                        | I <sub>O1</sub> = 5A, I <sub>O2</sub> = 2A, I <sub>O3</sub> = 2A                   | —                                                                          | 87                             | —                                   |                               | %                       |
| V <sub>o</sub> Ripple/Noise<br>(0 to 20MHz bandwidth)                              | V <sub>n</sub>                                           |                                                                                    | V <sub>O1</sub><br>V <sub>O2</sub><br>V <sub>O3</sub>                      | —<br>—<br>—                    | 40<br>35<br>25                      | —                             | mV <sub>pp</sub>        |
| Transient Response                                                                 | t <sub>TR</sub><br>V <sub>OS</sub>                       | 0.1A/μs load step, 50% to 75% I <sub>o</sub> max<br>V <sub>o</sub> over/undershoot | —<br>—                                                                     | 200<br>5                       | —<br>—                              |                               | μSec<br>%V <sub>o</sub> |
| Output Adjust Range                                                                | V <sub>o</sub> adj                                       |                                                                                    | V <sub>O1</sub> /V <sub>O2</sub> /V <sub>O3</sub>                          | —                              | ±10                                 | —                             | %V <sub>o</sub>         |
| Over-Current Threshold                                                             | I <sub>TRIP</sub>                                        | Total, all outputs. Reset with auto-recovery                                       | —                                                                          | 11                             | —                                   |                               | A                       |
| Switching Frequency                                                                | f <sub>s</sub>                                           | Over V <sub>in</sub> and I <sub>o</sub> ranges                                     | 350                                                                        | 400                            | 450                                 |                               | kHz                     |
| Under Voltage Lockout                                                              | V <sub>on</sub><br>V <sub>off</sub>                      | V <sub>in</sub> increasing<br>V <sub>in</sub> decreasing                           | —<br>—                                                                     | 35.5<br>34                     | —                                   |                               | V                       |
| Turn-On Time                                                                       | t <sub>on</sub>                                          | V <sub>in</sub> = 48V step                                                         | —                                                                          | 140 (4)                        | —                                   |                               | ms                      |
| Enable Control (pins 1 & 2)<br>High-Level Input Voltage<br>Low-Level Input Voltage | V <sub>IH</sub><br>V <sub>IL</sub>                       | Referenced to −V <sub>in</sub> (pin 4)                                             | 4<br>−0.2                                                                  | —<br>—                         | 15 (5)<br>0.8                       |                               | V                       |
| Low-Level Input Current                                                            | I <sub>IL</sub>                                          |                                                                                    | —                                                                          | 1                              | 2                                   |                               | mA                      |
| Standby Input Current                                                              | I <sub>in</sub> standby                                  | pins 1 & 2 open circuit                                                            | —                                                                          | 1                              | 5                                   |                               | mA                      |
| Internal Input Capacitance                                                         | C <sub>int</sub>                                         |                                                                                    | —                                                                          | 1.14                           | —                                   |                               | μF                      |
| External Output Capacitance                                                        | C <sub>O1</sub><br>C <sub>O2</sub><br>C <sub>O3</sub>    |                                                                                    | 0<br>0<br>0                                                                | 220<br>220<br>220              | 1,000 (6)<br>1,000 (6)<br>1,000 (6) |                               | μF                      |
| Primary/Secondary Isolation                                                        | V <sub>iso</sub><br>C <sub>iso</sub><br>R <sub>iso</sub> |                                                                                    | 1500<br>—<br>10                                                            | —<br>2,200<br>—                | —<br>—<br>—                         |                               | V<br>pF<br>MΩ           |

**Notes:** (1) The converter will operate down to no load with reduced specifications.(2) The sum-total current from outputs  $V_{o1}$ ,  $V_{o2}$ , and  $V_{o3}$  cannot exceed 9ADC.

(3) Limits are specified by design.

(4) Measured from the application of the input voltage to the instance that all outputs are in regulation.

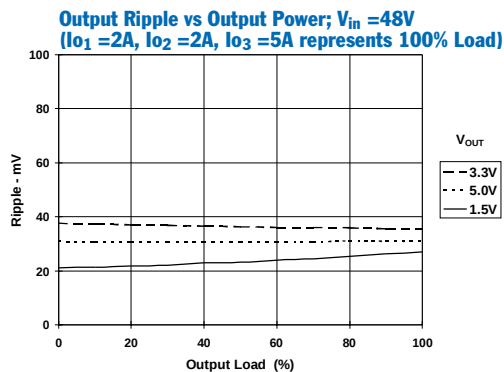
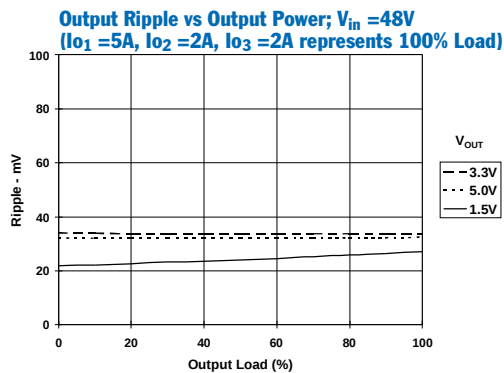
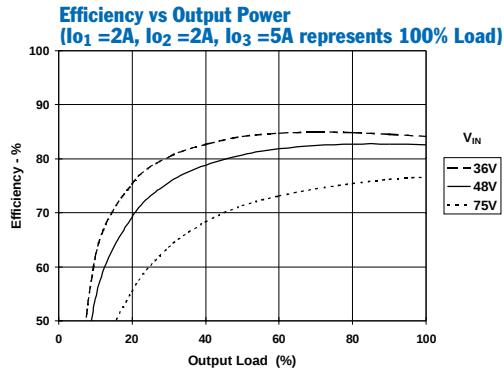
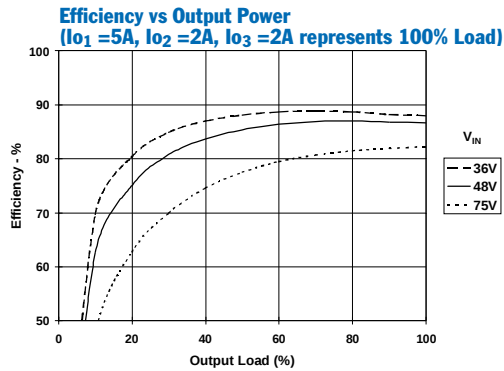
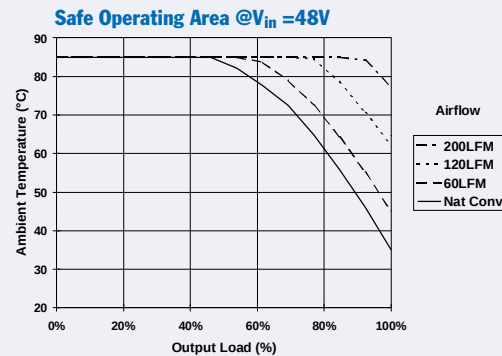
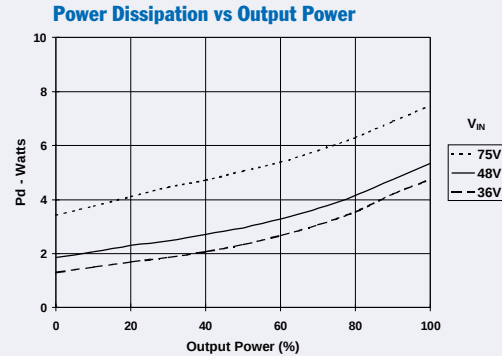
(5) The Enable inputs (pins 1 & 2) have internal pull-ups. Leaving pin 1 open-circuit and connecting pin 2 to  $-V_{in}$  allows the the converter to operate when input power is applied. The maximum open-circuit voltage is 4V.

(6) Ultra-low ESR capacitors, such as organic or polymer aluminum electrolytic types, may cause instability. Consult the factory before using.

## 35-W Triple Output Isolated DC/DC Converter for Logic Applications

SLTS165E - FEBRUARY 2002 - REVISED MARCH 2003

## PT4831 Performance Characteristics (See Notes A, B)

PT4831 Thermal Performance (See Note C)  
( $I_{O1} + I_{O2} + I_{O3} = 9A$ , represents 100% Load)**Note A:** All Characteristic data in the above graphs has been developed from actual products tested at 25°C. This data is considered typical data for the ISR.**Note B:** Output Load (%) represents the percent drawn from each output of the stated 100% load condition.**Note C:** SOA curves represent operating conditions at which the internal components are at or below the manufacturer's maximum rated operating temperatures.

**PT4832 Electrical Specifications**(Unless otherwise stated, the operating conditions are:  $T_a = 25^\circ\text{C}$ ,  $V_{in} = 48\text{V}$ , and  $I_o = 0.5I_{o\text{max}}$ )

| Characteristics                                                                    | Symbols                                                  | Conditions                                                                         | PT4832                                                                     |                                |                   | Units                               |                         |
|------------------------------------------------------------------------------------|----------------------------------------------------------|------------------------------------------------------------------------------------|----------------------------------------------------------------------------|--------------------------------|-------------------|-------------------------------------|-------------------------|
|                                                                                    |                                                          |                                                                                    | Min                                                                        | Typ                            | Max               |                                     |                         |
| Output Current                                                                     | I <sub>o</sub>                                           | Each output                                                                        | I <sub>O1</sub> (5.0V)<br>I <sub>O2</sub> (3.3V)<br>I <sub>O3</sub> (2.5V) | 0.25 (1)<br>0.1 (1)<br>0.1 (1) | —<br>—<br>—       | 5.0 (2)<br>5.5 (2)<br>5.5 (2)       | A                       |
|                                                                                    |                                                          | Total (I <sub>O1</sub> + I <sub>O2</sub> + I <sub>O3</sub> )                       |                                                                            | —                              | —                 | 9 (2)                               | A                       |
|                                                                                    |                                                          | Input Voltage Range                                                                | V <sub>in</sub>                                                            | Continuous<br>Surge (1 minute) | 36<br>—           | —<br>—                              | 75<br>80                |
| Set-Point Voltage                                                                  | V <sub>o</sub>                                           |                                                                                    | V <sub>O1</sub><br>V <sub>O2</sub><br>V <sub>O3</sub>                      | 4.9<br>3.24<br>2.45            | 5.0<br>3.3<br>2.5 | 5.1<br>3.36<br>2.55                 | V                       |
| Temperature Variation                                                              | Reg <sub>temp</sub>                                      | −40°C ≤ T <sub>a</sub> ≤ +85°C, I <sub>o</sub> = I <sub>o</sub> min                | V <sub>O1</sub><br>V <sub>O2</sub> /V <sub>O3</sub>                        | —<br>—                         | ±0.5<br>±0.5      | —<br>—                              | % V <sub>o</sub>        |
| Line Regulation                                                                    | Reg <sub>line</sub>                                      | All outputs, Over V <sub>in</sub> range                                            |                                                                            | —                              | ±0.1              | ±0.5                                | %V <sub>o</sub>         |
| Load Regulation                                                                    | Reg <sub>load</sub>                                      | All outputs, 0 ≤ I <sub>o</sub> ≤ I <sub>o</sub> max                               |                                                                            | —                              | ±0.1              | ±0.5                                | %V <sub>o</sub>         |
| Total Output Voltage Variation                                                     | ΔV <sub>o</sub> tol                                      | Includes set-point, line, load,<br>−40°C ≤ T <sub>a</sub> ≤ +85°C                  | V <sub>O1</sub><br>V <sub>O2</sub> /V <sub>O3</sub>                        | —<br>—                         | —<br>—            | ±3 (3)<br>±3 (3)                    | %V <sub>o</sub>         |
| Efficiency                                                                         | η                                                        | I <sub>O1</sub> = 5A, I <sub>O2</sub> = 2A, I <sub>O3</sub> = 2A                   |                                                                            | —                              | 86.7              | —                                   | %                       |
| V <sub>o</sub> Ripple/Noise<br>(0 to 20MHz bandwidth)                              | V <sub>n</sub>                                           |                                                                                    | V <sub>O1</sub><br>V <sub>O2</sub><br>V <sub>O3</sub>                      | —<br>—<br>—                    | 30<br>25<br>25    | —<br>—<br>—                         | mV <sub>pp</sub>        |
| Transient Response                                                                 | t <sub>TR</sub><br>V <sub>OS</sub>                       | 0.1A/μs load step, 50% to 75% I <sub>o</sub> max<br>V <sub>o</sub> over/undershoot |                                                                            | —<br>—                         | 200<br>5          | —<br>—                              | μSec<br>%V <sub>o</sub> |
| Output Adjust Range                                                                | V <sub>o</sub> adj                                       |                                                                                    | V <sub>O1</sub> /V <sub>O2</sub> /V <sub>O3</sub>                          | —                              | ±10               | —                                   | %V <sub>o</sub>         |
| Over-Current Threshold                                                             | I <sub>TRIP</sub>                                        | Total, all outputs. Reset with auto-recovery                                       |                                                                            | —                              | 11                | —                                   | A                       |
| Switching Frequency                                                                | f <sub>s</sub>                                           | Over V <sub>in</sub> and I <sub>o</sub> ranges                                     |                                                                            | 350                            | 400               | 450                                 | kHz                     |
| Under Voltage Lockout                                                              | V <sub>on</sub><br>V <sub>off</sub>                      | V <sub>in</sub> increasing<br>V <sub>in</sub> decreasing                           |                                                                            | —<br>—                         | 35.5<br>34        | —<br>—                              | V                       |
| Turn-On Time                                                                       | t <sub>on</sub>                                          | V <sub>in</sub> = 48V step                                                         |                                                                            | —                              | 140 (4)           | —                                   | ms                      |
| Enable Control (pins 1 & 2)<br>High-Level Input Voltage<br>Low-Level Input Voltage | V <sub>IH</sub><br>V <sub>IL</sub>                       | Referenced to −V <sub>in</sub> (pin 4)                                             |                                                                            | 4<br>−0.2                      | —<br>—            | 15 (5)<br>0.8                       | V                       |
| Low-Level Input Current                                                            | I <sub>IL</sub>                                          |                                                                                    |                                                                            | —                              | 1                 | 2                                   | mA                      |
| Standby Input Current                                                              | I <sub>in</sub> standby                                  | pins 1 & 2 open circuit                                                            |                                                                            | —                              | 1                 | 5                                   | mA                      |
| Internal Input Capacitance                                                         | C <sub>int</sub>                                         |                                                                                    |                                                                            | —                              | 1.14              | —                                   | μF                      |
| External Output Capacitance                                                        | C <sub>O1</sub><br>C <sub>O2</sub><br>C <sub>O3</sub>    |                                                                                    |                                                                            | 0<br>0<br>0                    | 220<br>220<br>220 | 1,000 (6)<br>1,000 (6)<br>1,000 (6) | μF                      |
| Primary/Secondary Isolation                                                        | V <sub>iso</sub><br>C <sub>iso</sub><br>R <sub>iso</sub> |                                                                                    |                                                                            | 1500<br>—<br>10                | —<br>2,200<br>—   | —<br>—<br>—                         | V<br>pF<br>MΩ           |

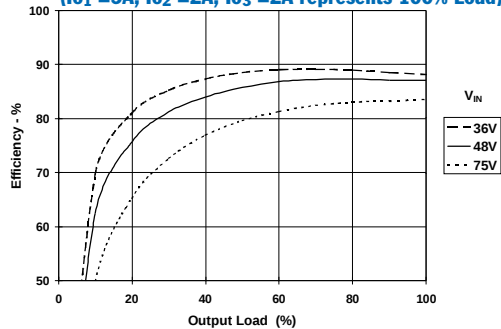
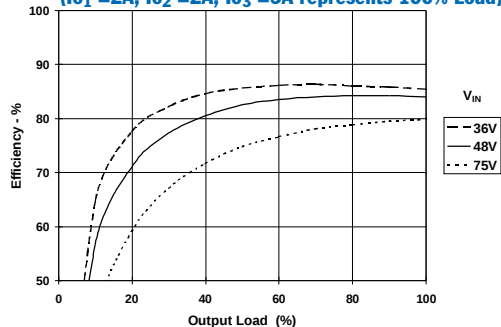
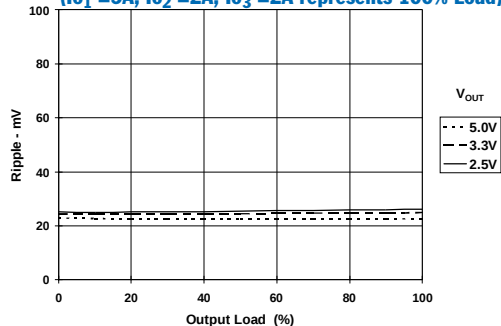
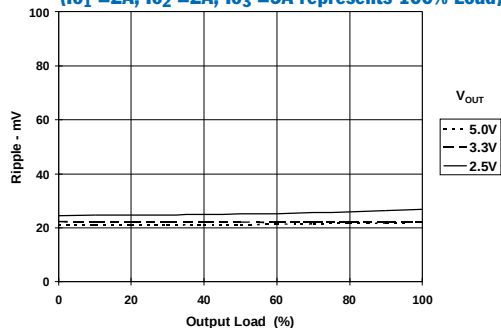
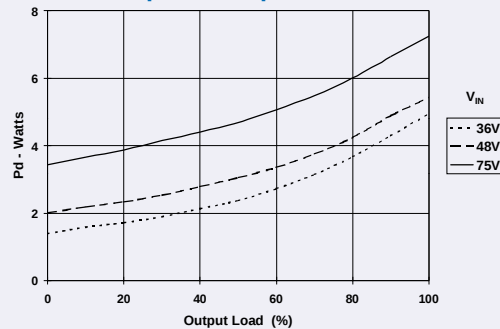
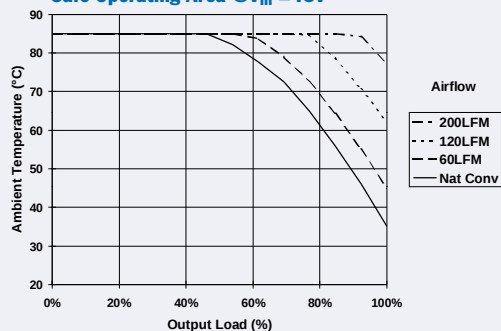
**Notes:** (1) The converter will operate down to no load with reduced specifications.(2) The sum-total current from outputs  $V_{o2}$ , and  $V_{o3}$  cannot exceed 9ADC.

(3) Limits are specified by design.

(4) Measured from the application of the input voltage to the instance that all outputs are in regulation.

(5) The Enable inputs (pins 1 & 2) have internal pull-ups. Leaving pin 1 open-circuit and connecting pin 2 to  $-V_{in}$  allows the the converter to operate when input power is applied. The maximum open-circuit voltage is 4V.

(6) Ultra-low ESR capacitors, such as organic or polymer aluminum electrolytic types, may cause instability. Consult the factory before using.

**PT4832 Performance Characteristics** (See Notes A, B)**Efficiency vs Output Power**  
( $I_{O1} = 5A$ ,  $I_{O2} = 2A$ ,  $I_{O3} = 2A$  represents 100% Load)**Efficiency vs Output Power**  
( $I_{O1} = 2A$ ,  $I_{O2} = 2A$ ,  $I_{O3} = 5A$  represents 100% Load)**Output Ripple vs Output Power;  $V_{IN} = 48V$**   
( $I_{O1} = 5A$ ,  $I_{O2} = 2A$ ,  $I_{O3} = 2A$  represents 100% Load)**Output Ripple vs Output Power;  $V_{IN} = 48V$**   
( $I_{O1} = 2A$ ,  $I_{O2} = 2A$ ,  $I_{O3} = 5A$  represents 100% Load)**PT4832 Thermal Performance** (See Note C)  
( $I_{O1} + I_{O2} + I_{O3} = 9A$ , represents 100% Load)**Power Dissipation vs Output Power****Safe Operating Area @  $V_{IN} = 48V$** **Note A:** All Characteristic data in the above graphs has been developed from actual products tested at 25°C. This data is considered typical data for the ISR.**Note B:** Output Load (%) represents the percent drawn from each output of the stated 100% load condition.**Note C:** SOA curves represent operating conditions at which the internal components are at or below the manufacturer's maximum rated operating temperatures.

**PT4833 Electrical Specifications**(Unless otherwise stated, the operating conditions are:  $T_a = 25^\circ\text{C}$ ,  $V_{in} = 48\text{V}$ , and  $I_o = 0.5I_{o\text{max}}$ )

| Characteristics                              | Symbols                             | Conditions                                                                             | PT4833                                                   |                        |                                     | Units                      |
|----------------------------------------------|-------------------------------------|----------------------------------------------------------------------------------------|----------------------------------------------------------|------------------------|-------------------------------------|----------------------------|
|                                              |                                     |                                                                                        | Min                                                      | Typ                    | Max                                 |                            |
| Output Current                               | $I_o$                               | Each output                                                                            | $I_{o1}$ (3.3V)<br>0.25 (1)                              | —                      | 8 (2)                               | A                          |
|                                              |                                     |                                                                                        | $I_{o2}$ (2.0V)<br>0.1 (1)                               | —                      | 6 (2)                               |                            |
|                                              |                                     |                                                                                        | $I_{o3}$ (1.5V)<br>0.1 (1)                               | —                      | 6 (2)                               |                            |
|                                              |                                     | Total ( $I_{o1} + I_{o2} + I_{o3}$ )                                                   | —                                                        | —                      | 12 (2)                              | A                          |
| Input Voltage Range                          | $V_{in}$                            | Continuous<br>Surge (1 minute)                                                         | 36<br>—                                                  | —<br>—                 | 75<br>80                            | V                          |
| Set-Point Voltage                            | $V_o$                               |                                                                                        | $V_{o1}$<br>3.24<br>$V_{o2}$<br>1.96<br>$V_{o3}$<br>1.47 | 3.3<br>2.0<br>1.5      | 3.36<br>2.04<br>1.53                | V                          |
| Temperature Variation                        | $\text{Reg}_{\text{temp}}$          | $-40^\circ\text{C} \leq T_a \leq +85^\circ\text{C}$ , $I_o = I_{o\text{min}}$          | $V_{o1}$<br>—<br>$V_{o2}/V_{o3}$<br>—                    | $\pm 0.5$<br>$\pm 0.5$ | —<br>—                              | % $V_o$                    |
| Line Regulation                              | $\text{Reg}_{\text{line}}$          | All outputs, Over $V_{in}$ range                                                       | —                                                        | $\pm 0.1$              | $\pm 0.5$                           | % $V_o$                    |
| Load Regulation                              | $\text{Reg}_{\text{load}}$          | All outputs, $0 \leq I_o \leq I_{o\text{max}}$                                         | —                                                        | $\pm 0.1$              | $\pm 0.5$                           | % $V_o$                    |
| Total Output Voltage Variation               | $\Delta V_o \text{ tol}$            | Includes set-point, line, load,<br>$-40^\circ\text{C} \leq T_a \leq +85^\circ\text{C}$ | $V_{o1}$<br>—<br>$V_{o2}/V_{o3}$<br>—                    | —<br>—                 | $\pm 3$ (3)<br>$\pm 3$ (3)          | % $V_o$                    |
| Efficiency                                   | $\eta$                              | $I_{o1} = 6\text{A}$ , $I_{o2} = 2\text{A}$ , $I_{o3} = 2\text{A}$                     | —                                                        | 86                     | —                                   | %                          |
| $V_o$ Ripple/Noise<br>(0 to 20MHz bandwidth) | $V_n$                               |                                                                                        | $V_{o1}$<br>—<br>$V_{o2}$<br>—<br>$V_{o3}$<br>—          | 40<br>25<br>25         | —<br>—                              | mV <sub>pp</sub>           |
| Transient Response                           | $t_{tr}$<br>$V_{os}$                | 0.1A/ $\mu\text{s}$ load step, 50% to 75% $I_{o\text{max}}$<br>$V_o$ over/undershoot   | —<br>—                                                   | 200<br>3               | —<br>—                              | $\mu\text{Sec}$<br>% $V_o$ |
| Output Adjust Range                          | $V_{o\text{adj}}$                   |                                                                                        | $V_{o1}/V_{o2}/V_{o3}$<br>—                              | $\pm 10$               | —                                   | % $V_o$                    |
| Over-Current Threshold                       | $I_{\text{TRIP}}$                   | Total, all outputs. Reset with auto-recovery                                           | —                                                        | 14                     | —                                   | A                          |
| Switching Frequency                          | $f_s$                               | Over $V_{in}$ and $I_o$ ranges                                                         | 350                                                      | 400                    | 450                                 | kHz                        |
| Under Voltage Lockout                        | $V_{on}$<br>$V_{off}$               | $V_{in}$ increasing<br>$V_{in}$ decreasing                                             | —<br>—                                                   | 35.5<br>34             | —<br>—                              | V                          |
| Turn-On Time                                 | $t_{on}$                            | $V_{in} = 48\text{V}$ step                                                             | —                                                        | 140 (4)                | —                                   | ms                         |
| Enable Control (pins 1 & 2)                  |                                     | Referenced to $-V_{in}$ (pin 4)                                                        |                                                          |                        |                                     |                            |
| High-Level Input Voltage                     | $V_{IH}$                            |                                                                                        | 4                                                        | —                      | 15 (5)                              | V                          |
| Low-Level Input Voltage                      | $V_{IL}$                            |                                                                                        | -0.2                                                     | —                      | 0.8                                 |                            |
| Low-Level Input Current                      | $I_{IL}$                            |                                                                                        | —                                                        | 1                      | 2                                   | mA                         |
| Standby Input Current                        | $I_{in \text{ standby}}$            | pins 1 & 2 open circuit                                                                | —                                                        | 1                      | 5                                   | mA                         |
| Internal Input Capacitance                   | $C_{int}$                           |                                                                                        | —                                                        | 1.14                   | —                                   | $\mu\text{F}$              |
| External Output Capacitance                  | $C_{o1}$<br>$C_{o2}$<br>$C_{o3}$    |                                                                                        | 0<br>0<br>0                                              | 220<br>220<br>220      | 1,000 (6)<br>1,000 (6)<br>1,000 (6) | $\mu\text{F}$              |
| Primary/Secondary Isolation                  | $V_{iso}$<br>$C_{iso}$<br>$R_{iso}$ |                                                                                        | 1500<br>—<br>10                                          | —<br>2,200<br>—        | —<br>—                              | V<br>pF<br>M $\Omega$      |

**Notes:** (1) The converter will operate down to no load with reduced specifications.(2) The sum-total current from outputs  $V_{o1}$ ,  $V_{o2}$ , and  $V_{o3}$  cannot exceed 12ADC.

(3) Limits are specified by design.

(4) Measured from the application of the input voltage to the instance that all outputs are in regulation.

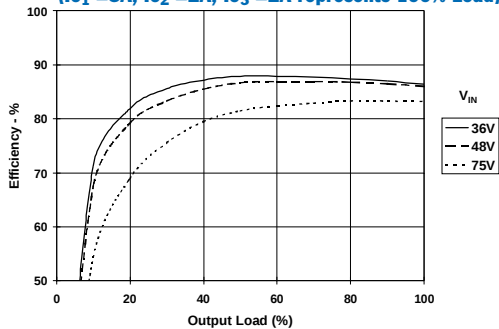
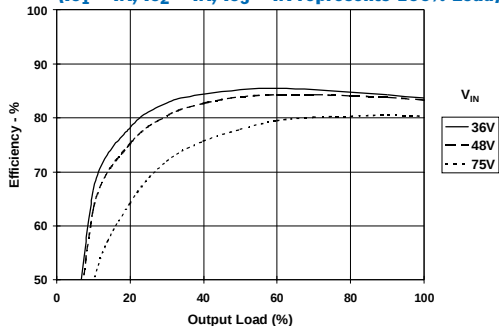
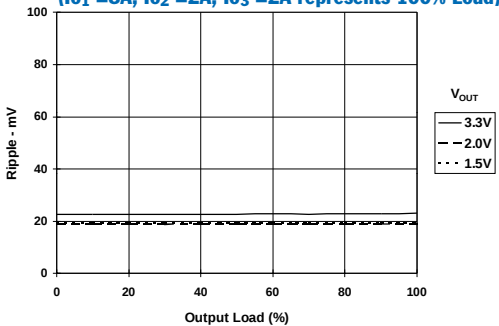
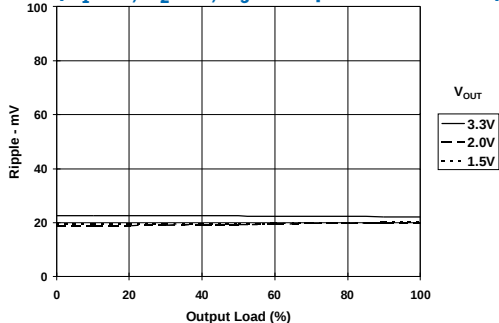
(5) The Enable inputs (pins 1 & 2) have internal pull-ups. Leaving pin 1 open-circuit and connecting pin 2 to  $-V_{in}$  allows the converter to operate when input power is applied. The maximum open-circuit voltage is 4V.

(6) Ultra-low ESR capacitors, such as organic or polymer aluminum electrolytic types, may cause instability. Consult the factory before using.

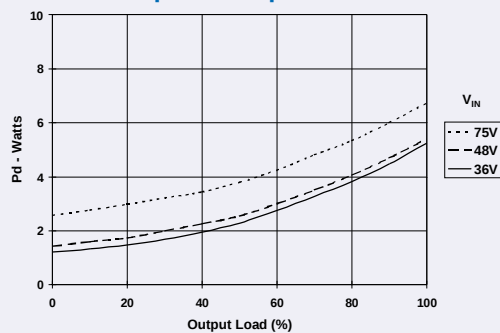
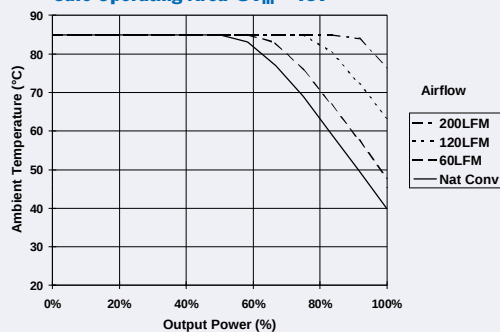
## 35-W Triple Output Isolated DC/DC Converter for Logic Applications

SLTS165E - FEBRUARY 2002 - REVISED MARCH 2003

## PT4833 Performance Characteristics (See Note A, B)

**Efficiency vs Output Power**  
 ( $I_{O1}=8A$ ,  $I_{O2}=2A$ ,  $I_{O3}=2A$  represents 100% Load)

**Efficiency vs Output Power**  
 ( $I_{O1}=4A$ ,  $I_{O2}=4A$ ,  $I_{O3}=4A$  represents 100% Load)

**Output Ripple vs Output Power;  $V_{in}=48V$**   
 ( $I_{O1}=8A$ ,  $I_{O2}=2A$ ,  $I_{O3}=2A$  represents 100% Load)

**Output Ripple vs Output Power;  $V_{in}=48V$**   
 ( $I_{O1}=4A$ ,  $I_{O2}=4A$ ,  $I_{O3}=4A$  represents 100% Load)


## PT4833 Thermal Performance (See Note C)

( $I_{O1} + I_{O2} + I_{O3} = 12A$ , represents 100% Load)
**Power Dissipation vs Output Load**

**Safe Operating Area @  $V_{in}=48V$** 


**Note A:** All Characteristic data in the above graphs has been developed from actual products tested at 25°C. This data is considered typical data for the ISR.

**Note B:** Output Load (%) represents the percent drawn from each output of the stated 100% load condition.

**Note C:** SOA curves represent operating conditions at which the internal components are at or below the manufacturer's maximum rated operating temperatures.

### Operating Features of the PT4820 Triple-Output DC/DC Converters

#### Short-Circuit Protection

To protect against load faults the PT4820 series of triple-output DC/DC converters incorporate output short-circuit protection. When the combined output current from all three outputs exceeds the over-current threshold (see data sheet specifications), the PT4820 shuts down after a short period of typically 15ms. This forces the output voltage at all three regulated outputs to simultaneously fall to zero. Following shutdown, the module automatically attempts to recover by executing a soft-start power-up. This occurs at intervals of approximately 65ms. If the load fault persists, the module will continually cycle through successive over-current trips and restarts.

#### Over-Temperature Protection

The PT4820 DC/DC converter series have an internal temperature sensor, which monitors the temperature of the module's metal case. If the case temperature exceeds a nominal 110°C the converter will shut down. The converter will automatically restart when the sensed temperature returns to about 100°C.

#### Under-Voltage Lock-Out

The Under-Voltage Lock-Out (UVLO) circuit prevents operation of the converter whenever the input voltage to the module is insufficient to maintain output regulation. The UVLO has approximately 2V of hysteresis. This is to prevent oscillation with a slowly changing input voltage. Below the UVLO threshold the module is off and the enable control inputs, EN1 and EN2 are inoperative.

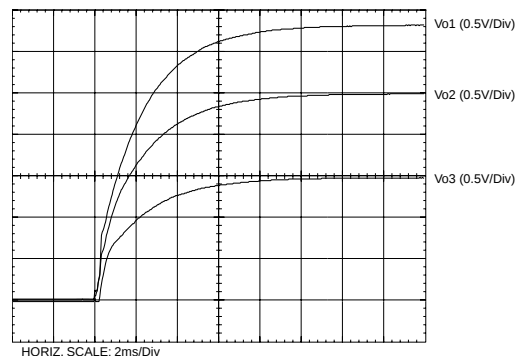
#### On/Off Output Voltage Sequencing

The power-up characteristic of the PT4820 series of DC/DC converters meets the requirements of microprocessor and DSP chipsets. All three outputs are internally sequenced to power-up in unison. Figure 1-1 shows the PT4820 output voltage rise times and characteristic shapes after either power is applied to the input of the converter, or the converter is enabled using one of the enable control inputs. All three output voltages rise simultaneously and monotonically until each reaches its respective output voltage. There is no turn-on overshoot and the output voltages are proportional to each other during power on.

#### Turn-On Time

The turn-on on time varies with the input voltage. The typical turn-on time (measured from the application of a valid input voltage to instance all outputs are in regulation) is typically 140 milliseconds at  $V_{in} = 48V$ . The rise time of the output voltage is between 10 and 15 milliseconds.

Figure 1-1;  $V_{o1}$ ,  $V_{o2}$ ,  $V_{o3}$  Power-Up Sequence



#### Primary-Secondary Isolation

The PT4820 series of DC/DC converters incorporate electrical isolation between the input terminals (primary) and the output terminals (secondary). All converters are production tested to a withstand voltage of 1500VDC. The isolation complies with UL60950 and EN60950, and the requirements for operational isolation. This allows the converter to be configured for either a positive or negative input voltage source.

The regulation control circuitry for these modules is located on the secondary (output) side of the isolation barrier. Control signals are passed between the primary and secondary sides of the converter. The data sheet 'Pin Descriptions' and 'Pin-Out Information' provides guidance as to which reference, primary or secondary, each pin is associated.

#### Input Current Limiting

**The converter is not internally fused.** For safety and overall system protection, the maximum input current to the converter must be limited. Active or passive current limiting can be used. Passive current limiting can be a fast acting fuse. A 125-V fuse, rated no more than 5A, is recommended. Active current limiting can be implemented with a current limited "Hot-Swap" controller.

### Using the On/Off Enable Controls on the PT4820 Series of Triple Output DC/DC Converters

The PT4820 (48V input) series of triple-output DC/DC converters incorporate two output enable controls. EN1 (pin 1) is the *Positive Enable* input, and EN2 (pin 2) is the *Negative Enable* input. Both inputs are electrically referenced to  $-V_{in}$  (pin 4) on the primary or input side of the converter. The *Enable* pins are ideally controlled with an open-collector (or open-drain) discrete transistor. A pull-up resistor is not required. If a pull-up resistor is added, the pull-up voltage must be limited to 15V.

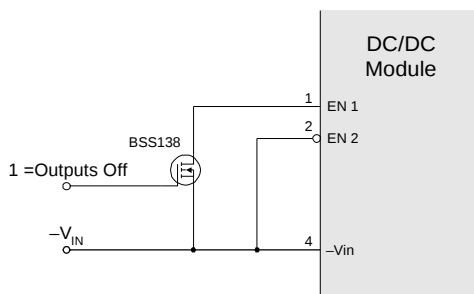
#### Automatic (UVLO) Power-Up

Connecting EN2 (pin 2) to  $-V_{in}$  (pin 4) and leaving EN1 (pin 1) open-circuit configures the converter for automatic power up. (See data sheet “Typical Application”). The converter control circuitry incorporates an “Under Voltage Lockout” (UVLO) function, which disables the converter until the minimum specified input voltage is present at  $\pm V_{in}$ . (See data sheet Specifications). The UVLO circuitry ensures a clean transition during power-up and power-down, allowing the converter to tolerate a slow-rising input voltage. For most applications EN1 and EN2, can be configured for automatic power-up.

#### Positive Output Enable (Negative Inhibit)

To configure the converter for a positive enable function, connect EN2 (pin 2) to  $-V_{in}$  (pin 4), and apply the system On/Off control signal to EN1 (pin 1). In this configuration, applying less than 0.8V (with respect to  $-V_{in}$  potential) to pin 1 disables the converter outputs. Figure 2-1 is an example of this implementation using a buffer transistor.

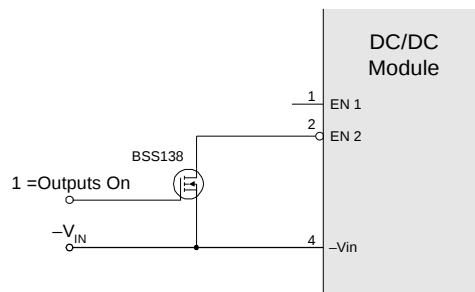
Figure 2-1; Positive Enable Configuration



#### Negative Output Enable (Positive Inhibit)

To configure the converter for a negative enable function, EN1 (pin 1) is left open circuit, and the system On/Off control signal is applied to EN2 (pin 2). Applying less than 0.8V (with respect to  $-V_{in}$  potential) to pin 2, enables the converter outputs. An example using a buffer transistor is again detailed in Figure 2-2. *Note: The converter will only produce and output voltage if a valid input voltage is applied to  $\pm V_{in}$ .*

Figure 2-2; Negative Enable Configuration



#### On/Off Enable Turn-On Time

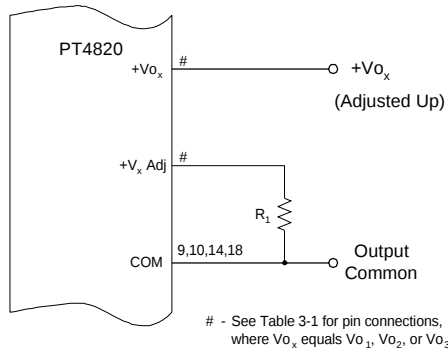
When the On/Off enable inputs, EN1 or EN2 are used to enable the PT4820's output voltages, the turn-on delay time (measured from the transition of the enable signal to the instance the outputs begin to rise) will vary with the input voltage and the module's internal timing. At an input voltage of 48V, the total turn-on time is between 20 and 60 milliseconds. This turn-on time reduces as the input voltage is increased. The rise time of the output voltages is between 10 and 15 milliseconds.

### Adjusting the Output Voltages of the PT4820 Triple-Output DC/DC Converters

The output voltages of the PT4820 series of triple-output DC/DC converters,  $V_{O1}$ ,  $V_{O2}$  and  $V_{O3}$  are independently adjustable. The adjustment method uses a single external resistor,  $R_1$  which may be used to adjust a selected output by up to a nominal  $\pm 10\%$  from the factory preset value. The value of the resistor determines the magnitude of adjustment, and the placement of the resistor determines the direction of adjustment (up or down). Resistor values can be calculated using the appropriate formula (see below) and the constants provided in Table 3-2. Alternatively the value may be selected directly from Table 3-3. The placement of each resistor is detailed as follows.

**Adjust Up:** To increase a specific output, add a resistor  $R_1$  between the appropriate  $V_{Ox}$  Adj ( $V_{O1}$  Adj,  $V_{O2}$  Adj, or  $V_{O3}$  Adj) and the output common (COM). See Figure 3-1(a) and Table 3-1 for the resistor placement and pin connections.

Figure 3-1a



**Adjust Down:** Add a resistor ( $R_2$ ), between the appropriate  $V_{Ox}$  Adj ( $V_{O1}$ ,  $V_{O2}$ , or  $V_{O3}$ ) and the output being adjusted. See Figure 3-1(b) and Table 1 for the resistor placement and pin connections.

Figure 3-1b

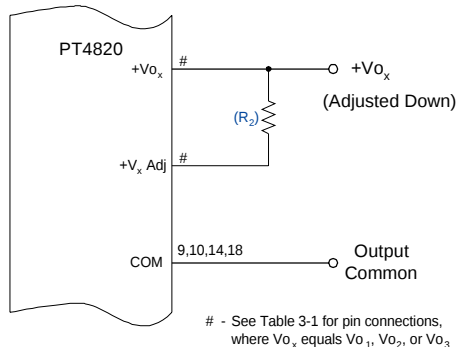


Table 3-1; Adjust Resistor Pin Connections

|          | To Adjust Up<br>Connect $R_1$ |           | To Adjust Down<br>Connect ( $R_2$ ) |                |
|----------|-------------------------------|-----------|-------------------------------------|----------------|
|          | from<br>$V_{Ox}$ Adj          | to<br>COM | from<br>$V_{Ox}$ Adj                | to<br>$V_{Ox}$ |
| $V_{O1}$ | 11                            | 10        | 11                                  | 12             |
| $V_{O2}$ | 15                            | 14        | 15                                  | 16             |
| $V_{O3}$ | 19                            | 18        | 19                                  | 20             |

### Calculation of Adjust Values

The adjust resistor values may be calculated. Use the applicable formula and select the appropriate constants from Table 2 for the output and model being adjusted.

$$R_1 \text{ [Adjust Up]}^3 = \frac{R_o \cdot V_r}{V_a - V_o} - R_s \text{ k}\Omega$$

$$(R_2) \text{ [Adjust Down]}^3 = \frac{R_o (V_a - V_r)}{V_o - V_a} - R_s \text{ k}\Omega$$

Where:  $V_o$  = Original output voltage  
 $V_a$  = Adjusted output voltage  
 $V_r$  = The reference voltage from Table 3-2  
 $R_o$  = The resistance value in Table 3-2  
 $R_s$  = The series resistance from Table 3-2

### Notes:

1. Use only a single 1% (or better) tolerance resistor in either the  $R_1$  or ( $R_2$ ) location to adjust a specific output. Place the resistor as close to the ISR as possible.
2. Never connect capacitors to any of the ' $V_{Ox}$  Adj' pins. Any capacitance added to these control pins will affect the stability of the respective regulated output.
3. Adjustments made to any output must also comply with the following limitations.

$$\begin{aligned} V_{O1} &\geq (V_{O2} + 0.5V), \text{ and} \\ V_{O1} &\geq (V_{O3} + 0.5V) \end{aligned}$$

## PT4820 Series

Table 3-2

**V<sub>O1</sub>, V<sub>O2</sub>, & V<sub>O3</sub> OUTPUT VOLTAGE ADJUSTMENT RANGE AND FORMULA PARAMETERS**

|                            |        |        |        |       |        |        |        |
|----------------------------|--------|--------|--------|-------|--------|--------|--------|
| <b>V<sub>O</sub> (nom)</b> | 5.0V   | 3.3V   | 2.5V   | 2.0V  | 1.8V   | 1.5V   | 1.2V   |
| <b>V<sub>a</sub> (min)</b> | 4.5V   | 2.97V  | 2.25V  | 1.8V  | 1.62V  | 1.35V  | 1.08V  |
| <b>V<sub>a</sub> (max)</b> | 5.5V   | 3.63V  | 2.75V  | 2.2V  | 1.98V  | 1.65V  | 1.32V  |
| <b>V<sub>r</sub></b>       | 1.225V | 1.225V | 1.225V | 1.225 | 1.225V | 1.225V | 1.003V |
| <b>R<sub>O</sub> (kΩ)</b>  | 15.4   | 11.0   | 10.2   | 10.2  | 12.1   | 7.5    | 9.76   |
| <b>R<sub>S</sub> (kΩ)</b>  | 33.2   | 40.2   | 40.2   | 24.9  | 22.1   | 5.36   | 3.65   |

Table 3-3

**V<sub>O1</sub>, V<sub>O2</sub>, & V<sub>O3</sub> OUTPUT VOLTAGE ADJUST RESISTOR VALUES** (See Note 3 for adjustment limitations)

| <b>V<sub>O</sub> (nom)</b>   | 5.0V      | 3.3V      | 2.5       | <b>V<sub>O</sub> (nom)</b>   | 2.0V      | 1.8V      | 1.5V     | 1.2V     |
|------------------------------|-----------|-----------|-----------|------------------------------|-----------|-----------|----------|----------|
| <b>V<sub>a</sub> (req'd)</b> |           |           |           | <b>V<sub>a</sub> (req'd)</b> |           |           |          |          |
| 2.25                         |           |           | (1.6)kΩ   | 1.080                        |           |           |          | (2.6)kΩ  |
| 2.3                          |           |           | (14.6)kΩ  | 1.100                        |           |           |          | (5.8)kΩ  |
| 2.35                         |           |           | (36.3)kΩ  | 1.120                        |           |           |          | (10.6)kΩ |
| 2.4                          |           |           | (79.6)kΩ  | 1.140                        |           |           |          | (18.6)kΩ |
| 2.45                         |           |           | (210.0)kΩ | 1.160                        |           |           |          | (34.7)kΩ |
| 2.5                          |           |           |           | 1.180                        |           |           |          | (82.7)kΩ |
| 2.55                         |           |           | 210.0kΩ   | 1.200                        |           |           |          |          |
| 2.6                          |           |           | 84.7kΩ    | 1.220                        |           |           |          | 486.0kΩ  |
| 2.65                         |           |           | 43.1kΩ    | 1.240                        |           |           |          | 241.0kΩ  |
| 2.7                          |           |           | 22.3kΩ    | 1.260                        |           |           |          | 160.0kΩ  |
| 2.75                         |           |           | 9.8kΩ     | 1.280                        |           |           |          | 119.0kΩ  |
| 2.97                         |           | (18.0)kΩ  |           | 1.300                        |           |           |          | 94.2kΩ   |
| 3.0                          |           | (24.9)kΩ  |           | 1.320                        |           |           |          | 77.9kΩ   |
| 3.05                         |           | (40.1)kΩ  |           | 1.350                        |           |           | (0.9)kΩ  |          |
| 3.1                          |           | (62.9)kΩ  |           | 1.375                        |           |           | (3.6)kΩ  |          |
| 3.15                         |           | (101.0)kΩ |           | 1.400                        |           |           | (7.8)kΩ  |          |
| 3.2                          |           | (177.0)kΩ |           | 1.425                        |           |           | (14.6)kΩ |          |
| 3.25                         |           | (405.0)kΩ |           | 1.450                        |           |           | (28.4)kΩ |          |
| 3.3                          |           |           |           | 1.475                        |           |           | (69.6)kΩ |          |
| 3.35                         |           | 229.0kΩ   |           | 1.500                        |           |           |          |          |
| 3.4                          |           | 94.5kΩ    |           | 1.525                        |           |           | 362.0kΩ  |          |
| 3.45                         |           | 49.6kΩ    |           | 1.550                        |           |           | 178.0kΩ  |          |
| 3.5                          |           | 27.2kΩ    |           | 1.575                        |           |           | 117.0kΩ  |          |
| 3.55                         |           | 13.7kΩ    |           | 1.600                        |           |           | 86.5kΩ   |          |
| 3.6                          |           | 4.7kΩ     |           | 1.620                        |           | (4.5)kΩ   | 71.2kΩ   |          |
| 3.63                         |           | 0.6kΩ     |           | 1.650                        |           | (12.2)kΩ  | 55.9kΩ   |          |
| •                            |           |           |           | 1.700                        |           | (35.4)kΩ  |          |          |
| 4.5                          | (67.7)kΩ  |           |           | 1.750                        |           | (105.0)kΩ |          |          |
| 4.6                          | (96.7)kΩ  |           |           | 1.800                        | (4.4)kΩ   |           |          |          |
| 4.7                          | (145.0)kΩ |           |           | 1.850                        | (17.6)kΩ  | 274.0kΩ   |          |          |
| 4.8                          | (242.0)kΩ |           |           | 1.900                        | (43.9)kΩ  | 126.0kΩ   |          |          |
| 4.9                          | (533.0)kΩ |           |           | 1.950                        | (123.0)kΩ | 76.7kΩ    |          |          |
| 5.0                          |           |           |           | 2.000                        |           |           |          |          |
| 5.1                          | 155.0kΩ   |           |           | 2.050                        | 225.0kΩ   |           |          |          |
| 5.2                          | 61.1kΩ    |           |           | 2.100                        | 100.0kΩ   |           |          |          |
| 5.3                          | 29.7kΩ    |           |           | 2.150                        | 58.4kΩ    |           |          |          |
| 5.4                          | 14.0kΩ    |           |           | 2.200                        | 37.6kΩ    |           |          |          |
| 5.5                          | 4.5kΩ     |           |           |                              |           |           |          |          |

R1 = (Blue) R2 = Black

## VDE Approved Installation Instructions (Installationsanleitung)

Nennspannung (Rated Voltage): PT4820 36 to 72 Vdc, Transient to 80Vdc

Nennaufnahme (Rated Input): PT4820 1.5 Adc

Nennleistung (Rated Power): 40 Watts Maximum

Ausgangsspannung (Sec. Voltage): PT4820 Series

PT4821, +3.3/ +2.5/ +1.5 Vdc; 8.0/ 6.0/ 6.0 Adc; Max total is 12Adc  
PT4822, +3.3/ +1.8/ +1.5 Vdc; 8.0/ 6.0/ 6.0 Adc; Max total is 12Adc  
Ausgangsstrom (Sec. Current): PT4823, +3.3/ +2.5/ +1.2 Vdc; 8.0/ 6.0/ 6.0 Adc; Max total is 12Adc  
oder (or) PT4824, +3.3/ +1.8/ +1.2 Vdc; 8.0/ 6.0/ 6.0 Adc; Max total is 12Adc  
Ausgangsleistung (Sec. Power): PT4825, +3.3/ +1.5/ +1.2 Vdc; 8.0/ 6.0/ 6.0 Adc; Max total is 12Adc  
PT4826, +5.0/ +3.3/ +1.8 Vdc; 5.0/ 5.5 /5.5 Adc; Max total is 9Adc  
PT4827, +3.3/ +2.5/ +1.8 Vdc; 8.0/ 6.0 /6.0 Adc; Max total is 12Adc  
PT4828, +5.0/ +2.5/ +1.5 Vdc; 5.0/ 5.5 /5.5 Adc; Max total is 9Adc  
PT4829, +5.0/ +1.8/ +1.5 Vdc; 5.0/ 5.5 /5.5 Adc; Max total is 9Adc  
PT4831, +5.0/ +3.3/ +1.5 Vdc; 5.0/ 5.5 /5.5 Adc; Max total is 9Adc  
PT4832, +5.0/ +3.3/ +2.5 Vdc; 5.0/ 5.5 /5.5 Adc; Max total is 9Adc

### Angabe der Umgebungstemperatur

(Information on ambient temperature): +85 °C maximum as tested

### Besondere Hinweise (Special Instructions):

Es ist vorzusehen, daß die Spannungsversorgung in einer Endanwendung über eine isolierte Sekundärschaltung bereit gestellt wird. Die Eingangsspannung der Spannungsversorgungsmodule muss eine verstärkte Isolierung von der Wechselstromquelle aufweisen.

Die Spannungsversorgung muss gemäß den Gehäuse-, Montage-, Kriech- und Luftstrecken-, Markierungs- und Trennanforderungen der Endanwendung installiert werden.

(The power supply is intended to be supplied by isolated secondary circuitry in an end use application. The input power to these power supplies shall have reinforced insulation from the AC mains.

The power supply shall be installed in compliance with the enclosure, mounting, creepage, clearance, casualty, markings, and segregation requirements of the end-use application.


Offenbach,

**VDE Prüf- und Zertifizierungsinstitut**  
Abteilung / Department TD

(Jürgen Bärwinkel)

Ort / Place:

Datum / Date: Nov 6, 2002

  
(Stempel und Unterschrift des Herstellers / Stamp  
and signature of the manufacturer)

**PACKAGING INFORMATION**

| Orderable Device | Status<br>(1) | Package Type | Package<br>Drawing | Pins | Package Qty | Eco Plan<br>(2) | Lead/Ball Finish | MSL Peak Temp<br>(3) | Samples<br>(Requires Login) |
|------------------|---------------|--------------|--------------------|------|-------------|-----------------|------------------|----------------------|-----------------------------|
| PT4821C          | OBSOLETE      | SIP MODULE   | ENP                | 21   |             | TBD             | Call TI          | Call TI              |                             |
| PT4823C          | LIFEBUY       | SIP MODULE   | ENP                | 21   | 8           | TBD             | Call TI          | Level-3-215C-168HRS  |                             |
| PT4826A          | LIFEBUY       | SIP MODULE   | ENN                | 21   | 8           | TBD             | Call TI          | Level-1-215C-UNLIM   |                             |
| PT4826C          | LIFEBUY       | SIP MODULE   | ENP                | 21   | 8           | TBD             | Call TI          | Level-3-215C-168HRS  |                             |
| PT4828C          | LIFEBUY       | SIP MODULE   | ENP                | 21   | 8           | TBD             | Call TI          | Level-3-215C-168HRS  |                             |
| PT4829C          | LIFEBUY       | SIP MODULE   | ENP                | 21   | 8           | TBD             | Call TI          | Level-3-215C-168HRS  |                             |
| PT4831C          | OBSOLETE      | SIP MODULE   | ENP                | 21   |             | TBD             | Call TI          | Call TI              |                             |
| PT4833C          | LIFEBUY       | SIP MODULE   | ENP                | 21   | 8           | TBD             | Call TI          | Level-3-215C-168HRS  |                             |

(1) The marketing status values are defined as follows:

**ACTIVE:** Product device recommended for new designs.

**LIFEBUY:** TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

**NRND:** Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

**PREVIEW:** Device has been announced but is not in production. Samples may or may not be available.

**OBSOLETE:** TI has discontinued the production of the device.

(2) Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS), Pb-Free (RoHS Exempt), or Green (RoHS & no Sb/Br) - please check <http://www.ti.com/productcontent> for the latest availability information and additional product content details.

**TBD:** The Pb-Free/Green conversion plan has not been defined.

**Pb-Free (RoHS):** TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.

**Pb-Free (RoHS Exempt):** This component has a RoHS exemption for either 1) lead-based flip-chip solder bumps used between the die and package, or 2) lead-based die adhesive used between the die and leadframe. The component is otherwise considered Pb-Free (RoHS compatible) as defined above.

**Green (RoHS & no Sb/Br):** TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)

(3) MSL, Peak Temp. -- The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

## IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, enhancements, improvements and other changes to its semiconductor products and services per JESD46, latest issue, and to discontinue any product or service per JESD48, latest issue. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All semiconductor products (also referred to herein as "components") are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its components to the specifications applicable at the time of sale, in accordance with the warranty in TI's terms and conditions of sale of semiconductor products. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by applicable law, testing of all parameters of each component is not necessarily performed.

TI assumes no liability for applications assistance or the design of Buyers' products. Buyers are responsible for their products and applications using TI components. To minimize the risks associated with Buyers' products and applications, Buyers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, machine, or process in which TI components or services are used. Information published by TI regarding third-party products or services does not constitute a license to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of significant portions of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI components or services with statements different from or beyond the parameters stated by TI for that component or service voids all express and any implied warranties for the associated TI component or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Buyer acknowledges and agrees that it is solely responsible for compliance with all legal, regulatory and safety-related requirements concerning its products, and any use of TI components in its applications, notwithstanding any applications-related information or support that may be provided by TI. Buyer represents and agrees that it has all the necessary expertise to create and implement safeguards which anticipate dangerous consequences of failures, monitor failures and their consequences, lessen the likelihood of failures that might cause harm and take appropriate remedial actions. Buyer will fully indemnify TI and its representatives against any damages arising out of the use of any TI components in safety-critical applications.

In some cases, TI components may be promoted specifically to facilitate safety-related applications. With such components, TI's goal is to help enable customers to design and create their own end-product solutions that meet applicable functional safety standards and requirements. Nonetheless, such components are subject to these terms.

No TI components are authorized for use in FDA Class III (or similar life-critical medical equipment) unless authorized officers of the parties have executed a special agreement specifically governing such use.

Only those TI components which TI has specifically designated as military grade or "enhanced plastic" are designed and intended for use in military/aerospace applications or environments. Buyer acknowledges and agrees that any military or aerospace use of TI components which have **not** been so designated is solely at the Buyer's risk, and that Buyer is solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI has specifically designated certain components as meeting ISO/TS16949 requirements, mainly for automotive use. In any case of use of non-designated products, TI will not be responsible for any failure to meet ISO/TS16949.

### Products

|                              |                                                                                      |
|------------------------------|--------------------------------------------------------------------------------------|
| Audio                        | <a href="http://www.ti.com/audio">www.ti.com/audio</a>                               |
| Amplifiers                   | <a href="http://amplifier.ti.com">amplifier.ti.com</a>                               |
| Data Converters              | <a href="http://dataconverter.ti.com">dataconverter.ti.com</a>                       |
| DLP® Products                | <a href="http://www.dlp.com">www.dlp.com</a>                                         |
| DSP                          | <a href="http://dsp.ti.com">dsp.ti.com</a>                                           |
| Clocks and Timers            | <a href="http://www.ti.com/clocks">www.ti.com/clocks</a>                             |
| Interface                    | <a href="http://interface.ti.com">interface.ti.com</a>                               |
| Logic                        | <a href="http://logic.ti.com">logic.ti.com</a>                                       |
| Power Mgmt                   | <a href="http://power.ti.com">power.ti.com</a>                                       |
| Microcontrollers             | <a href="http://microcontroller.ti.com">microcontroller.ti.com</a>                   |
| RFID                         | <a href="http://www.ti-rfid.com">www.ti-rfid.com</a>                                 |
| OMAP Applications Processors | <a href="http://www.ti.com/omap">www.ti.com/omap</a>                                 |
| Wireless Connectivity        | <a href="http://www.ti.com/wirelessconnectivity">www.ti.com/wirelessconnectivity</a> |

### Applications

|                               |                                                                                          |
|-------------------------------|------------------------------------------------------------------------------------------|
| Automotive and Transportation | <a href="http://www.ti.com/automotive">www.ti.com/automotive</a>                         |
| Communications and Telecom    | <a href="http://www.ti.com/communications">www.ti.com/communications</a>                 |
| Computers and Peripherals     | <a href="http://www.ti.com/computers">www.ti.com/computers</a>                           |
| Consumer Electronics          | <a href="http://www.ti.com/consumer-apps">www.ti.com/consumer-apps</a>                   |
| Energy and Lighting           | <a href="http://www.ti.com/energy">www.ti.com/energy</a>                                 |
| Industrial                    | <a href="http://www.ti.com/industrial">www.ti.com/industrial</a>                         |
| Medical                       | <a href="http://www.ti.com/medical">www.ti.com/medical</a>                               |
| Security                      | <a href="http://www.ti.com/security">www.ti.com/security</a>                             |
| Space, Avionics and Defense   | <a href="http://www.ti.com/space-avionics-defense">www.ti.com/space-avionics-defense</a> |
| Video and Imaging             | <a href="http://www.ti.com/video">www.ti.com/video</a>                                   |

### TI E2E Community

[e2e.ti.com](http://e2e.ti.com)