


SCVF SERIES PART NUMBERING SCHEME

REV	ECN	APP'D
-	4502	IQ 5/30/01
A	4974	IQ 9/10/02
B	5742	RN 12/28/05

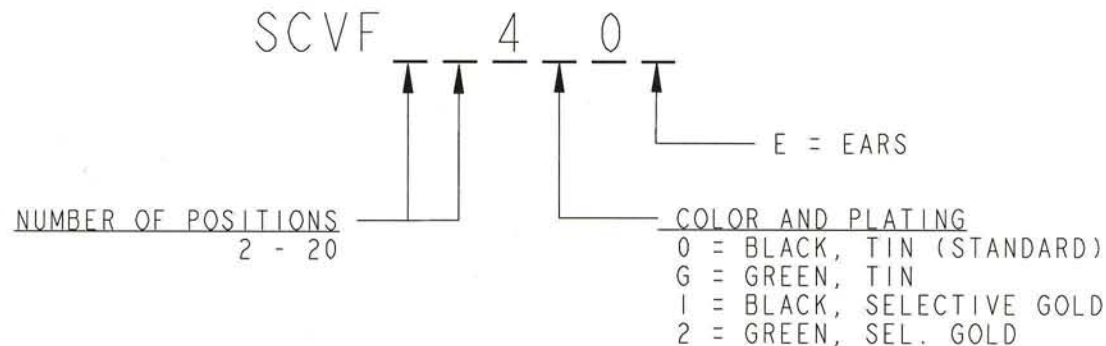

RATINGS

CURRENT - 12A
 VOLTAGE - 300V
 U.L. FILE NO. PENDING



RATINGS

CURRENT - 12 A
 VOLTAGE - 300 V
 CSA FILE NO. PENDING

DIN VDE 0627:1986
 DIN VDE 0110-1:1989
 EN 60947-1:1991
 EN 60947-7-1:1992

CURRENT - 12 A
 VOLTAGE - 300 V
 TUV FILE NO. PENDING

CONSULT PCD FOR PART NO. AND
 AVAILABILITY OF FOLLOWING OPTIONS:

- * CUSTOM COLORS
- * CUSTOM MARKING
- * CUSTOM KEYING
- * SELECTIVE CONTACT LOADING

INSTALLATION RECOMMENDATIONS:

WIRE RANGE: AWG #16-28, STRANDED OR SOLID
 WIRE STRIP LENGTH: .330" (8,38mm)

MATERIALS:
 HOUSING: PA 66-6, UL 94 V-0
 CONTACT: COPPER ALLOY, TIN
 OR GOLD FINISH
 SPRING CLAMP: STAINLESS STEEL

MAX OPERATING TEMP: 105°C


DIMENSIONS	TOLERANCES	PROJECTION	TITLE			
ANSI Y14.5M UNITS: INCHES Pro/E FILE	.XX ±0.15 .XXX ±0.006 ANGLES ±2.0°		SCVF SERIES FRONT/FRONT SPRING CLAMP TERMINAL BLOCK: .150 CL			
			ENGR C. LASHUA 5/29/01			
			CHKD I. QUINN 5/30/01			
			APPD I. QUINN 5/30/01			
			SIZE A	DWG NO. SCVF02400	REV B	
			CODE: 58982	SCALE: NONE	SHEET 1 OF 2	

ORIGINAL
 STAMPED
 IN RED


THIS DOCUMENT CONTAINS
 PROPRIETARY INFORMATION WHICH
 IS THE CONFIDENTIAL PROPERTY
 OF AMPHENOL PCD, INC.
 PEABODY, MA, USA

L=NUM OF POS X CL SPACING

SCVF WITHOUT EARS

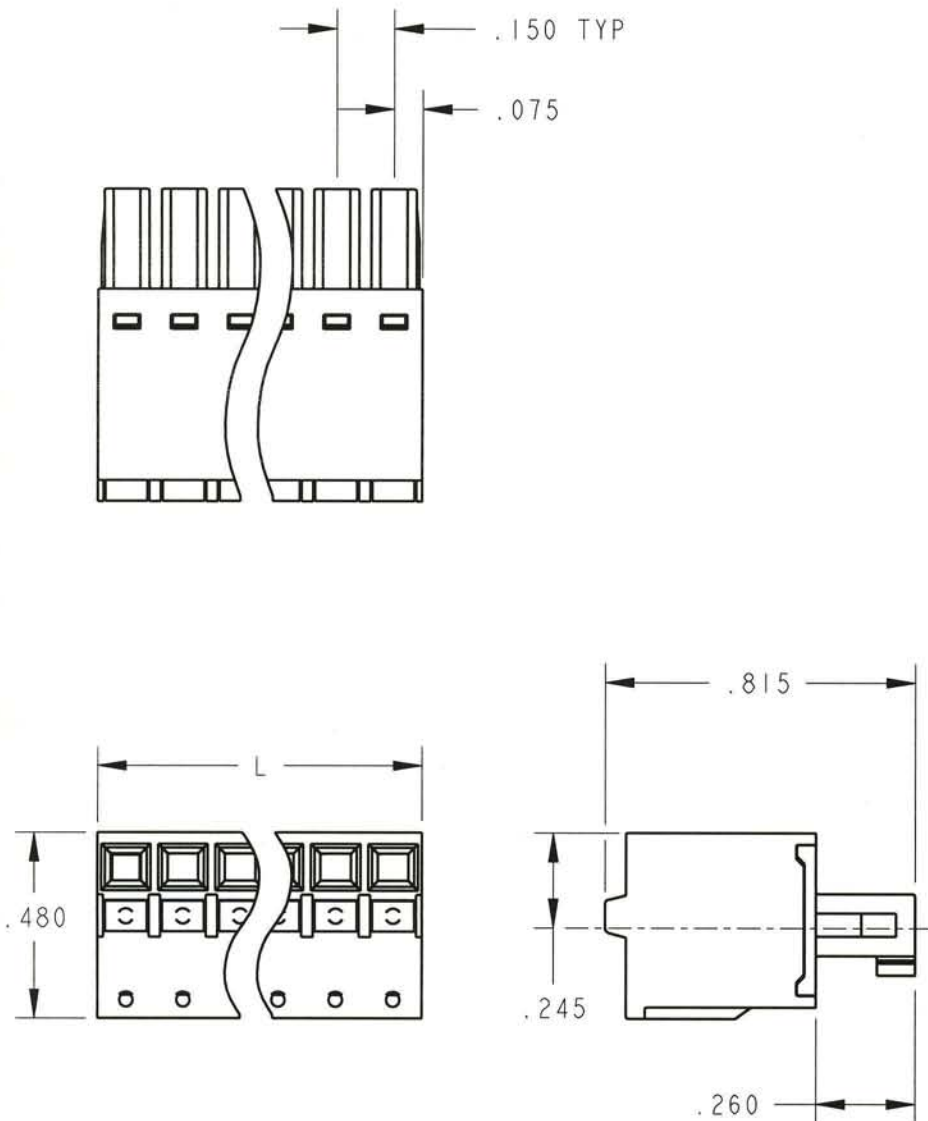

SCVF WITH EARS

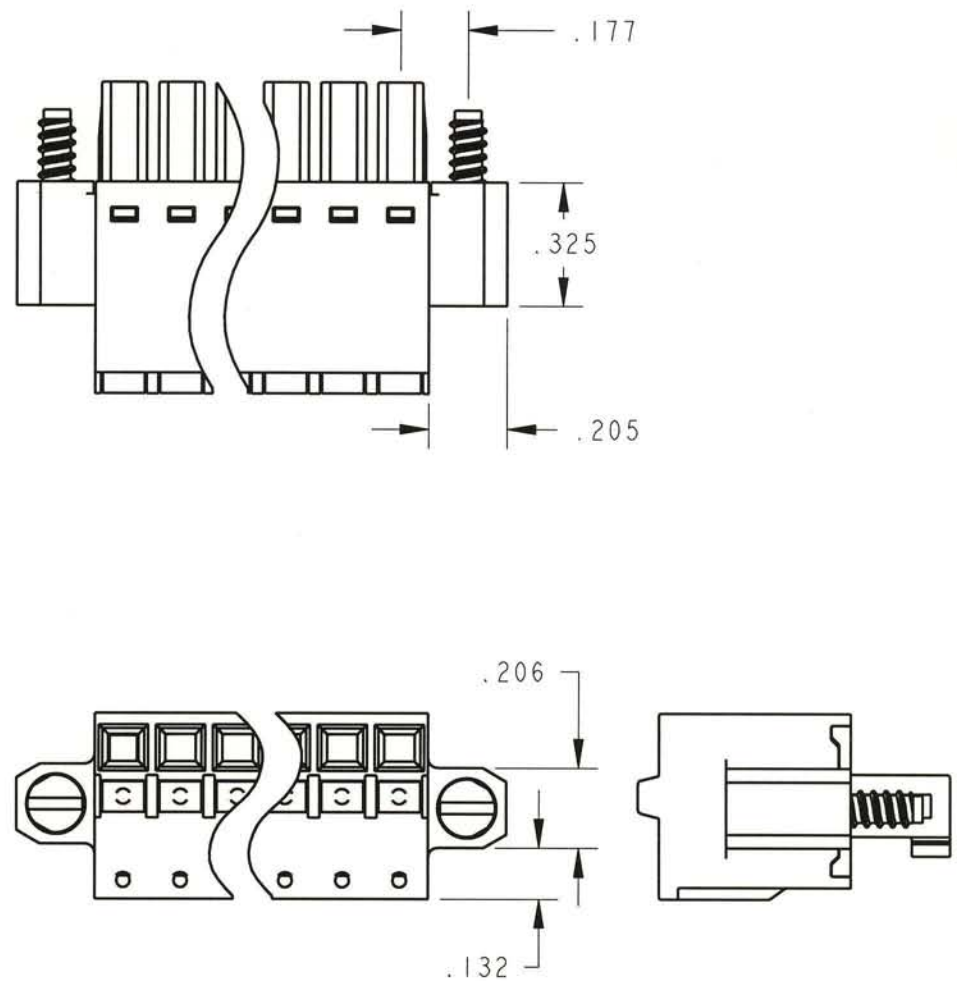

SIZE	DWG NO.	REV
A	SCVF02400	B
CODE: 58982	SCALE: NONE	SHEET 2 OF 2