



ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.

PC-	F005	DWG

REVISIONS		DOC. NO. SPC-F005 * Effective: 7/8/02 * DCP No: 1398						
DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
1969	Α	RELEASED	JN	07/09/09	JWM	07/09/09	JWM	07/09/09




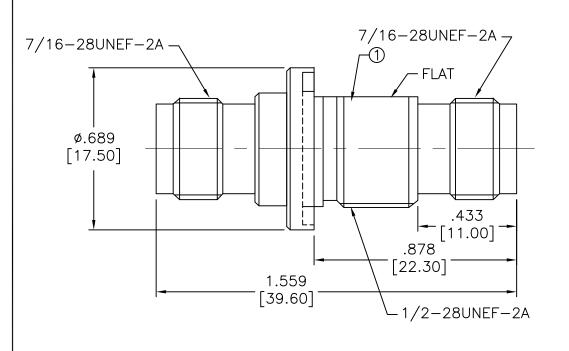

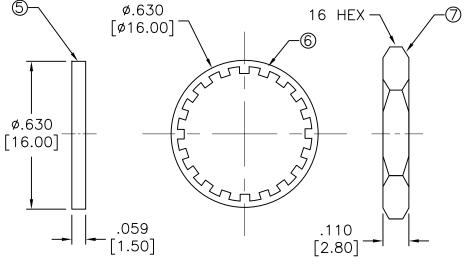

SPECIFICATIONS:

- -IMPEDIANCE: 50 OHMS
- -FREQUENCY RANGE: 0-7 GHz
- -VSWR: < 1.10:1 UP TO 5 GHz
- -WORKING VOLTAGE: 500 v rms @ SEA LEVEL
- -INSULATION RESISTANCE: 5k M ohms min.
- -TEMPERATURE RANGE: -65°c TO 165°c (GASKET 85°c MAX)



RECOMMENDED CUTOUT

DISCLAIMER:

1 BODY

2 BODY

3 INSULATOR

6 LOCK WASHER

4 CONTACT

7 HEX NUT

5 GASKET

ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.

DESCRIPTION QTY MATRL

1 BRASS

1 BRASS

1 BRASS

1 PTFE

NICKEL, 100μ"

NICKEL, 100μ"

NICKEL, 100μ"

FINISH

WHITE

1 PHOS. B GOLD, 3μ"

1 BRASS NICKEL, 100μ"

1 RUBBER RED

TOLERANCES:
UNLESS OTHERWISE

SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.

DRAWN BY:	DATE:
Jason Nash	07/09/09
CHECKED BY:	DATE:
Jeff McVicker	07/09/09
APPROVED BY:	DATE:
Jeff McVicker	07/09/09

DRAWING TITLE:

Bulkhead adapter, TNC Jack to TNC Jack

SIZE	DWG. NO.		ELEC	REV		
A	SPC33235		07R8002.dwg			Α
SCALE	· NTS	U.O.M.·INCHES [mm]		SHFFT.	1 OF	- 1