

Central[™] Semiconductor Corp.

FEATURES:

- SUPER MINIATURE CASE
- SPECIAL SELECTIONS AVAILABLE
- LOW COST
- SUPERIOR LOT TO LOT CONSISTENCY
- HIGH RELIABILITY
- "C" BEND CONSTRUCTION PROVIDES STRAIN RELIEF WHEN MOUNTED ON PC BOARD
- GLASS PASSIVATED CHIP

DESCRIPTION:

The CENTRAL SEMICONDUCTOR 1.0 Amp Surface Mount Fast Recovery Silicon Rectifier is a high quality, well constructed, highly reliable component designed for use in all types of commercial, industrial, entertainment, computer, and automotive applications where small size is required. The SMA case occupies 30% less board space than the SMB case. To order devices on 12mm Tape and Reel (5000/13" Reel), add TR13 suffix to part number.

MAXIMUM RATINGS: (T_A=25°C unless otherwise noted)


	SYMBOL	CMR1F -02M	CMR1F -04M	CMR1F -06M	CMR1F -10M	UNITS		
Peak Repetitive Reverse Voltage	V_{RRM}	200	400	600	1000	٧		
DC Blocking Voltage	٧R	200	400	600	1000	V		
RMS Reverse Voltage	V _{R(RMS}	140	280	420	700	V		
Average Forward Current (T _L =120)°C) IO	,	1.	.0		Α		
Peak Forward Surge Current (8.3ms) IFSM			30			Α		
Operating and Storage								
Junction Temperature	T_{J} , T_{stg}		-65 to	+150		°C		
Thermal Resistance	ΘJL		3	80		°C/W		

ELECTRICAL CHARACTERISTICS: (T_A=25°C unless otherwise noted)

SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNITS
^I R	V _R =Rated V _{RRM}			5.0	μΑ
I _R	V _R =Rated V _{RRM} , T _A =125°C			200	μΑ
٧F	I _F =1.0A			1.3	V
CJ	$V_{R}=4.0V$, f=1.0MHz		15		pF

■ 1989963 0001873 293 **■**

SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNITS
t _{rr}	I _F =0.5A, I _R =1.0A, Recover to 0.25A (CMR1F-02M, -04M)			150	ns
t _{rr}	I _F =0.5A, I _R =1.0A, Recover to 0.25A (CMR1F-06M)			250	ns
t _{rr}	I _F =0.5A, I _R =1.0A, Recover to 0.25A (CMR1F-10M)			500	ns

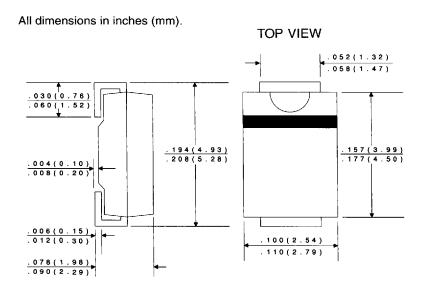

DEVICE	MARKING CODE
CMR1F-02M	CF02M
CMR1F-04M	CF04M
CMR1F-06M	CF06M
CMR1F-10M	CF10M



■ 1989963 0001874 127 ■