


| REVISIONS |     |                 |           |     |      |
|-----------|-----|-----------------|-----------|-----|------|
| P         | LTR | DESCRIPTION     | DATE      | DWN | APVD |
|           | A   | INITIAL RELEASE | 02JUL2015 | DL  | CW   |
|           |     |                 |           |     |      |
|           |     |                 |           |     |      |
|           |     |                 |           |     |      |

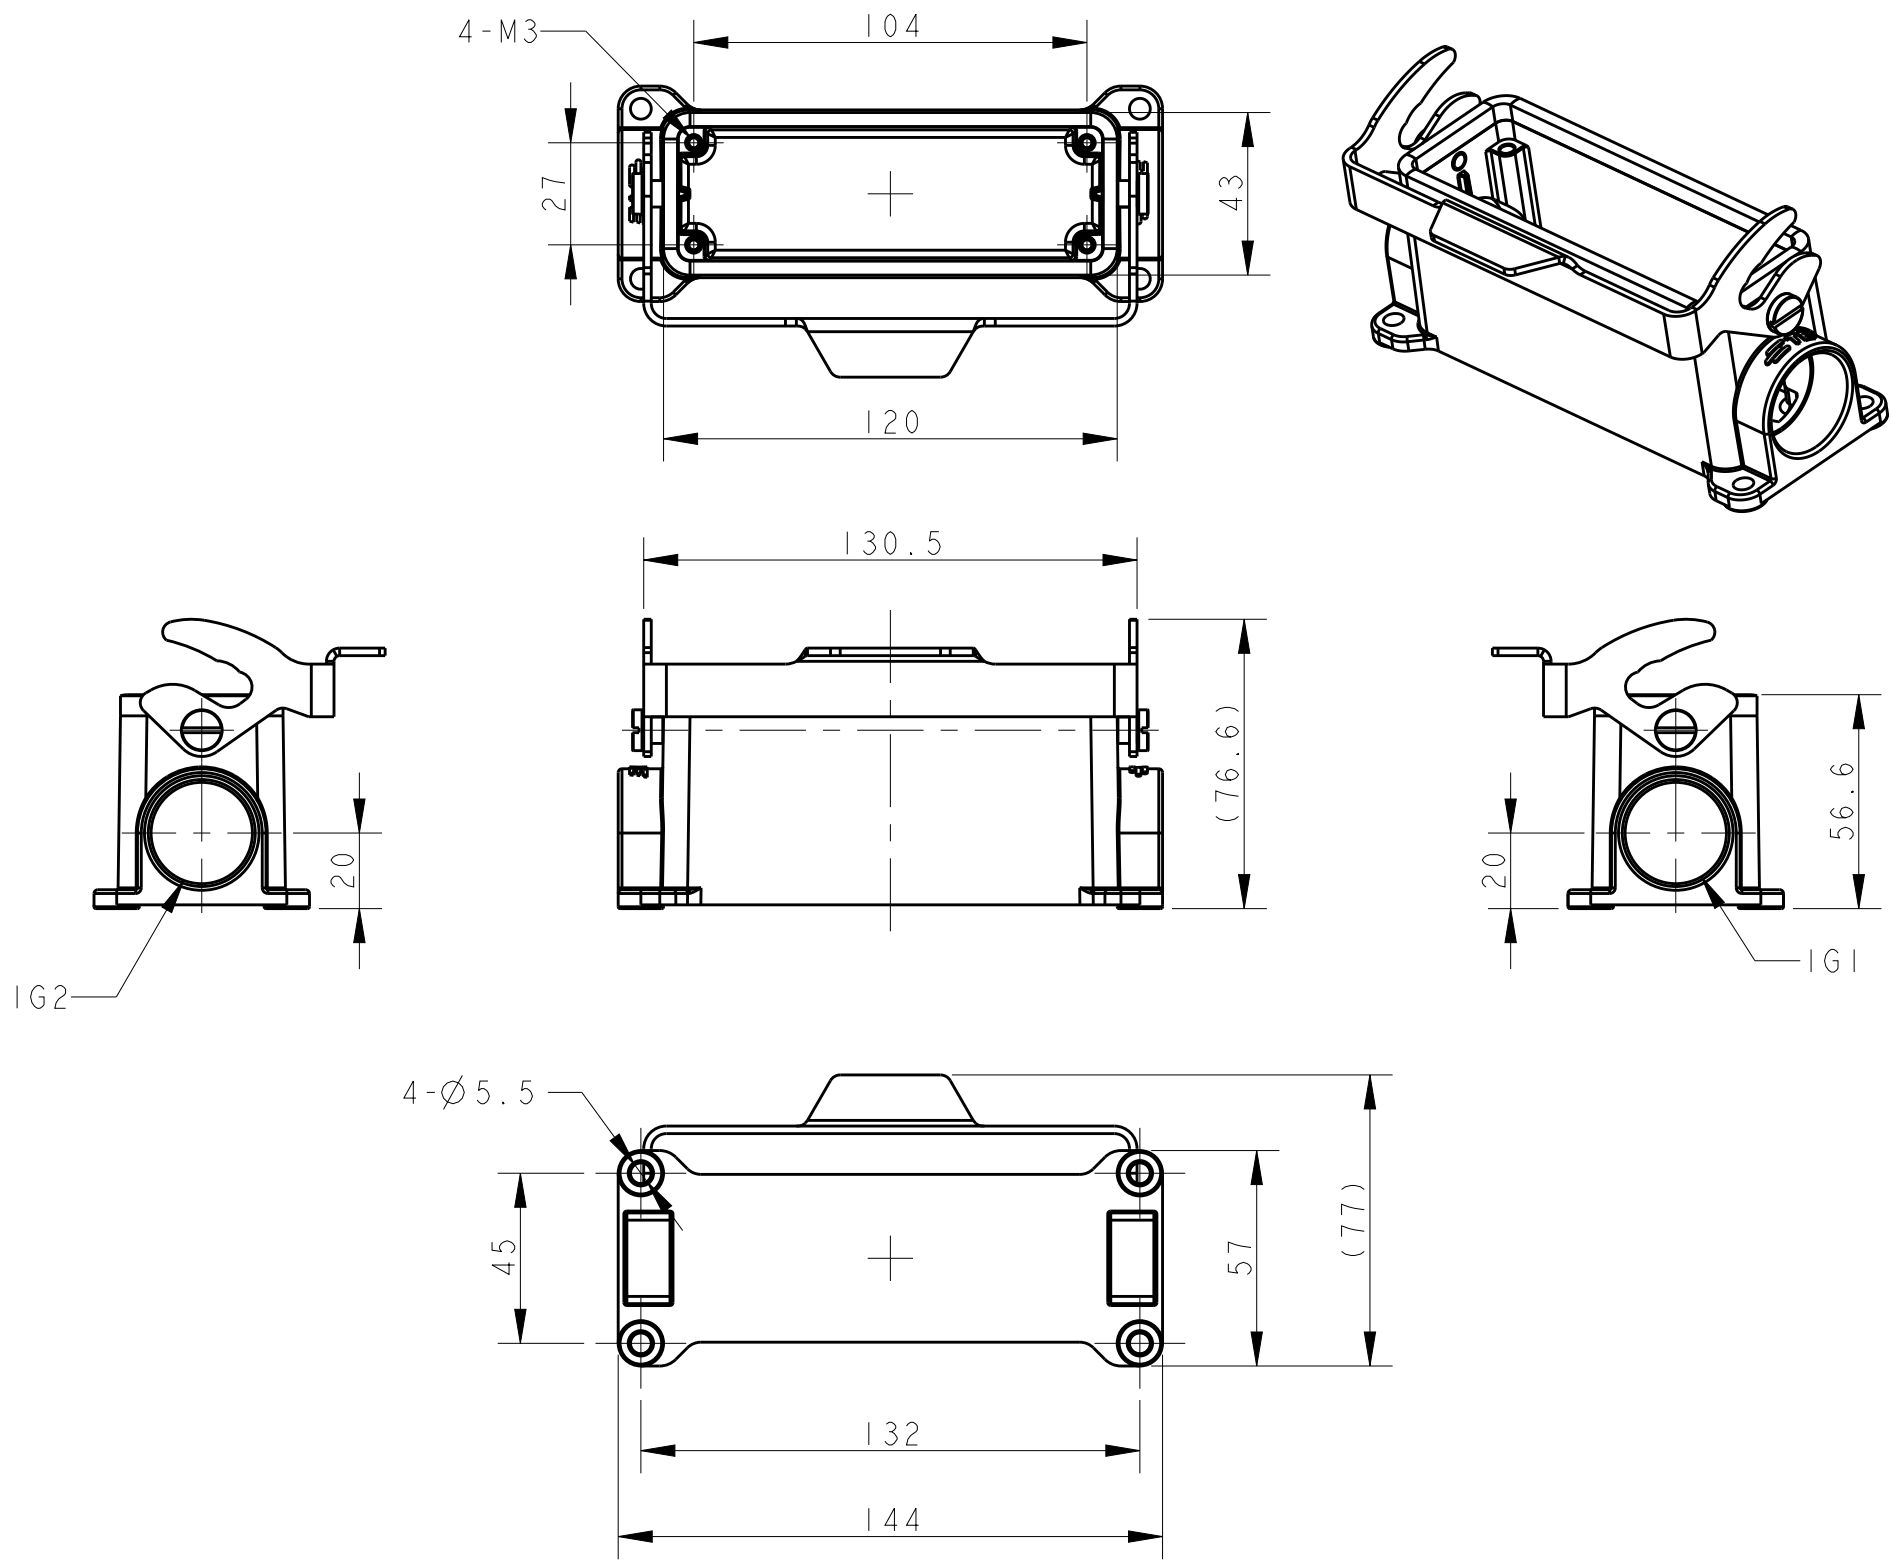


TYPE 1: BODY + SINGLE STEEL LOCKING


NOTES:  
1. TECHNICAL CHARACTERISTICS:  
BODY MATERIAL: DIE CAST ALUMINIUM ALLOY  
SURFACE TREATMENT: POWDER-COATED, GRAY  
OPERATION TEMPERATURE: -40-+125°C  
DEGREE OF PROTECTION: IP65 (MATED)

注释:  
1. 技术参数:  
主体材料: 铝合金  
表面处理: 粉末喷涂, 灰色  
工作温度: -40-+125°C  
防护等级: IP65(配合)

|                      |        |                           |      |      |
|----------------------|--------|---------------------------|------|------|
| TI610243121-000      | TYPE 1 | H24B-SGR-LB-PG21          | PG21 | -    |
| TI610243125-000      |        | H24B-SGR-LB-M25           | M25  | -    |
| TI610243221-000      |        | H24B-SGR-LB-2PG21         | PG21 | PG21 |
| TI610243225-000      |        | H24B-SGR-LB-2M25          | M25  | M25  |
| TI620243121-000      | TYPE 2 | H24B-SDR-LB-PG21          | PG21 | -    |
| TI620243125-000      |        | H24B-SDR-LB-M25           | M25  | -    |
| TI620243221-000      |        | H24B-SDR-LB-2PG21         | PG21 | PG21 |
| TI620243225-000      |        | H24B-SDR-LB-2M25          | M25  | M25  |
| TI620243421-000      | TYPE 3 | H24B-SDRM-LB-PG21         | PG21 | -    |
| TI620243425-000      |        | H24B-SDRM-LB-M25          | M25  | -    |
| TI620243321-000      |        | H24B-SDRM-LB-2PG21        | PG21 | PG21 |
| TI620243325-000      |        | H24B-SDRM-LB-2M25         | M25  | M25  |
| ASSEMBLY PART NUMBER | TYPE   | ASSEMBLY PART DESCRIPTION | IG1  | IG2  |

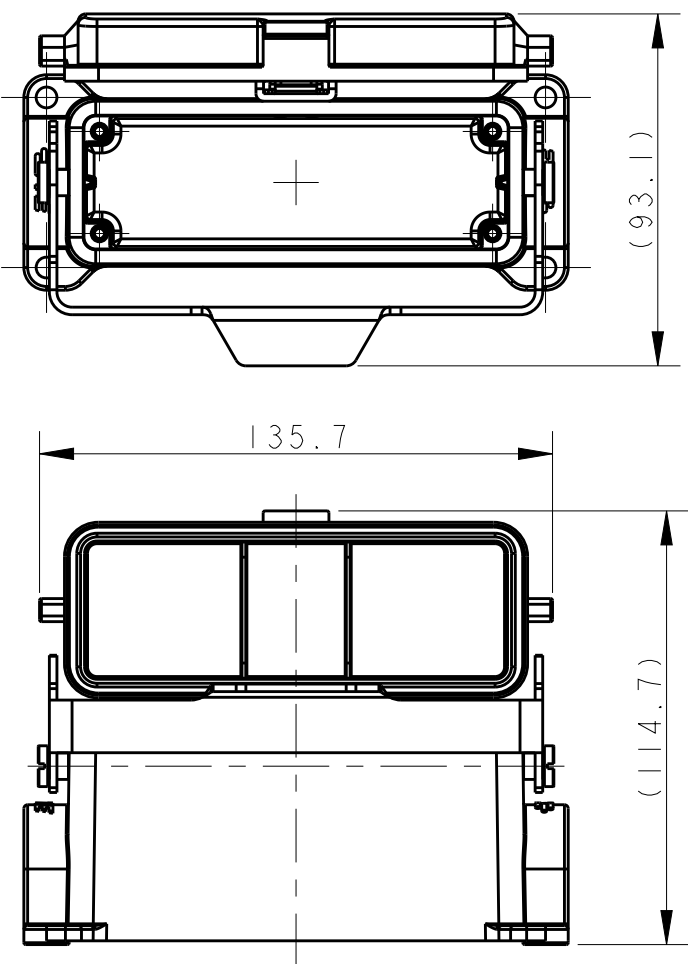


TYPE 2: BODY + SINGLE STEEL LOCKING + PLASTIC PROTECTION COVER  
OTHER SPEC REFER TO TYPE 1

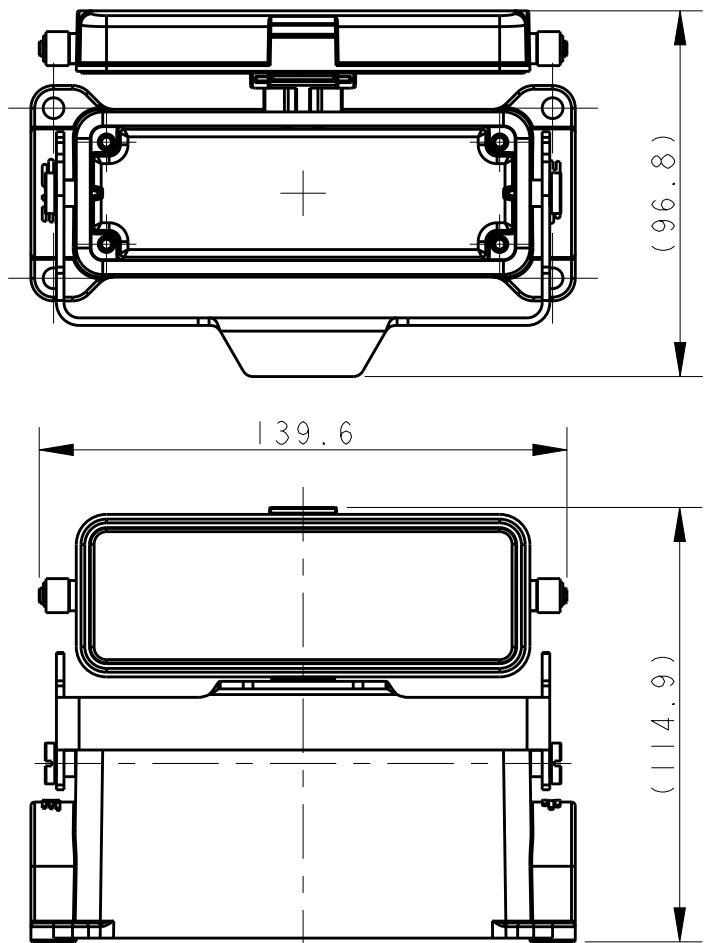


TYPE 3: BODY + SINGLE STEEL LOCKING + METAL PROTECTION COVER  
OTHER SPEC REFER TO TYPE 1

|                                        |  |                             |                                |              |                              |
|----------------------------------------|--|-----------------------------|--------------------------------|--------------|------------------------------|
| THIS DRAWING IS A CONTROLLED DOCUMENT. |  | DWN DAVID LI 02JUL2015      | TE Connectivity                |              |                              |
|                                        |  | CHK CHRIS WANG 02JUL2015    |                                |              |                              |
|                                        |  | APVD XU XIANG 02JUL2015     | NAME H24B-SGR/SDR/SDRM-LB-PG/M |              |                              |
| DIMENSIONS: mm                         |  | PRODUCT SPEC 108-137013     |                                |              |                              |
| TOLERANCES UNLESS OTHERWISE SPECIFIED: |  | APPLICATION SPEC 114-137013 |                                |              |                              |
| MATERIAL TBD                           |  | WEIGHT -                    | SIZE A2                        | CAGE CODE -  | DRAWING NO. C-TI6X0243XXXX00 |
|                                        |  | Customer Drawing            | SCALE 1:2                      | SHEET 1 OF 2 | REV A                        |

| P | LTR | DESCRIPTION | DATE | DWN | APVD |
|---|-----|-------------|------|-----|------|
|   | -   | SEE SHEET 1 | -    | -   | -    |
|   |     |             |      |     |      |
|   |     |             |      |     |      |
|   |     |             |      |     |      |

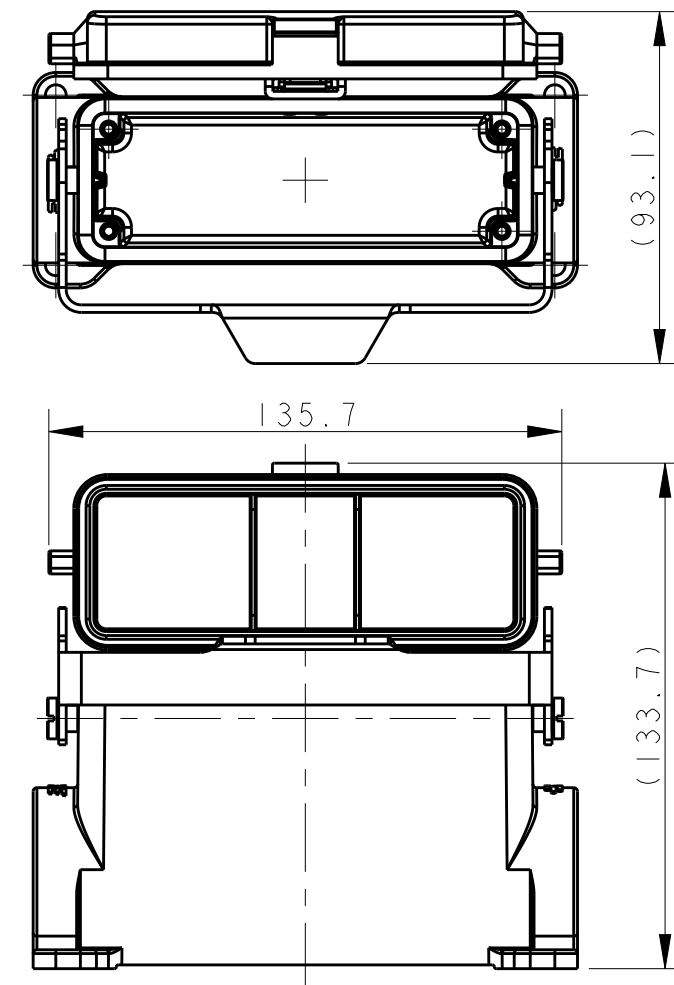

This diagram shows the front assembly of the machine. It includes the front panel with a handle on the left, a central control area with two buttons, and a large circular opening on the right. The front panel is shown in an exploded view, indicating its position relative to the base and handle components.

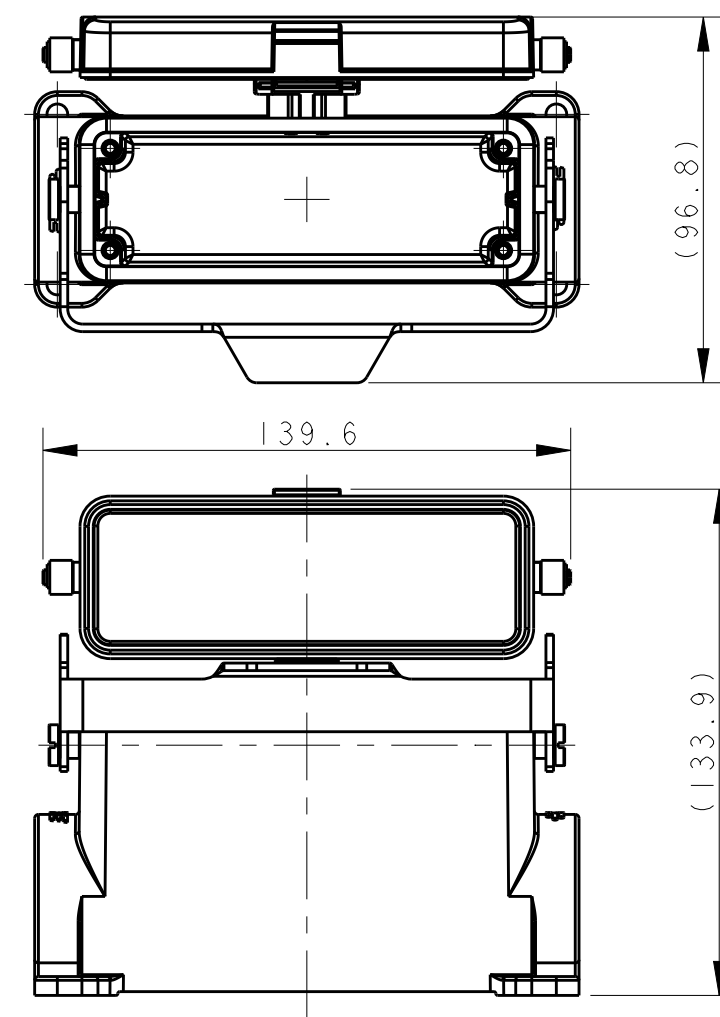

This diagram shows the front panel assembly in an exploded view. The main component is a rectangular front panel with a handle on the left and a large circular opening on the right. Above the panel is a separate rectangular component, likely a light or display, which is shown being aligned with the top of the panel. The panel itself has several mounting points and a small rectangular slot on its top edge.

|                                                                                                            |  |                                                                                                               |  |                                                                                                       |                |                                |                    |          |
|------------------------------------------------------------------------------------------------------------|--|---------------------------------------------------------------------------------------------------------------|--|-------------------------------------------------------------------------------------------------------|----------------|--------------------------------|--------------------|----------|
| THIS DRAWING IS A CONTROLLED DOCUMENT.                                                                     |  | DWN<br>DAVID LI<br>02JUL2015                                                                                  |  |  TE Connectivity |                |                                |                    |          |
|                                                                                                            |  | CHK<br>CHRIS WANG<br>02JUL2015                                                                                |  |                                                                                                       |                |                                |                    |          |
| DIMENSIONS:<br>mm<br> |  | TOLERANCES UNLESS OTHERWISE SPECIFIED:<br><br>0 PLC ±<br>1 PLC ±<br>2 PLC ±<br>3 PLC ±<br>4 PLC ±<br>ANGLES ± |  | NAME<br>H24B-SGR/SDR/SDRM-LB-PG/M                                                                     |                |                                |                    |          |
|                                                                                                            |  | APVD<br>XU XIANG<br>02JUL2015<br>PRODUCT SPEC<br>108-137013<br>APPLICATION SPEC<br>114-137013                 |  |                                                                                                       |                |                                |                    |          |
| MATERIAL<br>TBD<br>-                                                                                       |  | FINISH<br>-                                                                                                   |  | SIZE<br>A2                                                                                            | CAGE CODE<br>- | DRAWING NO<br>C-T16X0243XXXX00 | RESTRICTED TO<br>- |          |
| Customer Drawing                                                                                           |  |                                                                                                               |  |                                                                                                       |                | SCALE<br>1:2                   | SHEET<br>2 OF 2    | REV<br>A |