

ST2054


Current limited Power distribution switches

Features

- 80mΩ high-side MOSFET switch
- 500mA continuos current per channel
- independent thermal and short-circuit protection with overcurrent logic output
- Operating range from 2.7V to 5.5V
- CMOS- and TTL-compatible enable inputs
- 10ms OC_N fault blanking
- 2.5ms typical rise time
- Under voltage lock out
- 20µA maximum standby supply current
- Ambient temperature range, -40°C to 85°C
- ESD protection

Description

The ST2054 power distribution switches is intended for application where heavy capacitive loads and short circuits are likely to be encountered. These devices incorporate 80mΩ N-channel MOSFE high-side power switches for power-distribution systems that require multiple powers switches in a single package. Each switch is controlle thy an independent logic enable input. Gate crive is provided by an internal charge pump designed to control the power-switch rise times and fall times to minimize current surges during switching. The charge pump requires no external components and allows operation from supplies as low as 2.7 V.

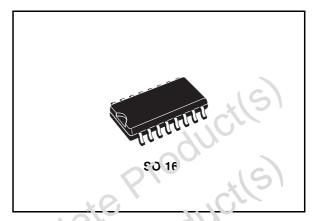

When the output load exceeds the current-limit threshold or a short is present, these devices limit the output current to a safe level by switching into a constant-current mode, pulling the overcurrent (OCx) logic output low. A 10ms deglitching circuit provides to the blanking feature, preventing the OC_N oin to be asserted during hot-insertion or their spikes of overcurrent conditions.

When continuous heavy overloads and short circuits increase the power dissipation in the switch, causing the junction temperature to rise, a thermal protection circuit shuts off the switch to prevent damage. Recovery from a thermal shutdown is automatic once the device has cooled sufficiently. Internal circuitry ensures the switch remains off until valid input voltage is present. These power-distribution switches are designed to current limit at 0.9 A.

Table 1. Device summary

Part number	Package	Packaging
ST2054BD	SO-16	Tube (50 parts per tube, 40 tube per box)
ST2054BDR	SO-16	Tape and reel (2500 parts per reel)

Contents ST2054


Contents

1	Block diagram 3
2	Pin connections
3	Electrical ratings 5
	3.1 Absolute maximum ratings
	3.2 Recommended operating conditions
4	Electrical characteristics 6
5	Package mechanical data
6	Revision history
Obsole Obsole	ate Product(s) obsolete Product(s) ate Product(s)

ST2054 **Block diagram**

Block diagram 1



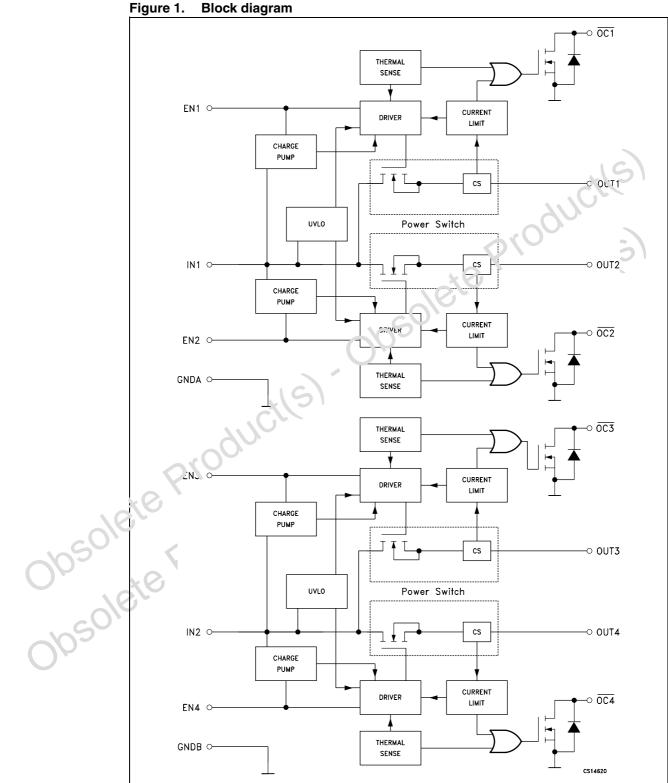

ST2054 Pin connections

2 Pin connections

Figure 2. Pin connections (top view)

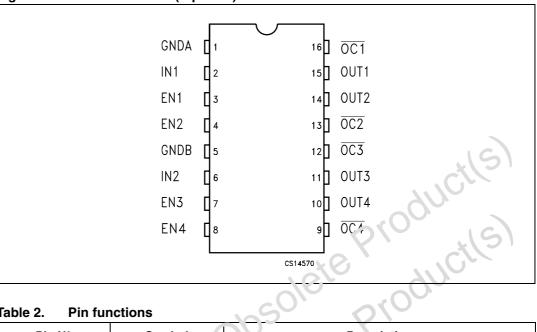


Table 2. Pin functions

	Pln N°	Symbol	Description
	1	GNDA	Ground
	2	No.	Input voltage
	3	EN1	Enable input. Logic high turns on power switch IN-OUT1
	4	EN2	Enable input. Logic high turns on power switch IN-OUT2
	5	GNDB	Ground
	6	IN2	Input voltage
10	7	EN3	Enable input. Logic high turns on power switch IN-OUT3
	8	EN4	Enable input. Logic high turns on power switch IN-OUT4
2005	9	OC4	Overcurrent. Logic output active low IN-OUT4
Ob	10	OUT4	Power switch output
2/6	11	OUT3	Power switch output
,,,,	12	OC3	Overcurrent. Logic output active low IN-OUT3
0,02	13	OC2	Overcurrent. Logic output active low IN-OUT2
	14	OUT2	Power switch output
	15	OUT1	Power switch output
	16	OC1	Overcurrent. Logic output active low IN-OUT1

ST2054 **Electrical ratings**

Electrical ratings 3

Absolute maximum ratings 3.1

Stressing the device above the rating listed in the "Absolute Maximum Ratings" table may cause permanent damage to the device. These are stress ratings only and operation of the device at these or any other conditions above those indicated in the Operating sections of this specification is not implied. Exposure to Absolute Maximum Rating conditions for extended periods may affect device reliability. Refer also to the STMicroelectronics SURE Program and other relevant quality documents.

Table 3. **Absolute maximum ratings**

Symbol	Parameter	Value	Unit
V _I	Input voltage range (1)	-0.3 tc 6	V
V _O	Output voltage range (1)	-0.3 - (1/2 + 0.3)	V
V _{IENX}	EN Input voltage range	-0.3 to 6	V
Io	Continuous output current	Internally Limited	
ESD	Electrostatic discharge	2	kV
T _J	Junction Operating Temperature	-40 to 125	С

^{1.} All voltage are referred to GND

3.2 Recommended operating conditions

Table 4. Recommended operating conditions

Symbol	Parameter	Min	Тур	Max	Unit
V _I	Input voltage range (1)	2.7		5.5	V
(Vo	Output voltage range (1)	0		5.5	V
lo	Continuous output current (Per switch)	0		500	mA
ofete P	ge are referred to GND				
Opso,					

Electrical characteristics ST2054

Electrical characteristics 4

 V_I = 5.5V, I_O = rated current, V_{IEN} = V_I , T_J = 25°C, unless otherwise specified. (See *Note 1*)

Table 5. Power switch electrical characteristics

Symbol	Parameter	Т	est conditions	Min	Тур	Max	Unit
		V _I = 5V	I _O = 0.5A		80	100	
	Static drain-source ON-state resistance	V _I = 5V	$I_O = 0.5A, T_J = 85^{\circ}C$		90	120	
D		V _I = 5V	$I_O = 0.5A, T_J = 125$ °C		100	135	mΩ
nDS(on)		$V_{I} = 3.3V$	I _O = 0.5A		90	125	111122
		V _I = 3.3V	$I_O = 0.5A, T_J = 85^{\circ}C$		110	1.15	
		V _I = 3.3V	$I_O = 0.5A, T_J = 125^{\circ}C$		120	160	
	Output rice time	V _I = 5.5V		~ ¢ O	2.5		ma
۱۲	t _r Output rise time	V _I = 2.7V	B = 10 C = 10E		3	1/5	ms
+	Output fall time	V _I = 5.5V	$R_L = 10, C_L = 1 \mu F$		0.3		me
t _f	Output fail tillle	V _I = 2.7V	78,		0.2		ms

Enable Input ENx characteristics Table 6.

High level input voltage Low level input voltage Input current Turn-on time Turn-off time	$V_{I} = 2.7V \text{ to } 5.5V$ $V_{I} = 4.5V \text{ to } 5.5V$ $V_{I} = 2.7V \text{ to } 4.5V$ $V_{IENX} = V_{I} \text{ or } 0V$ $V_{L} = 10\Omega C_{L} = 100\mu F$ $V_{L} = 10\Omega C_{L} = 100\mu F$	-0.5		0.8 0.4 0.5 20	V V μA ms
Input current Turn-on time	$V_{I} = 2.7V$ to 4.5V $V_{IENX} = V_{I}$ or 0V $R_{L} = 10\Omega$ $C_{L} = 100\mu$ F	-0.5		0.4	μА
Input current Turn-on time	$V_{IENX} = V_I \text{ or } 0V$ $R_L = 10\Omega C_L = 100\mu\text{F}$	-0.5		0.5	μА
Turn-on time	$R_L = 10\Omega \ C_L = 100 \mu F$	-0.5			-
1,10				20	ms
Turn-off time	$R_{I} = 10\Omega \ C_{I} = 100 \mu F$				
				40	ms
70					
Current limit ch	naracteristics		ı		1
Parameter	Test conditions	Min	Тур	Max	Unit
Short circuit output current	V _I = 5V, OUT connected to GND, device enabled into short circuit	0.7	1	1.3	Α
	Short circuit output	Short circuit output $V_1 = 5V$, OUT connected to GND,	Short circuit output $V_1 = 5V$, OUT connected to GND,	Short circuit output $V_1 = 5V$, OUT connected to GND, 0.7	Short circuit output $V_I = 5V$, OUT connected to GND, 0.7 1 1.3

Symbol	Parameter	Test conditions	Min	Тур	Max	Unit
I _{OS}		V _I = 5V, OUT connected to GND, device enabled into short circuit	0.7	1	1.3	Α

Table 8. Supply current characteristics

Symbol	Parameter	Test conditions	Min.	Тур.	Max.	Unit
	Current low level	V _{IENX} = 0, No Load,		0.05	2	
I _{SOL}	output	$V_{IENX} = 0$, No Load, T_{J} =-40 to 125°C			20	μА
	Current low high	V _{IENX} = V _I , No Load,		140	180	
I _{SOH}	output	$V_{IENX} = V_I$, No Load, T_J =-40 to 125°C			200	μА
IL	Output leakage current	V _{IENX} = 0, Output connected to GND, T _J =-40 to 125°C			20	μА

Table 9. **Undervoltage characteristics**

Symbol	Parameter	Test conditions	Min.	λλh·	Max.	Unit
V _{IL}	Low level input voltage		2		2.5	V
V _{HYS}	Hysteresis	i cilo		100	9	mV

Table 10. Overcurrent (OC) characteristics

Symbol	Parameter	Test conditions	Min.	Тур.	Max.	Unit
I _{SINK}	Sink current	V _∩ = 5V	10			mA
V _O	Output low voltage	U _ວ =: 5mA			0.5	V
I _{OFF}	OFF-state chirerit	$V_{O} = 5V V_{O} = 3.3V$			1	μА
T _{FB}	Fauit-โกละking period	V _I = 5.5V, T _J = 25°C (See Note 2 and 3)	2	10		ms

Sting technique sernal effect must be Specified by design, now 3 Guaranteed by design. Pulse testing techniques maintain junction temperature close to ambient temperature: ເກຍຕາal effect must be takes into account separately.

- Specified by design, not production tested.

Electrical characteristics ST2054

Figure 3. Test circuit


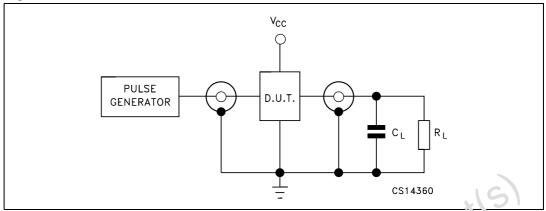


Figure 4. Waveform - propagation delays (f=1MHz; 50% duty cycle)

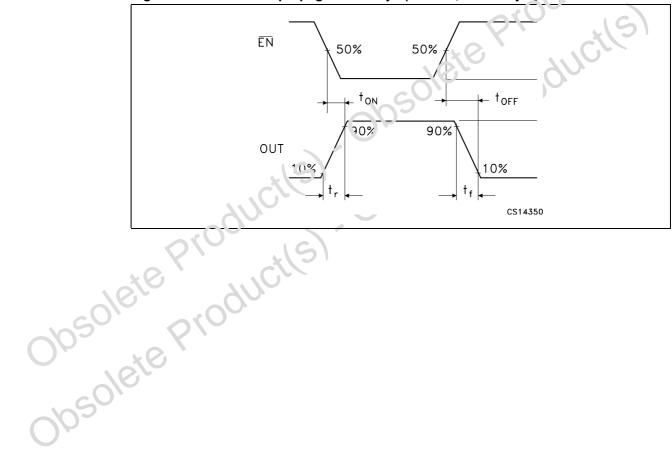


5 Package mechanical data

In order to meet environmental requirements, ST offers these devices in ECOPACK® packages. These packages have a Lead-free second level interconnect. The category of second level interconnect is marked on the package and on the inner box label, in compliance with JEDEC Standard JESD97. The maximum ratings related to soldering conditions are also marked on the inner box label. ECOPACK is an ST trademark. ECOPACK specifications are available at: www.st.com

Obsolete Product(s) - Obsolete Product(s)
Obsolete Product(s) - Obsolete Product(s)


SO-16 MECHANICAL DATA

DIM		mm.			inch	
DIM.	MIN.	TYP	MAX.	MIN.	TYP.	MAX.
Α			1.75			0.068
a1	0.1		0.25	0.004		0.010
a2			1.64			0.063
b	0.35		0.46	0.013		0.018
b1	0.19		0.25	0.007		0.010
С		0.5			0.019	
c1			45°	(typ.)	-	16
D	9.8		10	0.385		0.593
E	5.8		6.2	0.228	1.1	0.244
е		1.27			0.057	
e3		8.89			().350	
F	3.8		4.0	0.149		0.157
G	4.6		5.3	(1.131		0.208
L	0.5		1.27	2.019		0.050
М			0.62			0.024
S			8° (1	max.)	•	I.

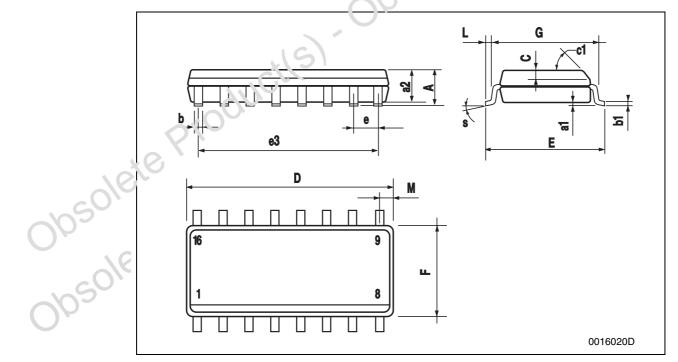

Tape & Reel SO-16 MECHANICAL DATA

DIM.	mm.			inch		
	MIN.	ТҮР	MAX.	MIN.	TYP.	MAX.
Α			330			12.992
С	12.8		13.2	0.504		0.519
D	20.2			0.795		
N	60			2.362		
Т			22.4			0.882
Ao	6.45		6.65	0.254		0.252
Во	10.3		10.5	0.406	1,10	0.414
Ko	2.1		2.3	0.082	0	0.090
Po	3.9		4.1	0.153		0.161
Р	7.9		8.1	0.211		0.319

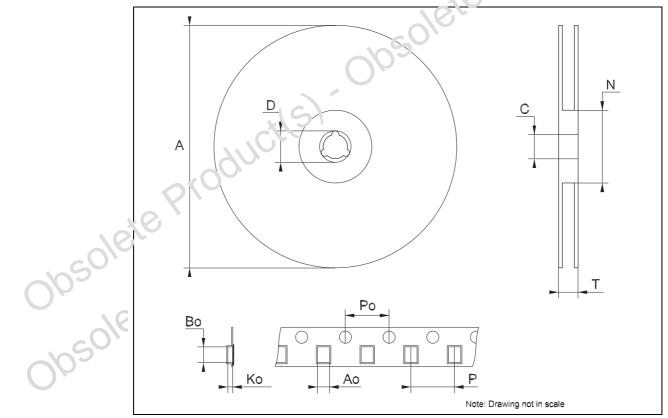

577

Revision history ST2054

6 Revision history

Table 11. Revision history

Date	Revision	Changes		
28-Oct-2004	2	Maturity change		
13-Jul-2005		Add bullet on pag. 1, add paragraph in the description on pag. 1 and add row T_{FB} on Table 10.		
29-May-200	7 4	Updated features in cover page, document reformatted		
Obsolete Pro	ductis	Updated features in cover page, document reformatted		

Please Read Carefully:

Information in this document is provided solely in connection with ST products. STMicroelectronics NV and its subsidie rics (Sf") reserve the right to make changes, corrections, modifications or improvements, to this document, and the products and servines described herein at any time, without notice.

All ST products are sold pursuant to ST's terms and conditions of sale.

Purchasers are solely responsible for the choice, selection and use of the ST products and services described herein, and ST assumes no liability whatsoever relating to the choice, selection or use of the ST products and services described herein.

No license, express or implied, by estoppel or otherwise, to any intellectual property 'ig 't's 's granted under this document. If any part of this document refers to any third party products or services it shall not be deemed a license grant by ST for the use of such third party products or services, or any intellectual property contained therein or considered as a warrancy covering the use in any manner whatsoever of such third party products or services or any intellectual property contained the rein.

UNLESS OTHERWISE SET FORTH IN ST'S TERMS AND CONDITIONS OF SALE ST DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY WITH RESPECT TO THE USE AND/OR SALE OF ST PRODUCTS INCLUDING WITHOUT LIMITATION IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION), OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.

UNLESS EXPRESSLY APPROVED IN VINING BY AN AUTHORIZED ST REPRESENTATIVE, ST PRODUCTS ARE NOT RECOMMENDED, AUTHORIZED OF WANDANTED FOR USE IN MILITARY, AIR CRAFT, SPACE, LIFE SAVING, OR LIFE SUSTAINING APPLICATIONS, NOR IN PRODUCTS OR SYSTEMS WHERE FAILURE OR MALFUNCTION MAY RESULT IN PERSONAL INJURY, DEATH, OR SEVERE PROFINITY OR ENVIRONMENTAL DAMAGE. ST PRODUCTS WHICH ARE NOT SPECIFIED AS "AUTOMOTIVE GRADE" MAY ONLY BE VISED IN AUTOMOTIVE APPLICATIONS AT USER'S OWN RISK.

Resale of ST | roducts with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by ST for the ST product or service described herein and shall not create or extend in any manner whatsoever, any liability of ST.

ST and the ST logo are trademarks or registered trademarks of ST in various countries.

Information in this document supersedes and replaces all information previously supplied.

The ST logo is a registered trademark of STMicroelectronics. All other names are the property of their respective owners.

© 2007 STMicroelectronics - All rights reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

www.st.com

