

FEATURES

- Resistances from 0.002Ohm to 100Ohms
- Power Rating to 15Watt
- Resistance Tolerances to $\pm 0.1\%$
- TCR to $\pm 30\text{ppm/K}$
- Load Stability to 0.1%
- TO-220 Housing
- Convenient SMD D2Pak Available




TABLE 1 – SPECIFICATIONS		
TYPE		
		FPR 4-T220
		FPR 4-T221
Resistance Range		0.002 to 10 Ohms
Power Rating	Free air 70°C	1.5 W
	With heatsink	15 W
Tolerances		
from 0.002 Ohms		1% / 2% / 5%
from 0.01 Ohms		0.1% / 0.25% / 0.5% / 1% / 2% / 5%
from 0.1 Ohms		0.1% / 0.25% / 0.5% / 1% / 2% / 5%
Thermal Resistance		4.8 K/W
Stability (1000h)		0.1% / 0.2% / 0.5% (depends on stress)
Temperature Coefficient		$\pm 30\text{ppm/K}$ (20 to 60°C) other specifications upon request
Voltage Proof		300 VDC
Maximum Current		50 A
Thermal EMF		$< 0.1\mu\text{V/K}$
Operating Temperature Range		-40 to 130°C
Resistor Material		CuNiMn-Foil
Substrate		Anodized aluminium
Housing		PPS
Connector Material		Cu / tinned
Terminals		4
Max. Torque		1 Nm
		0.8 Nm

ORDERING INFORMATION

Part Number - Resistance - Contact - Tolerance

FPR 4-T220 0.01 Ohms C 0.1%

FIGURE 1 – TEMPERATURE COEFFICIENT


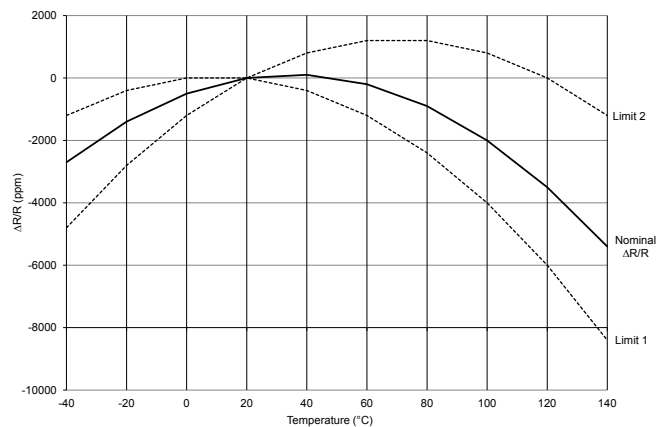


FIGURE 2 – DERATING

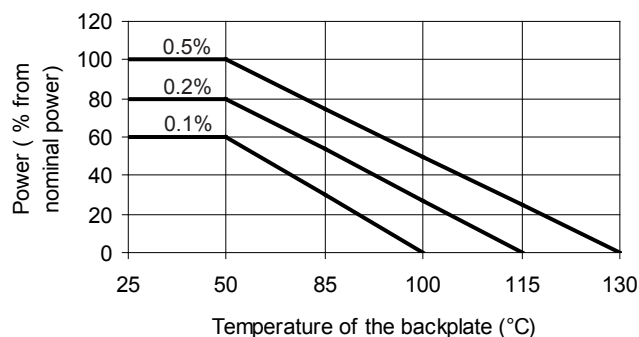

Power Rating Notes -


The FPR Series Resistors must be attached to a suitable heat-sink. The maximum internal resistor temperature is 130°C. To specify an appropriate heatsink use the following formula :

$$R_{\theta H} = \frac{T_{MAX} - (P \times R_{\theta R}) - T_A}{P}$$

Where: $R_{\theta H}$ = Thermal Resistance of Heatsink (K/W)
 $R_{\theta R}$ = Thermal Resistance of Resistor (K/W)
 T_{MAX} = Maximum Temperature of Resistor
 T_A = Ambient Temperature of Heatsink (°C)
 P = Power Through Resistor (W)


FIGURE 3—DIMENSIONS in mm (inches)

FPR 4-T220

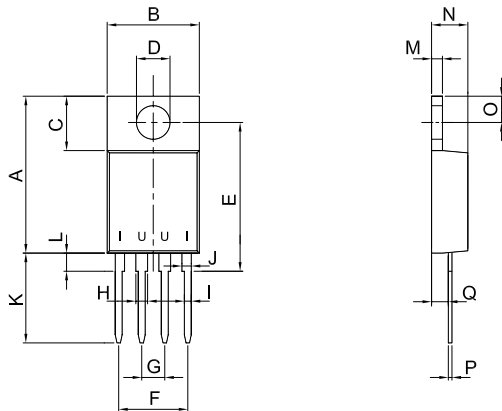

Dimension	Standard contact	C-contact
A ± 0.2 (± 0.008)	17.30 (0.68)	
B ± 0.2 (± 0.008)	10.16 (0.40)	
C ± 0.1 (± 0.004)	6.00 (0.24)	
D ± 0.1 (± 0.004)	Ø3.7 (Ø0.146)	
E ± 0.2 (± 0.008)	16.40 (0.65)	
F ± 0.2 (± 0.008)	7.62 (0.30)	
G ± 0.1 (± 0.004)	2.54 (0.10)	
H ± 0.1 (± 0.004)	1.30 (0.05)	
I ± 0.1 (± 0.004)	0.76 (0.03)	
J ± 0.1 (± 0.004)	1.03 (0.04)	
K ± 0.2 (± 0.008)	10.00 (0.39)	13.80 (0.54)
L ± 0.1 (± 0.004)	2.00 (0.08)	
M ± 0.1 (± 0.004)	1.20 (0.05)	
N ± 0.1 (± 0.004)	4.00 (0.16)	
O ± 0.1 (± 0.004)	2.90 (0.11)	
P ± 0.1 (± 0.004)	0.40 (0.02)	
Q ± 0.1 (± 0.004)	1.85 (0.07)	

FPR 4-T221

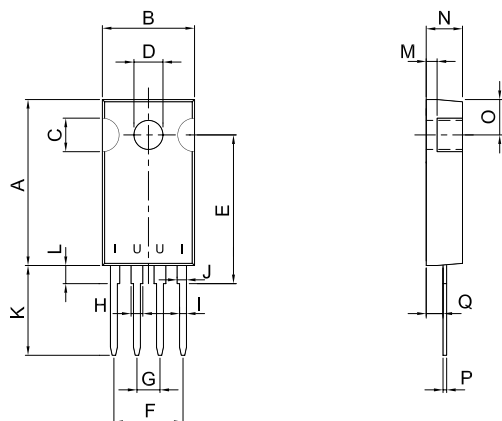

Dimension	Standard contact	C-contact
A ± 0.2 (± 0.008)	18.30 (0.72)	
B ± 0.2 (± 0.008)	10.16 (0.40)	
C ± 0.1 (± 0.004)	3.70 (0.15)	
D ± 0.1 (± 0.004)	Ø3.2 (Ø0.126)	
E ± 0.2 (± 0.008)	16.40 (0.65)	
F ± 0.2 (± 0.008)	7.62 (0.30)	
G ± 0.1 (± 0.004)	2.54 (0.10)	
H ± 0.1 (± 0.004)	1.30 (0.05)	
I ± 0.1 (± 0.004)	0.76 (0.03)	
J ± 0.1 (± 0.004)	1.03 (0.04)	
K ± 0.2 (± 0.008)	10.00 (0.39)	13.80 (0.54)
L ± 0.1 (± 0.004)	2.00 (0.08)	
M ± 0.1 (± 0.004)	1.20 (0.05)	
N ± 0.1 (± 0.004)	4.00 (0.16)	
O ± 0.1 (± 0.004)	3.90 (0.15)	
P ± 0.1 (± 0.004)	0.40 (0.02)	
Q ± 0.1 (± 0.004)	1.85 (0.07)	