

SMT PLANAR TRANSFORMERS

30 Watt Platform



NEW!



- ⊕ **Height:** 7.36 mm Max
- ⊕ **Footprint:** 18.8 mm x 17.8 mm
- ⊕ **Power Range:** up to 30 Watts
- ⊕ **Frequency Range:** 200 kHz to 750 kHz

Electrical Specifications @ 25°C — Operating Temperature -40°C to +130°C






Part Number	Reference Application Information ¹					Primary Side					Secondary Side		
	Power Rating (W)	Frequency (kHz)	Input Voltage Range (V)	Output Voltage & Current	Pri/Sec Isolation (Operational)	Pins	Turns	Ind. (μH) MIN	Lk. Ind. (μH) MAX	DCR (mΩ) MAX	Pins	Turns	DCR (mΩ) MAX
30 WATT FORWARD TRANSFORMERS													
PA0030	30	400	18-60	3.3 v @ 8.0 A	1500 Vdc	Pri (1-2)	6T	52	0.850	43	Sec (3-4)	2T	2.7
PA0031	30	400	36-75	3.3 v @ 8.0 A	1500 Vdc	Pri (1-2)	12T	200	1.700	210	Sec (3-4)	2T	3.5
PA0032	30	400	18-60	5 v @ 6 A	1500 Vdc	Pri (1-2)	6T	52	0.270	43	Sec (3-3A & 4-4A) ¹	3T	20
PA0033	30	400	36-75	5 v @ 6 A	1500 Vdc	Pri (1-2)	12T	200	0.925	210	Sec (3-3A & 4-4A) ¹	3T	20
PA0034	30	400	18-60	12 v @ 2.5 A	1500 Vdc	Pri (1-2)	6T	52	0.270	43	Sec (3-4)	6T	43
PA0035	30	400	36-75	12 v @ 2.5 A	1500 Vdc	Pri (1-2)	12T	200	0.980	210	Sec (3-4)	8T	75
PA0036	30	400	18-60	15 v @ 2 A	1500 Vdc	Pri (1-2)	6T	52	0.195	43	Sec (3-4)	8T	75
PA0037	30	400	36-75	15 v @ 2 A	1500 Vdc	Pri (1-2)	12T	200	0.980	210	Sec (3-4)	8T	75

NOTE 1: PA0032/33 - Secondary windings (3-3A & 4-4A) can be connected for either series or parallel configurations by laying out the following trace pattern in the power supplies PCB (see back page). Other configurations for parallel operation are available. Please contact Pulse Applications Engineering for details.


Mechanical

Schematics

PA0030-37

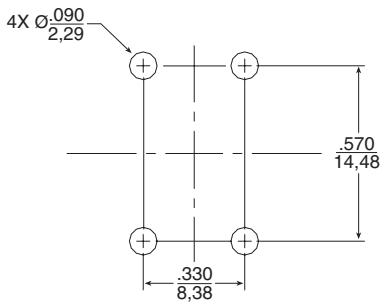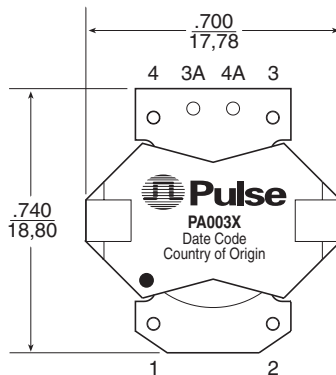

SUGGESTED PAD LAYOUT
(PA0030/31/34/35/36/37)

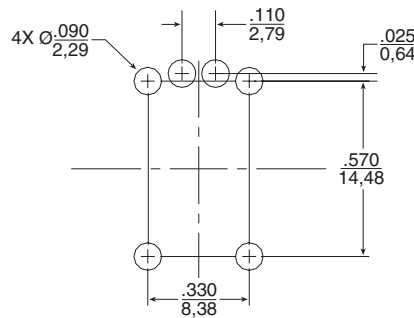

SUGGESTED PAD LAYOUT
(PA0032/33)

Weight 4.5 grams
Tape & Reel250/reel
Tray90/tray

Dimensions: Inches
 mm
 Unless otherwise specified, all tolerances are ± .010
 0,25



SMT PLANAR TRANSFORMERS

30 Watt Platform





Notes from Tables



1. **PA0032/33** - Secondary windings (3-3A & 4A-4) can be connected for either series or parallel configurations by laying out the following trace pattern in the power supplies PCB. Other configurations for parallel operation are available. Please contact Pulse Applications Engineering for details.



Parallel



Series

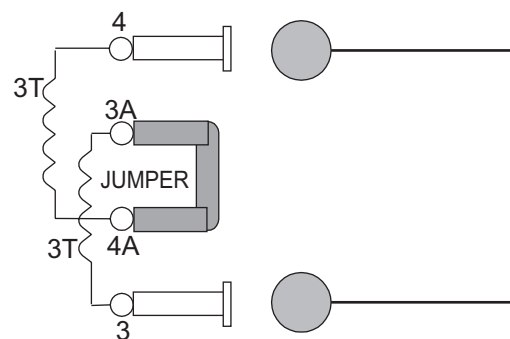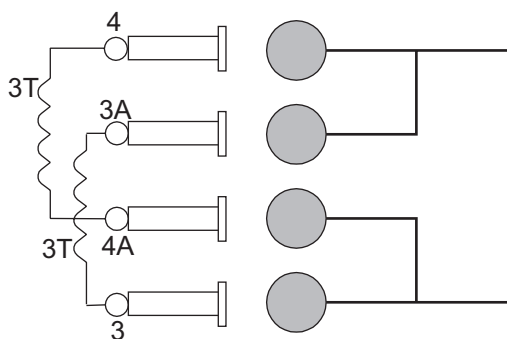

For More Information :

UNITED STATES (Worldwide)	UNITED KINGDOM (Northern Europe)	FRANCE (Southern Europe)	SINGAPORE (Southern Asia)	TAIWAN, R.O.C. (Northern Asia)	HONG KONG (Great China)	DISTRIBUTOR
12220 World Trade Drive San Diego, CA 92128 U.S.A. http://www.pulseeng.com TEL: 858 674 8100 FAX: 858 674 8262	1 & 2 Huxley Road The Surrey Research Park Guildford, Surrey GU2 5RE United Kingdom TEL: 44 1483 401700 FAX: 44 1483 401701	Zone Industrielle F-39270 Orgelet France TEL: 33 3 84 35 04 04 FAX: 33 3 84 25 46 41	150 Kampong Ampat #07-01/02 KA Centre Singapore 368324 TEL: 65 287 8998 FAX: 65 280 0080	3F-4, No. 81, Sec. 1 HsinTai Wu Road Hsi-Chih, Taipei Hsien Taiwan, R.O.C. Tel: 886 2 2698 0228 FAX: 886 2 2698 0948	19/F, China United Plaza 1008 Tai Nan West Street Cheung Sha Wan, Kowloon Hong Kong, China TEL: 852 2788 6588 FAX: 852 2776 1055	

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners.