

Product Brief

TC358746 MIPI® CSI-2 Camera Bridge IC

Highlights

- MIPI® CSI-2 bridge for converting parallel data into MIPI CSI-2 data or MIPI CSI-2 data into parallel data for more flexible sensor selection.
- The TC358746 can be configured as CSI-2 TX with a parallel input port or CSI-2 RX with a parallel output port.
- Solutions are based on the latest versions of the industry standard MIPI CSI-2 version 1.01.
- Applies to products such as smartphones, tablets, VOIP phones, and industrial devices.

Description


The Toshiba TC358746 camera bridge incorporates a Mobile Industry Processor Interface (MIPI) Camera Serial Interface Type 2 (CSI-2) that functions either as a CSI-2 receiver or as a CSI-2 transmitter. The TC358746 bridge can be configured to connect to a camera with a parallel interface or with a CSI-2 interface. This enables camera selection to be based on performance, and mechanical and electrical criteria, rather than interface connectivity requirements to the Host processor. It can be configured to function as a bridge from a parallel-interface sensor to a MIPI CSI-2 Host or from a MIPI CSI-2 sensor to a parallel-interface Host. It supports several data formats such as RAW, RGB and YUV data formats.

The TC358746 camera bridge supports MIPI CSI-2 version 1.01, up to 4 data lanes with data speed of up to 1 Gbps/lane, for total bandwidth of 4 Gbps. It supports a parallel interface with performance of 100 MHz clock frequency for output mode and 154 MHz clock frequency for input mode. Additional I²C and GPIO interfaces are provided to configure the bridge registers and for control signals.

The Toshiba TC358746 camera bridge is a 72-pin device and is optimized for smartphone and handheld devices. It has a small package of 4.5 mm x 4.5 mm, 0.40 mm ball pitch, 1.0 mm height; and it is designed with clock and power management to support low-power states.


Toshiba TC358746 System Diagram

Use case 1: CSI-2 RX, Parallel Output

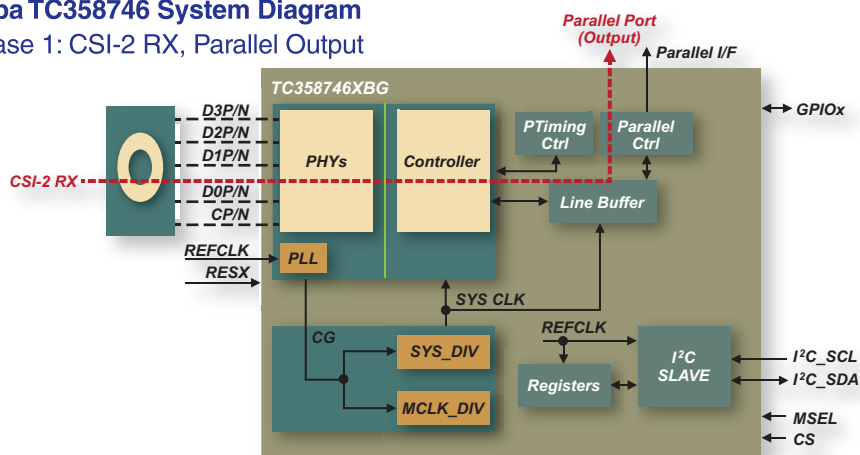

Toshiba TC358746 System Diagram

Use case 2: CSI-2 TX, Parallel Input

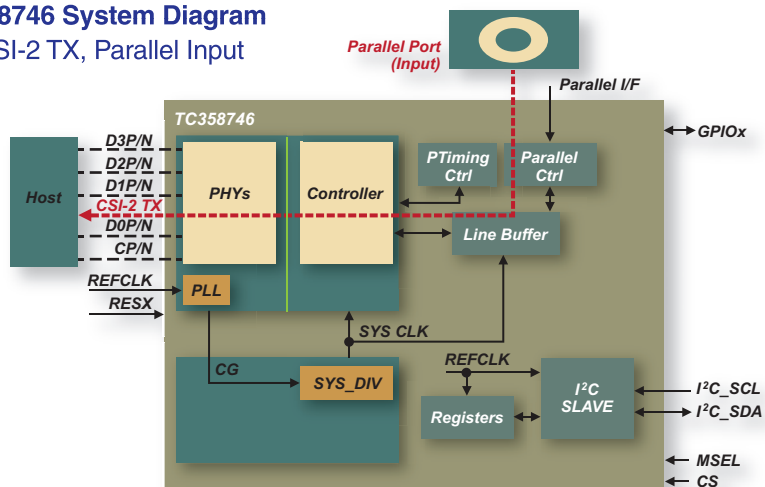

Product Brief

Regional Sales Offices

NORTHWEST

San Jose, CA
TEL: (408) 526-2400
FAX: (408) 526-2410

SOUTHWEST

Irvine, CA
TEL: (949) 623-2900
FAX: (949) 474-1330
El Paso, TX
TEL: 915-771-8156
FAX: 915-771-8178

MIDWEST

Wixom, MI
TEL: (248) 347-2607
FAX: (248) 347-2602
Buffalo Grove, IL
TEL: (847) 484-2400
FAX: (847) 541-7287

NORTHEAST

Marlboro, MA
TEL: (508) 481-0034
FAX: (508) 481-8828
Parsippany, NJ
TEL: (973) 541-4715
FAX: (973) 541-4716

SOUTHEAST

Duluth, GA
TEL: (770) 931-3363
FAX: (770) 931-7602

Features

CSI-2 TX/RX Interface

- MIPI CSI-2 compliant (Version 1.01 Revision 0.04 — 2 April 2009)
- Configurable to TX or RX controller
- Supports up to 1 Gbps per data lane
- Supports up to 4 data lanes
- Supports the following video data formats
 - For CSI RX configuration: RAW8/10/12/14, YUV422 (CCIR/ITU 8/10-bit), RGB888/666/565 and user-defined 8-bit
 - For CSI TX configuration: YUV422 (CCIR/ITU 8/10-bit), YUV444, RGB888/666/565 and RAW8/10/12/14

Parallel Port Interface

- Supports the following video data formats
 - 24-bit bus — un-packed format (Both input and output mode)
 - RGB888/666/565, RAW8/10/12/14 and YUV422 8-bit (on 8/16-bit data bus) and 10-bit data formats.
 - YUV444 (for parallel input mode only)
 - YUV422 8-bit — ITU BT.656 and ITU BT.601 (for parallel input mode only)
- Up to 100 MHz PCLK frequency for output mode, and 154 MHz for input mode

I²C Slave Interface

- Support for normal (100KHz), fast mode (400 KHz) and special mode (1 MHz)
- Can be used to configure all TC358746 internal registers

GPIO signals

- 3 GPIO signals can be configured as control signals

System

- Clock and power management support to achieve low-power states.
- Chip Select (CS) input signal to allow multiple TC358746 chips on the same system

Power supply inputs

- Core and MIPI D-PHY: 1.2V
- I/O: 1.8V – 3.3V

Package

- TC358746XBG:
72-pin, 4.5 mm x 4.5 mm, 0.40 mm ball pitch, 1.0 mm height

www.Toshiba.com/taec

- The information contained herein is subject to change without notice.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA for any infringements of patents or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of TOSHIBA or others.
- TOSHIBA is continually working to improve the quality and reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to comply with the standards of safety in making a safe design for the entire system, and to avoid situation in which a malfunction or failure of such TOSHIBA products could cause loss of human life, bodily injury or damage to property. In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent TOSHIBA products specifications. Also, please keep in mind the precautions and conditions set forth in the "Handling Guide for Semiconductor Devices," or "TOSHIBA Semiconductor Reliability Handbook" etc.
- The Toshiba products listed in this document are intended for usage in general electronics applications (computer, personal equipment, office equipment, measuring equipment, industrial robotics, domestic appliances, etc.). These Toshiba products are neither intended nor warranted for usage in equipment that requires extraordinarily high quality and/or reliability or a malfunction or failure of which may cause loss of human life or bodily injury ("Unintended Usage"). Unintended Usage include atomic energy control instruments, airplane or spaceship instruments, transportation instruments, traffic signal instruments, combustion control instruments, medical instruments, all types of safety devices, etc. Unintended usage of Toshiba products listed in this document shall be made at the customer's own risk.
- The products described in this document may include products subject to foreign exchange and foreign trade laws.
- The products contained herein may also be controlled under the U.S. Export Administration Regulations and/or subject to the approval of the U.S. Department of Commerce or U.S. Department of State prior to export. Any export or re-export, directly or indirectly in contravention of any of the applicable export laws and regulations, is hereby prohibited.

MIPI is a licensed trademark of MIPI Alliance, Inc. in the U.S. and other jurisdictions

TOSHIBA
Leading Innovation >>>

TC358746 MIPI® CSI-2 Camera Bridge IC