



"O" CRIMP	
GO	NO GO
.075	.079

INSULATION CRIMP .224 .238

CENTER CONTACT CRIMP SECTION A-A

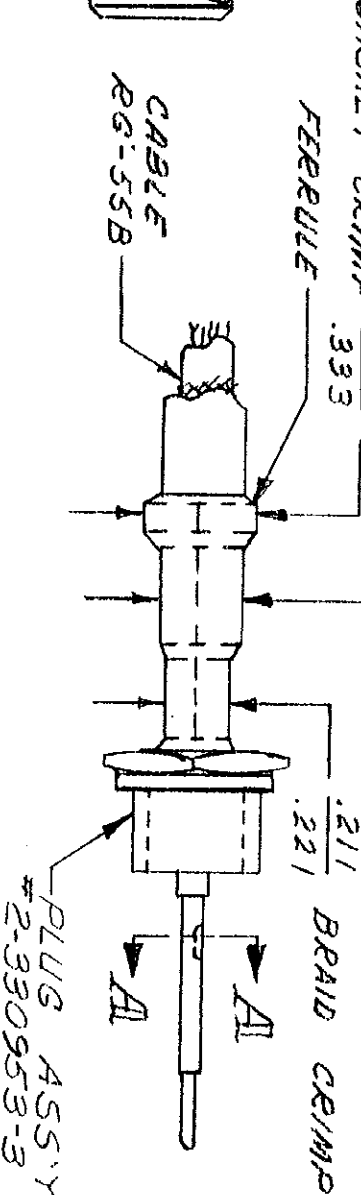

METHOD OF GAGING CRIMP DIMS.
THE CRIMP DIMS. APPLY ONLY TO THE ABOVE
COMBINATIONS ON A CRIMPED PRODUCT.
SUPERSEDED BY U.S. 2610

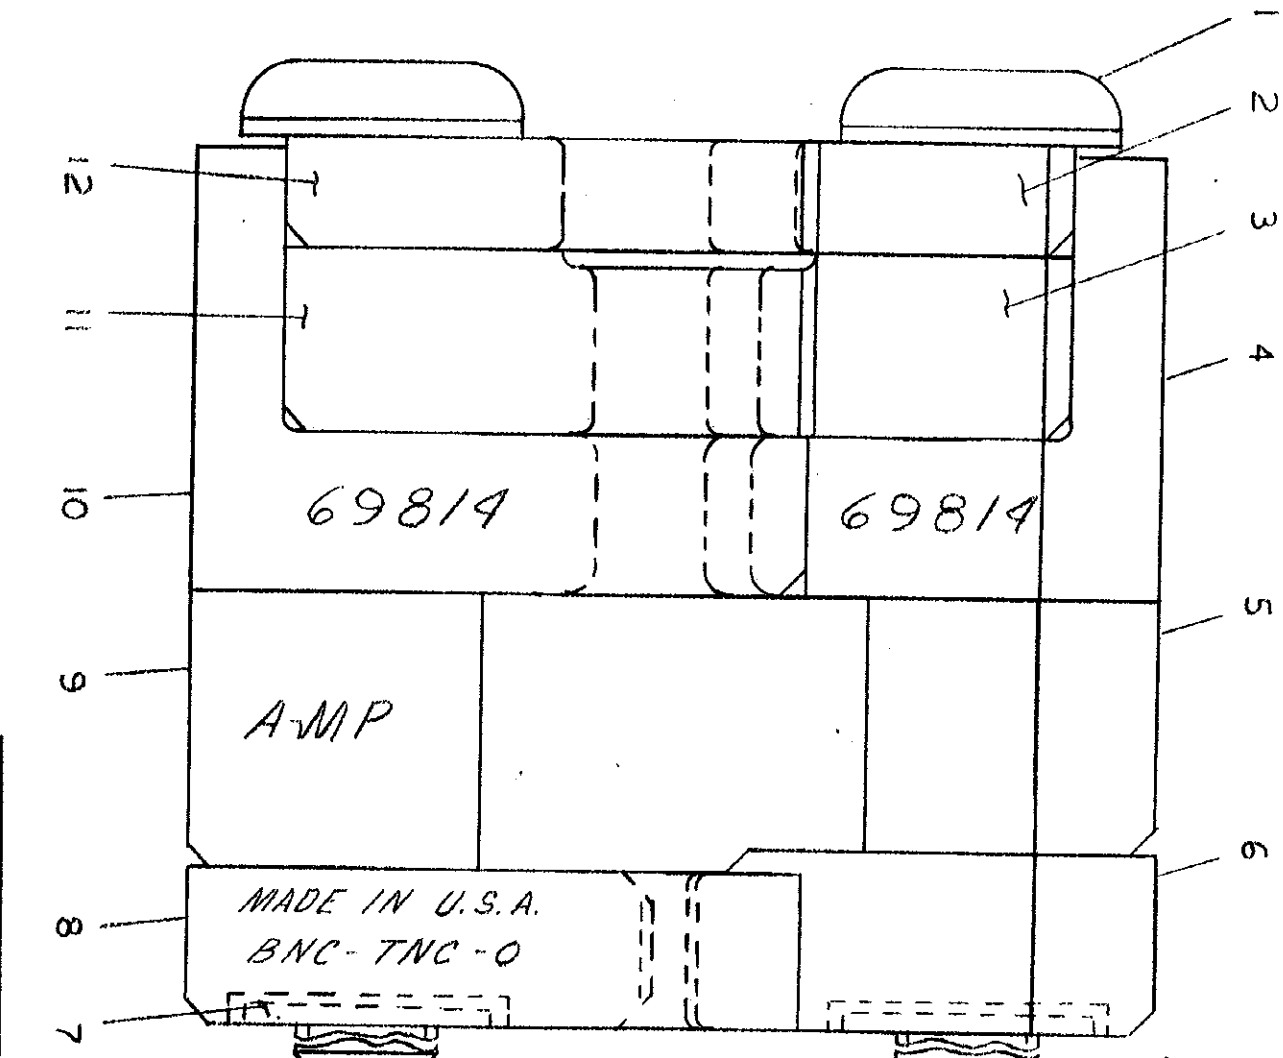

1	306328	INDENTER - GASKET	12
1	306332-1	INDENTER - INSULATION	11
1	306330-1	INDENTER - BRAID	10
1	6-305832-7	SPACER	9
1	306949	INDENTER	8
2	1-21046-3	RING-RETAINING	7
1	45969-3	ANVIL - BARREL	6
1	1-59672-4	SPACER - UPPER	5
1	306331-1	ANVIL - BRAID	4
1	306333-1	ANVIL - INSULATION	3
1	306329	ANVIL - GASKET	2
2	7-306131-1	SCREW	1

REQUIRED PER ASSEMBLY

©1967 BY AMP INCORPORATED. ALL RIGHTS RESERVED.
AMP PRODUCTS COVERED BY PATENTS AND/OR PATENTS PENDING.

CUSTOMER COPY
REFERENCE ONLY



A

B

C

D

5

PRINT DIST

DIMENSIONS IN INCHES. DO NOT SCALE PRINT

AMP 1253 REV 7/68 8

6	5	4	3	2	1
LTR	REVISION RECORD	DR	CHK	DATE	NUMBER
B	REVIS	BY	LS	2610	61869
A	REVIS	BY	LS	2610	61869

6	5	4	3	2	1
DESCRIPTION	DESCRIPTION	DESCRIPTION	DESCRIPTION	DESCRIPTION	DESCRIPTION
69814	69814	69814	69814	69814	69814

6	5	4	3	2	1
DR	CHK	DE	NAME	DATE	REMARKS
5-26-67	5-26-67	5-26-67	5-26-67	5-26-67	5-26-67

6	5	4	3	2	1
WIRE - RANGE - INSULATION	WIRE - RANGE - INSULATION	WIRE - RANGE - INSULATION	WIRE - RANGE - INSULATION	WIRE - RANGE - INSULATION	WIRE - RANGE - INSULATION
4-1	4-1	4-1	4-1	4-1	4-1
LOC	LOC	LOC	LOC	LOC	LOC
B	B	B	B	B	B
NO	NO	NO	NO	NO	NO
69814	69814	69814	69814	69814	69814
REV	REV	REV	REV	REV	REV
B	B	B	B	B	B