




Features

- Carbon element
- Standard surface mount profile compatibility
- Assorted resistances and tapers
- Flatted and knurled shaft styles
- Wide operating temperature range
- RoHS compliant*

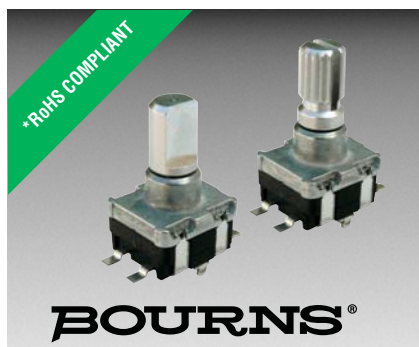

PRS11S - 11 mm SMD Potentiometer

Electrical Characteristics

Standard Resistance Range.....	1K ohms to 1 megohm
Standard Resistance Tolerance.....	
R < 250K ohms	±20 %
R ≥ 250K ohms	±30 %
End Resistance.....	
R < 50K ohms	30 ohms max.
R ≥ 50K ohms	0.1 % of TR max.
Insulation Resistance @ 250 VDC.....	100 megohms min.
Dielectric Withstanding Voltage.....	300 VAC
Standard Taper.....	Linear, audio
Power Rating.....	
Linear.....	0.05 watts
Audio.....	0.025 watts
Slider Noise.....	100 mV max.
Max. Operating Voltage.....	50 VAC / 30 VDC

Environmental Characteristics

Rotational Life.....	15,000 cycles
TR Shift.....	±15 %
Operating Temperature Range.....	-10 °C to +70 °C
Storage Temperature.....	-40 °C to +85 °C
IP Rating.....	IP 40

Mechanical Characteristics

Mechanical Angle	300 ° +10 °, -5 °
Running Torque	20 to 150 gf-cm
Stop Strength.....	5.1 kgf-cm min.
Shaft Push/Pull Strength	10.2 kgf max.
Weight	5 gm (0.17 oz.) max.
Terminals	Printed circuit board surface mount
Soldering Condition.....	
Reflow Soldering.....	Sn 95.5 / Ag 2.8 / Cu 0.7 solder with no clean flux (see solder profiles for recommended time and temperature)
Manual Soldering.....	Not recommended
Hardware.....	No hardware supplied with this potentiometer
Packaging.....	40 pcs./tube


How To Order

	PRS11S - N 20 K - 103 B1
Model Number.....	
Designator.....	
PRS11S = 11 mm SMD Potentiometer	
Switch Option.....	
N = No switch	
Shaft Length (FMS).....	
20 = 20 mm	
Shaft Style.....	
F = Flatted Metal	
K = Knurled Metal (18 tooth)	
Resistance Code.....	
(See Standard Resistance Table)	
Resistance Taper (See Taper Charts).....	
Taper Series followed by Curve Number	

Standard Resistance Table

Resistance (Ohms)	Resistance Code
1,000	102
5,000	502
10,000	103
25,000	253
50,000	503
100,000	104
250,000	254
300,000	304
500,000	504
1,000,000	105

Derating Curve

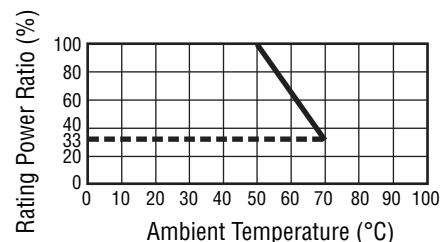

*RoHS Directive 2002/95/EC Jan. 27, 2003 including annex and RoHS Recast 2011/65/EU June 8, 2011.

Specifications are subject to change without notice.

The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time.

Users should verify actual device performance in their specific applications.

- Multimedia sound systems
- Audio and DJ equipment
- Portable electronics
- Portable appliances
- Automotive sound systems
- Environmental controls

BOURNS®

[illegible]

1. Layout tolerances: ± 0.1 mm/(.004 in.).
2. Recommended PCB thickness: 1.6 mm/(.063 in.).

4 = no connection
5 = no connection


DIMENSION	TOLERANCE
$\frac{<10.0}{(<.394)}$	$\frac{\pm 0.3}{(\pm .012)}$
$\frac{10.0 \sim 100}{(.394 \sim 3.937)}$	$\frac{\pm 0.5}{(\pm .020)}$

Specifications are subject to change without notice.
The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time.
Users should verify actual device performance in their specific applications.


PRS11S - 11 mm SMD Potentiometer

BOURNS®

Solder Profiles

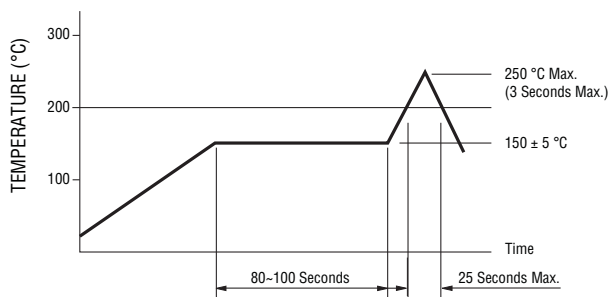

Processing Method: Reflow soldering with **infrared heat** (only once).

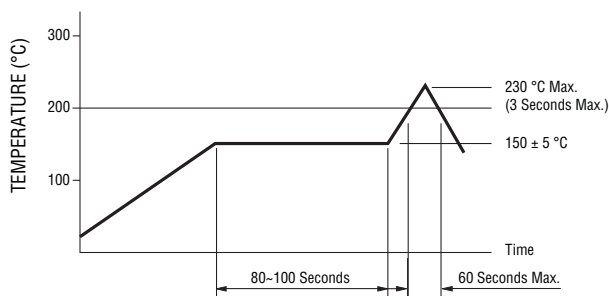

Processing Method: Reflow soldering with **hot air** (only once).

Notes:

1. No clean solder paste is recommended.
2. Aqueous wash is not recommended.
3. Use of water soluble soldering flux shall be avoided due to possible corrosion.
4. Multiple passes through the soldering process is not recommended.

BOURNS®




Asia-Pacific: Tel: +886-2 2562-4117 • Fax: +886-2 2562-4116

EMEA: Tel: +36 88 520 390 • Fax: +36 88 520 211

The Americas: Tel: +1-951 781-5500 • Fax: +1-951 781-5700

www.bourns.com

Taper Charts

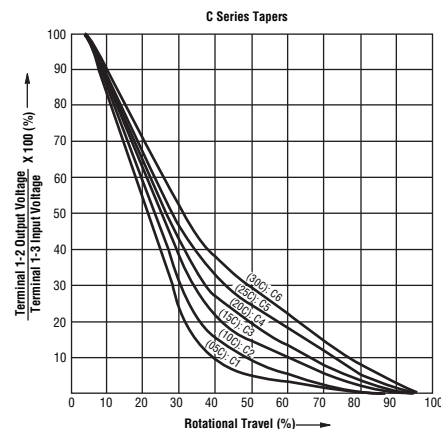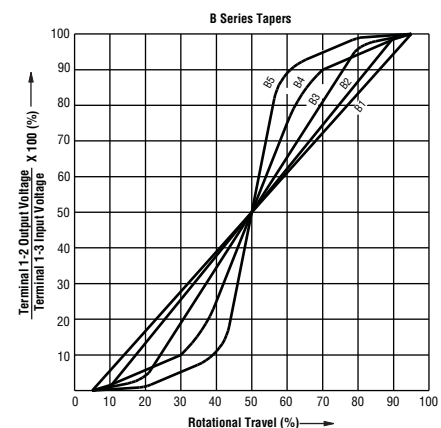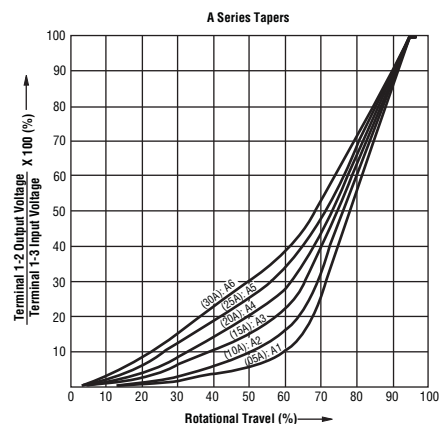

REV. 08/14

Specifications are subject to change without notice.

The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time.

Users should verify actual device performance in their specific applications.