



## 32-Tap Digitally Programmable Potentiometer (DPP™)

### FEATURES

- 32-position linear taper potentiometer
- Non-volatile EEPROM wiper storage
- Low standby current
- Single supply operation: 2.5V – 6V
- Increment up/down serial interface
- Resistance values: 10kΩ, 50kΩ and 100kΩ
- Available in PDIP, SOIC, TSSOP, MSOP and space saving 2 x 2.5mm TDFN packages

### APPLICATIONS

- Automated product calibration
- Remote control adjustments
- Offset, gain and zero control
- Tamper-proof calibrations
- Contrast, brightness and volume controls
- Motor controls and feedback systems
- Programmable analog functions

For Ordering Information details, see page 14.


### DESCRIPTION

The CAT5114 is a single digitally programmable potentiometer (DPP™) designed as a electronic replacement for mechanical potentiometers and trim pots. Ideal for automated adjustments on high volume production lines, they are also well suited for applications where equipment requiring periodic adjustment is either difficult to access or located in a hazardous or remote environment.

The CAT5114 contains a 32-tap series resistor array connected between two terminals  $R_H$  and  $R_L$ . An up/down counter and decoder that are controlled by three input pins, determines which tap is connected to the wiper,  $R_W$ . The wiper setting, stored in nonvolatile memory, is not lost when the device is powered down and is automatically reinstated when power is returned. The wiper can be adjusted to test new system values without affecting the stored setting. Wiper-control of the CAT5114 is accomplished with three input control pins,  $\overline{CS}$ ,  $U/\overline{D}$ , and  $\overline{INC}$ . The  $\overline{INC}$  input increments the wiper in the direction which is determined by the logic state of the  $U/\overline{D}$  input. The  $\overline{CS}$  input is used to select the device and also store the wiper position prior to power down.


The digitally programmable potentiometer can be used as a three-terminal resistive divider or as a two-terminal variable resistor. DPPs bring variability and programmability to a wide variety of applications including control, parameter adjustments, and signal processing.

### FUNCTIONAL DIAGRAM

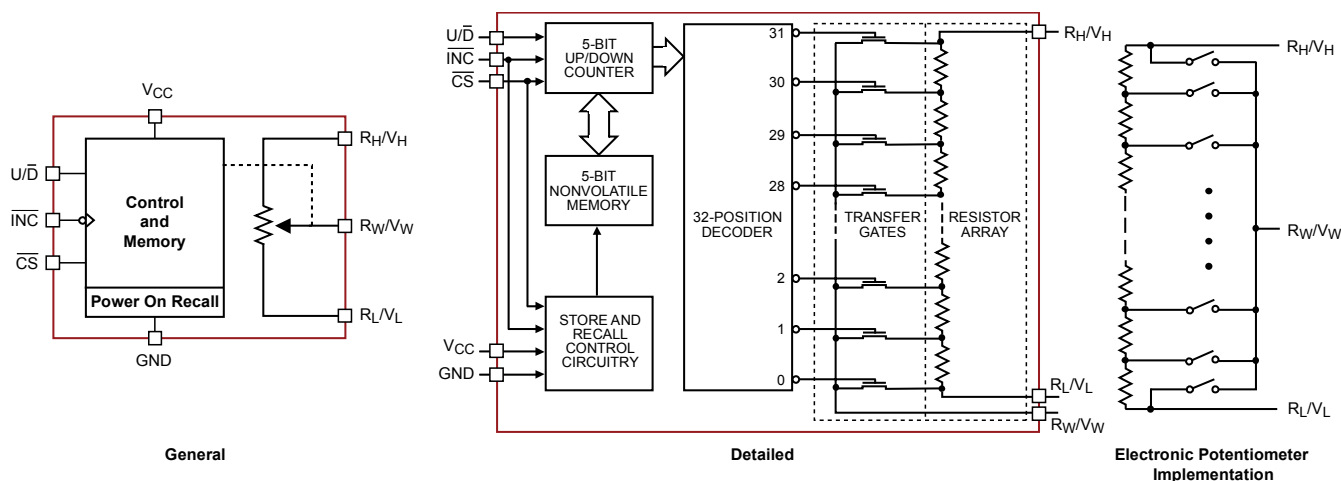


## PIN CONFIGURATION


PDIP 8-Lead (L), SOIC 8-Lead (V),  
MSOP 8-Lead (Z)



TSSOP 8-Lead (Y)



TDFN 8-Pad  
(ZD7, VP2) Top View

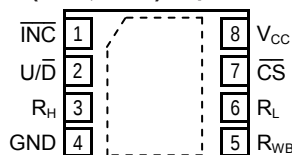

## PIN FUNCTION

**INC:** Increment Control Input

The  $\overline{\text{INC}}$  input moves the wiper in the up or down direction determined by the condition of the  $\text{U}/\overline{\text{D}}$  input.

**U/D:** Up/Down Control Input

The  $\text{U}/\overline{\text{D}}$  input controls the direction of the wiper movement. When in a high state and  $\overline{\text{CS}}$  is low, any high-to-low transition on  $\overline{\text{INC}}$  will cause the wiper to move one increment toward the  $\text{R}_\text{H}$  terminal. When in a low state and  $\overline{\text{CS}}$  is low, any high-to-low transition on  $\overline{\text{INC}}$  will cause the wiper to move one increment towards the  $\text{R}_\text{L}$  terminal.

**R<sub>H</sub>:** High End Potentiometer Terminal

$\text{R}_\text{H}$  is the high end terminal of the potentiometer. It is not required that this terminal be connected to a potential greater than the  $\text{R}_\text{L}$  terminal. Voltage applied to the  $\text{R}_\text{H}$  terminal cannot exceed the supply voltage,  $\text{V}_{\text{CC}}$  or go below ground, GND.

**R<sub>W</sub>:** Wiper Potentiometer Terminal

$\text{R}_\text{W}$  is the wiper terminal of the potentiometer. Its position on the resistor array is controlled by the control inputs,  $\overline{\text{INC}}$ ,  $\text{U}/\overline{\text{D}}$  and  $\overline{\text{CS}}$ . Voltage applied to the  $\text{R}_\text{W}$  terminal cannot exceed the supply voltage,  $\text{V}_{\text{CC}}$  or go below ground, GND.

**R<sub>L</sub>:** Low End Potentiometer Terminal

$\text{R}_\text{L}$  is the low end terminal of the potentiometer. It is not required that this terminal be connected to a potential less than the  $\text{R}_\text{H}$  terminal. Voltage applied to the  $\text{R}_\text{L}$  terminal cannot exceed the supply voltage,  $\text{V}_{\text{CC}}$  or go below ground, GND.  $\text{R}_\text{L}$  and  $\text{R}_\text{H}$  are electrically interchangeable.

**CS:** Chip Select

The chip select input is used to activate the control input of the CAT5114 and is active low. When in a

## PIN DESCRIPTIONS

| Name                           | Function                    |
|--------------------------------|-----------------------------|
| $\overline{\text{INC}}$        | Increment Control           |
| $\text{U}/\overline{\text{D}}$ | Up/Down Control             |
| $\text{R}_\text{H}$            | Potentiometer High Terminal |
| GND                            | Ground                      |
| $\text{R}_\text{W}$            | Wiper Terminal              |
| $\text{R}_\text{L}$            | Potentiometer Low Terminal  |
| $\overline{\text{CS}}$         | Chip Select                 |
| $\text{V}_{\text{CC}}$         | Supply Voltage              |

high state, activity on the  $\overline{\text{INC}}$  and  $\text{U}/\overline{\text{D}}$  inputs will not affect or change the position of the wiper.

## DEVICE OPERATION


The CAT5114 operates like a digitally controlled potentiometer with  $\text{R}_\text{H}$  and  $\text{R}_\text{L}$  equivalent to the high and low terminals and  $\text{R}_\text{W}$  equivalent to the mechanical potentiometer's wiper. There are 32 available tap positions including the resistor end points,  $\text{R}_\text{H}$  and  $\text{R}_\text{L}$ . There are 31 resistor elements connected in series between the  $\text{R}_\text{H}$  and  $\text{R}_\text{L}$  terminals. The wiper terminal is connected to one of the 32 taps and controlled by three inputs,  $\overline{\text{INC}}$ ,  $\text{U}/\overline{\text{D}}$  and  $\overline{\text{CS}}$ . These inputs control a seven-bit up/down counter whose output is decoded to select the wiper position. The selected wiper position can be stored in non-volatile memory using the  $\overline{\text{INC}}$  and  $\overline{\text{CS}}$  inputs.

With  $\overline{\text{CS}}$  set LOW the CAT5114 is selected and will respond to the  $\text{U}/\overline{\text{D}}$  and  $\overline{\text{INC}}$  inputs. HIGH to LOW transitions on  $\overline{\text{INC}}$  will increment or decrement the wiper (depending on the state of the  $\text{U}/\overline{\text{D}}$  input and seven-bit counter). The wiper, when at either fixed terminal, acts like its mechanical equivalent and does not move beyond the last position. The value of the counter is stored in nonvolatile memory whenever  $\overline{\text{CS}}$  transitions HIGH while the  $\overline{\text{INC}}$  input is also HIGH. When the CAT5114 is powered-down, the last stored wiper counter position is maintained in the nonvolatile memory. When power is restored, the contents of the memory are recalled and the counter is set to the value stored.

With  $\overline{\text{INC}}$  set low, the CAT5114 may be de-selected and powered down without storing the current wiper position in nonvolatile memory. This allows the system to always power up to a preset value stored in non-volatile memory.

## OPERATION MODES

| $\overline{INC}$ | $\overline{CS}$ | $U/\overline{D}$ | Operation                   |
|------------------|-----------------|------------------|-----------------------------|
| High to Low      | Low             | High             | Wiper toward H              |
| High to Low      | Low             | Low              | Wiper toward L              |
| High             | Low to High     | X                | Store Wiper Position        |
| Low              | Low to High     | X                | No Store, Return to Standby |
| X                | High            | X                | Standby                     |

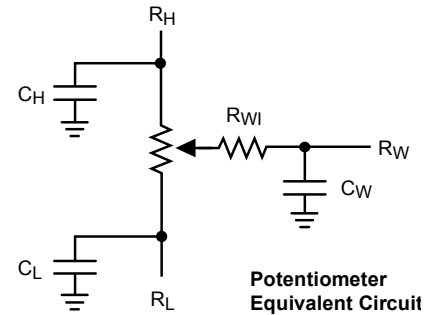

## ABSOLUTE MAXIMUM RATINGS <sup>(1)</sup>

| Parameters                        | Ratings                | Units |
|-----------------------------------|------------------------|-------|
| Supply Voltage<br>$V_{CC}$ to GND | -0.5 to +7V            | V     |
| Inputs                            |                        |       |
| $\overline{CS}$ to GND            | -0.5 to $V_{CC} + 0.5$ | V     |
| $\overline{INC}$ to GND           | -0.5 to $V_{CC} + 0.5$ | V     |
| $U/\overline{D}$ to GND           | -0.5 to $V_{CC} + 0.5$ | V     |
| H to GND                          | -0.5 to $V_{CC} + 0.5$ | V     |
| L to GND                          | -0.5 to $V_{CC} + 0.5$ | V     |
| W to GND                          | -0.5 to $V_{CC} + 0.5$ | V     |

| Parameters                                               | Ratings    | Units |
|----------------------------------------------------------|------------|-------|
| Operating Ambient Temperature<br>Industrial ('I' suffix) | -40 to +85 | °C    |
| Junction Temperature                                     | +150       | °C    |
| Storage Temperature                                      | -65 to 150 | °C    |
| Lead Soldering (10s max)                                 | +300       | °C    |

## RELIABILITY CHARACTERISTICS

| Symbol             | Parameter          | Test Method                   | Min       | Typ | Max | Units  |
|--------------------|--------------------|-------------------------------|-----------|-----|-----|--------|
| $V_{ZAP}^{(2)}$    | ESD Susceptibility | MIL-STD-883, Test Method 3015 | 2000      |     |     | V      |
| $I_{LTH}^{(2)(3)}$ | Latch-Up           | JEDEC Standard 17             | 100       |     |     | mA     |
| $T_{DR}$           | Data Retention     | MIL-STD-883, Test Method 1008 | 100       |     |     | Years  |
| $N_{END}$          | Endurance          | MIL-STD-883, Test Method 1003 | 1,000,000 |     |     | Stores |

## DC ELECTRICAL CHARACTERISTICS

$V_{CC} = +2.5V$  to +6V unless otherwise specified

### Power Supply

| Symbol          | Parameter                  | Conditions                                                                                            | Min | Typ | Max  | Units   |
|-----------------|----------------------------|-------------------------------------------------------------------------------------------------------|-----|-----|------|---------|
| $V_{CC}$        | Operating Voltage Range    |                                                                                                       | 2.5 | —   | 6.0  | V       |
| $I_{CC1}$       | Supply Current (Increment) | $V_{CC} = 6V, f = 1MHz, I_W = 0$                                                                      | —   | —   | 100  | $\mu A$ |
|                 |                            | $V_{CC} = 6V, f = 250kHz, I_W = 0$                                                                    | —   | —   | 50   | $\mu A$ |
| $I_{CC2}$       | Supply Current (Write)     | Programming, $V_{CC} = 6V$                                                                            | —   | —   | 1000 | $\mu A$ |
|                 |                            | $V_{CC} = 3V$                                                                                         | —   | —   | 500  | $\mu A$ |
| $I_{SB1}^{(3)}$ | Supply Current (Standby)   | $\overline{CS} = \overline{V_{CC}} - 0.3V$<br>$U/\overline{D}, \overline{INC} = V_{CC} - 0.3V$ or GND | —   | —   | 1    | $\mu A$ |

### Notes

- (1) Stresses above those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions outside of those listed in the operational sections of this specification is not implied. Exposure to any absolute maximum rating for extended periods may affect device performance and reliability.
- (2) This parameter is tested initially and after a design or process change that affects the parameter.
- (3) Latch-up protection is provided for stresses up to 100mA on address and data pins from -1V to  $V_{CC} + 1V$ .
- (4)  $I_W$  = source or sink.
- (5) These parameters are periodically sampled and are not 100% tested.

**Logic Inputs**

| Symbol    | Parameter                     | Conditions                 | Min                 | Typ | Max                 | Units   |
|-----------|-------------------------------|----------------------------|---------------------|-----|---------------------|---------|
| $I_{IH}$  | Input Leakage Current         | $V_{IN} = V_{CC}$          | –                   | –   | 10                  | $\mu A$ |
| $I_{IL}$  | Input Leakage Current         | $V_{IN} = 0V$              | –                   | –   | -10                 | $\mu A$ |
| $V_{IH2}$ | CMOS High Level Input Voltage | $2.5V \leq V_{CC} \leq 6V$ | $V_{CC} \times 0.7$ | –   | $V_{CC} + 0.3$      | V       |
| $V_{IL2}$ | CMOS Low Level Input Voltage  |                            | -0.3                | –   | $V_{CC} \times 0.2$ | V       |

**Potentiometer Characteristics**

| Symbol        | Parameter                    | Conditions                       | Min  | Typ    | Max      | Units            |
|---------------|------------------------------|----------------------------------|------|--------|----------|------------------|
| $R_{POT}$     | Potentiometer Resistance     | -10 Device                       |      | 10     |          | k $\Omega$       |
|               |                              | -50 Device                       |      | 50     |          |                  |
|               |                              | -00 Device                       |      | 100    |          |                  |
|               | Pot. Resistance Tolerance    |                                  |      |        | $\pm 20$ | %                |
| $V_{RH}$      | Voltage on $R_H$ pin         |                                  | 0    |        | $V_{CC}$ | V                |
| $V_{RL}$      | Voltage on $R_L$ pin         |                                  | 0    |        | $V_{CC}$ | V                |
|               | Resolution                   |                                  |      | 3.2    |          | %                |
| INL           | Integral Linearity Error     | $I_W \leq 2\mu A$                |      | 0.5    | 1        | LSB              |
| DNL           | Differential Linearity Error | $I_W \leq 2\mu A$                |      | 0.25   | 0.5      | LSB              |
| $R_{WI}$      | Wiper Resistance             | $V_{CC} = 5V, I_W = 1mA$         |      | 70     | 200      | $\Omega$         |
|               |                              | $V_{CC} = 2.5V, I_W = 1mA$       |      | 150    | 400      | $\Omega$         |
| $I_W$         | Wiper Current                |                                  | -4.4 |        | 4.4      | mA               |
| $TC_{RPOT}$   | TC of Pot Resistance         |                                  |      | 300    |          | ppm/ $^{\circ}C$ |
| $TC_{RATIO}$  | Ratiometric TC               |                                  |      |        | 20       | ppm/ $^{\circ}C$ |
| $V_N$         | Noise                        | 100kHz / 1kHz                    |      | 8/24   |          | nV/ $\sqrt{Hz}$  |
| $C_H/C_L/C_W$ | Potentiometer Capacitances   |                                  |      | 8/8/25 |          | pF               |
| fc            | Frequency Response           | Passive Attenuator, 10k $\Omega$ |      | 1.7    |          | MHz              |

## AC CONDITIONS OF TEST


|                           |                                          |
|---------------------------|------------------------------------------|
| V <sub>CC</sub> Range     | 2.5V ≤ V <sub>CC</sub> ≤ 6V              |
| Input Pulse Levels        | 0.2V <sub>CC</sub> to 0.7V <sub>CC</sub> |
| Input Rise and Fall Times | 10ns                                     |
| Input Reference Levels    | 0.5V <sub>CC</sub>                       |

## AC OPERATING CHARACTERISTICS

V<sub>CC</sub> = +2.5V to +6.0V, V<sub>H</sub> = V<sub>CC</sub>, V<sub>L</sub> = 0V, unless otherwise specified

| Symbol                                         | Parameter                                             | Min | Typ <sup>(1)</sup> | Max | Units |
|------------------------------------------------|-------------------------------------------------------|-----|--------------------|-----|-------|
| t <sub>CI</sub>                                | $\overline{CS}$ to $\overline{INC}$ Setup             | 100 | –                  | –   | ns    |
| t <sub>DI</sub>                                | U/ $\overline{D}$ to $\overline{INC}$ Setup           | 50  | –                  | –   | ns    |
| t <sub>ID</sub>                                | U/ $\overline{D}$ to $\overline{INC}$ Hold            | 100 | –                  | –   | ns    |
| t <sub>IL</sub>                                | $\overline{INC}$ LOW Period                           | 250 | –                  | –   | ns    |
| t <sub>IH</sub>                                | $\overline{INC}$ HIGH Period                          | 250 | –                  | –   | ns    |
| t <sub>IC</sub>                                | $\overline{INC}$ Inactive to $\overline{CS}$ Inactive | 1   | –                  | –   | μs    |
| t <sub>CPH</sub>                               | $\overline{CS}$ Deselect Time (NO STORE)              | 100 | –                  | –   | ns    |
| t <sub>CPH</sub>                               | $\overline{CS}$ Deselect Time (STORE)                 | 10  | –                  | –   | ms    |
| t <sub>IW</sub>                                | $\overline{INC}$ to V <sub>OUT</sub> Change           | –   | 1                  | 5   | μs    |
| t <sub>CYC</sub>                               | $\overline{INC}$ Cycle Time                           | 1   | –                  | –   | μs    |
| t <sub>R</sub> , t <sub>F</sub> <sup>(2)</sup> | $\overline{INC}$ Input Rise and Fall Time             | –   | –                  | 500 | μs    |
| t <sub>PU</sub> <sup>(2)</sup>                 | Power-up to Wiper Stable                              | –   | –                  | 1   | ms    |
| t <sub>WR</sub>                                | Store Cycle                                           | –   | 5                  | 10  | ms    |

## A.C. TIMING

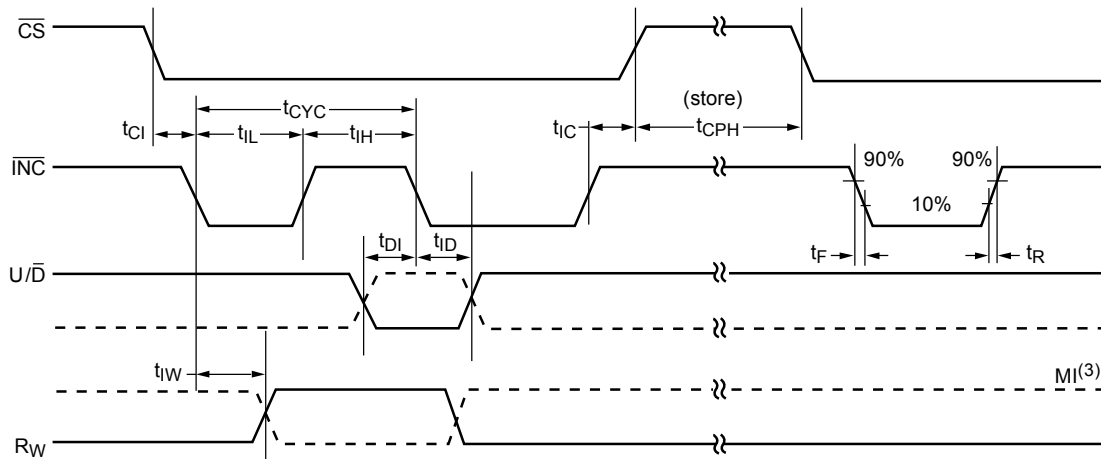


### Notes


- (1) Typical values are for T<sub>A</sub> = 25°C and nominal supply voltage.
- (2) This parameter is periodically sampled and not 100% tested.
- (3) MI in the A.C. Timing diagram refers to the minimum incremental change in the W output due to a change in the wiper position.

## APPLICATIONS INFORMATION


### POTENTIOMETER CONFIGURATION

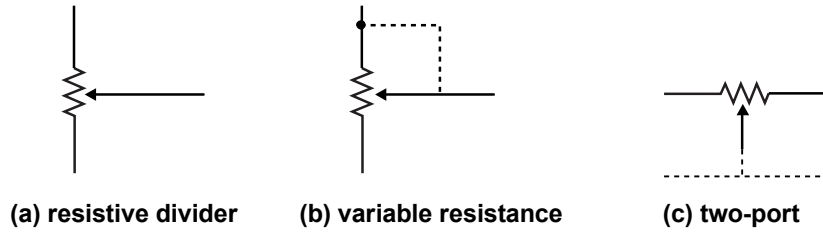


### APPLICATIONS

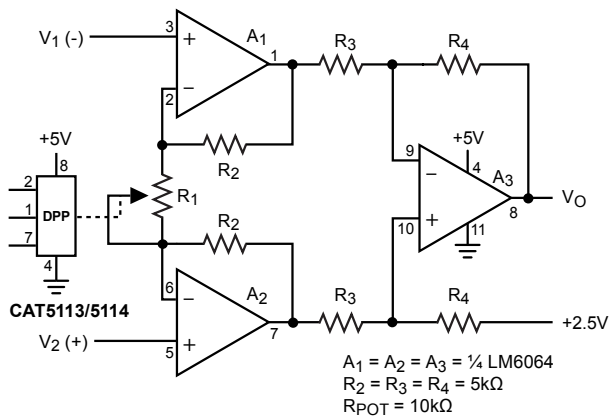


**Programmable Instrumentation Amplifier**

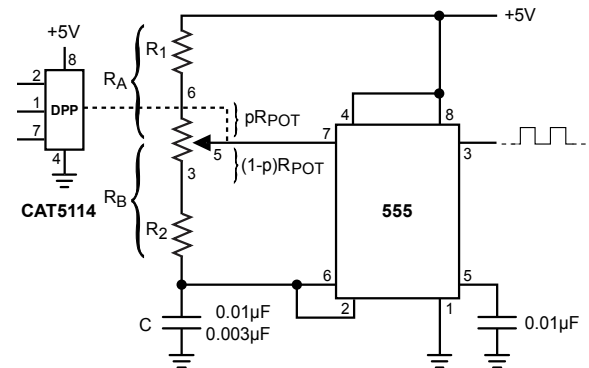


**Programmable Sq. Wave Oscillator (555)**

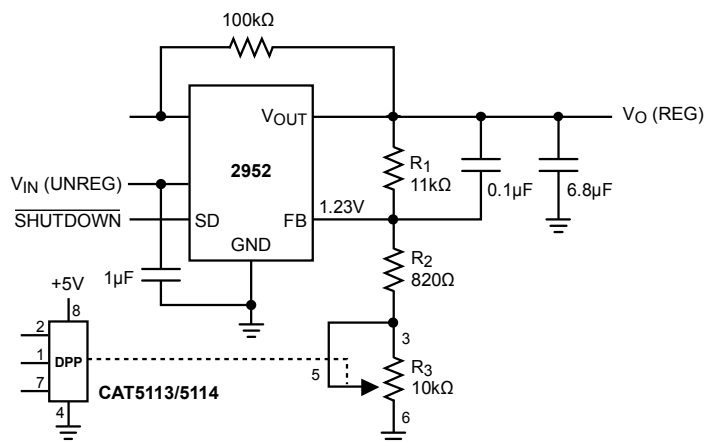


**Programmable Voltage Regulator**

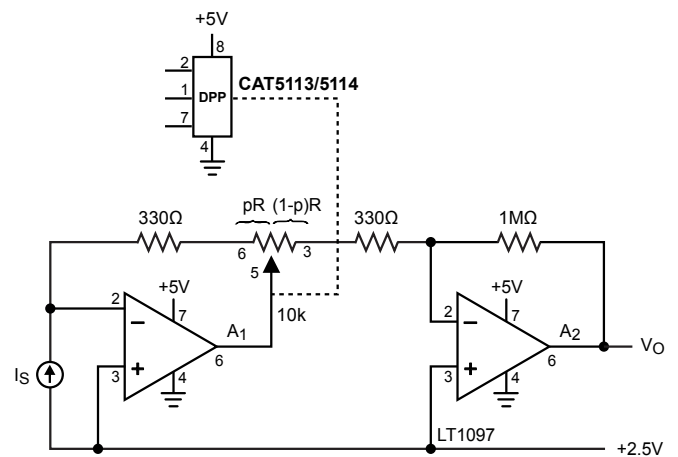

**Programmable I to V Converter**

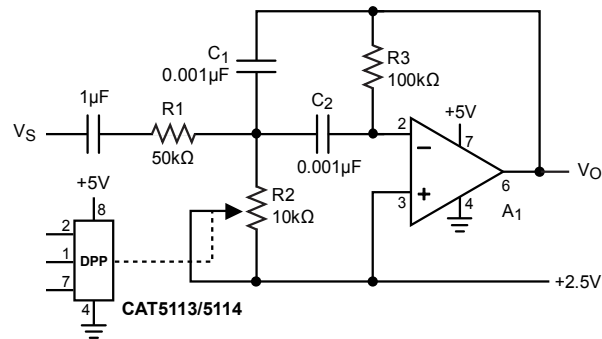


**Programmable Bandpass Filter**

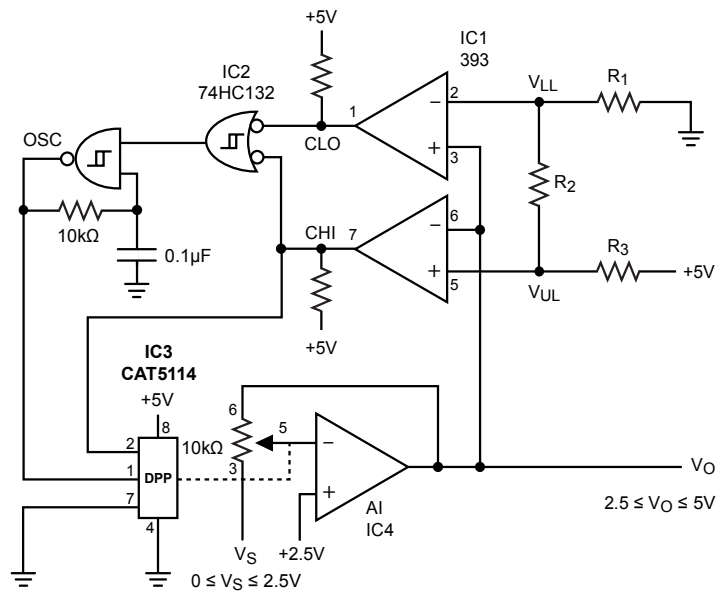

**Automatic Gain Control**


## PACKAGE OUTLINE DRAWINGS

### PDIP 8-Lead 300mils (L) <sup>(1)(2)</sup>

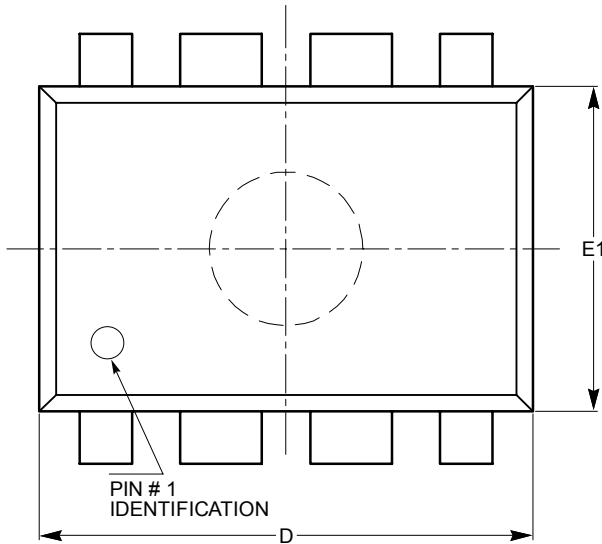


TOP VIEW

| SYMBOL | MIN      | NOM  | MAX   |
|--------|----------|------|-------|
| A      |          |      | 5.33  |
| A1     | 0.38     |      |       |
| A2     | 2.92     | 3.30 | 4.95  |
| b      | 0.36     | 0.46 | 0.56  |
| b2     | 1.14     | 1.52 | 1.78  |
| c      | 0.20     | 0.25 | 0.36  |
| D      | 9.02     | 9.27 | 10.16 |
| E      | 7.62     | 7.87 | 8.25  |
| e      | 2.54 BSC |      |       |
| E1     | 6.10     | 6.35 | 7.11  |
| eB     | 7.87     |      | 10.92 |
| L      | 2.92     | 3.30 | 3.80  |

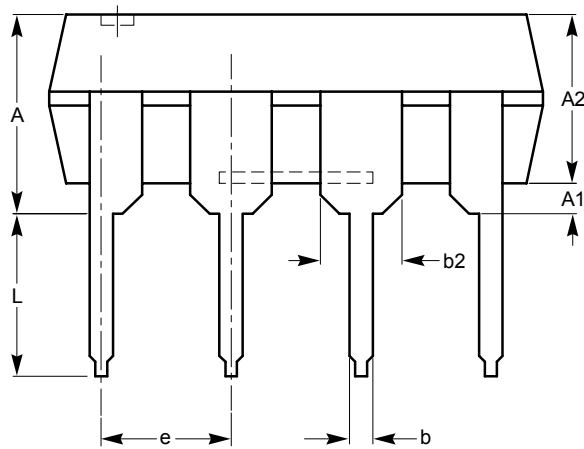

SIDE VIEW

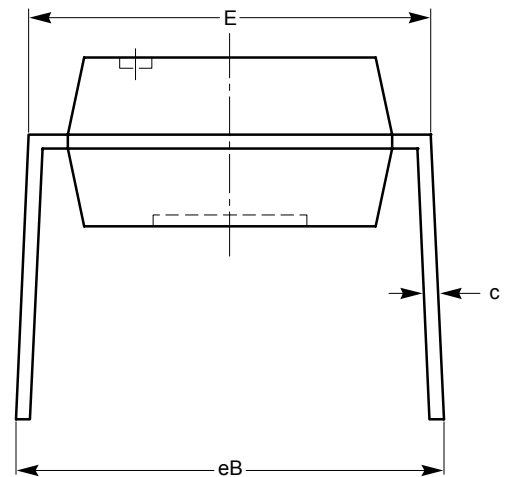


END VIEW

For current Tape and Reel information, download the PDF file from:  
<http://www.catsemi.com/documents/tapeandreeel.pdf>.

#### Notes


- (1) All dimensions are in millimeters.
- (2) Complies with JEDEC MS-001.

**SOIC 8-Lead 150mils (V) <sup>(1)(2)</sup>**

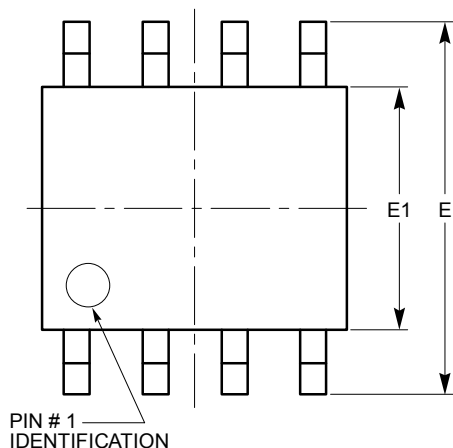


**TOP VIEW**

| SYMBOL | MIN      | NOM | MAX  |
|--------|----------|-----|------|
| A      | 1.35     |     | 1.75 |
| A1     | 0.10     |     | 0.25 |
| b      | 0.33     |     | 0.51 |
| c      | 0.19     |     | 0.25 |
| D      | 4.80     |     | 5.00 |
| E      | 5.80     |     | 6.20 |
| E1     | 3.80     |     | 4.00 |
| e      | 1.27 BSC |     |      |
| h      | 0.25     |     | 0.50 |
| L      | 0.40     |     | 1.27 |
| θ      | 0°       |     | 8°   |

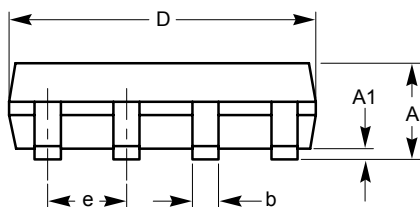

**SIDE VIEW**

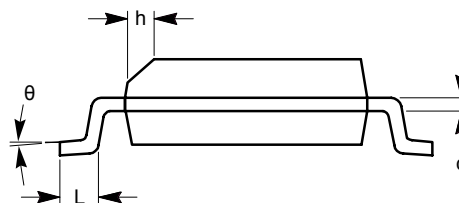


**END VIEW**

**For current Tape and Reel information, download the PDF file from:  
<http://www.catsemi.com/documents/tapeandreel.pdf>.**


**Notes**

- (1) All dimensions are in millimeters. Angles in degrees.
- (2) Complies with JEDEC MS-012.

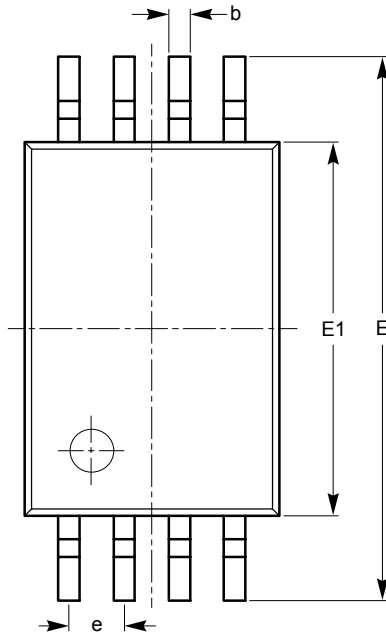
**TSSOP 8-Lead 4.4mm (Y) <sup>(1)(2)</sup>**


TOP VIEW

| SYMBOL | MIN      | NOM  | MAX  |
|--------|----------|------|------|
| A      |          |      | 1.20 |
| A1     | 0.05     |      | 0.15 |
| A2     | 0.80     | 0.90 | 1.05 |
| b      | 0.19     |      | 0.30 |
| c      | 0.09     |      | 0.20 |
| D      | 2.90     | 3.00 | 3.10 |
| E      | 6.30     | 6.40 | 6.50 |
| E1     | 4.30     | 4.40 | 4.50 |
| e      | 0.65 BSC |      |      |
| L      | 1.00 REF |      |      |
| L1     | 0.50     | 0.60 | 0.75 |
| θ1     | 0°       |      | 8°   |

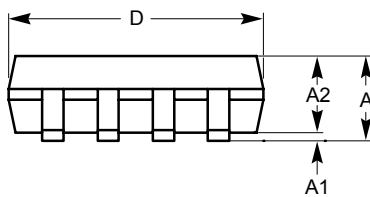

SIDE VIEW

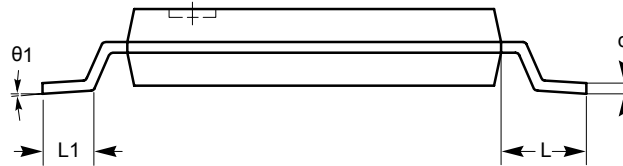


END VIEW

For current Tape and Reel information, download the PDF file from:  
<http://www.catsemi.com/documents/tapeandreel.pdf>.

**Notes**


- (1) All dimensions are in millimeters. Angles in degrees.  
 (2) Complies with JEDEC MO-153.

**MSOP 8-Lead 3.0mm (Z) <sup>(1)(2)</sup>**

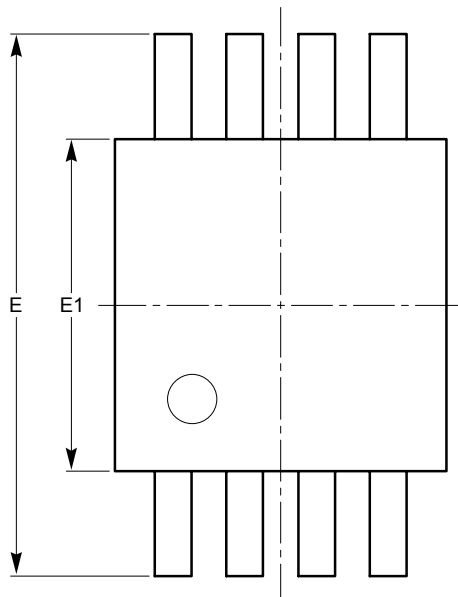


**TOP VIEW**


| SYMBOL | MIN      | NOM  | MAX  |
|--------|----------|------|------|
| A      |          |      | 1.10 |
| A1     | 0.05     | 0.10 | 0.15 |
| A2     | 0.75     | 0.85 | 0.95 |
| b      | 0.22     |      | 0.38 |
| c      | 0.13     |      | 0.23 |
| D      | 2.90     | 3.00 | 3.10 |
| E      | 4.80     | 4.90 | 5.00 |
| E1     | 2.90     | 3.00 | 3.10 |
| e      | 0.65 BSC |      |      |
| L      | 0.40     | 0.60 | 0.80 |
| L1     | 0.95 REF |      |      |
| L2     | 0.25 BSC |      |      |
| θ      | 0°       |      | 6°   |

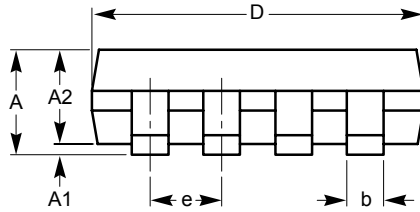

**SIDE VIEW**

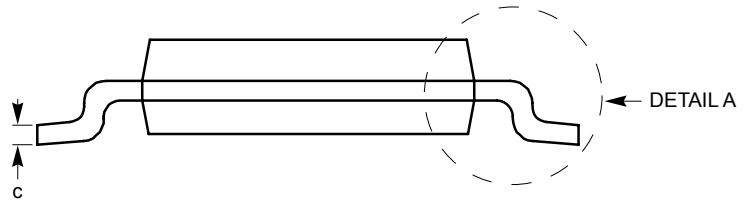

**END VIEW**

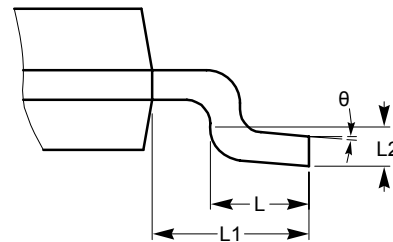


**DETAIL A**



**For current Tape and Reel information, download the PDF file from:**  
**<http://www.catsemi.com/documents/tapeandreel.pdf>**

**Notes**

- (1) All dimensions are in millimeters. Angles in degrees.
- (2) Complies with JEDEC MS-187.

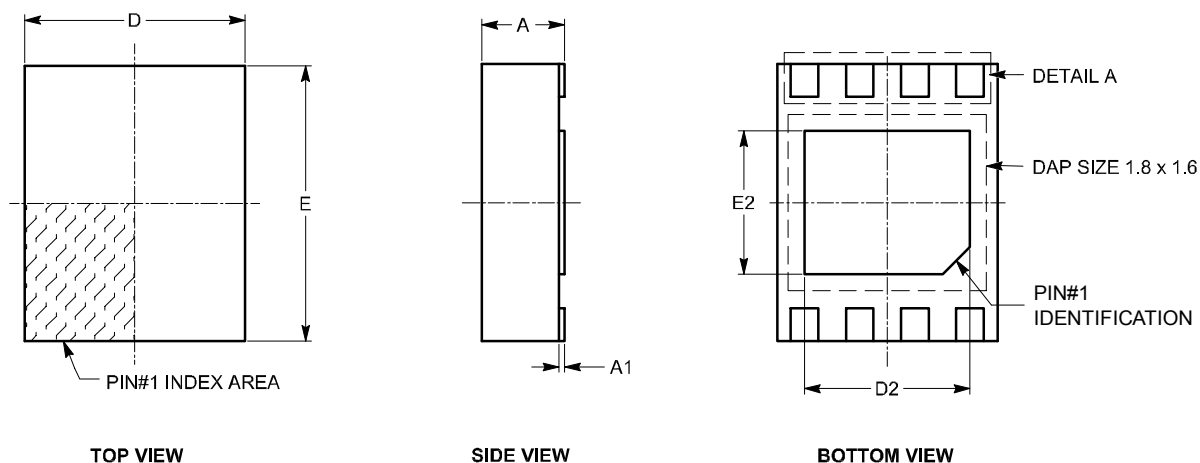**TDFN 8-Pad 2 x 2.5mm (ZD7) <sup>(1)(2)</sup>**


| SYMBOL | MIN      | NOM  | MAX  |
|--------|----------|------|------|
| A      | 0.70     | 0.75 | 0.80 |
| A1     | 0.00     | 0.02 | 0.05 |
| A3     | 0.20 REF |      |      |
| b      | 0.20     | 0.25 | 0.30 |
| D      | 1.90     | 2.00 | 2.10 |
| D2     | 1.40     | 1.50 | 1.60 |
| E      | 2.40     | 2.50 | 2.60 |
| E2     | 1.20     | 1.30 | 1.40 |
| e      | 0.50 TYP |      |      |
| L      | 0.20     | 0.30 | 0.40 |




**For current Tape and Reel information, download the PDF file from:**  
<http://www.catsemi.com/documents/tapeandreel.pdf>.


**Notes**

- (1) All dimensions are in millimeters.  
 (2) Complies with JEDEC MO-229.

**TDFN 8-Pad 2 x 3mm (VP2) <sup>(1)(2)</sup>**

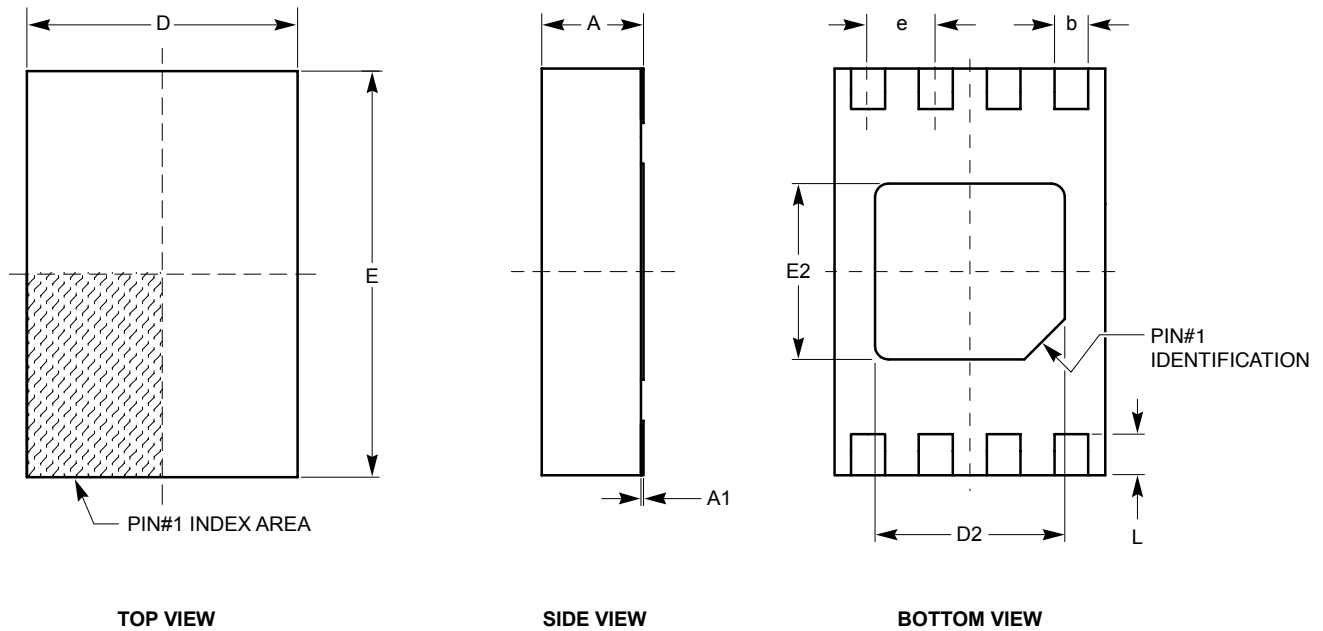

| SYMBOL | MIN      | NOM  | MAX  |
|--------|----------|------|------|
| A      | 0.70     | 0.75 | 0.80 |
| A1     | 0.00     | 0.02 | 0.05 |
| A2     | 0.45     | 0.55 | 0.65 |
| A3     | 0.20 REF |      |      |
| b      | 0.20     | 0.25 | 0.30 |
| D      | 1.90     | 2.00 | 2.10 |
| D2     | 1.30     | 1.40 | 1.50 |
| E      | 2.90     | 3.00 | 3.10 |
| E2     | 1.20     | 1.30 | 1.40 |
| e      | 050 TYP  |      |      |
| L      | 0.20     | 0.30 | 0.40 |

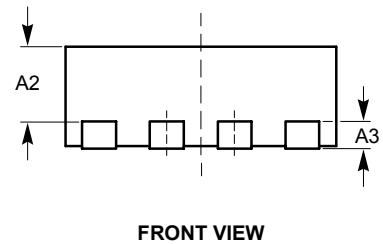


For current Tape and Reel information, download the PDF file from:  
<http://www.catsemi.com/documents/tapeandreel.pdf>.

**Notes**

- (1) All dimensions are in millimeters.
- (2) Complies with JEDEC MO-229.

## EXAMPLE OF ORDERING INFORMATION

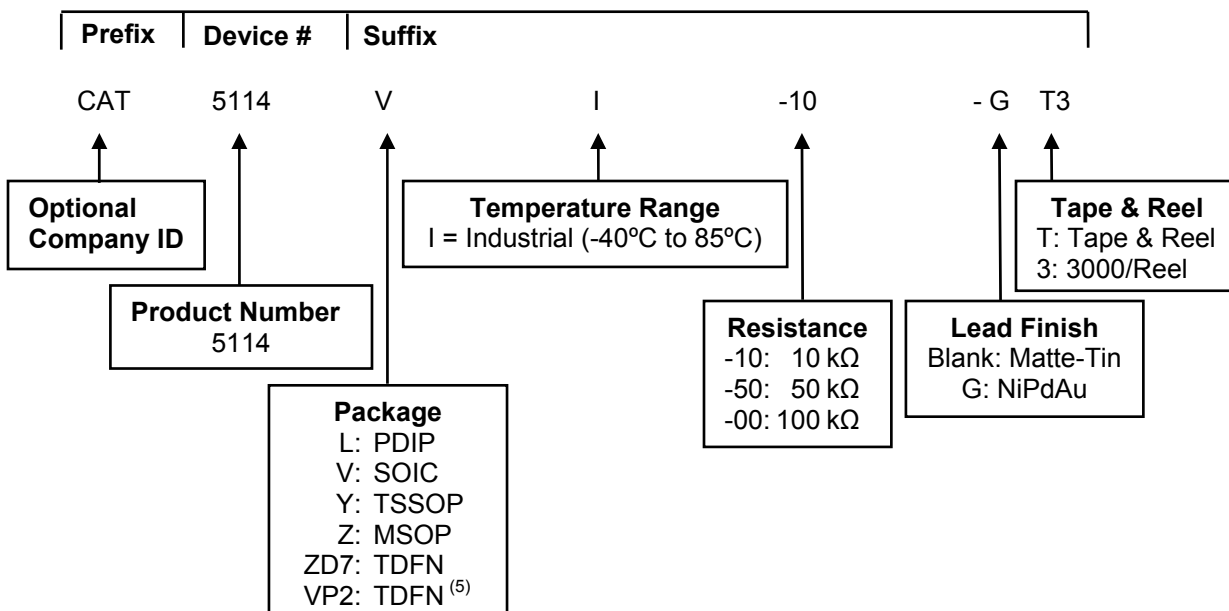

## ORDERING PART NUMBER

|                                  |
|----------------------------------|
| CAT5114LI-10-G                   |
| CAT5114LI-50-G                   |
| CAT5114LI-00-G                   |
| CAT5114VI-10-G                   |
| CAT5114VI-50-G                   |
| CAT5114VI-00-G                   |
| CAT5114YI-10-G                   |
| CAT5114YI-50-G                   |
| CAT5114YI-00-G                   |
| CAT5114ZI-10-G                   |
| CAT5114ZI-50-G                   |
| CAT5114ZI-00-G                   |
| CAT5114ZD7I-10-G                 |
| CAT5114 ZD7I-50-G <sup>(5)</sup> |
| CAT5114 ZD7I-00-G <sup>(5)</sup> |
| CAT5114VP2I-10-G <sup>(5)</sup>  |
| CAT5114VP2I-50-G <sup>(5)</sup>  |
| CAT5114VP2I-00-G <sup>(5)</sup>  |

### Notes

- (1) All packages are RoHS-compliant (Lead-free, Halogen-free).
- (2) The standard lead finish is NiPdAu.
- (3) This device used in the above example is a CAT5114VI-10-GT3 (SOIC, Industrial Temperature, 10kΩ, NiPdAu, Tape & Reel)
- (4) For additional package and temperature options, please contact your nearest Catalyst Semiconductor Sales office.
- (5) Contact factory for package availability.

## REVISION HISTORY

| Date       | Rev. | Reason                                                                                                                                                                                                                                           |
|------------|------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 10/09/2003 | G    | Revised Features<br>Revised DC Electrical Characteristics                                                                                                                                                                                        |
| 03/10/2004 | H    | Updated Potentiometer Parameters                                                                                                                                                                                                                 |
| 03/29/2004 | I    | Changed Green Package marking for SOIC from W to V<br>Updated Ordering Information (removed old 5112 references)                                                                                                                                 |
| 04/12/2004 | J    | Updated Reel Ordering Information                                                                                                                                                                                                                |
| 08/31/2004 | K    | Added TDFN package in all areas                                                                                                                                                                                                                  |
| 04/08/2005 | L    | Updated Ordering Information                                                                                                                                                                                                                     |
| 07/28/2005 | M    | Updated Pin Configuration, Application Information, and Ordering Information                                                                                                                                                                     |
| 07/06/2007 | N    | Update Features<br>Add TDFN (ZD7)<br>Update Absolute Maximum Ratings table<br>Update Potentiometer Characteristics table<br>Update all Package Outline Drawings<br>Update Example of Ordering Information note 2.<br>Update Ordering Part Number |
| 08/07/2007 | O    | Update MSOP Package Outline Drawing                                                                                                                                                                                                              |
| 02/15/2008 | P    | Update Logic Inputs table<br>Update Package Outline Drawings                                                                                                                                                                                     |

---

### Copyrights, Trademarks and Patents

© Catalyst Semiconductor, Inc.

Trademarks and registered trademarks of Catalyst Semiconductor include each of the following:

Adaptive Analog™, Beyond Memory™, DPP™, EZDim™, LDD™, MiniPot™, Quad-Mode™ and Quantum Charge Programmable™

Catalyst Semiconductor has been issued U.S. and foreign patents and has patent applications pending that protect its products.

*CATALYST SEMICONDUCTOR MAKES NO WARRANTY, REPRESENTATION OR GUARANTEE, EXPRESS OR IMPLIED, REGARDING THE SUITABILITY OF ITS PRODUCTS FOR ANY PARTICULAR PURPOSE, NOR THAT THE USE OF ITS PRODUCTS WILL NOT INFRINGE ITS INTELLECTUAL PROPERTY RIGHTS OR THE RIGHTS OF THIRD PARTIES WITH RESPECT TO ANY PARTICULAR USE OR APPLICATION AND SPECIFICALLY DISCLAIMS ANY AND ALL LIABILITY ARISING OUT OF ANY SUCH USE OR APPLICATION, INCLUDING BUT NOT LIMITED TO, CONSEQUENTIAL OR INCIDENTAL DAMAGES.*

Catalyst Semiconductor products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Catalyst Semiconductor product could create a situation where personal injury or death may occur.

Catalyst Semiconductor reserves the right to make changes to or discontinue any product or service described herein without notice. Products with data sheets labeled "Advance Information" or "Preliminary" and other products described herein may not be in production or offered for sale.

Catalyst Semiconductor advises customers to obtain the current version of the relevant product information before placing orders. Circuit diagrams illustrate typical semiconductor applications and may not be complete.

---



Catalyst Semiconductor, Inc.  
Corporate Headquarters  
2975 Stender Way  
Santa Clara, CA 95054  
Phone: 408.542.1000  
Fax: 408.542.1200  
www.catsemi.com

Document No: MD-2007  
Revision: P  
Issue date: 02/15/08