


DIMENSIONS FOR LARGE POLARIZATION RIB TERMINAL ONLY



NOTES: (UNLESS OTHERWISE SPECIFIED)

- MATING TERMINAL SHOWN ON SD-33000-001
- MATERIAL: ASTM B422, UNS C19025, HR04
THICKNESS: 0.30 mm ±0.01
TEMPER: FULL HARD (REF)
TENSILE: 496 MIN MPA
- TIN PLATED TERMINAL FINISH:
OVERALL UNDERPLATE ELECTRODEPOSITED NICKEL
OVERALL ELECTRODEPOSITED REFLOW TIN
- GOLD PLATED TERMINAL FINISH:
OVERALL UNDERPLATE ELECTRODEPOSITED DUCTILE SULFAMATE NICKEL
CONTACT AREA - ELECTRODEPOSITED GOLD
GRIP AREA - ELECTRODEPOSITED 100% TIN MATTE FINISH
- SILVER PLATED TERMINAL FINISH:
OVERALL UNDERPLATE ELECTRODEPOSITED DUCTILE SULFAMATE NICKEL
CONTACT AREA - ELECTRODEPOSITED PURE SILVER (0.5% MAX IMPURITIES) SEMI-BRIGHT FINISH
- SILVER ANTI-TARNISH : EVABRITE
GRIP AREA - ELECTRODEPOSITED 100% TIN MATTE FINISH
- MEETS PERFORMANCE SPECIFICATION FOR CABLE TO TERMINAL ELECTRICAL CRIMPS PER SAE/USCAR-21 (8/2001)
- MEETS PERFORMANCE STANDARD FOR AUTOMOTIVE ELECTRICAL CONNECTOR SYSTEMS FOR SAE/USCAR-2, REV. 4 (TEMP CLASS 3) (4/2001)
- MEETS ELECTRICAL CONNECTION SYSTEM DESIGN SPECIFICATION (SDS) REV.11 (5/2002)
- MEETS FIELD CORRELATED LIFE TEST (FCLT) PER SAE/USCAR-20 (11/2001)
- MEETS WIRING COMPONENT DESIGN GUIDELINES SAE/USCAR-12 REV 2 (12/2001)
- TSC ON A DIMENSION TO BE INTERPRETED AS DISTANCE TO A THEORETICAL SHARP CORNER AS IF THE RADIUS WERE NOT PRESENT
- REFERENCE 97BG-14474-AAB FOR LARGE POLARIZATION RIB CAVITY SPECIFICATION
- INSERTION FORCE (TIN) AVG. FROM PV TESTING =
3.8N LARGE POLARIZATION RIB
3.5N SMALL POLARIZATION RIB (REFERENCE)
- ALL DIMENSIONS EXCEPT (1), (2), (3) & (4) ARE COMMON TO BOTH SMALL AND LARGE POLARIZATION RIB TERMINALS
- REFERENCE PK-31300-516 FOR REEL DIRECTION
- REFERENCE AS-33012-002 FOR CRIMP INFORMATION

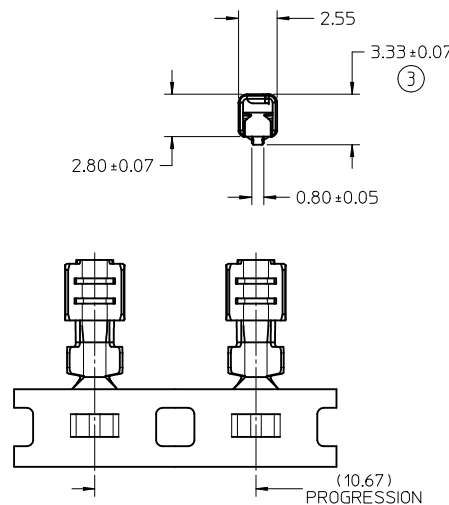


STAMP PLATING TYPE
Sn-TIN, Au-GOLD OR
Ag-SILVER IN THIS
AREA


SEE SHEET 5
0.35mm² AND 0.50mm²
ISO WIRE SIZE P/N'S
33012-2004/3004
33001-4005/5005

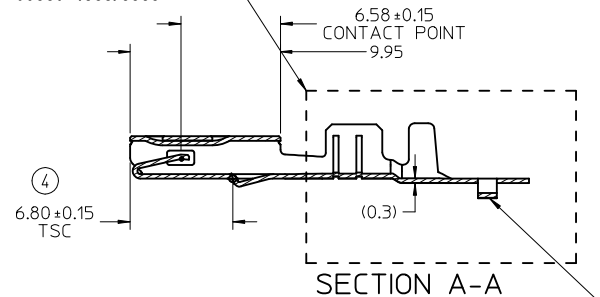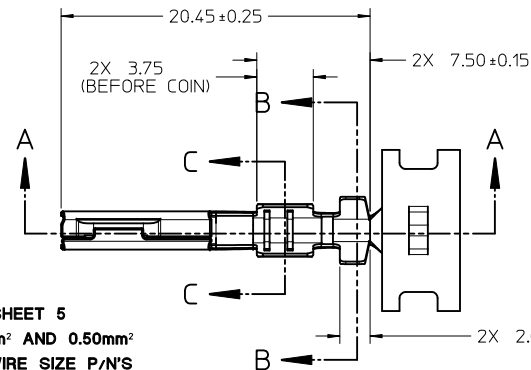


CARRIER BUMP DIRECTION
POINTS DOWN FOR TIN PLATED TERMINALS
POINTS UP FOR PRECIOUS PLATED TERMINALS



SCALE 2:1




SECTION B-B
SCALE 5:1



SECTION C-C
SCALE 5:1

ENTER DESCRIPTION EC NO: UAU2011-1208 DRWN:ADHIR 2011/06/28 CHKD: APPR:BMOSER 2011/07/06 B3	DESCRIPTION ▽=0 ▽=0 ▽=0 REV	QUALITY SYMBOLS		GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		SCALE		DESIGN UNITS		THIRD ANGLE PROJECTION	
						MM ONLY		4:1		METRIC			
						DRAWN BY DATE		TITLE		MX150 RECEPTACLE TERMINAL			
						L. PULLIAM 2005/06/21							
						CHECKED BY DATE				MOLEX INCORPORATED			
						A. DHIR 2005/06/21							
						APPROVED BY DATE				DOCUMENT NO. SD-33012-002			
						B. MOSER 2005/06/22							
						MATERIAL NO.				SHEET NO. 1 OF 5			
						SEE TABLE							
				SIZE C				THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					
				DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS									








THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

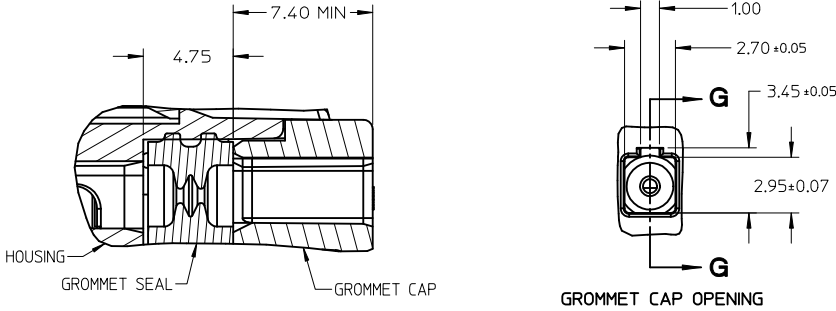	13	12	11	10	9	8	7	6	5	4	3	2	1					
J	TABLE													J				
	SUPPLIER PART NUMBER	PLATING	GRIP CODE	WIRE APPLICATION		A ±0.30	B ±0.30	C ±0.30	D ±0.30	COMMENTS								
	SMALL POLARIZATION RIB																	
	RIGHT PAYOFF DIRECTION B	LEFT PAYOFF DIRECTION D			SAE (AWG)	METRIC (mm²)												
	33012-2001	33012-3001	TIN	14	14/16	2.0-15	3.9	4.4	1.7	1.6								
	33012-2002	33012-3002	TIN	18	18/20	1.0-0.75	3.3	3.1	1.3	1.4								
	33012-2003	33012-3003	TIN	22	22	0.35-0.50	2.5	2.6	0.9	1.0								
I	33012-2004	33012-3004	TIN	M3	N/A	0.35-0.50	2.5	2.7	0.9	154±0.1	PREFERRED TERMINAL FOR USE IN SEALED APPLICATION WITH 0.35& 0.50 WIRES (OD 1.2-1.7mm)							
	33001-2003	33001-3003	GOLD	14	14/16	2.0-15	3.9	4.4	1.7	1.6								
	33001-2004	33001-3004	GOLD	18	18/20	1.0-0.75	3.3	3.1	1.3	1.4								
	33001-2005	33001-3005	GOLD	22	22	0.35-0.50	2.5	2.6	0.9	1.0								
	33001-4001	33001-5001	SILVER	14	14/16	2.0-15	3.9	4.4	1.7	1.6								
	33001-4002	33001-5002	SILVER	18	18/20	1.0-0.75	3.3	3.1	1.3	1.4								
33001-4003	33001-5003	SILVER	22	22	0.35-0.50	2.5	2.6	0.9	1.0									
H	33001-4005	33001-5005	SILVER	M3	N/A	0.35-0.50	2.5	2.7	0.9	154±0.1	PREFERRED TERMINAL FOR USE IN SEALED APPLICATION WITH 0.35& 0.50 WIRES (OD 1.2-1.7mm) USE IN CLASS 3 (125° C) APPLICATIONS ONLY							
	LARGE POLARIZATION RIB - NOT TO BE USED IN MX150 SEALED CONNECTORS																	
G	33012-2021	33012-3021	TIN	14	14/16	2.0-15	3.9	4.4	1.7	1.6								
	33012-2022	33012-3022	TIN	18	18/20	1.0-0.75	3.3	3.1	1.3	1.4								
	33012-2023	33012-3023	TIN	22	22	0.35-0.50	2.5	2.6	0.9	1.0								
	33001-2021	33001-3021	GOLD	14	14/16	2.0-15	3.9	4.4	1.7	1.6								
	33001-2022	33001-3022	GOLD	18	18/20	1.0-0.75	3.3	3.1	1.3	1.4								
	33001-2023	33001-3023	GOLD	22	22	0.35-0.50	2.5	2.6	0.9	1.0								
	33001-4021	33001-5021	SILVER	14	14/16	2.0-15	3.9	4.4	1.7	1.6								
	33001-4022	33001-5022	SILVER	18	18/20	1.0-0.75	3.3	3.1	1.3	1.4								
	33001-4023	33001-5023	SILVER	22	22	0.35-0.50	2.5	2.6	0.9	1.0								
F														F				
															E			
E														E				
D														D				
C														C				
B														B				
A														A				
ENTER DESCRIPTION EC NO: UAU2011-1208 DRWN:ADHIR CHKD: B3 2011/06/28 APPR:BMOSER 2011/07/06 DESCRIPTION REV														QUALITY SYMBOLS ▽=0 ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED) mm INCH 4 PLACES ± --- ± --- 3 PLACES ± 0.005 ± --- 2 PLACES ± 0.10 ± --- 1 PLACE ± 0.3 ± --- ANGULAR ± 3 ° DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	DIMENSION STYLE MM ONLY DRAWN BY DATE L. PULLIAM 2005/06/21 CHECKED BY DATE A. DHIR 2005/06/21 APPROVED BY DATE B. MOSER 2005/06/22 MATERIAL NO. SIZE C	SCALE DESIGN UNITS METRIC TITLE MX150 RECEPTACLE TERMINAL MOLEX INCORPORATED DOCUMENT NO. SD-33012-002 THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	SHEET NO. 2 OF 5
tb_frame_C_P_AM_T Rev. F 2009/06/18	12	11	10	9	8	7	6	5	4	3	2	1						

THIS CHECKING - AID IS FOR SMALL POLARIZATION RIB TERMINALS ONLY



CHECKING - AID ASSEMBLY
SCALE 1:1

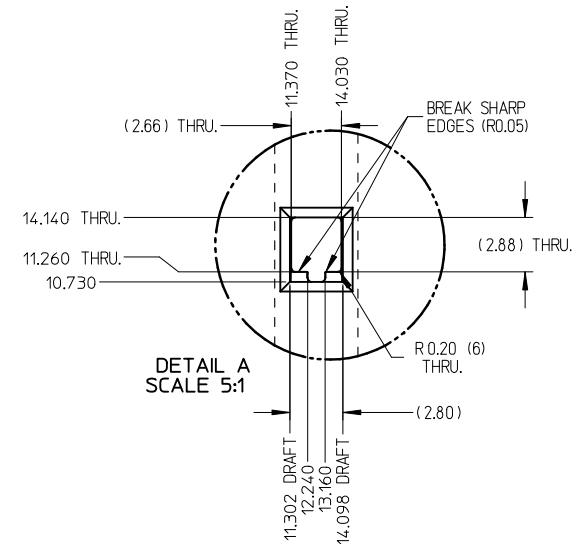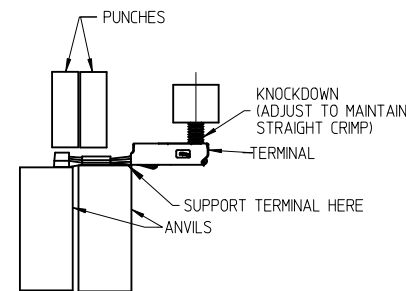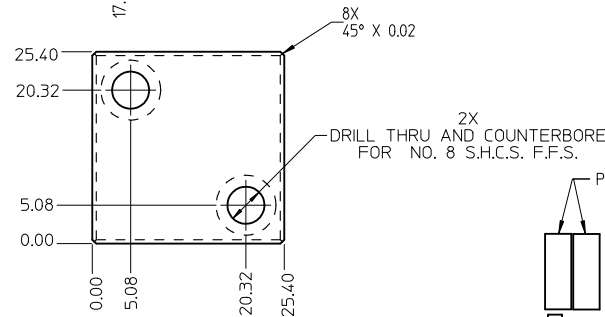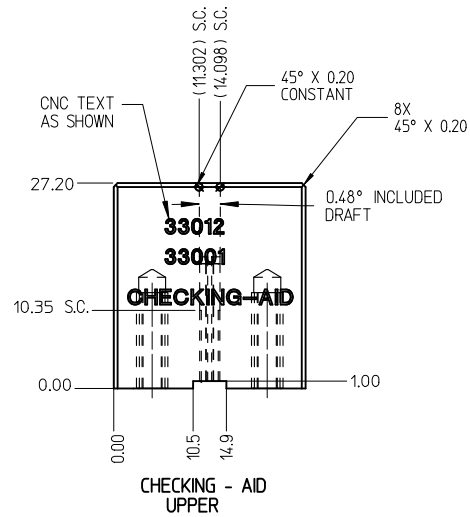

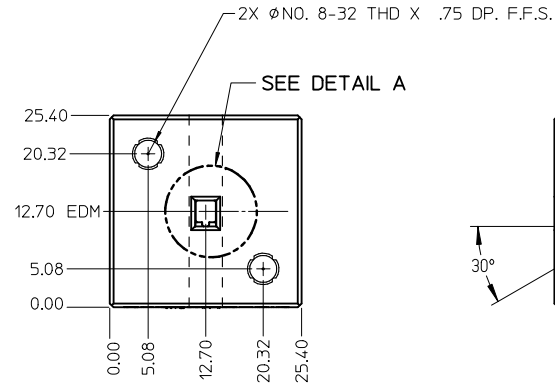


CRIMP REQUIREMENTS:

1. CRIMP STRAIGHTNESS MUST BE MAINTAINED
USE A KNOCKDOWN TOOL LOCATED AS SHOWN
TERMINAL BOX MUST NOT BE DEFORMED
2. AFTER CRIMPING, THE CRIMPED TERMINAL (AND UP TO 5 mm
OF WIRE PAST THE INSULATOR CUTOFF TAB) MUST FIT FREELY
INTO THE CHECKING-AID SHOWN ON THIS PAGE
3. FOR OTHER MECHANICAL REQUIREMENTS ON CRIMPED
TERMINALS, REFER TO SAE/USCAR-21 (5-13-02)
SECTIONS 4.2 (VISUAL INSPECTION), 4.2 (CROSS SECTION
ANALYSIS) AND 4.4 (CONDUCTOR CRIMP PULLOUT FORCE)





UPPER & LOWER
CHECKING-AID
A2 TOOL STEEL
HARDEN & GRIND
ROCKWELL "C" 56-58

ENTER DESCRIPTION EC NO: UAU2011-1208 DRWN:ADHIR CHKD: APPR:BMOSER	DESCRIPTION 2011/06/28 2011/07/06	QUALITY SYMBOLS ▽=0 ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE MM ONLY		SCALE 2:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION					
			4 PLACES 3 PLACES 2 PLACES 1 PLACE	mm	INCH	DRAWN BY L. PULLIAM	DATE 2005/06/21	TITLE MX150 RECEPTACLE TERMINAL							
						CHECKED BY A. DHIR	DATE 2005/06/21								
						APPROVED BY B. MOSER	DATE 2005/06/22								
						MATERIAL NO.				DOCUMENT NO.				SHEET NO.	
						SEE TABLE				SD-33012-002				3 OF 5	
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION									

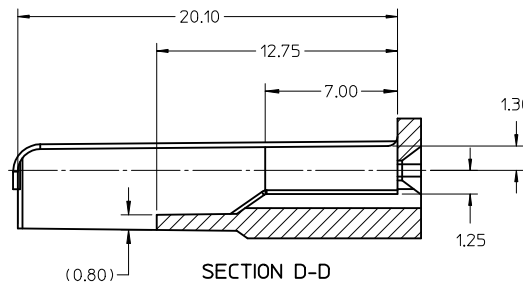


NOTES: UNLESS OTHERWISE SPECIFIED

1. TOLERANCES: LINEAR ± 0.10
ANGULAR $\pm 3^\circ$
2. ALL DRAFT WITHIN TOLERANCE.
3. MAX RADII ON ALL CORNERS SHOWN SHARP: 0.10
4. MAX FLASH PERMISSIBLE: 0.1
5. EJECTOR PIN MARKS PERMISSIBLE IF FLUSH TO 0.25 BELOW SURFACE.
6. MATERIAL: HOUSING/FINGER SPECIFICATION ENGINEERED FOR MATERIAL WITH THE FOLLOWING PROPERTIES:
A. FLEXURAL MODULUS = 4,500 TO 9,400 MPa
PER ASTM TEST D790
B. ELONGATION AT YIELD = 2.3% OR BETTER
PER ASTM TEST D638 TYPE V
7. CAVITY SPEC FOR USE ONLY WITH MOLEX RECEPTACLE
TERMINAL PART NUMBERS SPECIFIED ELSEWHERE ON THIS
DRAWING

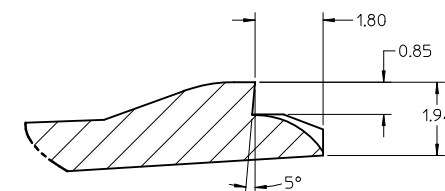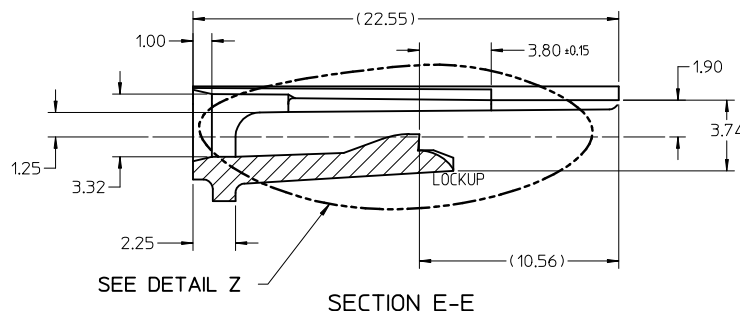



DETAIL Z
SCALE 20:1

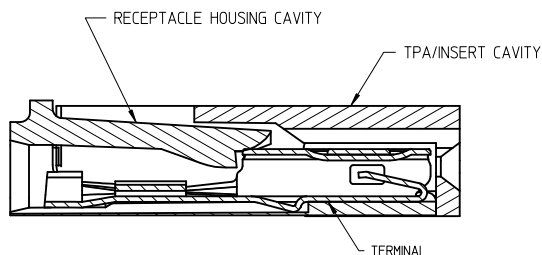


SECTION F-F

RECEPTACLE CAVITY ASSEMBLED VIEWS
FOR SMALL POLARIZATION RIB APPLICATIONS
FIG. 1



SECTION D-D
FOR LARGE POLARIZATION RIB APPLICATIONS
FIG. 2



PROBING DOWN THE
THROAT MUST USE
THIS TERMINAL PROBE

PROBE PIN DETAILS:
MANUFACTURER: LONE STAR INDUSTRIAL
PART NUMBER: LS054R-403-N-4.6
PIN DIAMETER: 0.025 IN (0.64mm)
TIP SHAPE: SPHERICAL
TEL: 915-779-7255

PREFERRED PROBING LOCATION
IS NOT ON SPRING MEMBER

IF ELECTRICAL CONTINUITY PROBE
TOUCHES SPRING MEMBER USE
PROBING AS SHOWN IN FIG. 2

ENTER DESCRIPTION
EC NO: UAU2011-1208
DRAWN:ADHIR
CHKD:
APPR:BMOSER
REV


DATE: 2011/06/28
DATE: 2011/07/06
DESCRIPTION
REV

QUALITY
SYMBOLS
▽=0
▽=0
▽=0






GENERAL TOLERANCES (UNLESS SPECIFIED)		
	mm	INCH
4 PLACES	± ---	± ---
3 PLACES	± 0.005	± ---
2 PLACES	± 0.10	± ---
1 PLACE	± 0.3	± ---
ANGULAR $\pm 3^\circ$		
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		

DIMENSION STYLE MM ONLY	
DRAWN BY	DATE
L. PULLIAM	2005/06/21
CHECKED BY	DATE
A. DHIR	2005/06/21
APPROVED BY	DATE
B. MOSER	2005/06/22
MATERIAL NO.	
SEE TABLE	
SIZE	C

SCALE 5:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION
TITLE MX150 RECEPTACLE TERMINAL		
MOLEX INCORPORATED		
DOCUMENT NO. SD-33012-002		SHEET NO. 4 OF 5
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		



ISO VIEW
SCALE 2:1

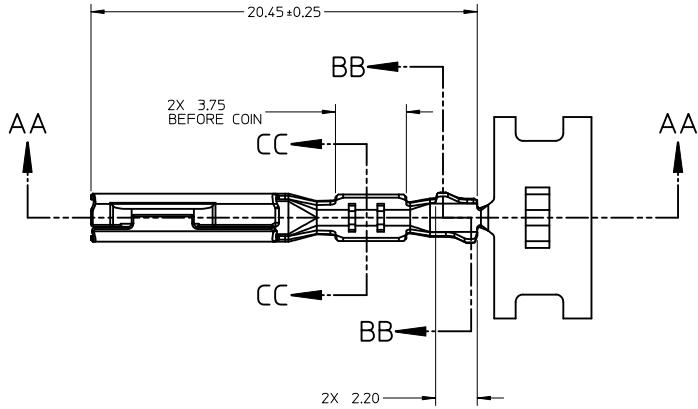

SECTION AA-AA

P/N'S 33012-2004/3004
33001-4005/5005

CARRIER BUMP DIRECTION
POINTS DOWN FOR TIN PLATED TERMINAL
POINTS UP FOR PRECIOUS METAL PLATED
TERMINAL

ENTER DESCRIPTION EC NO: UAU2011-1208 2011/06/28 DRWN:ADHIR CHKD: APPR:BMOSER 2011/07/06		DESCRIPTION REV	QUALITY SYMBOLS ▽=0 ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 5:1	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION	TITLE MX150 RECEPTACLE TERMINAL MOLEX INCORPORATED SD-33012-002	SHEET NO. 5 OF 5		
						DRAWN BY L. PULLIAM		DATE 2005/06/21						
						CHECKED BY A. DHIR		DATE 2005/06/21						
						APPROVED BY B. MOSER		DATE 2005/06/22						
						MATERIAL NO.							DOCUMENT NO.	
B3				DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SIZE C		SEE TABLE						