

Features

- 90%+ Efficiency
- Internal Short-Circuit Protection
- Pin-Compatible with 3-Terminal Linear Regulators
- Laser-Trimmed Output Voltage
- Over-Temperature Protection
- Small Footprint
- Wide Input Range
- 5-Pin Mount Option (Suffixes L & M)

Description

The PT5100 modules are a series of economical, easy-to-use 1-A positive step-down, Integrated Switching Regulators (ISRs). These ISRs are compatible with most TO-220 style linear regulators, and when employed as a linear replacement, provide significant benefits in both efficiency and power dissipation. They are recommended for use in a wide variety of on-board power regulation applications. These include computer, data storage, industrial controls, and battery powered equipment. Modules are laser-trimmed for optimal output voltage accuracy, and exhibit excellent line and load regulation. The PT5100 also features output current limiting and thermal shutdown protection.


Ordering Information

PT5101 □	= +5.0 Volts
PT5102 □	= +12.0 Volts
PT5103 □	= +3.3 Volts
PT5105 □	= +6.5 Volts
PT5107 □	= +15.0 Volts
PT5109 □	= +5.6 Volts
PT5110 □	= +9.0 Volts
PT5111 □	= +10.0 Volts
PT5112 □	= +8.0 Volts

PT Series Suffix (PT1234x)

Case/Pin Configuration	Order Suffix	Package Code
Vertical	N	(EAD)
Horizontal	A	(EAA)
SMD	C	(EAC)
Horizontal, 2-pin Tab	M	(EAM)
SMD, 2-Pin Tab	L	(EAL)


(Reference the applicable package code drawing for the dimensions and PC board layout)



Pin-Out Information

Pin	Function
1	V _{in}
2	GND
3	V _{out}

Standard Application

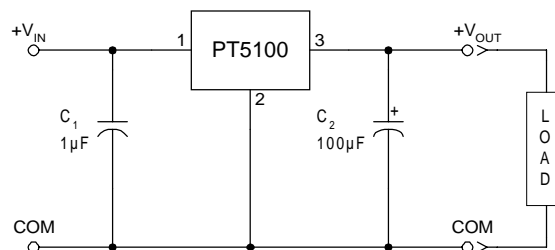

C₁ = Optional 1µF ceramic capacitor
C₂ = Required 100µF electrolytic

Specifications (Unless otherwise stated, $T_a = 25^\circ\text{C}$, $V_{in} = V_{inmin}$, $C_{out} = 100\mu\text{F}$, and $I_o = I_{o\max}$)

Characteristic	Symbol	Conditions	PT5100 SERIES			Units
			Min	Typ	Max	
Output Current	I_o	Over V_{in} range	0.1 ⁽¹⁾	—	1.0	A
Input Voltage Range	V_{in}	Over I_o Range $V_o = 3.3\text{V}$ $V_o = 5.0\text{V}$ $V_o > 5.0\text{V}$	9 9 $V_o + 4$	— — —	26 38 38	VDC
Set Point Voltage Tolerance	$V_o \text{ tol}$		—	± 1	± 2	% V_o
Temperature Variation	Reg_{temp}	$0^\circ \leq T_a \leq +60^\circ\text{C}$, $I_o = I_{o\min}$	—	± 0.5	—	% V_o
Line Regulation	Reg_{line}	Over V_{in} range	—	± 5	± 10	mV
Load Regulation	Reg_{load}	Over I_o range	—	± 5	± 10	mV
Total Output Voltage Variation	$\Delta V_{o\text{tot}}$	Includes set-point, line, load, $0^\circ \leq T_a \leq +60^\circ\text{C}$	—	± 1.5	± 3	% V_o
Efficiency	η	$V_o = 15\text{V}$ $V_o = 12\text{V}$ $V_o = 10\text{V}$ $V_o = 5.0\text{V}$ $V_o = 3.3\text{V}$	— — — — —	95 94 92 90 82	— — — — —	%
V_o Ripple (pk-pk)	V_r	20MHz bandwidth	—	2	—	% V_o
Transient Response	t_{tr}	1A/ μs load step, 50% to 100% $I_{o\max}$	—	100	200	μs
	ΔV_{tr}	V_o over/undershoot	—	± 5.0	—	% V_o
Current Limit	I_{lim}	$\Delta V_o = -1\%$	1.2	2.6	—	A
Switching Frequency	f_s	Over V_{in} range $V_o \geq 5.0\text{V}$ $V_o \leq 3.3\text{V}$	500 575	650 725	800 875	kHz
External Output Capacitance	C_{out}		100	—	—	μF
Operating Temperature Range	T_a	Over V_{in} range	-40 ⁽²⁾	—	$+85$ ⁽³⁾	$^\circ\text{C}$
Thermal Resistance	θ_{ja}	Free-air convection (40-60LFM) $V_o = 3.3\text{V}$ $V_o = 5.0\text{V}$ $V_o \geq 12\text{V}$	— — —	45 50 60	— — —	$^\circ\text{C}/\text{W}$
Storage Temperature	T_s	—	-40	—	$+125$	$^\circ\text{C}$
Reliability	MTBF	Per Bellcore TR-332 50% stress, $T_a = 40^\circ\text{C}$, ground benign	11.3	—	—	10^6 Hrs
Mechanical Shock	—	Per Mil-Std-883D, method 2002.3, 1mS, half-sine, mounted to a fixture	—	500	—	G's
Mechanical Vibration	—	Per Mil-Std-883D, Method 2007.2 20-2000Hz, soldered in PC board	—	5 ⁽⁴⁾	—	G's
Weight	—	Suffixes N, A, & C Suffixes L & M	— —	4.5 6.5	— —	grams
Flammability	—	Materials meet UL 94V-0	—	—	—	

Notes: (1) The ISR will operate at no load with reduced specifications.(2) For operation below 0°C , use a tantalum type capacitor for C_2 .


(3) See Thermal Derating curves.

(4) The tab pins on the 5-pin mount package types (suffixes L & M) must be soldered. For more information see the applicable package outline drawing.



1-A Positive Step-down
Integrated Switching Regulator

PT5103, 3.3 VDC (See Note A)


Efficiency vs Output Current



Ripple vs Output Current

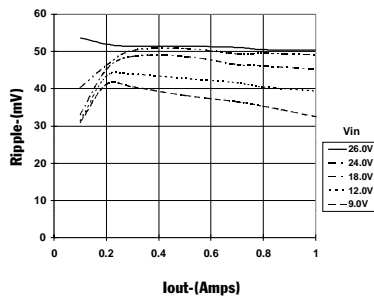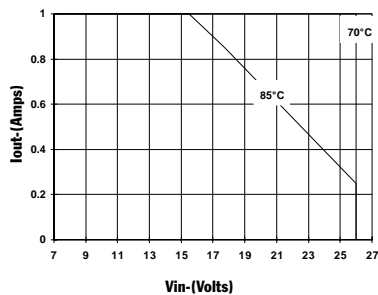
Thermal Derating (T_A) (See Note B)

Power Dissipation vs Output Current


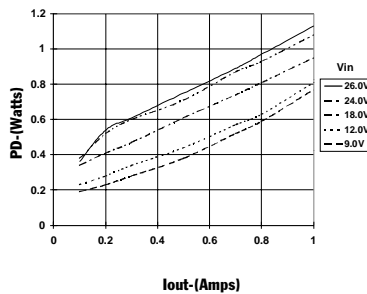


PT5101, 5.0 VDC (See Note A)


Efficiency vs Output Current

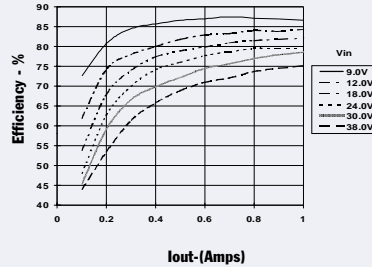

Ripple vs Output Current

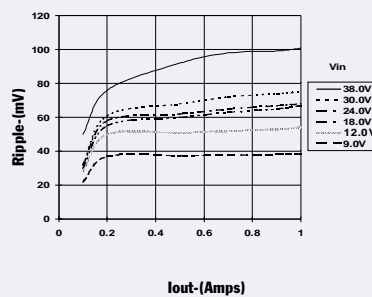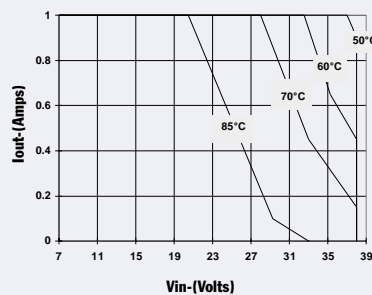
Thermal Derating (T_A) (See Note B)

Power Dissipation vs Output Current


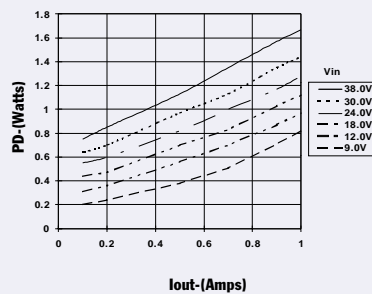


PT5102, 12.0 VDC (See Note A)


Efficiency vs Output Current

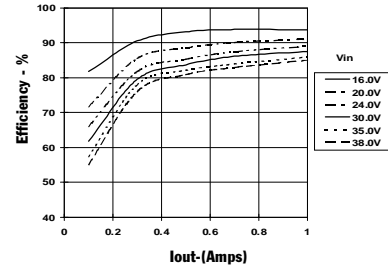

Ripple vs Output Current

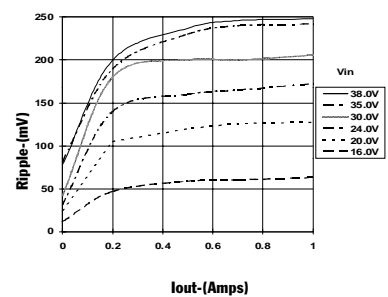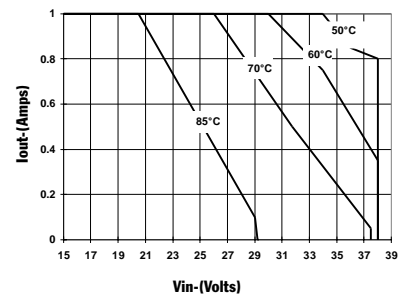Thermal Derating (T_A) (See Note B)

Power Dissipation vs Output Current

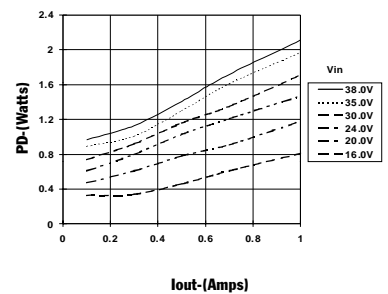

Note A: Characteristic data has been developed from actual products tested at 25°C. This data is considered typical data for the Converter.

Note B: Thermal derating graphs are developed in free-air convection cooling, which corresponds to approximately 40-60LFM of airflow.

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Mailing Address:

Texas Instruments
Post Office Box 655303
Dallas, Texas 75265