


To _____

No. A237-040403N-01

Date 3rd Apr. '04



Data Sheet

EGSM900 Rx SAW Filter	
Application	: Rx Filter for EGSM900
Center Frequency	: 942.5MHz
Size	: 2.0x1.4mm, 5pin-layout
Impedance	: 50-150ohms unbalance-balance
Part No.	: EFCH942MTCA7

Issued S. Suzuki
Check K. Nishimura

CIRCUIT COMPONENTS BUSINESS UNIT
MATSUSHITA ELECTRONIC COMPONENTS CO.,LTD
KADOMA, OSAKA, JAPAN

EGSM900 Rx SAW Filter

----- Unbalanced input and balanced output -----

Part No. :

Design No. : T942TGD

Parameter		Frequency	Your request			Our preliminary spec.			Unit
			Min.	Typ.	Max.	Min.	Typ.	Max.	
Passband			925 ... 960			925 ... 960			MHz
Insertion loss		925 ... 960MHz					1.8	2.5	dB
Ripple in passband		925 ... 960MHz					0.5	1.5	dB
Amplitude imbalance		925 ... 960MHz				-0.5	-0.2 +0.1	+0.5	dB
Phase imbalance		925 ... 960MHz				-5	-1 +1	+5	deg.
Attenuation	Att1	DC ... 880MHz				50	63		dB
	Att2	880 ... 905MHz				25	34		dB
	Att3	905 ... 915MHz				18	22		dB
	Att4	980 ... 1500MHz				23	28		dB
	Att5	1500 ... 3000MHz				40	60		dB
	Att6	3000 ... 6000MHz				35	60		dB
VSWR	Input	925 ... 960MHz					1.7	2.0	
	Output	925 ... 960MHz					1.6	2.0	
Input impedance (Single Ended)						50			Ohm
Output impedance (Differential)						150 // 82 nH			Ohm
Maximum drive level								13	dBm
Operating temperature						-10		+80	deg. C
Storage temperature						-40		+85	deg. C


EGSM900 Rx SAW Filter

----- Unbalanced input and balanced output -----


Part No. :

Design No. : T942TGD

Tr1 Sds21 Log Mag 10.00dB/ Ref 0.000dB [F4]
Tr2 Sds21 Log Mag 1.000dB/ Ref 0.000dB [F4]

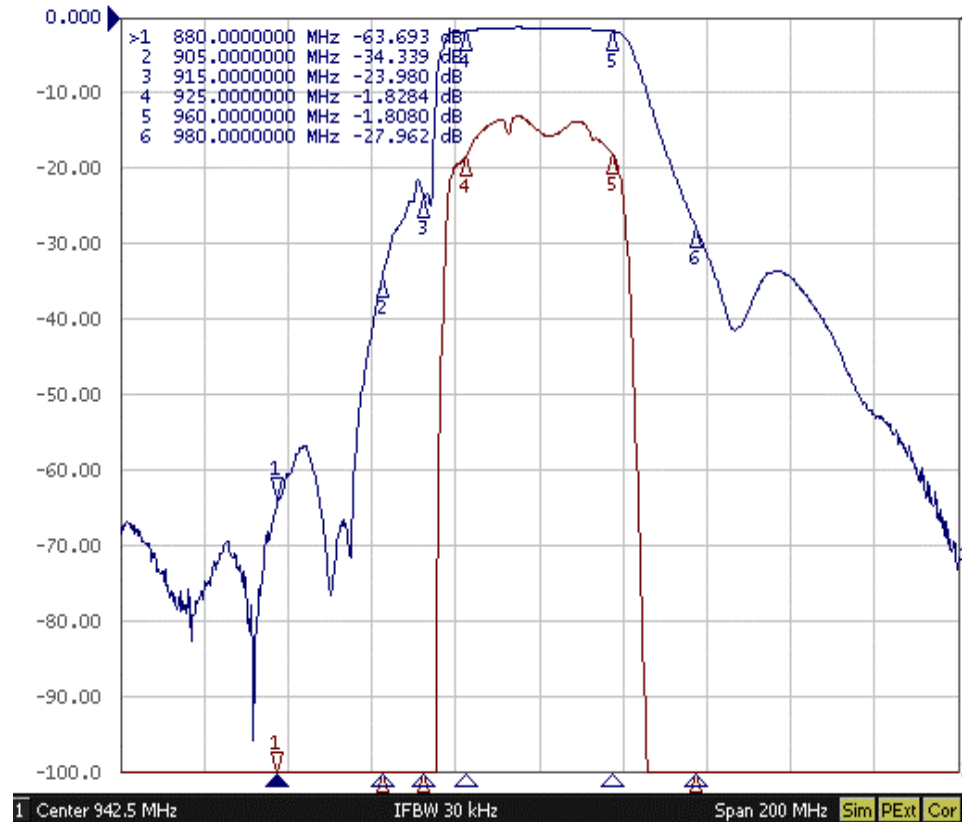

Tr1 Sds21 Log Mag 10.00dB/ Ref 0.000dB [F4]

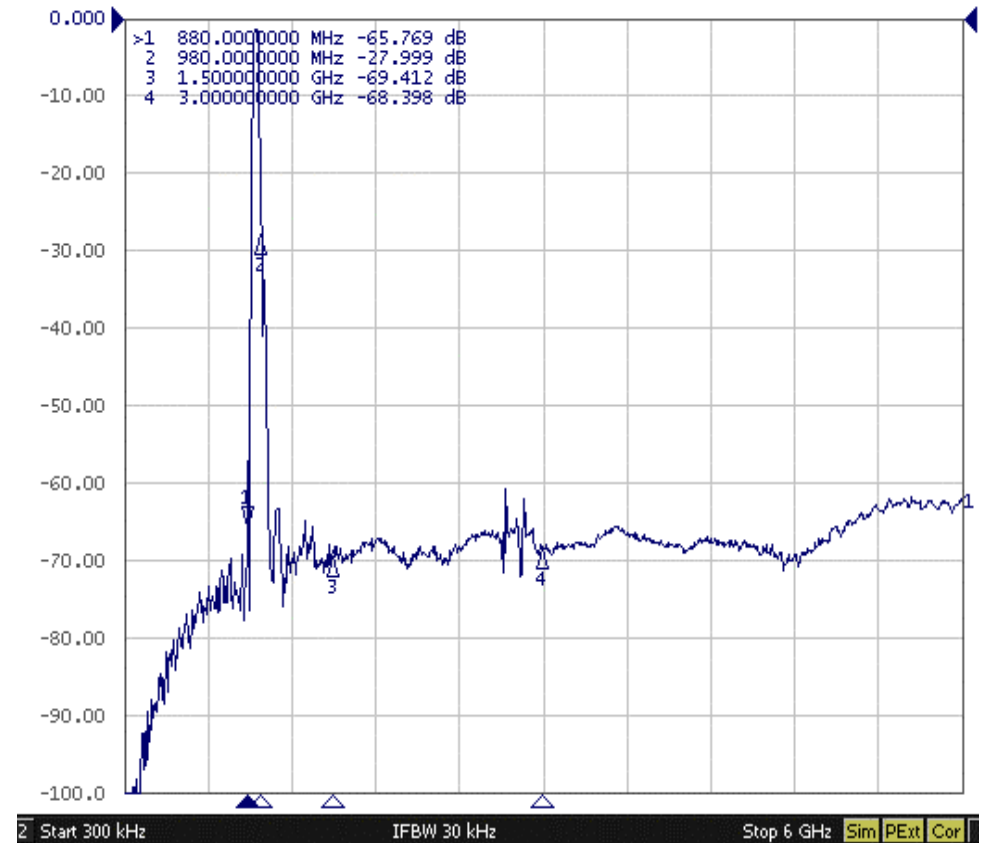


EGSM900 Rx SAW Filter

----- Unbalanced input and balanced output -----

Part No. :

Design No. : T942TGD

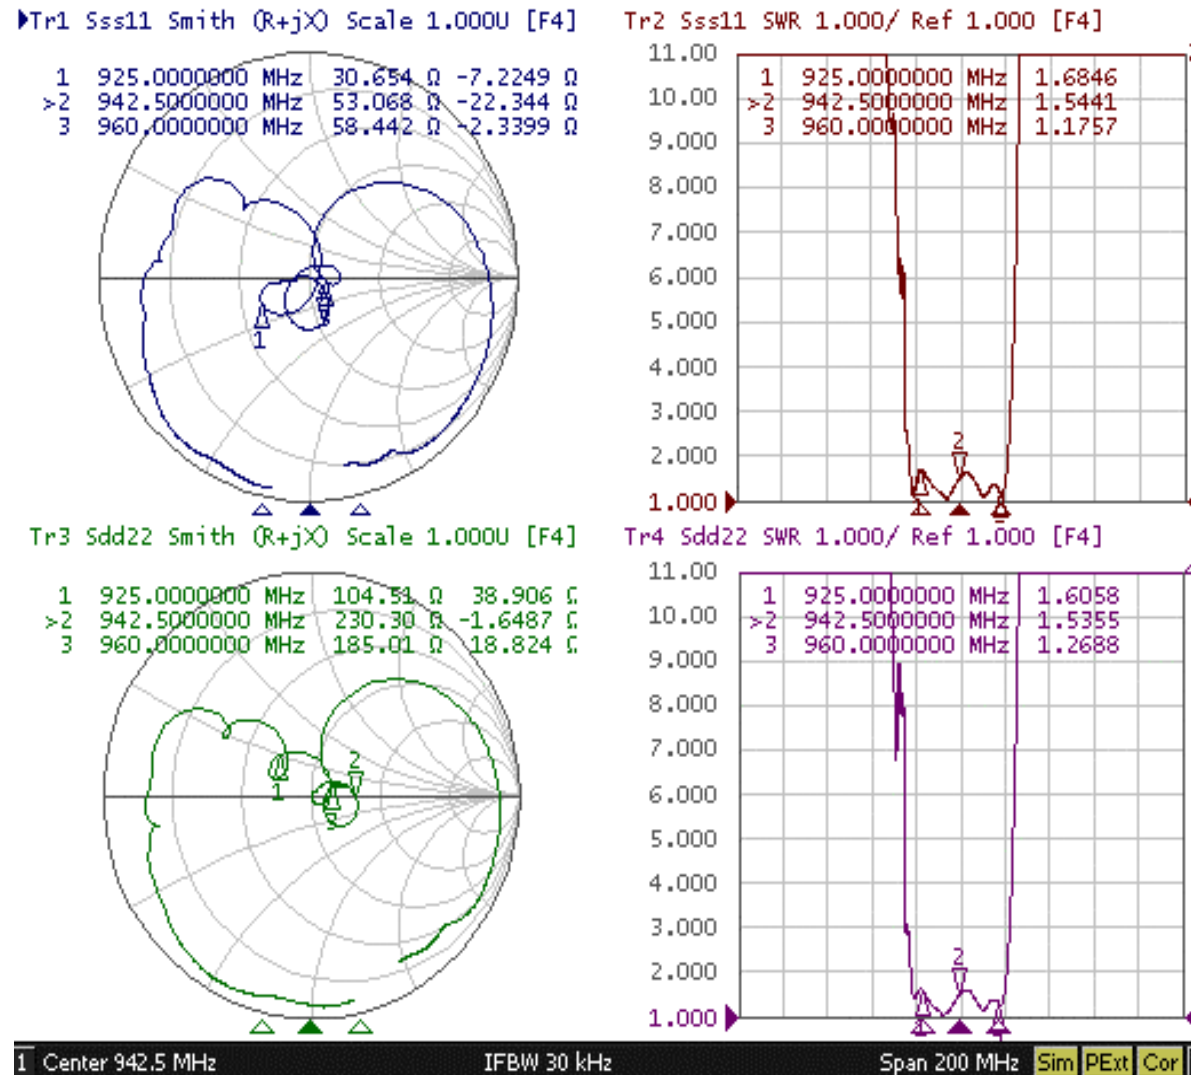


EGSM900 Rx SAW Filter

----- Unbalanced input and balanced output -----




Part No. :

Design No. : T942TGD

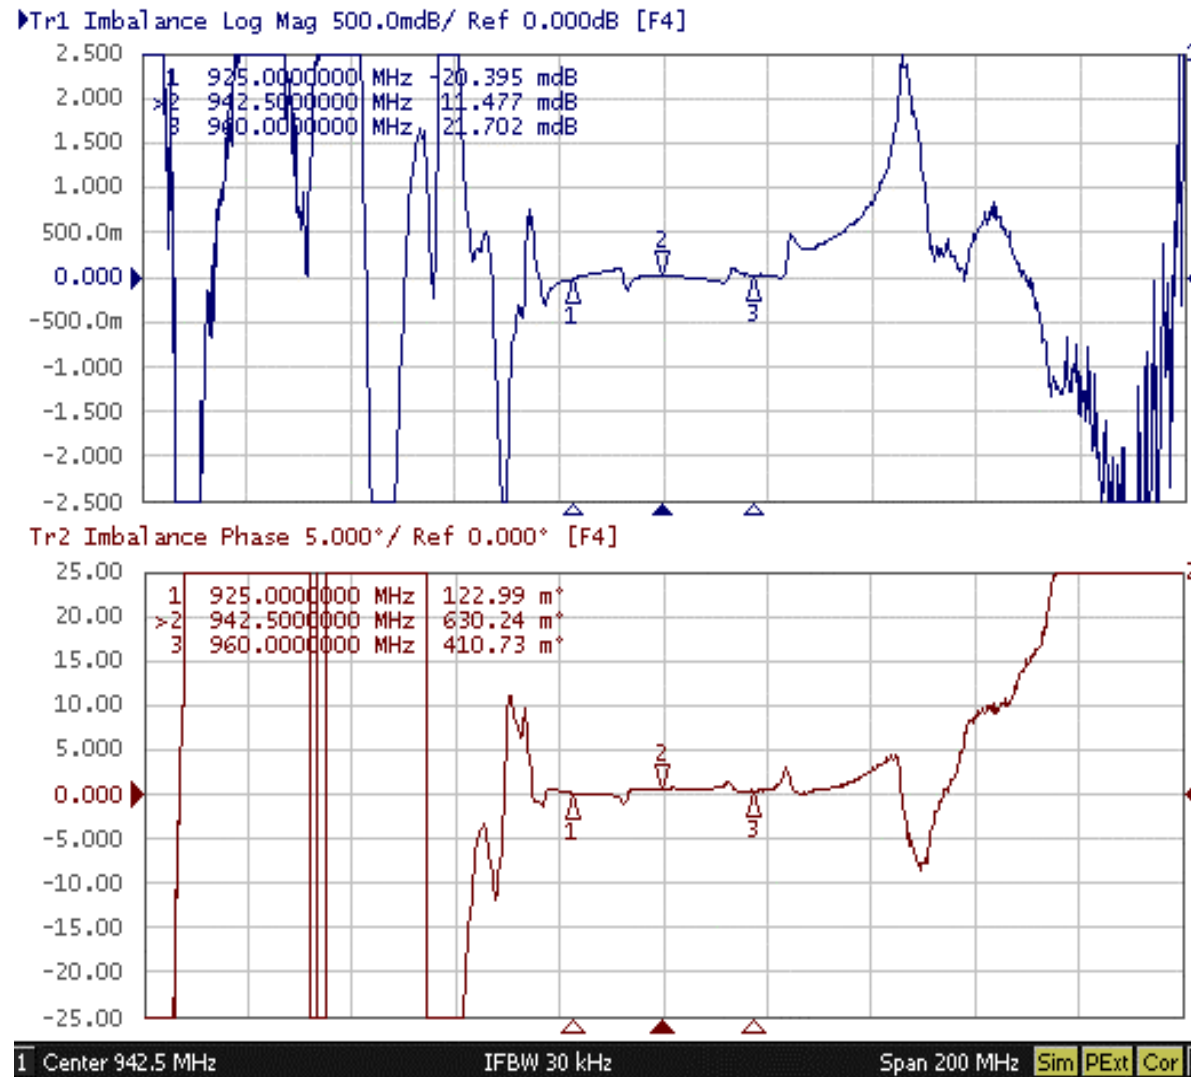

THIRD ANGLE PROJECTION

Tolerance : +/-0.05

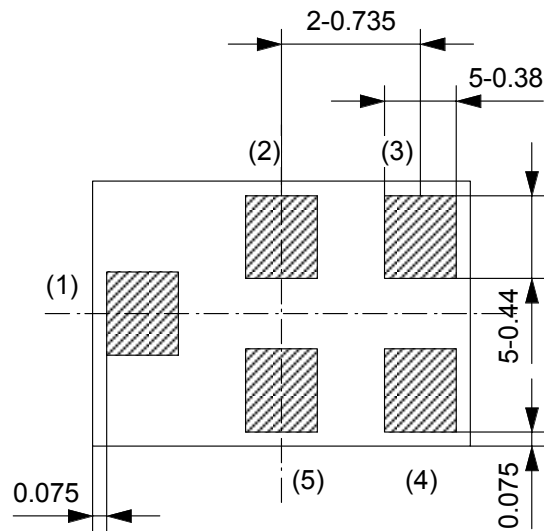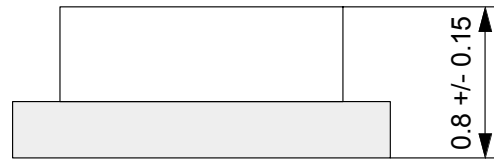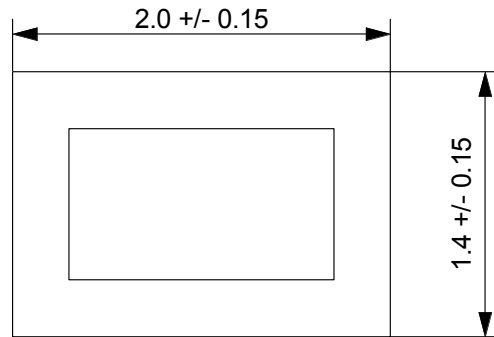

- (1) Input
- (2) GND
- (3) Output
- (4) Output
- (5) GND

Note :
The design manufacturing process,
and Specification of this device
are subject to change without
notice.

UNLESS OTHERWISE SPECIFIED

BASIC DIMENSIONS		TOLERANCE
UP TO	INCL	
TO	INCL	
TO	INCL	
TO	INCL	
ABOVE		

--	--	--

ISSUE	REVISIONS	DATE
MATERIAL	FINISH	SCALE
DESIGN		
DRAW		
CHECK		
APPROVAL		
DRAWING NO.		

NAME	TYPE NO.
------	----------

SAW Filter


CERAMIC BUSINESS UNIT, LCR DEVICE COMPANY
MATSUSHITA ELECTRONIC COMPONENTS CO.,LTD.
KADOMA, OSAKA, JAPAN

DO NOT SCALE DRAWING

REVISIONS INDICATED BY Δ

ALL DIMENSIONS ARE IN MILLIMETERS

Measurement Circuit

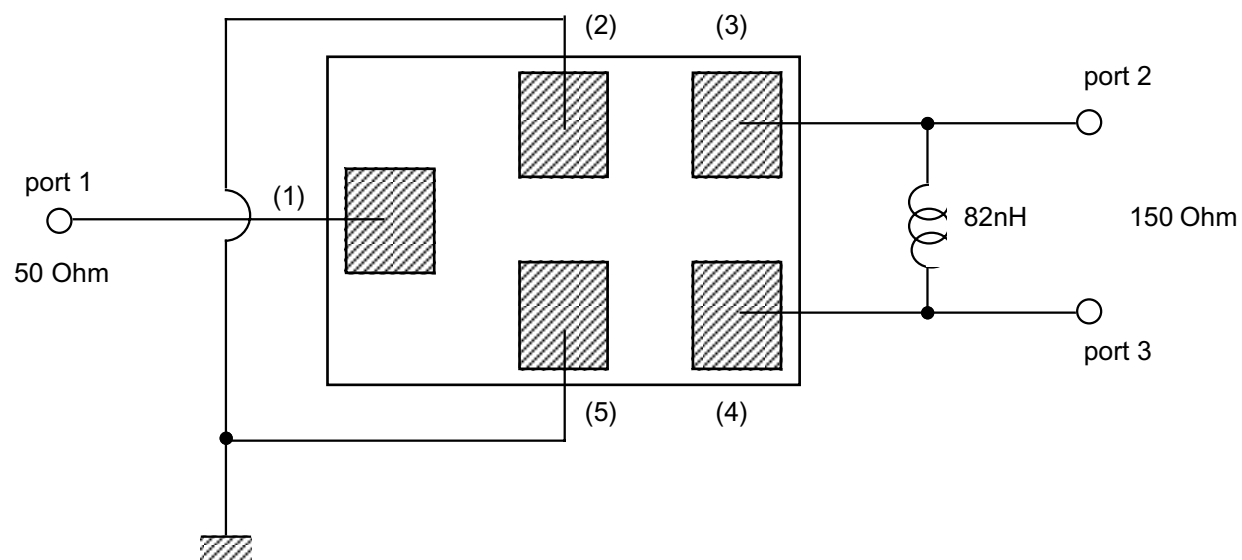

Input impedance : 50 Ohm (Single ended)
Output impedance : 150 Ohm (Differential)


Fig. 2

ISSUE	REVISIONS		DATE
MATERIAL	FINISH	SCALE	
DESIGN			
DRAW			
CHECK			
APPROVAL			
DRAWING NO.			
NAME		TYPE NO.	
SAW Filter			

CERAMIC BUSINESS UNIT, LCR DEVICE COMPANY
MATSUSHITA ELECTRONIC COMPONENTS CO.,LTD.
KADOMA, OSAKA, JAPAN

THIRD ANGLE PROJECTION

Recommended land pattern

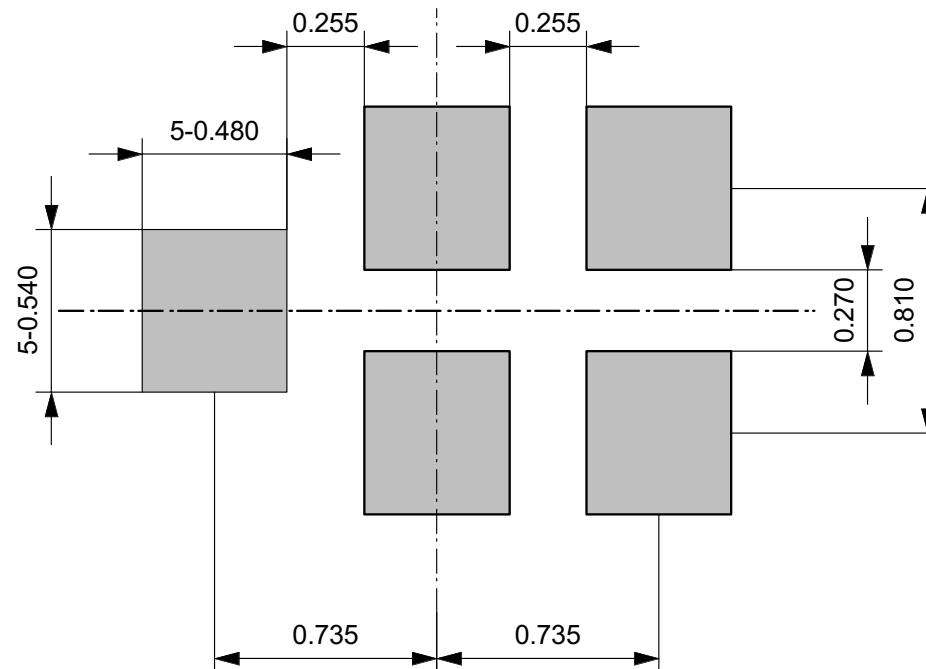

Note :
The design manufacturing process, and Specification of this device are subject to change without notice.

UNLESS OTHERWISE SPECIFIED

BASIC DIMENSIONS		TOLERANCE
UP TO	INCL	
TO	INCL	
TO	INCL	
TO	INCL	
ABOVE		

ISSUE	REVISIONS	DATE
MATERIAL	FINISH	SCALE
DESIGN		
DRAW		
CHECK		
APPROVAL		
DRAWING NO.		
NAME		TYPE NO.

SAW Filter

CERAMIC BUSINESS UNIT, LCR DEVICE COMPANY
MATSUSHITA ELECTRONIC COMPONENTS CO.,LTD.
KADOMA, OSAKA, JAPAN

DO NOT SCALE DRAWING

REVISIONS INDICATED BY Δ

ALL DIMENSIONS ARE IN MILLIMETERS