



Micro Commercial Components
20736 Marilla Street Chatsworth
CA 91311
Phone: (818) 701-4933
Fax: (818) 701-4939

GBU10A THRU GBU10M

Features

- Plastic Material has Underwriters Laboratory
- Glass Passivated Chip junction
- High Surge Overload Rating
- Reliable Low Cost Construction Utilizing Molded Plastic Technique

Maximum Ratings

- Operating Temperature: -55°C to +150°C
- Storage Temperature: -55°C to +150°C
- Typical Thermal Resistance: 2.2°C/W Junction to Case(Heatsink)

MCC Part Number	Maximum Recurrent Peak Reverse Voltage	Maximum RMS Voltage	Maximum DC Blocking Voltage
GBU10A	50V	35V	50V
GBU10B	100V	70V	100V
GBU10D	200V	140V	200V
GBU10G	400V	280V	400V
GBU10J	600V	420V	600V
GBU10K	800V	560V	800V
GBU10M	1000V	700V	1000V


Electrical Characteristics @ 25°C Unless Otherwise Specified

Maximum Average Forward Current (with heatsink Note 1)	$I_{F(AV)}$	10 A	$T_A = 100^\circ\text{C}$
Peak Forward Surge Current	I_{FSM}	200A	8.3ms, half sine
Maximum Instantaneous Forward Voltage	V_F	1.1V	At 5.0/7.5/12.5/17.5A DC
Maximum DC Reverse Current At Rated DC Blocking Voltage	I_R	5.0uA 500uA	$T_A = 25^\circ\text{C}$ $T_A = 125^\circ\text{C}$
Typical Junction Capacitance	C_J	70pF	Measured at 1.0MHz, $V_R=4.0V$
I^2t Rating for Fusing	I^2t	200A ² S	$t < 8.3\text{ms}$

Note: 1. Device mounted on 100mm x 100mm x 1.6mm Cu Plate Heatsink

10 Amp Single Phase Glass Passivated Bridge Rectifiers 50 to 1000 Volts


GBU



DIM	INCHES		MM		NOTE
	MIN	MAX	MIN	MAX	
A	.860	.880	21.80	22.30	
B	.720	.740	18.30	18.80	
C	.130	.140	3.30	3.56	
D	.690	.710	17.50	18.00	
E	.030	.039	0.76	1.00	
F	.018	.022	0.46	0.56	
G	.290	.310	7.40	7.90	
H	.140	.160	3.50	4.10	
I	.065	.085	1.65	2.16	
J	.089	.108	2.25	2.75	
K	.077	.093	1.95	2.35	
L	.040	.050	1.02	1.27	
M	.190	.210	4.83	5.33	
N	7.0° TYPICAL				


GBU10A thru GBU10M

Figure1
Maximum Forward Surge Current

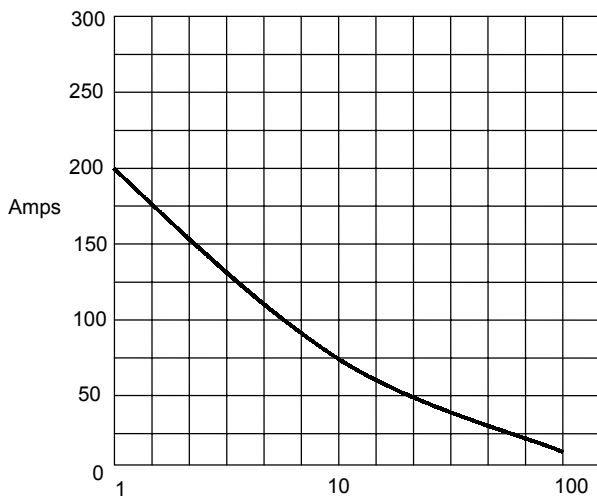


Peak Forward Surge Current - Amperes *versus*
Number of Cycles At 60 Hz

Figure2
Derating Curve Output Rectified Current

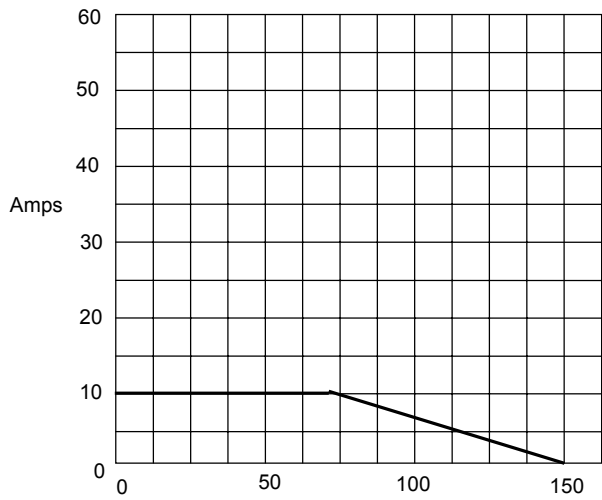


Peak Forward Surge Current - Amperes *versus*
Number of Cycles At 60 Hz

Figure 3
Typical Forward Characteristics

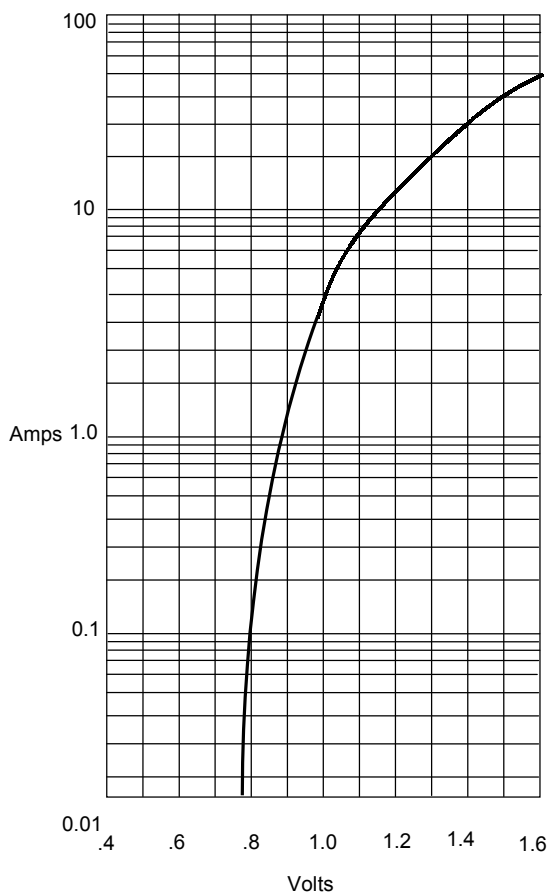

Instantaneous Forward Current -Amperes *versus*
Instantaneous Forward Voltage - Volts

Figure 4
Typical Reverse Characteristics

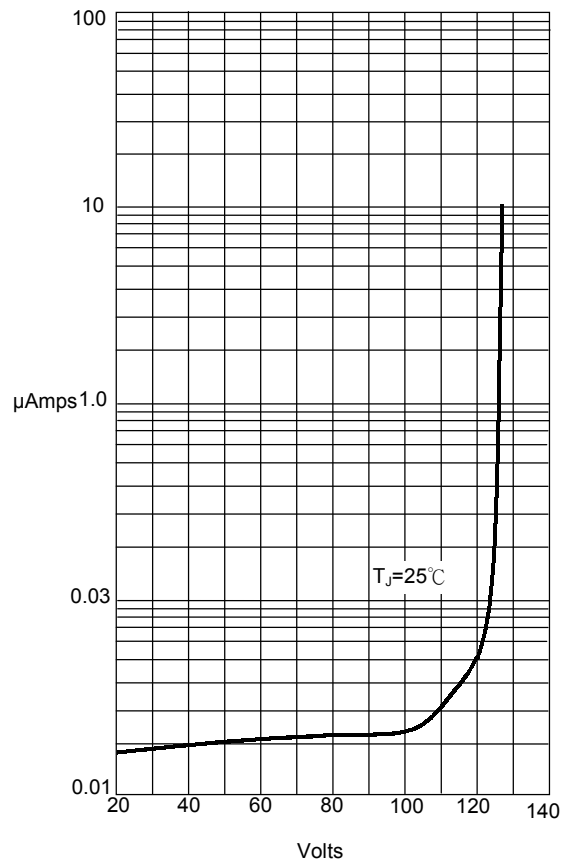

Instantaneous Reverse Current - MicroAmperes *versus*
Percent of Rated Peak Reverse Voltage - Volts