



Thermal Overcurrent Circuit Breaker 1410-L2/G1

Dimensions


1410-L210-L2F1-S02

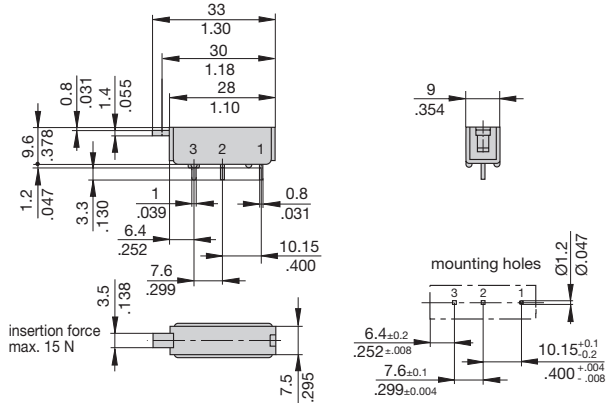


1410-G111-P2F1-S01

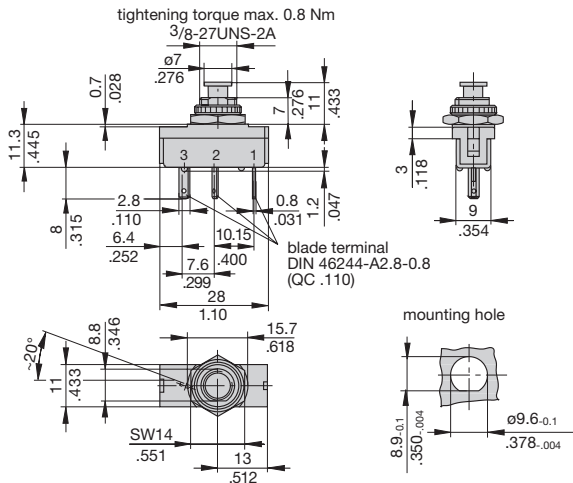


1410-G110-P2F1-S01

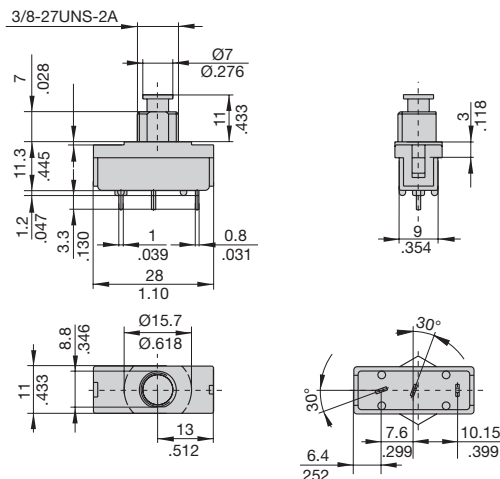

Internal connection diagram




Typical time/current characteristics at +23 °C/+73.4 °F

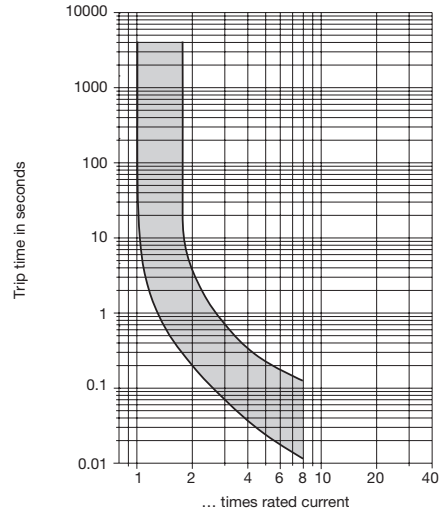


Installation drawings

1410-L2..




1410-G...

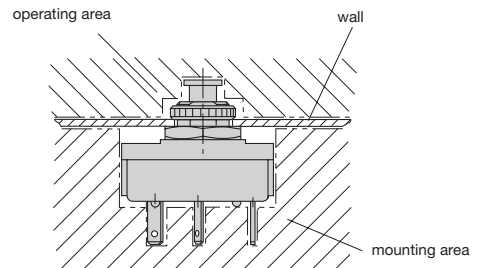


This is a metric design and millimeter dimensions take precedence ($\frac{\text{mm}}{\text{inch}}$)

Accessory

Knurled nut 3/8" plastic Y 307 117 02



Hex nut 3/8" nickel-plated brass Y 300 192 01



All dimensions without tolerances are for reference only. In the interest of improved design, performance and cost effectiveness the right to make changes in these specifications without notice is reserved. Product markings may not be exactly as the ordering codes. Errors and omissions excepted.