

2




2



Technical drawing of the Hammond 1551G component showing dimensions in inches and millimeters:

- Overall width: 50.00 [1.969]
- Overall height: 35.00 [1.378]
- Distance between mounting holes (top): 20.00 [.787]
- Distance between mounting holes (bottom): 20.00 [.787]
- Distance from left edge to mounting hole (bottom): 10.00 [.394]
- Distance from right edge to mounting hole (top): 10.00 [.394]
- Distance from right edge to mounting hole (bottom): 10.00 [.394]
- Distance from left edge to mounting hole (top): 10.00 [.394]
- Distance from mounting hole (top) to mounting hole (bottom): 15.00 [.591]
- Distance from mounting hole (top) to mounting hole (right): 15.00 [.591]
- Distance from mounting hole (bottom) to mounting hole (right): 15.00 [.591]
- Distance from mounting hole (right) to mounting hole (left): 15.00 [.591]
- Distance from mounting hole (right) to mounting hole (top): 15.00 [.591]
- Distance from mounting hole (right) to mounting hole (bottom): 15.00 [.591]
- Distance from mounting hole (left) to mounting hole (right): 15.00 [.591]
- Distance from mounting hole (left) to mounting hole (top): 15.00 [.591]
- Distance from mounting hole (left) to mounting hole (bottom): 15.00 [.591]

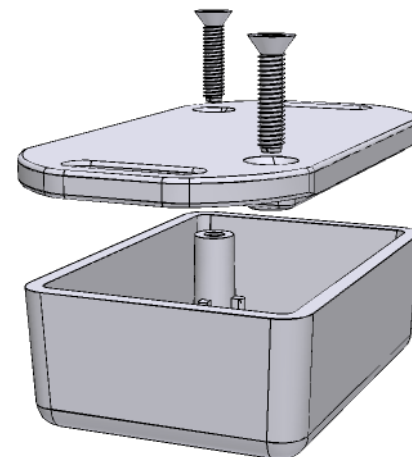

Purchased assembly includes lid and box made from GP ABS material and cover screws.

1551GFL		
1551GFL Enclosure		
Black Enclosure - RAL 9011 - UL94 - HB		1551GFLBK
Gray Enclosure - RAL 7035 - UL94 - HB		1551GFLGY
Translucent Blue - UL94 - HB		1551GFLTBU
ACCESSORIES		
Recommended Screw Torque: 15-20 ozf.in (10-15 cN.m)		
Black Enclosure Cover Screws (Pkg 100) X 1/2" Self Tapping]	[#4	1591TS100BK
Gray Enclosure Cover Screws (Pkg 100) X 1/2" Self Tapping]	[#4	1591TS100
P.C. Board Screws (Pkg 100) [#2 x 3/16" Self Tapping]		1551ATS100



HAMMOND
MANUFACTURING™
1551GFL
www.hammondmfg.com

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Hammond:](#)

[1551GFLGY](#) [1551GFLBK](#)