

MAXIM**±15V Digitally Programmable Precision Voltage-Dividers for PGAs****General Description**

The MAX5430/MAX5431 are digitally programmable high-precision resistor arrays for PGAs. The MAX5430/MAX5431 operate from a single 15V supply or dual $\pm 15V$ supplies, and consume only $35\mu A$ supply current. These devices are intended for programmable-gain amplifier (PGA) applications and consist of fixed resistor-dividers. Each device has digitally controlled contacts with four precision noninverting gains of 1, 2, 4, and 8 with ratio accuracy of 0.025% (MAX5430A/MAX5431A), 0.09% (MAX5430B/MAX5431B), or 0.5% (MAX5430C/MAX5431C). The MAX5431 includes an on-chip matching resistor for op amp input bias-current compensation.

The MAX5430/MAX5431 are available in space-saving 8-pin SOT23 and 10-pin μ MAX packages, and specified over the extended temperature range of ($-40^{\circ}C$ to $+85^{\circ}C$).

Features

- ◆ Four Noninverting PGA Gain Configurations:
 $A_V = 1, 2, 4, \text{ and } 8$
- ◆ Precision 0.025% Ratio Accuracy
- ◆ On-Chip Matching Resistor for Op Amp Bias-Current Compensation (MAX5431)
- ◆ Single-Supply 12V to 15V, or Dual-Supply $\pm 12V$ to $\pm 15V$ Operation
- ◆ Low $35\mu A$ Supply Current
- ◆ CMOS/TTL Logic Compatible 2-Wire Parallel Interface
- ◆ Space-Saving 8-Pin SOT23 and 10-Pin μ MAX Packages
- ◆ 3V Logic Compatibility



MAX5430/MAX5431**Applications**

General-Purpose Programmable Noninverting Amplifier

Programmable Instrumentation Amplifier

Ordering Information

PART	TEMP RANGE	PIN-PACKAGE	GAIN ACCURACY
MAX5430AEKA	$-40^{\circ}C$ to $+85^{\circ}C$	8 SOT23	0.025%
MAX5430BEKA	$-40^{\circ}C$ to $+85^{\circ}C$	8 SOT23	0.09%
MAX5430CEKA	$-40^{\circ}C$ to $+85^{\circ}C$	8 SOT23	0.5%
MAX5431AEUB	$-40^{\circ}C$ to $+85^{\circ}C$	10 μ MAX	0.025%
MAX5431BEUB	$-40^{\circ}C$ to $+85^{\circ}C$	10 μ MAX	0.09%
MAX5431CEUB	$-40^{\circ}C$ to $+85^{\circ}C$	10 μ MAX	0.5%

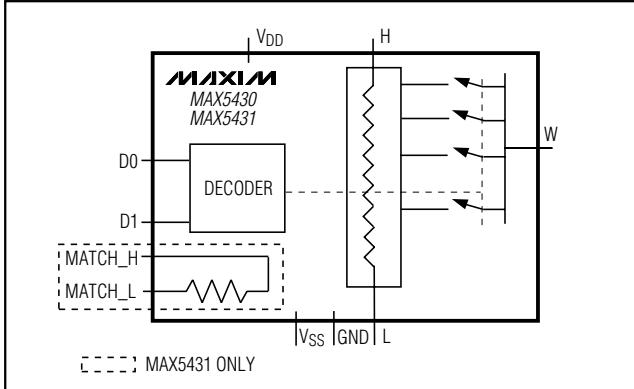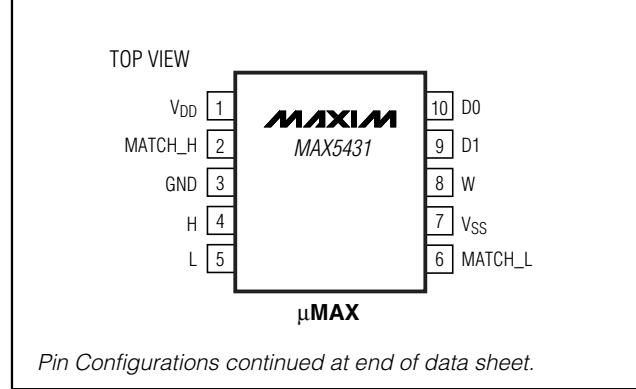Functional Diagram**Pin Configurations**

Pin Configurations continued at end of data sheet.

MAXIM

Maxim Integrated Products 1

For pricing, delivery, and ordering information, please contact Maxim/Dallas Direct! at 1-888-629-4642, or visit Maxim's website at www.maxim-ic.com.

±15V Digitally Programmable Precision Voltage-Dividers for PGAs

ABSOLUTE MAXIMUM RATINGS

V _{DD} to GND	-0.3V to +17V
V _{SS} to GND	-17V to +0.3V
D ₀ , D ₁ to GND	-0.3V to +6V
H, L, W, MATCH _H to GND	(V _{SS} - 0.3V) to (V _{DD} + 0.3V)
Current Into Any Signal Pin.....	±50mA
Continuous Power Dissipation (T _A = +70°C)	
8-Pin SOT23 (derate 8.9mW/°C above +70°C).....	714mW
10-Pin µMAX (derate 10.3mW/°C above +70°C).....	825mW

Operating Temperature Range	-40°C to +85°C
Storage Temperature Range	-60°C to +150°C
Junction Temperature	+150°C
Lead Temperature (soldering, 10s)	+300°C

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

ELECTRICAL CHARACTERISTICS

(V_{DD} = +15V, V_{SS} = -15V, GND = 0, T_A = T_{MIN} to T_{MAX}. Typical values are at T_A = +25°C, unless otherwise noted.) (Note 1)

PARAMETER	SYMBOL	CONDITIONS		MIN	TYP	MAX	UNITS	
DC PERFORMANCE								
Divider Ratio Accuracy (Note 2)		V _H = +5V, V _L = -5V	MAX543_A			0.025	%	
			MAX543_B			0.09		
			MAX543_C			0.5		
Resistance between H and L (Figure 1)	R _{HL}			57		kΩ		
Capacitance at Analog Pins	C _{ANALOG}			2		pF		
Matching Resistor		MAX5431 only	Ratio = 1	0.5		kΩ		
			Ratio = 2, 4, 8	14				
W, H, L, MATCH _H , MATCH _L Voltage Range	V _{ANALOG}			V _{SS}	V _{DD}		V	
DIGITAL INPUTS								
Input High Voltage	V _{IH}			2.4		V		
Input Low Voltage	V _{IL}			0.8		V		
Input Leakage Current		D ₀ , D ₁ = 5V or GND			±1		µA	
Input Capacitance	C _{IN}			5		pF		
POWER REQUIREMENTS								
Negative Supply Current	I _{SS}			1	25	µA		
Positive Supply Current	I _{DD}			35	60	µA		
Positive Power-Supply Voltage	V _{DD}			10.8	15.75		V	
Negative Power-Supply Voltage	V _{SS}			-15.75	0		V	
DYNAMIC PERFORMANCE								
Switching Time	t _{D2W} , t _{H2W}			0.3		µs		

Note 1: All devices are 100% production tested at T_A = +25°C. SOT23 packages are guaranteed by design from T_A = T_{MIN} to T_{MAX}.

Note 2: Gain accuracy is measured without load at pin W.


±15V Digitally Programmable Precision Voltage-Dividers for PGAs

Typical Operating Characteristics


($V_{DD} = +15V$, $V_{SS} = -15V$ or $V_{SS} = GND$, $V_H = 5V$, $V_L = -5V$, $T_A = 25^\circ C$, unless otherwise noted.) (Note 3)

MAX5430/MAX5431


MAX543_A DIVIDER RATIO ACCURACY vs. TEMPERATURE (RATIO = 1)

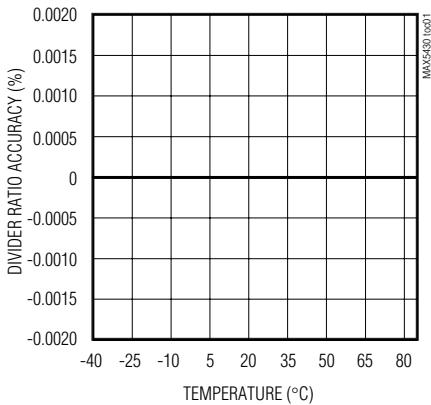


MAX543_A DIVIDER RATIO ACCURACY vs. TEMPERATURE (RATIO = 2)

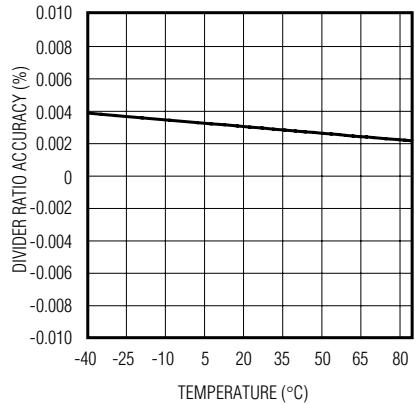


MAX543_A DIVIDER RATIO ACCURACY vs. TEMPERATURE (RATIO = 4)

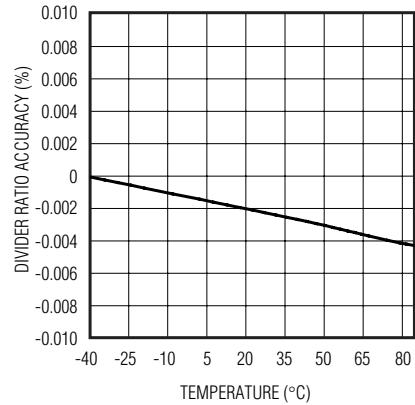


MAX543_A DIVIDER RATIO ACCURACY vs. TEMPERATURE (RATIO = 8)

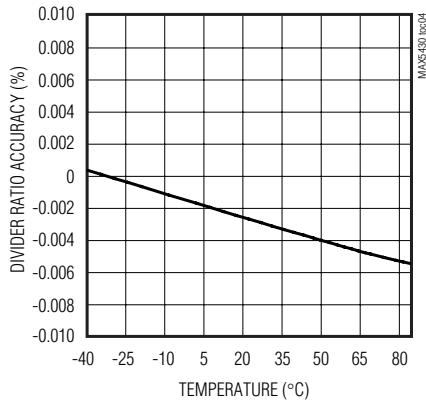


MAX543_B DIVIDER RATIO ACCURACY vs. TEMPERATURE (RATIO = 1)

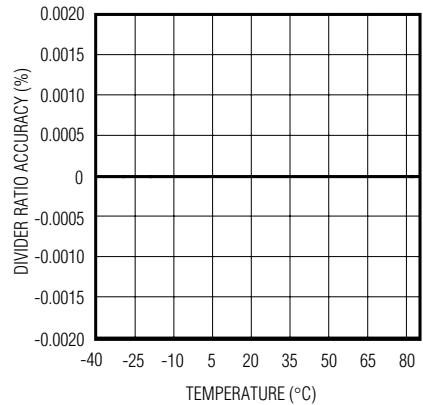


MAX543_B DIVIDER RATIO ACCURACY vs. TEMPERATURE (RATIO = 2)

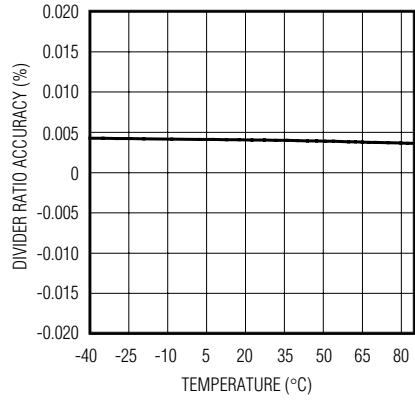


MAX543_B DIVIDER RATIO ACCURACY vs. TEMPERATURE (RATIO = 4)

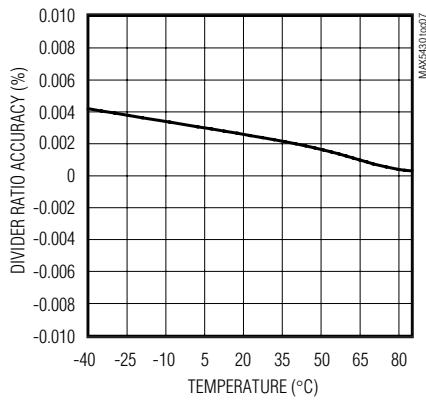

MAX543_B DIVIDER RATIO ACCURACY vs. TEMPERATURE (RATIO = 8)

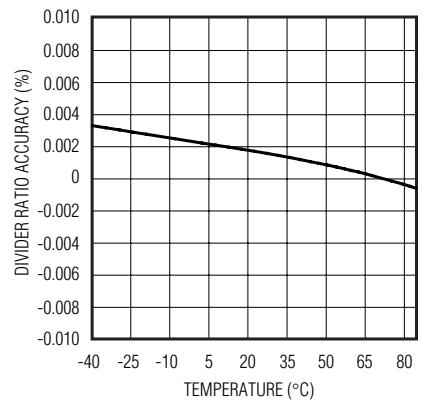

MAX543_A DIVIDER RATIO ACCURACY vs. POSITIVE SUPPLY ($V_{SS} = -15V$)

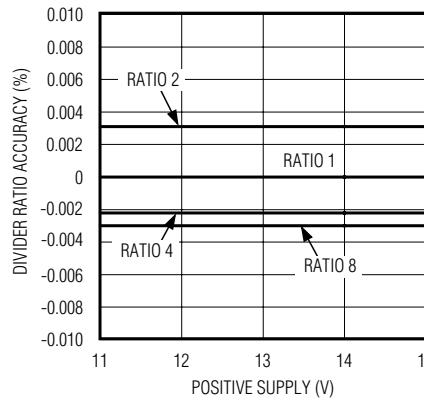


$\pm 15V$ Digitally Programmable Precision Voltage-Dividers for PGAs


Typical Operating Characteristics (continued)

($V_{DD} = +15V$, $V_{SS} = -15V$ or $V_{SS} = GND$, $V_H = 5V$, $V_L = -5V$, $T_A = 25^\circ C$, unless otherwise noted.) (Note 3)


MAX543_B DIVIDER RATIO ACCURACY vs. POSITIVE SUPPLY ($V_{SS} = -15V$)

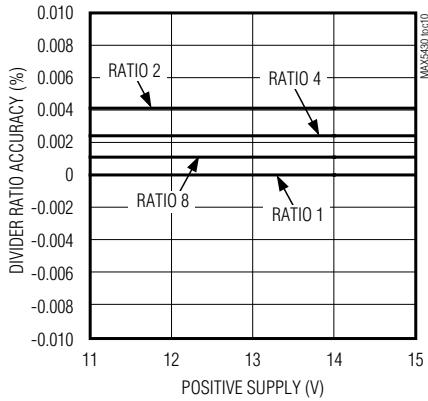


MAX543_A DIVIDER RATIO ACCURACY vs. POSITIVE SUPPLY ($V_{SS} = 0V$)

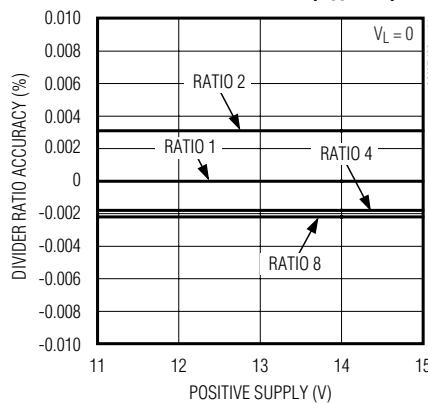


MAX543_B DIVIDER RATIO ACCURACY vs. POSITIVE SUPPLY ($V_{SS} = 0V$)

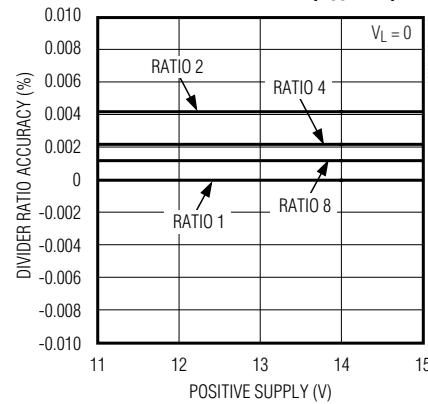


MAX543_A DIVIDER RATIO ACCURACY vs. NEGATIVE SUPPLY

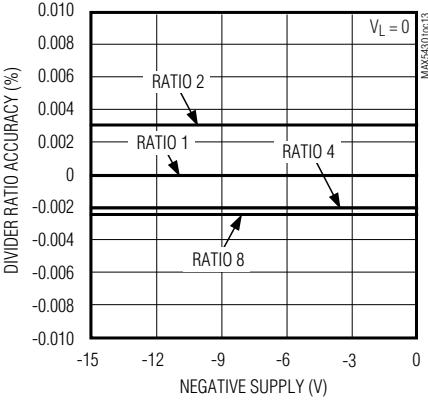

MAX543_B DIVIDER RATIO ACCURACY vs. NEGATIVE SUPPLY

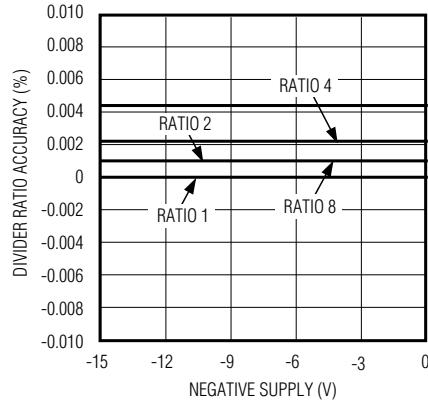

SUPPLY CURRENT vs. TEMPERATURE

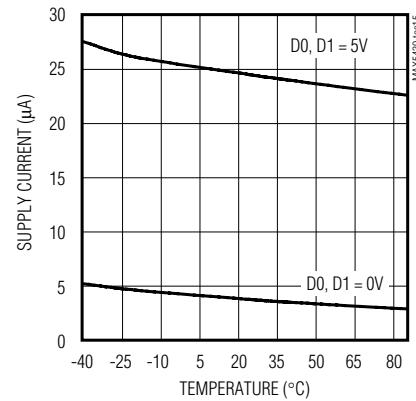

Note 3: For MAX543_C accuracy *Typical Operating Characteristics*, refer to MAX543_B accuracy *Typical Operating Characteristics*.

$\pm 15V$ Digitally Programmable Precision Voltage-Dividers for PGAs

Pin Description

PIN		NAME	FUNCTION
MAX5431	MAX5430		
1	8	V _{DD}	Positive Power Supply
2	—	MATCH_H	Matching Resistor High Terminal
3	7	GND	Ground
4	6	H	High Terminal of Resistive-Divider
5	5	L	Low Terminal of Resistive-Divider
6	—	MATCH_L	Matching Resistor Low Terminal
7	4	V _{SS}	Negative Power Supply
8	3	W	Wiper Terminal of Resistive-Divider
9	2	D1	Second Bit Digital Input (MSB) (Table 1)
10	1	D0	First Bit Digital Input (LSB) (Table 1)

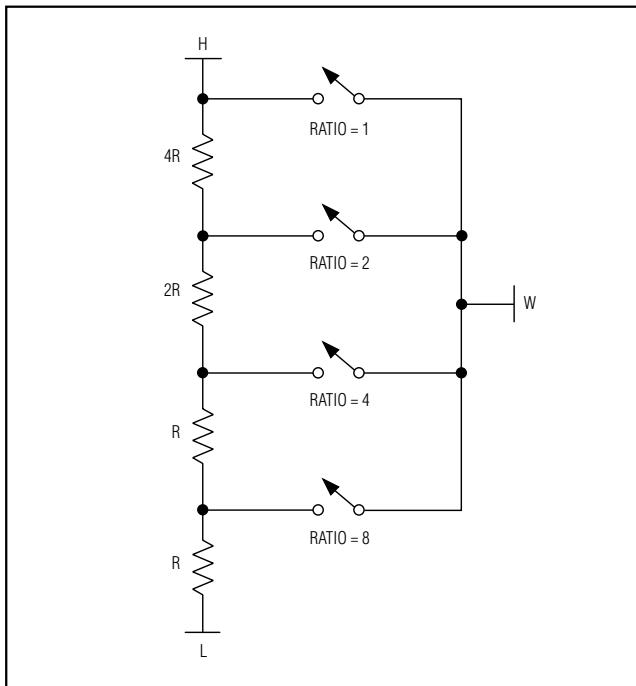


Figure 1. Simplified Functional Diagram

Detailed Description

The MAX5430/MAX5431 are digitally programmable precision resistor arrays. These devices have fixed resistor-dividers with digitally controlled contacts, providing four precision noninverting gains of 1, 2, 4, and 8 for PGA applications (see *Functional Diagram* and Figure 1). The MAX5430/MAX5431 achieve ratio accuracies of 0.025%

(MAX5430A/MAX5431A), 0.09% (MAX5430B/MAX5431B), or 0.5% (MAX5430C/MAX5431C).

The end-to-end resistance from H to L is $57\text{k}\Omega$. The impedance seen at W is designed to be the same $14\text{k}\Omega$ for gain settings 2, 4, and 8, ensuring excellent op amp input-resistance balance, regardless of gain setting (MAX5431 only). In a gain of 1 configuration, H is internally connected to W with a typical resistance of 500Ω .

Matching Resistor (MAX5431)

The MAX5431 includes a matching resistor to compensate the offset voltage due to the input bias current of the op amp. The resistance from MATCH_H to MATCH_L is a fixed matching resistor, equal to the resistance seen at W for gains of 2, 4, and 8. In the gain of 1, an internal switch short circuits MATCH_H and MATCH_L. This internal switch matches the impedance of the switch between H and W.

Table 1. Logic-Control Truth Table

DIGITAL INPUTS		GAIN
D1	D0	
0	0	1
0	1	2
1	0	4
1	1	8

MAX5430/MAX5431

±15V Digitally Programmable Precision Voltage-Dividers for PGAs

Digital Interface Operation

The MAX5430/MAX5431 feature a simple two-bit parallel programming interface. D1 and D0 program the gain setting according to the *Logic-Control Truth Table* (see Table 1). The digital interface is CMOS/TTL logic compatible.

Applications Information

Programmable-Gain Amplifier

The MAX5430/MAX5431 are ideally suited for high-precision PGA applications. The typical application circuit of Figure 2 uses the MAX5431 with matching resistor to compensate for voltage offset due to op amp input bias currents. Use the MAX5430 with an ultra-low input bias current op amp (see Figure 3).

Power Supplies and Bypassing

The MAX5430/MAX5431 operate from dual $\pm 15\text{V}$ supplies or a single 15V supply. For dual supplies, bypass V_{DD} and V_{SS} with $0.1\mu\text{F}$ ceramic capacitors to GND. For single supply, connect V_{SS} to GND and bypass V_{DD} with a $0.1\mu\text{F}$ ceramic capacitor to GND.

Switching Time and Layout Concerns

The switching time of the MAX5430/MAX5431 depends on the capacitive loading at W. For best performance, reduce parasitic board capacitance by minimizing the circuit board trace from W to the op amp inverting input, and choose an op amp with low input capacitance.

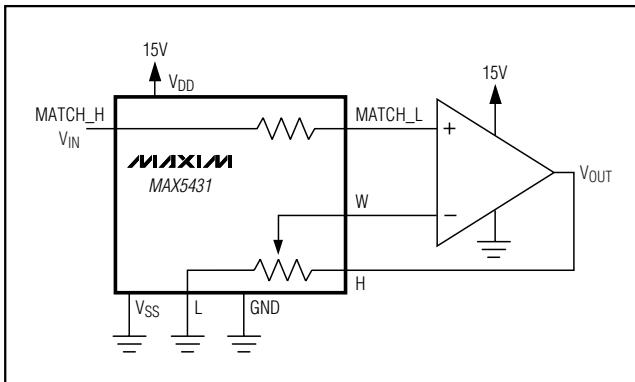


Figure 2. MAX5431 Typical Application Circuit


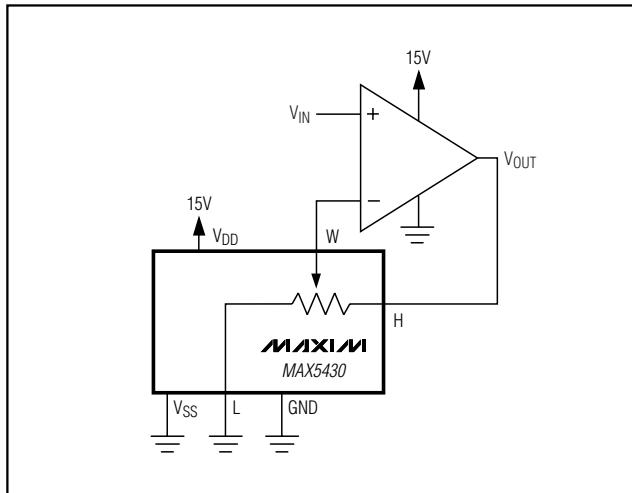


Figure 3. Programmable-Gain Amplifier Using the MAX5430

Pin Configurations (continued)

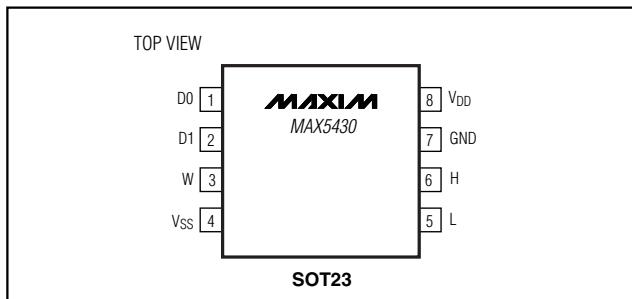

Chip Information



TRANSISTOR COUNT: 121

PROCESS: CMOS

$\pm 15V$ Digitally Programmable Precision Voltage-Dividers for PGAs

Package Information

MAX5430/MAX5431

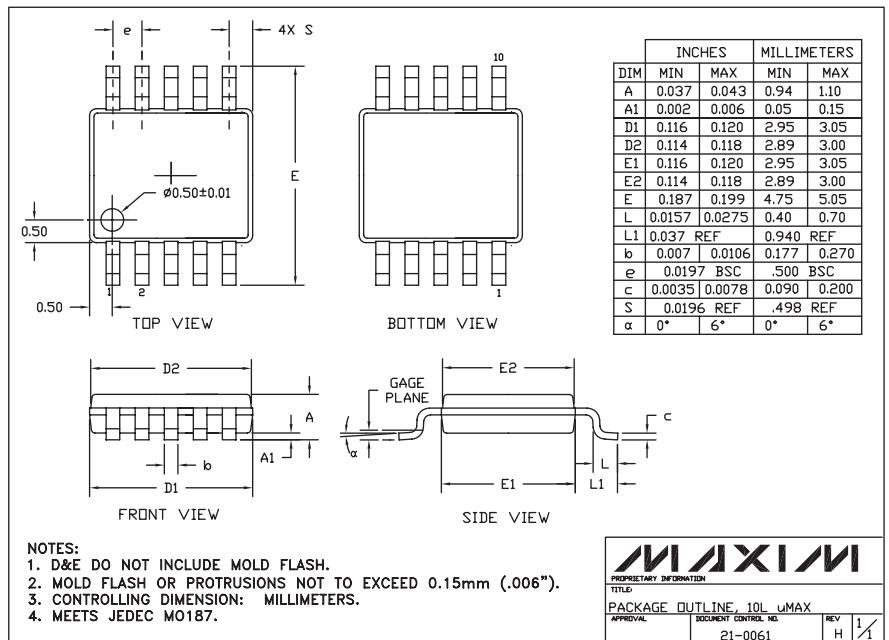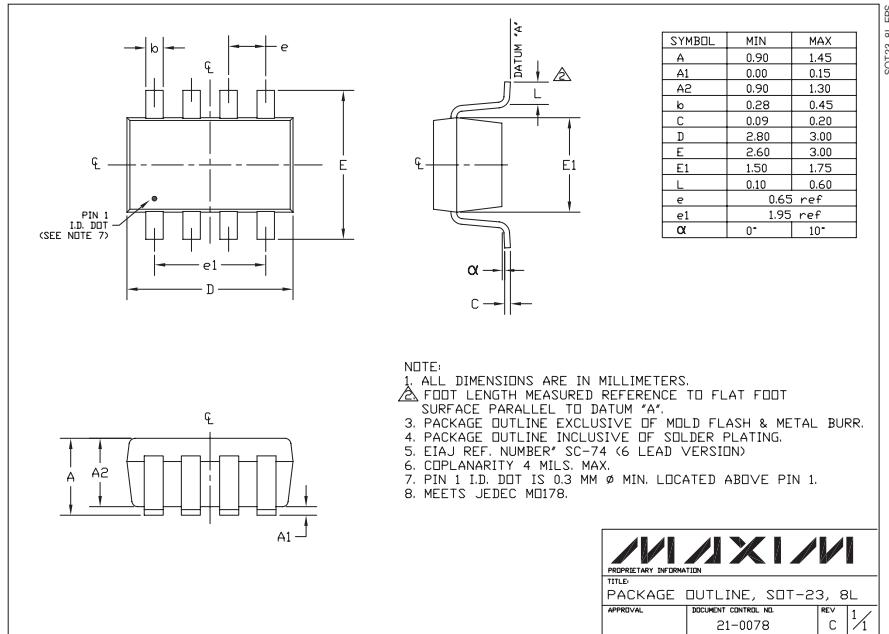

Maxim cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim product. No circuit patent licenses are implied. Maxim reserves the right to change the circuitry and specifications without notice at any time.

Maxim Integrated Products, 120 San Gabriel Drive, Sunnyvale, CA 94086 408-737-7600

7