

## VERY LOW DROP VOLTAGE REGULATORS WITH INHIBIT


- VERY LOW DROPOUT VOLTAGE (0.45V)
- VERY LOW QUIESCENT CURRENT (TYP. 50  $\mu$ A IN OFF MODE, 500  $\mu$ A IN ON MODE)
- OUTPUT CURRENT UP TO 500 mA
- LOGIC-CONTROLLED ELECTRONIC SHUTDOWN
- OUTPUT VOLTAGES OF 1.25; 1.5; 1.8; 2.5; 2.7; 3; 3.3; 3.5; 4; 4.5; 4.7; 5; 5.2; 5.5; 6; 8; 8.5; 9; 12V
- INTERNAL CURRENT AND THERMAL LIMIT
- ONLY 2.2  $\mu$ F FOR STABILITY
- AVAILABLE IN  $\pm 1\%$  (AB) OR  $\pm 2\%$  (C) SELECTION AT 25 °C
- SUPPLY VOLTAGE REJECTION: 80db (TYP.)
- TEMPERATURE RANGE: -40 TO 125 °C

### DESCRIPTION

The LF00 series are very Low Drop regulators available in PENTAWATT, TO-220, TO-220FP, DPAK and PPAK package and in a wide range of output voltages.


The very Low Drop voltage (0.45V) and the very low quiescent current make them particularly suitable for Low Noise, Low Power applications and specially in battery powered systems.

In the 5 pins configuration (PENTAWATT and PPAK) a Shutdown Logic Control function is available (pin 2, TTL compatible). This means that

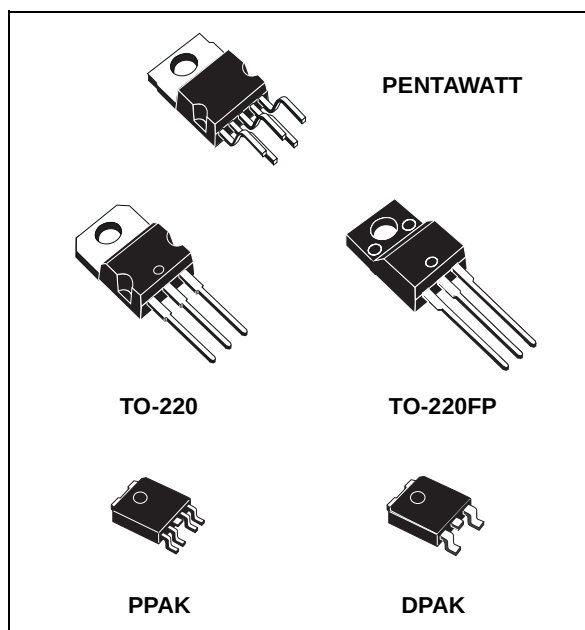

when the device is used as a local regulator, it is possible to put a part of the board in standby, decreasing the total power consumption. In the three terminal configuration the device has the same electrical performance, but is fixed in the ON state. It requires only a 2.2  $\mu$ F capacitor for stability allowing space and cost saving.

### SCHEMATIC DIAGRAM

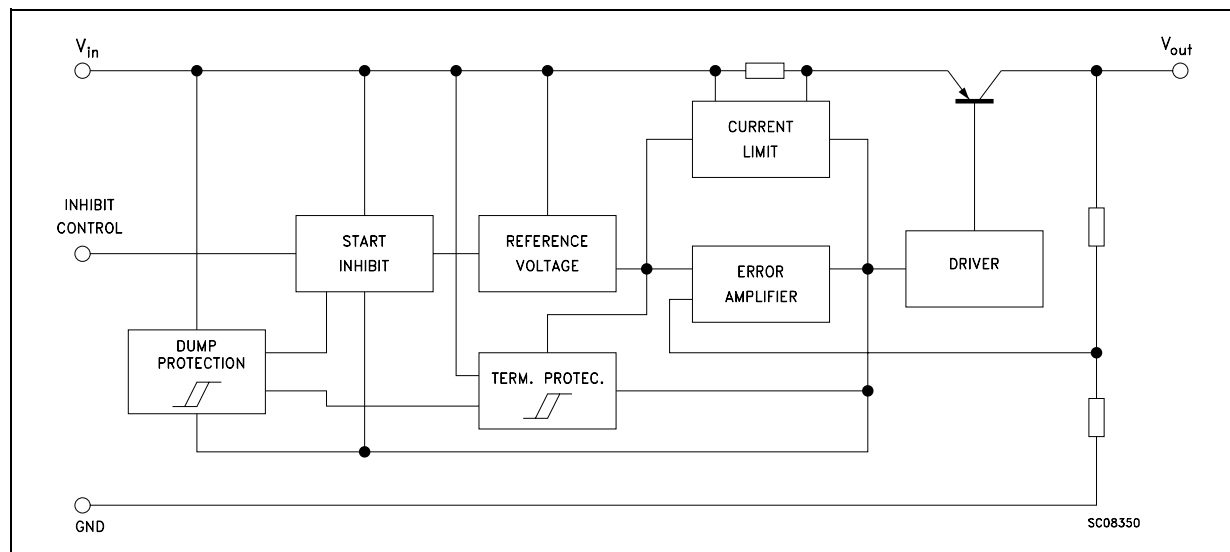

LF00 SERIES

ABSOLUTE MAXIMUM RATINGS


| Symbol    | Parameter                            | Value              | Unit |
|-----------|--------------------------------------|--------------------|------|
| $V_I$     | DC Input Voltage                     | -0.5 to 40 (*)     | V    |
| $I_O$     | Output Current                       | Internally Limited |      |
| $P_{tot}$ | Power Dissipation                    | Internally Limited |      |
| $T_{stg}$ | Storage Temperature Range            | -40 to 150         | °C   |
| $T_{op}$  | Operating Junction Temperature Range | -40 to 125         | °C   |

(\*) For  $18 < V_{IN} < 40$  the regulator is in shut-down

THERMAL DATA

| Symbol         | Parameter                           | PENTAWATT | TO-220 | TO-220FP | DDPAK/PPAK | Unit |
|----------------|-------------------------------------|-----------|--------|----------|------------|------|
| $R_{thj-case}$ | Thermal Resistance Junction-case    | 3         | 3      | 5        | 8          | °C/W |
| $R_{thj-amb}$  | Thermal Resistance Junction-ambient | 50        | 50     | 60       | 100        | °C/W |

CONNECTION DIAGRAM (top view)

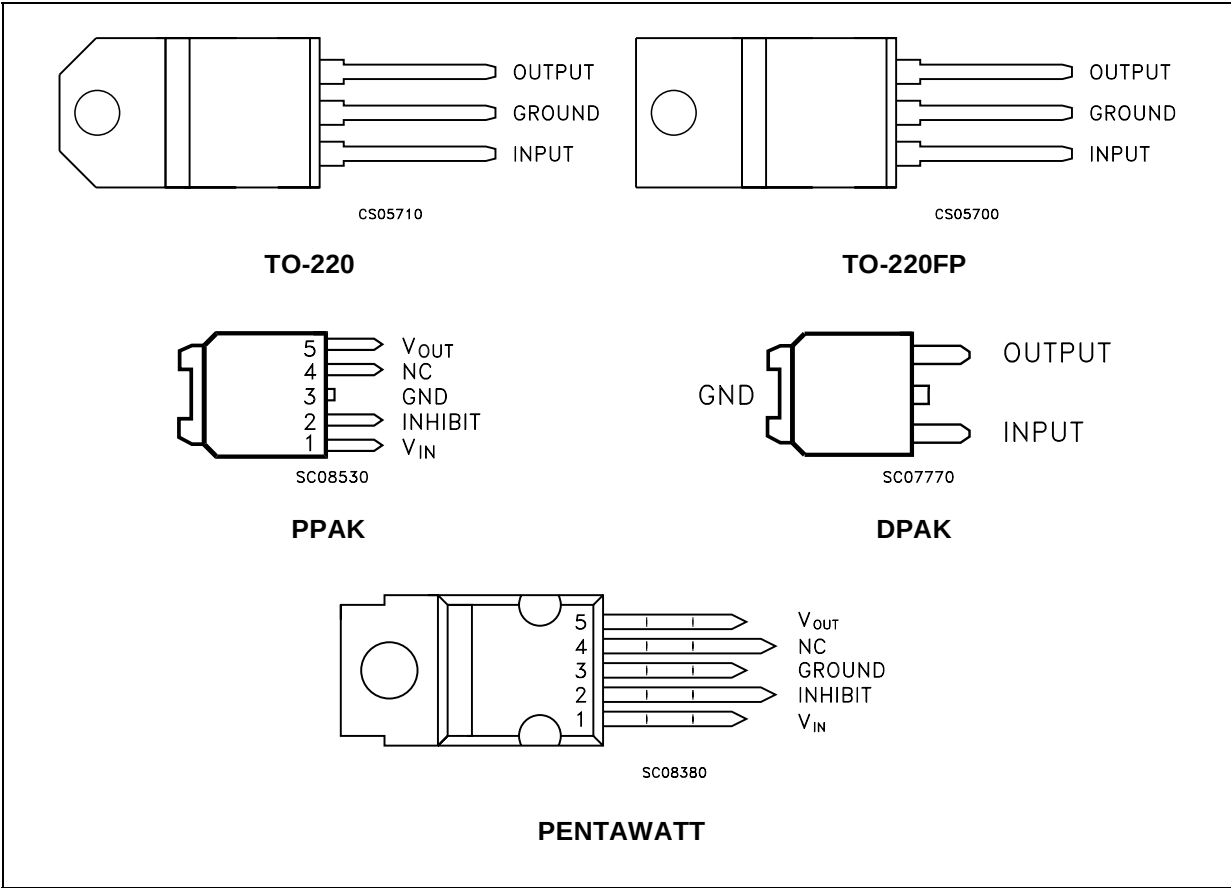

**ORDERING CODES**


| TYPE       | PENTAWATT     | TO-220      | TO-220FP    | DDPAK (#) | PPAK (#)     | OUTPUT VOLTAGE |
|------------|---------------|-------------|-------------|-----------|--------------|----------------|
| LF12C (*)  | LF12CV5V      | LF12CV      | LF12CP      | LF12CDT   | LF12CPT      | 1.25 V         |
| LF12AB (*) | LF12ABV5V     | LF12ABV     | LF12ABP     | LF12ABDT  | LF12ABPT     | 1.25 V         |
| LF15C      | LF15CV5V (*)  | LF15CV (*)  | LF15CP (*)  | LF15CDT   | LF15CPT (*)  | 1.5 V          |
| LF15AB     | LF15ABV5V (*) | LF15ABV (*) | LF15ABP (*) | LF15ABDT  | LF15ABPT (*) | 1.5 V          |
| LF18C      | LF18CV5V      | LF18CV      | LF18CP      | LF18CDT   | LF18CPT      | 1.8 V          |
| LF18AB     | LF18ABV5V     | LF18ABV     | LF18ABP     | LF18ABDT  | LF18ABPT     | 1.8 V          |
| LF25C      | LF25CV5V      | LF25CV      | LF25CP      | LF25CDT   | LF25CPT      | 2.5 V          |
| LF25AB     | LF25ABV5V     | LF25ABV     | LF25ABP     | LF25ABDT  | LF25ABPT     | 2.5 V          |
| LF27C      | LF27CV5V      | LF27CV      | LF27CP      | LF27CDT   | LF27CPT      | 2.7 V          |
| LF27AB     | LF27ABV5V     | LF27ABV     | LF27ABP     | LF27ABDT  | LF27ABPT     | 2.7 V          |
| LF30C      | LF30CV5V      | LF30CV      | LF30CP      | LF30CDT   | LF30CPT      | 3 V            |
| LF30AB     | LF30ABV5V     | LF30ABV     | LF30ABP     | LF30ABDT  | LF30ABPT     | 3 V            |
| LF33C      | LF33CV5V      | LF33CV      | LF33CP      | LF33CDT   | LF33CPT      | 3.3 V          |
| LF33AB     | LF33ABV5V     | LF33ABV     | LF33ABP     | LF33ABDT  | LF33ABPT     | 3.3 V          |
| LF35C      | LF35CV5V      | LF35CV      | LF35CP      | LF35CDT   | LF35CPT      | 3.5 V          |
| LF35AB     | LF35ABV5V     | LF35ABV     | LF35ABP     | LF35ABDT  | LF35ABPT     | 3.5 V          |
| LF40C      | LF40CV5V      | LF40CV      | LF40CP      | LF40CDT   | LF40CPT      | 4 V            |
| LF40AB     | LF40ABV5V     | LF40ABV     | LF40ABP     | LF40ABDT  | LF40ABPT     | 4 V            |
| LF45C (*)  | LF45CV5V      | LF45CV      | LF45CP      | LF45CDT   | LF45CPT      | 4.5 V          |
| LF45AB (*) | LF45ABV5V     | LF45ABV     | LF45ABP     | LF45ABDT  | LF45ABPT     | 4.5 V          |
| LF47C      | LF47CV5V      | LF47CV      | LF47CP      | LF47CDT   | LF47CPT      | 4.75 V         |
| LF47AB     | LF47ABV5V     | LF47ABV     | LF47ABP     | LF47ABDT  | LF47ABPT     | 4.75 V         |
| LF50C      | LF50CV5V      | LF50CV      | LF50CP      | LF50CDT   | LF50CPT      | 5 V            |
| LF50AB     | LF50ABV5V     | LF50ABV     | LF50ABP     | LF50ABDT  | LF50ABPT     | 5 V            |
| LF52C      | LF52CV5V      | LF52CV      | LF52CP      | LF52CDT   | LF52CPT      | 5.2 V          |
| LF52AB     | LF52ABV5V     | LF52ABV     | LF52ABP     | LF52ABDT  | LF52ABPT     | 5.2 V          |
| LF55C      | LF55CV5V      | LF55CV      | LF55CP      | LF55CDT   | LF55CPT      | 5.5 V          |
| LF55AB     | LF55ABV5V     | LF55ABV     | LF55ABP     | LF55ABDT  | LF55ABPT     | 5.5 V          |
| LF60C      | LF60CV5V      | LF60CV      | LF60CP      | LF60CDT   | LF60CPT      | 6 V            |
| LF60AB     | LF60ABV5V     | LF60ABV     | LF60ABP     | LF60ABDT  | LF60ABPT     | 6 V            |
| LF80C      | LF80CV5V      | LF80CV      | LF80CP      | LF80CDT   | LF80CPT      | 8 V            |
| LF80AB     | LF80ABV5V     | LF80ABV     | LF80ABP     | LF80ABDT  | LF80ABPT     | 8 V            |
| LF85C      | LF85CV5V      | LF85CV      | LF85CP      | LF85CDT   | LF85CPT      | 8.5 V          |
| LF85AB     | LF85ABV5V     | LF85ABV     | LF85ABP     | LF85ABDT  | LF85ABPT     | 8.5 V          |
| LF90C      | LF90CV5V      | LF90CV      | LF90CP      | LF90CDT   | LF90CPT      | 9 V            |
| LF90AB     | LF90ABV5V     | LF90ABV     | LF90ABP     | LF90ABDT  | LF90ABPT     | 9 V            |
| LF120C     | LF120CV5V     | LF120CV     | LF120CP     | LF120CDT  | LF120CPT     | 12 V           |
| LF120AB    | LF120ABV5V    | LF120ABV    | LF120ABP    | LF120ABDT | LF120ABPT    | 12 V           |

(\*) Available on request.

(#) Available in Tape &amp; Reel with the suffix "-TR".

## LF00 SERIES

### TEST CIRCUITS

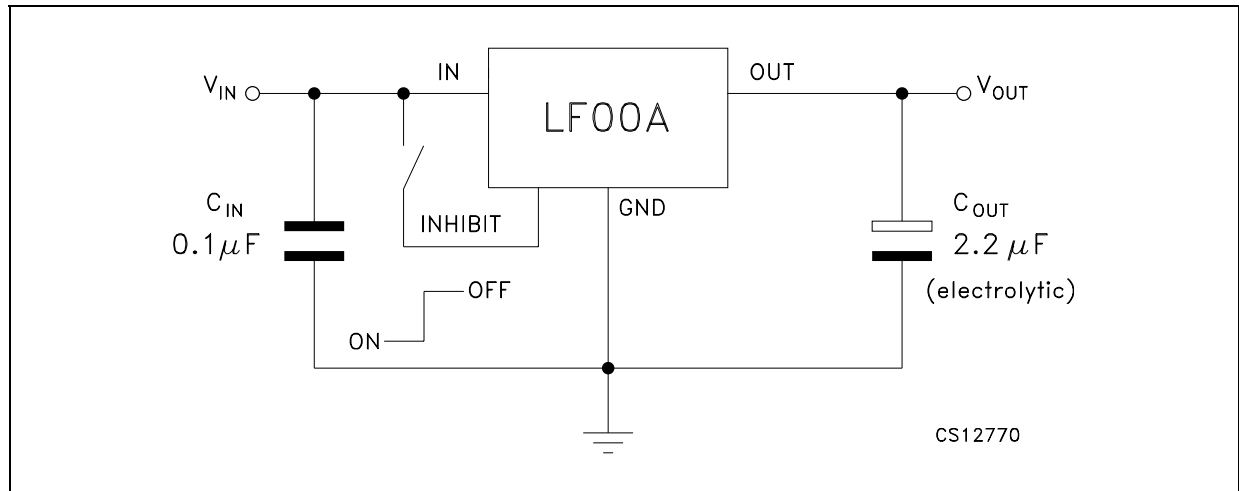

**ELECTRICAL CHARACTERISTICS FOR LF12AB** (refer to the test circuits,  $T_j = 25^\circ\text{C}$ ,  $C_I = 0.1\ \mu\text{F}$ ,  $C_O = 2.2\ \mu\text{F}$  unless otherwise specified.)

| Symbol       | Parameter                 | Test Conditions                                                                          | Min.  | Typ. | Max.  | Unit          |
|--------------|---------------------------|------------------------------------------------------------------------------------------|-------|------|-------|---------------|
| $V_O$        | Output Voltage            | $I_O = 50\ \text{mA}$ , $V_I = 3.3\ \text{V}$                                            | 1.238 | 1.25 | 1.263 | V             |
|              |                           | $I_O = 50\ \text{mA}$ , $V_I = 3.3\ \text{V}$ , $T_a = -25\ \text{to}\ 85^\circ\text{C}$ | 1.225 |      | 1.275 |               |
| $V_I$        | Operating Input Voltage   | $I_O = 500\ \text{mA}$                                                                   | 2.5   |      | 16    | V             |
| $I_O$        | Output Current Limit      |                                                                                          |       | 1    |       | A             |
| $\Delta V_O$ | Line Regulation           | $V_I = 2.5\ \text{to}\ 16\ \text{V}$ , $I_O = 5\ \text{mA}$                              |       | 2    | 10    | mV            |
| $\Delta V_O$ | Load Regulation           | $V_I = 2.8\ \text{V}$ , $I_O = 5\ \text{to}\ 500\ \text{mA}$                             |       | 2    | 10    | mV            |
| $I_d$        | Quiescent Current         | $V_I = 2.5\ \text{to}\ 16\ \text{V}$ , $I_O = 0\ \text{mA}$ ON MODE                      |       | 0.5  | 1     | mA            |
|              |                           | $V_I = 2.6\ \text{to}\ 16\ \text{V}$ , $I_O = 500\ \text{mA}$                            |       |      | 12    |               |
|              |                           | $V_I = 6\ \text{V}$ OFF MODE                                                             |       | 50   | 100   | $\mu\text{A}$ |
| SVR          | Supply Voltage Rejection  | $I_O = 5\ \text{mA}$ , $V_I = 3.5 \pm 1\ \text{V}$ , $f = 120\ \text{Hz}$                |       | 82   |       | dB            |
|              |                           | $f = 1\ \text{KHz}$                                                                      |       | 77   |       |               |
|              |                           | $f = 10\ \text{KHz}$                                                                     |       | 65   |       |               |
| eN           | Output Noise Voltage      | $B = 10\ \text{Hz to}\ 100\ \text{KHz}$                                                  |       | 50   |       | $\mu\text{V}$ |
| $V_d$        | Dropout Voltage           | $I_O = 200\ \text{mA}$                                                                   |       | 1.25 |       | V             |
| $V_{IL}$     | Control Input Logic Low   | $T_a = -40\ \text{to}\ 125^\circ\text{C}$                                                |       |      | 0.8   | V             |
| $V_{IH}$     | Control Input Logic High  | $T_a = -40\ \text{to}\ 125^\circ\text{C}$                                                | 2     |      |       | V             |
| $I_I$        | Control Input Current     | $V_I = 6\ \text{V}$ , $V_C = 6\ \text{V}$                                                |       | 10   |       | $\mu\text{A}$ |
| $C_O$        | Output Bypass Capacitance | $\text{ESR} = 0.1\ \text{to}\ 10\ \Omega$ , $I_O = 0\ \text{to}\ 500\ \text{mA}$         | 2     | 10   |       | $\mu\text{F}$ |

**ELECTRICAL CHARACTERISTICS FOR LF12C** (refer to the test circuits,  $T_j = 25^\circ\text{C}$ ,  $C_I = 0.1\ \mu\text{F}$ ,  $C_O = 2.2\ \mu\text{F}$  unless otherwise specified.)

| Symbol       | Parameter                 | Test Conditions                                                                          | Min.                 | Typ. | Max.  | Unit          |
|--------------|---------------------------|------------------------------------------------------------------------------------------|----------------------|------|-------|---------------|
| $V_O$        | Output Voltage            | $I_O = 50\ \text{mA}$ , $V_I = 3.3\ \text{V}$                                            | 1.225                | 1.25 | 1.275 | V             |
|              |                           | $I_O = 50\ \text{mA}$ , $V_I = 3.3\ \text{V}$ , $T_a = -25\ \text{to}\ 85^\circ\text{C}$ | 1.2                  |      | 1.3   |               |
| $V_I$        | Operating Input Voltage   | $I_O = 500\ \text{mA}$                                                                   | 2.5                  |      | 16    | V             |
| $I_O$        | Output Current Limit      |                                                                                          |                      | 1    |       | A             |
| $\Delta V_O$ | Line Regulation           | $V_I = 2.5\ \text{to}\ 16\ \text{V}$ , $I_O = 5\ \text{mA}$                              |                      | 2    | 10    | mV            |
| $\Delta V_O$ | Load Regulation           | $V_I = 2.8\ \text{V}$ , $I_O = 5\ \text{to}\ 500\ \text{mA}$                             |                      | 2    | 10    | mV            |
| $I_d$        | Quiescent Current         | $V_I = 2.5\ \text{to}\ 16\ \text{V}$ , $I_O = 0\ \text{mA}$                              | ON MODE              | 0.5  | 1     | mA            |
|              |                           | $V_I = 2.6\ \text{to}\ 16\ \text{V}$ , $I_O = 500\ \text{mA}$                            |                      |      | 12    |               |
|              |                           | $V_I = 6\ \text{V}$                                                                      | OFF MODE             | 50   | 100   | $\mu\text{A}$ |
| SVR          | Supply Voltage Rejection  | $I_O = 5\ \text{mA}$<br>$V_I = 3.5 \pm 1\ \text{V}$                                      | $f = 120\ \text{Hz}$ | 82   |       | dB            |
|              |                           |                                                                                          | $f = 1\ \text{KHz}$  | 77   |       |               |
|              |                           |                                                                                          | $f = 10\ \text{KHz}$ | 65   |       |               |
| eN           | Output Noise Voltage      | $B = 10\ \text{Hz to}\ 100\ \text{KHz}$                                                  |                      | 50   |       | $\mu\text{V}$ |
| $V_d$        | Dropout Voltage           | $I_O = 200\ \text{mA}$                                                                   |                      | 1.25 |       | V             |
| $V_{IL}$     | Control Input Logic Low   | $T_a = -40\ \text{to}\ 125^\circ\text{C}$                                                |                      |      | 0.8   | V             |
| $V_{IH}$     | Control Input Logic High  | $T_a = -40\ \text{to}\ 125^\circ\text{C}$                                                | 2                    |      |       | V             |
| $I_I$        | Control Input Current     | $V_I = 6\ \text{V}$ , $V_C = 6\ \text{V}$                                                |                      | 10   |       | $\mu\text{A}$ |
| $C_O$        | Output Bypass Capacitance | $\text{ESR} = 0.1\ \text{to}\ 10\ \Omega$ , $I_O = 0\ \text{to}\ 500\ \text{mA}$         | 2                    | 10   |       | $\mu\text{F}$ |

**ELECTRICAL CHARACTERISTICS FOR LF15AB** (refer to the test circuits,  $T_j = 25^\circ\text{C}$ ,  $C_I = 0.1\ \mu\text{F}$ ,  $C_O = 2.2\ \mu\text{F}$  unless otherwise specified.)

| Symbol       | Parameter                 | Test Conditions                                                                          | Min.                 | Typ. | Max.  | Unit          |
|--------------|---------------------------|------------------------------------------------------------------------------------------|----------------------|------|-------|---------------|
| $V_O$        | Output Voltage            | $I_O = 50\ \text{mA}$ , $V_I = 3.5\ \text{V}$                                            | 1.485                | 1.5  | 1.515 | V             |
|              |                           | $I_O = 50\ \text{mA}$ , $V_I = 3.5\ \text{V}$ , $T_a = -25\ \text{to}\ 85^\circ\text{C}$ | 1.470                |      | 1.530 |               |
| $V_I$        | Operating Input Voltage   | $I_O = 500\ \text{mA}$                                                                   | 2.5                  |      | 16    | V             |
| $I_O$        | Output Current Limit      |                                                                                          |                      | 1    |       | A             |
| $\Delta V_O$ | Line Regulation           | $V_I = 2.5\ \text{to}\ 16\ \text{V}$ , $I_O = 5\ \text{mA}$                              |                      | 2    | 10    | mV            |
| $\Delta V_O$ | Load Regulation           | $V_I = 2.8\ \text{V}$ , $I_O = 5\ \text{to}\ 500\ \text{mA}$                             |                      | 2    | 10    | mV            |
| $I_d$        | Quiescent Current         | $V_I = 2.5\ \text{to}\ 16\ \text{V}$ , $I_O = 0\ \text{mA}$                              | ON MODE              | 0.5  | 1     | mA            |
|              |                           | $V_I = 2.8\ \text{to}\ 16\ \text{V}$ , $I_O = 500\ \text{mA}$                            |                      |      | 12    |               |
|              |                           | $V_I = 6\ \text{V}$                                                                      | OFF MODE             | 50   | 100   | $\mu\text{A}$ |
| SVR          | Supply Voltage Rejection  | $I_O = 5\ \text{mA}$<br>$V_I = 3.5 \pm 1\ \text{V}$                                      | $f = 120\ \text{Hz}$ | 82   |       | dB            |
|              |                           |                                                                                          | $f = 1\ \text{KHz}$  | 77   |       |               |
|              |                           |                                                                                          | $f = 10\ \text{KHz}$ | 65   |       |               |
| eN           | Output Noise Voltage      | $B = 10\ \text{Hz to}\ 100\ \text{KHz}$                                                  |                      | 50   |       | $\mu\text{V}$ |
| $V_d$        | Dropout Voltage           | $I_O = 200\ \text{mA}$                                                                   |                      | 1    |       | V             |
| $V_{IL}$     | Control Input Logic Low   | $T_a = -40\ \text{to}\ 125^\circ\text{C}$                                                |                      |      | 0.8   | V             |
| $V_{IH}$     | Control Input Logic High  | $T_a = -40\ \text{to}\ 125^\circ\text{C}$                                                | 2                    |      |       | V             |
| $I_I$        | Control Input Current     | $V_I = 6\ \text{V}$ , $V_C = 6\ \text{V}$                                                |                      | 10   |       | $\mu\text{A}$ |
| $C_O$        | Output Bypass Capacitance | $\text{ESR} = 0.1\ \text{to}\ 10\ \Omega$ , $I_O = 0\ \text{to}\ 500\ \text{mA}$         | 2                    | 10   |       | $\mu\text{F}$ |

## LF00 SERIES

**ELECTRICAL CHARACTERISTICS FOR LF15C** (refer to the test circuits,  $T_j = 25^\circ\text{C}$ ,  $C_I = 0.1\ \mu\text{F}$ ,  $C_O = 2.2\ \mu\text{F}$  unless otherwise specified.)

| Symbol       | Parameter                 | Test Conditions                                                                          | Min.                 | Typ. | Max. | Unit          |
|--------------|---------------------------|------------------------------------------------------------------------------------------|----------------------|------|------|---------------|
| $V_O$        | Output Voltage            | $I_O = 50\ \text{mA}$ , $V_I = 3.5\ \text{V}$                                            | 1.47                 | 1.5  | 1.53 | V             |
|              |                           | $I_O = 50\ \text{mA}$ , $V_I = 3.5\ \text{V}$ , $T_a = -25\ \text{to}\ 85^\circ\text{C}$ | 1.44                 |      | 1.56 |               |
| $V_I$        | Operating Input Voltage   | $I_O = 500\ \text{mA}$                                                                   | 2.5                  |      | 16   | V             |
| $I_O$        | Output Current Limit      |                                                                                          |                      | 1    |      | A             |
| $\Delta V_O$ | Line Regulation           | $V_I = 2.5\ \text{to}\ 16\ \text{V}$ , $I_O = 5\ \text{mA}$                              |                      | 2    | 10   | mV            |
| $\Delta V_O$ | Load Regulation           | $V_I = 2.8\ \text{V}$ , $I_O = 5\ \text{to}\ 500\ \text{mA}$                             |                      | 2    | 10   | mV            |
| $I_d$        | Quiescent Current         | $V_I = 2.5\ \text{to}\ 16\ \text{V}$ , $I_O = 0\ \text{mA}$                              | ON MODE              | 0.5  | 1    | mA            |
|              |                           | $V_I = 2.8\ \text{to}\ 16\ \text{V}$ , $I_O = 500\ \text{mA}$                            |                      |      | 12   |               |
|              |                           | $V_I = 6\ \text{V}$                                                                      | OFF MODE             | 50   | 100  | $\mu\text{A}$ |
| SVR          | Supply Voltage Rejection  | $I_O = 5\ \text{mA}$<br>$V_I = 3.5 \pm 1\ \text{V}$                                      | $f = 120\ \text{Hz}$ | 82   |      | dB            |
|              |                           |                                                                                          | $f = 1\ \text{KHz}$  | 77   |      |               |
|              |                           |                                                                                          | $f = 10\ \text{KHz}$ | 65   |      |               |
| eN           | Output Noise Voltage      | $B = 10\ \text{Hz to}\ 100\ \text{KHz}$                                                  |                      | 50   |      | $\mu\text{V}$ |
| $V_d$        | Dropout Voltage           | $I_O = 200\ \text{mA}$                                                                   |                      | 1    |      | V             |
| $V_{IL}$     | Control Input Logic Low   | $T_a = -40\ \text{to}\ 125^\circ\text{C}$                                                |                      |      | 0.8  | V             |
| $V_{IH}$     | Control Input Logic High  | $T_a = -40\ \text{to}\ 125^\circ\text{C}$                                                | 2                    |      |      | V             |
| $I_I$        | Control Input Current     | $V_I = 6\ \text{V}$ , $V_C = 6\ \text{V}$                                                |                      | 10   |      | $\mu\text{A}$ |
| $C_O$        | Output Bypass Capacitance | $\text{ESR} = 0.1\ \text{to}\ 10\ \Omega$ , $I_O = 0\ \text{to}\ 500\ \text{mA}$         | 2                    | 10   |      | $\mu\text{F}$ |

**ELECTRICAL CHARACTERISTICS FOR LF18AB** (refer to the test circuits,  $T_j = 25^\circ\text{C}$ ,  $C_I = 0.1\ \mu\text{F}$ ,  $C_O = 2.2\ \mu\text{F}$  unless otherwise specified.)

| Symbol       | Parameter                 | Test Conditions                                                                          | Min.                 | Typ. | Max.  | Unit          |
|--------------|---------------------------|------------------------------------------------------------------------------------------|----------------------|------|-------|---------------|
| $V_O$        | Output Voltage            | $I_O = 50\ \text{mA}$ , $V_I = 3.3\ \text{V}$                                            | 1.782                | 1.8  | 1.818 | V             |
|              |                           | $I_O = 50\ \text{mA}$ , $V_I = 3.3\ \text{V}$ , $T_a = -25\ \text{to}\ 85^\circ\text{C}$ | 1.764                |      | 1.836 |               |
| $V_I$        | Operating Input Voltage   | $I_O = 500\ \text{mA}$                                                                   | 3                    |      | 16    | V             |
| $I_O$        | Output Current Limit      |                                                                                          |                      | 1    |       | A             |
| $\Delta V_O$ | Line Regulation           | $V_I = 2.8\ \text{to}\ 16\ \text{V}$ , $I_O = 5\ \text{mA}$                              |                      | 2    | 12    | mV            |
| $\Delta V_O$ | Load Regulation           | $V_I = 3.3\ \text{V}$ , $I_O = 5\ \text{to}\ 500\ \text{mA}$                             |                      | 2    | 10    | mV            |
| $I_d$        | Quiescent Current         | $V_I = 2.5\ \text{to}\ 16\ \text{V}$ , $I_O = 0\ \text{mA}$                              | ON MODE              | 0.5  | 1     | mA            |
|              |                           | $V_I = 3.1\ \text{to}\ 16\ \text{V}$ , $I_O = 500\ \text{mA}$                            |                      |      | 12    |               |
|              |                           | $V_I = 6\ \text{V}$                                                                      | OFF MODE             | 50   | 100   | $\mu\text{A}$ |
| SVR          | Supply Voltage Rejection  | $I_O = 5\ \text{mA}$<br>$V_I = 3.5 \pm 1\ \text{V}$                                      | $f = 120\ \text{Hz}$ | 82   |       | dB            |
|              |                           |                                                                                          | $f = 1\ \text{KHz}$  | 77   |       |               |
|              |                           |                                                                                          | $f = 10\ \text{KHz}$ | 60   |       |               |
| eN           | Output Noise Voltage      | $B = 10\ \text{Hz to}\ 100\ \text{KHz}$                                                  |                      | 50   |       | $\mu\text{V}$ |
| $V_d$        | Dropout Voltage           | $I_O = 200\ \text{mA}$                                                                   |                      | 0.7  |       | V             |
| $V_{IL}$     | Control Input Logic Low   | $T_a = -40\ \text{to}\ 125^\circ\text{C}$                                                |                      |      | 0.8   | V             |
| $V_{IH}$     | Control Input Logic High  | $T_a = -40\ \text{to}\ 125^\circ\text{C}$                                                | 2                    |      |       | V             |
| $I_I$        | Control Input Current     | $V_I = 6\ \text{V}$ , $V_C = 6\ \text{V}$                                                |                      | 10   |       | $\mu\text{A}$ |
| $C_O$        | Output Bypass Capacitance | $\text{ESR} = 0.1\ \text{to}\ 10\ \Omega$ , $I_O = 0\ \text{to}\ 500\ \text{mA}$         | 2                    | 10   |       | $\mu\text{F}$ |

**ELECTRICAL CHARACTERISTICS FOR LF18C** (refer to the test circuits,  $T_j = 25^\circ\text{C}$ ,  $C_1 = 0.1\ \mu\text{F}$ ,  $C_O = 2.2\ \mu\text{F}$  unless otherwise specified.)

| Symbol       | Parameter                 | Test Conditions                                                                          | Min.                 | Typ. | Max.  | Unit          |
|--------------|---------------------------|------------------------------------------------------------------------------------------|----------------------|------|-------|---------------|
| $V_O$        | Output Voltage            | $I_O = 50\ \text{mA}$ , $V_I = 3.5\ \text{V}$                                            | 1.764                | 1.8  | 1.836 | V             |
|              |                           | $I_O = 50\ \text{mA}$ , $V_I = 3.5\ \text{V}$ , $T_a = -25\ \text{to}\ 85^\circ\text{C}$ | 1.728                |      | 1.872 |               |
| $V_I$        | Operating Input Voltage   | $I_O = 500\ \text{mA}$                                                                   | 3                    |      | 16    | V             |
| $I_O$        | Output Current Limit      |                                                                                          |                      | 1    |       | A             |
| $\Delta V_O$ | Line Regulation           | $V_I = 2.8\ \text{to}\ 16\ \text{V}$ , $I_O = 5\ \text{mA}$                              |                      | 2    | 12    | mV            |
| $\Delta V_O$ | Load Regulation           | $V_I = 3.3\ \text{V}$ , $I_O = 5\ \text{to}\ 500\ \text{mA}$                             |                      | 2    | 10    | mV            |
| $I_d$        | Quiescent Current         | $V_I = 2.5\ \text{to}\ 16\ \text{V}$ , $I_O = 0\ \text{mA}$                              | ON MODE              | 0.5  | 1     | mA            |
|              |                           | $V_I = 3.1\ \text{to}\ 16\ \text{V}$ , $I_O = 500\ \text{mA}$                            |                      |      | 12    |               |
|              |                           | $V_I = 6\ \text{V}$                                                                      | OFF MODE             | 50   | 100   | $\mu\text{A}$ |
| SVR          | Supply Voltage Rejection  | $I_O = 5\ \text{mA}$<br>$V_I = 3.5 \pm 1\ \text{V}$                                      | $f = 120\ \text{Hz}$ | 82   |       | dB            |
|              |                           |                                                                                          | $f = 1\ \text{KHz}$  | 77   |       |               |
|              |                           |                                                                                          | $f = 10\ \text{KHz}$ | 60   |       |               |
| eN           | Output Noise Voltage      | $B = 10\ \text{Hz to}\ 100\ \text{KHz}$                                                  |                      | 50   |       | $\mu\text{V}$ |
| $V_d$        | Dropout Voltage           | $I_O = 200\ \text{mA}$                                                                   |                      | 0.7  |       | V             |
| $V_{IL}$     | Control Input Logic Low   | $T_a = -40\ \text{to}\ 125^\circ\text{C}$                                                |                      |      | 0.8   | V             |
| $V_{IH}$     | Control Input Logic High  | $T_a = -40\ \text{to}\ 125^\circ\text{C}$                                                | 2                    |      |       | V             |
| $I_I$        | Control Input Current     | $V_I = 6\ \text{V}$ , $V_C = 6\ \text{V}$                                                |                      | 10   |       | $\mu\text{A}$ |
| $C_O$        | Output Bypass Capacitance | $\text{ESR} = 0.1\ \text{to}\ 10\ \Omega$ , $I_O = 0\ \text{to}\ 500\ \text{mA}$         | 2                    | 10   |       | $\mu\text{F}$ |

**ELECTRICAL CHARACTERISTICS FOR LF25AB** (refer to the test circuits,  $T_j = 25^\circ\text{C}$ ,  $C_1 = 0.1\ \mu\text{F}$ ,  $C_O = 2.2\ \mu\text{F}$  unless otherwise specified.)

| Symbol       | Parameter                 | Test Conditions                                                                          | Min.                 | Typ. | Max.  | Unit          |
|--------------|---------------------------|------------------------------------------------------------------------------------------|----------------------|------|-------|---------------|
| $V_O$        | Output Voltage            | $I_O = 50\ \text{mA}$ , $V_I = 4.5\ \text{V}$                                            | 2.475                | 2.5  | 2.525 | V             |
|              |                           | $I_O = 50\ \text{mA}$ , $V_I = 4.5\ \text{V}$ , $T_a = -25\ \text{to}\ 85^\circ\text{C}$ | 2.450                |      | 2.550 |               |
| $V_I$        | Operating Input Voltage   | $I_O = 500\ \text{mA}$                                                                   |                      |      | 16    | V             |
| $I_O$        | Output Current Limit      |                                                                                          |                      | 1    |       | A             |
| $\Delta V_O$ | Line Regulation           | $V_I = 3.5\ \text{to}\ 16\ \text{V}$ , $I_O = 5\ \text{mA}$                              |                      | 2    | 12    | mV            |
| $\Delta V_O$ | Load Regulation           | $V_I = 3.8\ \text{V}$ , $I_O = 5\ \text{to}\ 500\ \text{mA}$                             |                      | 2    | 12    | mV            |
| $I_d$        | Quiescent Current         | $V_I = 3.5\ \text{to}\ 16\ \text{V}$ , $I_O = 0\ \text{mA}$                              | ON MODE              | 0.5  | 1     | mA            |
|              |                           | $V_I = 3.8\ \text{to}\ 16\ \text{V}$ , $I_O = 500\ \text{mA}$                            |                      |      | 12    |               |
|              |                           | $V_I = 6\ \text{V}$                                                                      | OFF MODE             | 50   | 100   | $\mu\text{A}$ |
| SVR          | Supply Voltage Rejection  | $I_O = 5\ \text{mA}$<br>$V_I = 4.5 \pm 1\ \text{V}$                                      | $f = 120\ \text{Hz}$ | 82   |       | dB            |
|              |                           |                                                                                          | $f = 1\ \text{KHz}$  | 77   |       |               |
|              |                           |                                                                                          | $f = 10\ \text{KHz}$ | 65   |       |               |
| eN           | Output Noise Voltage      | $B = 10\ \text{Hz to}\ 100\ \text{KHz}$                                                  |                      | 50   |       | $\mu\text{V}$ |
| $V_d$        | Dropout Voltage           | $I_O = 200\ \text{mA}$                                                                   |                      | 0.2  | 0.35  | V             |
|              |                           | $I_O = 500\ \text{mA}$                                                                   |                      | 0.4  | 0.7   |               |
| $V_{IL}$     | Control Input Logic Low   | $T_a = -40\ \text{to}\ 125^\circ\text{C}$                                                |                      |      | 0.8   | V             |
| $V_{IH}$     | Control Input Logic High  | $T_a = -40\ \text{to}\ 125^\circ\text{C}$                                                | 2                    |      |       | V             |
| $I_I$        | Control Input Current     | $V_I = 6\ \text{V}$ , $V_C = 6\ \text{V}$                                                |                      | 10   |       | $\mu\text{A}$ |
| $C_O$        | Output Bypass Capacitance | $\text{ESR} = 0.1\ \text{to}\ 10\ \Omega$ , $I_O = 0\ \text{to}\ 500\ \text{mA}$         | 2                    | 10   |       | $\mu\text{F}$ |

## LF00 SERIES

**ELECTRICAL CHARACTERISTICS FOR LF25C** (refer to the test circuits,  $T_j = 25^\circ\text{C}$ ,  $C_1 = 0.1\ \mu\text{F}$ ,  $C_O = 2.2\ \mu\text{F}$  unless otherwise specified.)

| Symbol       | Parameter                 | Test Conditions                                                                          | Min.                 | Typ. | Max. | Unit          |
|--------------|---------------------------|------------------------------------------------------------------------------------------|----------------------|------|------|---------------|
| $V_O$        | Output Voltage            | $I_O = 50\ \text{mA}$ , $V_I = 4.5\ \text{V}$                                            | 2.45                 | 2.5  | 2.55 | V             |
|              |                           | $I_O = 50\ \text{mA}$ , $V_I = 4.5\ \text{V}$ , $T_a = -25\ \text{to}\ 85^\circ\text{C}$ | 2.4                  |      | 2.6  |               |
| $V_I$        | Operating Input Voltage   | $I_O = 500\ \text{mA}$                                                                   |                      |      | 16   | V             |
| $I_O$        | Output Current Limit      |                                                                                          |                      | 1    |      | A             |
| $\Delta V_O$ | Line Regulation           | $V_I = 3.5\ \text{to}\ 16\ \text{V}$ , $I_O = 5\ \text{mA}$                              |                      | 2    | 12   | mV            |
| $\Delta V_O$ | Load Regulation           | $V_I = 3.8\ \text{V}$ , $I_O = 5\ \text{to}\ 500\ \text{mA}$                             |                      | 2    | 12   | mV            |
| $I_d$        | Quiescent Current         | $V_I = 3.5\ \text{to}\ 16\ \text{V}$ , $I_O = 0\ \text{mA}$                              | ON MODE              | 0.5  | 1    | mA            |
|              |                           | $V_I = 3.8\ \text{to}\ 16\ \text{V}$ , $I_O = 500\ \text{mA}$                            |                      |      | 12   |               |
|              |                           | $V_I = 6\ \text{V}$                                                                      | OFF MODE             | 50   | 100  | $\mu\text{A}$ |
| SVR          | Supply Voltage Rejection  | $I_O = 5\ \text{mA}$<br>$V_I = 4.5 \pm 1\ \text{V}$                                      | $f = 120\ \text{Hz}$ | 82   |      | dB            |
|              |                           |                                                                                          | $f = 1\ \text{KHz}$  | 77   |      |               |
|              |                           |                                                                                          | $f = 10\ \text{KHz}$ | 65   |      |               |
| eN           | Output Noise Voltage      | $B = 10\ \text{Hz to}\ 100\ \text{KHz}$                                                  |                      | 50   |      | $\mu\text{V}$ |
| $V_d$        | Dropout Voltage           | $I_O = 200\ \text{mA}$                                                                   |                      | 0.2  | 0.35 | V             |
|              |                           | $I_O = 500\ \text{mA}$                                                                   |                      | 0.4  | 0.7  |               |
| $V_{IL}$     | Control Input Logic Low   | $T_a = -40\ \text{to}\ 125^\circ\text{C}$                                                |                      |      | 0.8  | V             |
| $V_{IH}$     | Control Input Logic High  | $T_a = -40\ \text{to}\ 125^\circ\text{C}$                                                | 2                    |      |      | V             |
| $I_I$        | Control Input Current     | $V_I = 6\ \text{V}$ , $V_C = 6\ \text{V}$                                                |                      | 10   |      | $\mu\text{A}$ |
| $C_O$        | Output Bypass Capacitance | $\text{ESR} = 0.1\ \text{to}\ 10\ \Omega$ , $I_O = 0\ \text{to}\ 500\ \text{mA}$         | 2                    | 10   |      | $\mu\text{F}$ |

**ELECTRICAL CHARACTERISTICS FOR LF27AB** (refer to the test circuits,  $T_j = 25^\circ\text{C}$ ,  $C_1 = 0.1\ \mu\text{F}$ ,  $C_O = 2.2\ \mu\text{F}$  unless otherwise specified.)

| Symbol       | Parameter                 | Test Conditions                                                                          | Min.                 | Typ. | Max.  | Unit          |
|--------------|---------------------------|------------------------------------------------------------------------------------------|----------------------|------|-------|---------------|
| $V_O$        | Output Voltage            | $I_O = 50\ \text{mA}$ , $V_I = 4.7\ \text{V}$                                            | 2.673                | 2.7  | 2.727 | V             |
|              |                           | $I_O = 50\ \text{mA}$ , $V_I = 4.7\ \text{V}$ , $T_a = -25\ \text{to}\ 85^\circ\text{C}$ | 2.646                |      | 2.754 |               |
| $V_I$        | Operating Input Voltage   | $I_O = 500\ \text{mA}$                                                                   |                      |      | 16    | V             |
| $I_O$        | Output Current Limit      |                                                                                          |                      | 1    |       | A             |
| $\Delta V_O$ | Line Regulation           | $V_I = 3.7\ \text{to}\ 16\ \text{V}$ , $I_O = 5\ \text{mA}$                              |                      | 2    | 13    | mV            |
| $\Delta V_O$ | Load Regulation           | $V_I = 4\ \text{V}$ , $I_O = 5\ \text{to}\ 500\ \text{mA}$                               |                      | 2    | 13    | mV            |
| $I_d$        | Quiescent Current         | $V_I = 3.7\ \text{to}\ 16\ \text{V}$ , $I_O = 0\ \text{mA}$                              | ON MODE              | 0.5  | 1     | mA            |
|              |                           | $V_I = 4\ \text{to}\ 16\ \text{V}$ , $I_O = 500\ \text{mA}$                              |                      |      | 12    |               |
|              |                           | $V_I = 6\ \text{V}$                                                                      | OFF MODE             | 50   | 100   | $\mu\text{A}$ |
| SVR          | Supply Voltage Rejection  | $I_O = 5\ \text{mA}$<br>$V_I = 4.7 \pm 1\ \text{V}$                                      | $f = 120\ \text{Hz}$ | 82   |       | dB            |
|              |                           |                                                                                          | $f = 1\ \text{KHz}$  | 77   |       |               |
|              |                           |                                                                                          | $f = 10\ \text{KHz}$ | 65   |       |               |
| eN           | Output Noise Voltage      | $B = 10\ \text{Hz to}\ 100\ \text{KHz}$                                                  |                      | 50   |       | $\mu\text{V}$ |
| $V_d$        | Dropout Voltage           | $I_O = 200\ \text{mA}$                                                                   |                      | 0.2  | 0.35  | V             |
|              |                           | $I_O = 500\ \text{mA}$                                                                   |                      | 0.4  | 0.7   |               |
| $V_{IL}$     | Control Input Logic Low   | $T_a = -40\ \text{to}\ 125^\circ\text{C}$                                                |                      |      | 0.8   | V             |
| $V_{IH}$     | Control Input Logic High  | $T_a = -40\ \text{to}\ 125^\circ\text{C}$                                                | 2                    |      |       | V             |
| $I_I$        | Control Input Current     | $V_I = 6\ \text{V}$ , $V_C = 6\ \text{V}$                                                |                      | 10   |       | $\mu\text{A}$ |
| $C_O$        | Output Bypass Capacitance | $\text{ESR} = 0.1\ \text{to}\ 10\ \Omega$ , $I_O = 0\ \text{to}\ 500\ \text{mA}$         | 2                    | 10   |       | $\mu\text{F}$ |



**ELECTRICAL CHARACTERISTICS FOR LF27C** (refer to the test circuits,  $T_j = 25^\circ\text{C}$ ,  $C_1 = 0.1\ \mu\text{F}$ ,  $C_O = 2.2\ \mu\text{F}$  unless otherwise specified.)

| Symbol       | Parameter                 | Test Conditions                                                                          | Min.                 | Typ. | Max.  | Unit          |
|--------------|---------------------------|------------------------------------------------------------------------------------------|----------------------|------|-------|---------------|
| $V_O$        | Output Voltage            | $I_O = 50\ \text{mA}$ , $V_I = 4.7\ \text{V}$                                            | 2.646                | 2.7  | 2.754 | V             |
|              |                           | $I_O = 50\ \text{mA}$ , $V_I = 4.7\ \text{V}$ , $T_a = -25\ \text{to}\ 85^\circ\text{C}$ | 2.592                |      | 2.808 |               |
| $V_I$        | Operating Input Voltage   | $I_O = 500\ \text{mA}$                                                                   |                      |      | 16    | V             |
| $I_O$        | Output Current Limit      |                                                                                          |                      | 1    |       | A             |
| $\Delta V_O$ | Line Regulation           | $V_I = 3.7\ \text{to}\ 16\ \text{V}$ $I_O = 5\ \text{mA}$                                |                      | 2    | 13    | mV            |
| $\Delta V_O$ | Load Regulation           | $V_I = 4\ \text{V}$ , $I_O = 5\ \text{to}\ 500\ \text{mA}$                               |                      | 2    | 13    | mV            |
| $I_d$        | Quiescent Current         | $V_I = 3.7\ \text{to}\ 16\ \text{V}$ $I_O = 0\ \text{mA}$ ON MODE                        |                      | 0.5  | 1     | mA            |
|              |                           | $V_I = 4\ \text{to}\ 16\ \text{V}$ $I_O = 500\ \text{mA}$                                |                      |      | 12    |               |
|              |                           | $V_I = 6\ \text{V}$ OFF MODE                                                             |                      | 50   | 100   | $\mu\text{A}$ |
| SVR          | Supply Voltage Rejection  | $I_O = 5\ \text{mA}$<br>$V_I = 4.7 \pm 1\ \text{V}$                                      | $f = 120\ \text{Hz}$ | 82   |       | dB            |
|              |                           |                                                                                          | $f = 1\ \text{KHz}$  | 77   |       |               |
|              |                           |                                                                                          | $f = 10\ \text{KHz}$ | 65   |       |               |
| eN           | Output Noise Voltage      | $B = 10\ \text{Hz to}\ 100\ \text{KHz}$                                                  |                      | 50   |       | $\mu\text{V}$ |
| $V_d$        | Dropout Voltage           | $I_O = 200\ \text{mA}$                                                                   |                      | 0.2  | 0.35  | V             |
|              |                           | $I_O = 500\ \text{mA}$                                                                   |                      | 0.4  | 0.7   |               |
| $V_{IL}$     | Control Input Logic Low   | $T_a = -40\ \text{to}\ 125^\circ\text{C}$                                                |                      |      | 0.8   | V             |
| $V_{IH}$     | Control Input Logic High  | $T_a = -40\ \text{to}\ 125^\circ\text{C}$                                                | 2                    |      |       | V             |
| $I_I$        | Control Input Current     | $V_I = 6\ \text{V}$ , $V_C = 6\ \text{V}$                                                |                      | 10   |       | $\mu\text{A}$ |
| $C_O$        | Output Bypass Capacitance | $\text{ESR} = 0.1\ \text{to}\ 10\ \Omega$ $I_O = 0\ \text{to}\ 500\ \text{mA}$           | 2                    | 10   |       | $\mu\text{F}$ |

**ELECTRICAL CHARACTERISTICS FOR LF30AB** (refer to the test circuits,  $T_j = 25^\circ\text{C}$ ,  $C_1 = 0.1\ \mu\text{F}$ ,  $C_O = 2.2\ \mu\text{F}$  unless otherwise specified.)

| Symbol       | Parameter                 | Test Conditions                                                                        | Min.                 | Typ. | Max. | Unit          |
|--------------|---------------------------|----------------------------------------------------------------------------------------|----------------------|------|------|---------------|
| $V_O$        | Output Voltage            | $I_O = 50\ \text{mA}$ , $V_I = 5\ \text{V}$                                            | 2.970                | 3    | 3.03 | V             |
|              |                           | $I_O = 50\ \text{mA}$ , $V_I = 5\ \text{V}$ , $T_a = -25\ \text{to}\ 85^\circ\text{C}$ | 2.94                 |      | 3.06 |               |
| $V_I$        | Operating Input Voltage   | $I_O = 500\ \text{mA}$                                                                 |                      |      | 16   | V             |
| $I_O$        | Output Current Limit      |                                                                                        |                      | 1    |      | A             |
| $\Delta V_O$ | Line Regulation           | $V_I = 4\ \text{to}\ 16\ \text{V}$ , $I_O = 5\ \text{mA}$                              |                      | 3    | 15   | mV            |
| $\Delta V_O$ | Load Regulation           | $V_I = 4.3\ \text{V}$ , $I_O = 5\ \text{to}\ 500\ \text{mA}$                           |                      | 3    | 15   | mV            |
| $I_d$        | Quiescent Current         | $V_I = 4\ \text{to}\ 16\ \text{V}$ , $I_O = 0\ \text{mA}$ ON MODE                      |                      | 0.5  | 1    | mA            |
|              |                           | $V_I = 4.3\ \text{to}\ 16\ \text{V}$ $I_O = 500\ \text{mA}$                            |                      |      | 12   |               |
|              |                           | $V_I = 6\ \text{V}$ OFF MODE                                                           |                      | 50   | 100  | $\mu\text{A}$ |
| SVR          | Supply Voltage Rejection  | $I_O = 5\ \text{mA}$<br>$V_I = 5 \pm 1\ \text{V}$                                      | $f = 120\ \text{Hz}$ | 81   |      | dB            |
|              |                           |                                                                                        | $f = 1\ \text{KHz}$  | 76   |      |               |
|              |                           |                                                                                        | $f = 10\ \text{KHz}$ | 65   |      |               |
| eN           | Output Noise Voltage      | $B = 10\ \text{Hz to}\ 100\ \text{KHz}$                                                |                      | 50   |      | $\mu\text{V}$ |
| $V_d$        | Dropout Voltage           | $I_O = 200\ \text{mA}$                                                                 |                      | 0.2  | 0.35 | V             |
|              |                           | $I_O = 500\ \text{mA}$                                                                 |                      | 0.4  | 0.7  |               |
| $V_{IL}$     | Control Input Logic Low   | $T_a = -40\ \text{to}\ 125^\circ\text{C}$                                              |                      |      | 0.8  | V             |
| $V_{IH}$     | Control Input Logic High  | $T_a = -40\ \text{to}\ 125^\circ\text{C}$                                              | 2                    |      |      | V             |
| $I_I$        | Control Input Current     | $V_I = 6\ \text{V}$ , $V_C = 6\ \text{V}$                                              |                      | 10   |      | $\mu\text{A}$ |
| $C_O$        | Output Bypass Capacitance | $\text{ESR} = 0.1\ \text{to}\ 10\ \Omega$ $I_O = 0\ \text{to}\ 500\ \text{mA}$         | 2                    | 10   |      | $\mu\text{F}$ |

## LF00 SERIES

**ELECTRICAL CHARACTERISTICS FOR LF30C** (refer to the test circuits,  $T_j = 25^\circ\text{C}$ ,  $C_I = 0.1\ \mu\text{F}$ ,  $C_O = 2.2\ \mu\text{F}$  unless otherwise specified.)

| Symbol       | Parameter                 | Test Conditions                                                                        | Min.                 | Typ. | Max. | Unit          |
|--------------|---------------------------|----------------------------------------------------------------------------------------|----------------------|------|------|---------------|
| $V_O$        | Output Voltage            | $I_O = 50\ \text{mA}$ , $V_I = 5\ \text{V}$                                            | 2.94                 | 3    | 3.06 | V             |
|              |                           | $I_O = 50\ \text{mA}$ , $V_I = 5\ \text{V}$ , $T_a = -25\ \text{to}\ 85^\circ\text{C}$ | 2.88                 |      | 3.12 |               |
| $V_I$        | Operating Input Voltage   | $I_O = 500\ \text{mA}$                                                                 |                      |      | 16   | V             |
| $I_O$        | Output Current Limit      |                                                                                        |                      | 1    |      | A             |
| $\Delta V_O$ | Line Regulation           | $V_I = 4\ \text{to}\ 16\ \text{V}$ , $I_O = 5\ \text{mA}$                              |                      | 3    | 15   | mV            |
| $\Delta V_O$ | Load Regulation           | $V_I = 4.3\ \text{V}$ , $I_O = 5\ \text{to}\ 500\ \text{mA}$                           |                      | 3    | 15   | mV            |
| $I_d$        | Quiescent Current         | $V_I = 4\ \text{to}\ 16\ \text{V}$ , $I_O = 0\ \text{mA}$ ON MODE                      |                      | 0.5  | 1    | mA            |
|              |                           | $V_I = 4.3\ \text{to}\ 16\ \text{V}$ , $I_O = 500\ \text{mA}$                          |                      |      | 12   |               |
|              |                           | $V_I = 6\ \text{V}$ OFF MODE                                                           |                      | 50   | 100  | $\mu\text{A}$ |
| SVR          | Supply Voltage Rejection  | $I_O = 5\ \text{mA}$<br>$V_I = 5 \pm 1\ \text{V}$                                      | $f = 120\ \text{Hz}$ | 81   |      | dB            |
|              |                           |                                                                                        | $f = 1\ \text{KHz}$  | 76   |      |               |
|              |                           |                                                                                        | $f = 10\ \text{KHz}$ | 65   |      |               |
| eN           | Output Noise Voltage      | $B = 10\ \text{Hz to}\ 100\ \text{KHz}$                                                |                      | 50   |      | $\mu\text{V}$ |
| $V_d$        | Dropout Voltage           | $I_O = 200\ \text{mA}$                                                                 |                      | 0.2  | 0.35 | V             |
|              |                           | $I_O = 500\ \text{mA}$                                                                 |                      | 0.4  | 0.7  |               |
| $V_{IL}$     | Control Input Logic Low   | $T_a = -40\ \text{to}\ 125^\circ\text{C}$                                              |                      |      | 0.8  | V             |
| $V_{IH}$     | Control Input Logic High  | $T_a = -40\ \text{to}\ 125^\circ\text{C}$                                              | 2                    |      |      | V             |
| $I_I$        | Control Input Current     | $V_I = 6\ \text{V}$ , $V_C = 6\ \text{V}$                                              |                      | 10   |      | $\mu\text{A}$ |
| $C_O$        | Output Bypass Capacitance | $\text{ESR} = 0.1\ \text{to}\ 10\ \Omega$ , $I_O = 0\ \text{to}\ 500\ \text{mA}$       | 2                    | 10   |      | $\mu\text{F}$ |

**ELECTRICAL CHARACTERISTICS FOR LF33AB** (refer to the test circuits,  $T_j = 25^\circ\text{C}$ ,  $C_I = 0.1\ \mu\text{F}$ ,  $C_O = 2.2\ \mu\text{F}$  unless otherwise specified.)

| Symbol       | Parameter                 | Test Conditions                                                                          | Min.                 | Typ. | Max.  | Unit          |
|--------------|---------------------------|------------------------------------------------------------------------------------------|----------------------|------|-------|---------------|
| $V_O$        | Output Voltage            | $I_O = 50\ \text{mA}$ , $V_I = 5.3\ \text{V}$                                            | 3.267                | 3.3  | 3.333 | V             |
|              |                           | $I_O = 50\ \text{mA}$ , $V_I = 5.3\ \text{V}$ , $T_a = -25\ \text{to}\ 85^\circ\text{C}$ | 3.234                |      | 3.366 |               |
| $V_I$        | Operating Input Voltage   | $I_O = 500\ \text{mA}$                                                                   |                      |      | 16    | V             |
| $I_O$        | Output Current Limit      |                                                                                          |                      | 1    |       | A             |
| $\Delta V_O$ | Line Regulation           | $V_I = 4.3\ \text{to}\ 16\ \text{V}$ , $I_O = 5\ \text{mA}$                              |                      | 3    | 16    | mV            |
| $\Delta V_O$ | Load Regulation           | $V_I = 4.6\ \text{V}$ , $I_O = 5\ \text{to}\ 500\ \text{mA}$                             |                      | 3    | 16    | mV            |
| $I_d$        | Quiescent Current         | $V_I = 4.3\ \text{to}\ 16\ \text{V}$ , $I_O = 0\ \text{mA}$ ON MODE                      |                      | 0.5  | 1     | mA            |
|              |                           | $V_I = 4.6\ \text{to}\ 16\ \text{V}$ , $I_O = 500\ \text{mA}$                            |                      |      | 12    |               |
|              |                           | $V_I = 6\ \text{V}$ OFF MODE                                                             |                      | 50   | 100   | $\mu\text{A}$ |
| SVR          | Supply Voltage Rejection  | $I_O = 5\ \text{mA}$<br>$V_I = 5.3 \pm 1\ \text{V}$                                      | $f = 120\ \text{Hz}$ | 80   |       | dB            |
|              |                           |                                                                                          | $f = 1\ \text{KHz}$  | 75   |       |               |
|              |                           |                                                                                          | $f = 10\ \text{KHz}$ | 65   |       |               |
| eN           | Output Noise Voltage      | $B = 10\ \text{Hz to}\ 100\ \text{KHz}$                                                  |                      | 50   |       | $\mu\text{V}$ |
| $V_d$        | Dropout Voltage           | $I_O = 200\ \text{mA}$                                                                   |                      | 0.2  | 0.35  | V             |
|              |                           | $I_O = 500\ \text{mA}$                                                                   |                      | 0.4  | 0.7   |               |
| $V_{IL}$     | Control Input Logic Low   | $T_a = -40\ \text{to}\ 125^\circ\text{C}$                                                |                      |      | 0.8   | V             |
| $V_{IH}$     | Control Input Logic High  | $T_a = -40\ \text{to}\ 125^\circ\text{C}$                                                | 2                    |      |       | V             |
| $I_I$        | Control Input Current     | $V_I = 6\ \text{V}$ , $V_C = 6\ \text{V}$                                                |                      | 10   |       | $\mu\text{A}$ |
| $C_O$        | Output Bypass Capacitance | $\text{ESR} = 0.1\ \text{to}\ 10\ \Omega$ , $I_O = 0\ \text{to}\ 500\ \text{mA}$         | 2                    | 10   |       | $\mu\text{F}$ |

**ELECTRICAL CHARACTERISTICS FOR LF33C** (refer to the test circuits,  $T_j = 25^\circ\text{C}$ ,  $C_1 = 0.1\ \mu\text{F}$ ,  $C_O = 2.2\ \mu\text{F}$  unless otherwise specified.)

| Symbol       | Parameter                 | Test Conditions                                                                          | Min.                 | Typ. | Max.  | Unit          |
|--------------|---------------------------|------------------------------------------------------------------------------------------|----------------------|------|-------|---------------|
| $V_O$        | Output Voltage            | $I_O = 50\ \text{mA}$ , $V_I = 5.3\ \text{V}$                                            | 3.234                | 3.3  | 3.366 | V             |
|              |                           | $I_O = 50\ \text{mA}$ , $V_I = 5.3\ \text{V}$ , $T_a = -25\ \text{to}\ 85^\circ\text{C}$ | 3.168                |      | 3.432 |               |
| $V_I$        | Operating Input Voltage   | $I_O = 500\ \text{mA}$                                                                   |                      |      | 16    | V             |
| $I_O$        | Output Current Limit      |                                                                                          |                      | 1    |       | A             |
| $\Delta V_O$ | Line Regulation           | $V_I = 4.3\ \text{to}\ 16\ \text{V}$ , $I_O = 5\ \text{mA}$                              |                      | 3    | 16    | mV            |
| $\Delta V_O$ | Load Regulation           | $V_I = 4.6\ \text{V}$ , $I_O = 5\ \text{to}\ 500\ \text{mA}$                             |                      | 3    | 16    | mV            |
| $I_d$        | Quiescent Current         | $V_I = 4.3\ \text{to}\ 16\ \text{V}$ , $I_O = 0\ \text{mA}$                              | ON MODE              | 0.5  | 1     | mA            |
|              |                           | $V_I = 4.6\ \text{to}\ 16\ \text{V}$ , $I_O = 500\ \text{mA}$                            |                      |      | 12    |               |
|              |                           | $V_I = 6\ \text{V}$                                                                      | OFF MODE             | 50   | 100   | $\mu\text{A}$ |
| SVR          | Supply Voltage Rejection  | $I_O = 5\ \text{mA}$<br>$V_I = 5.3 \pm 1\ \text{V}$                                      | $f = 120\ \text{Hz}$ | 80   |       | dB            |
|              |                           |                                                                                          | $f = 1\ \text{KHz}$  | 75   |       |               |
|              |                           |                                                                                          | $f = 10\ \text{KHz}$ | 65   |       |               |
| eN           | Output Noise Voltage      | $B = 10\ \text{Hz to}\ 100\ \text{KHz}$                                                  |                      | 50   |       | $\mu\text{V}$ |
| $V_d$        | Dropout Voltage           | $I_O = 200\ \text{mA}$                                                                   |                      | 0.2  | 0.35  | V             |
|              |                           | $I_O = 500\ \text{mA}$                                                                   |                      | 0.4  | 0.7   |               |
| $V_{IL}$     | Control Input Logic Low   | $T_a = -40\ \text{to}\ 125^\circ\text{C}$                                                |                      |      | 0.8   | V             |
| $V_{IH}$     | Control Input Logic High  | $T_a = -40\ \text{to}\ 125^\circ\text{C}$                                                | 2                    |      |       | V             |
| $I_I$        | Control Input Current     | $V_I = 6\ \text{V}$ , $V_C = 6\ \text{V}$                                                |                      | 10   |       | $\mu\text{A}$ |
| $C_O$        | Output Bypass Capacitance | $\text{ESR} = 0.1\ \text{to}\ 10\ \Omega$ , $I_O = 0\ \text{to}\ 500\ \text{mA}$         | 2                    | 10   |       | $\mu\text{F}$ |

**ELECTRICAL CHARACTERISTICS FOR LF35AB** (refer to the test circuits,  $T_j = 25^\circ\text{C}$ ,  $C_1 = 0.1\ \mu\text{F}$ ,  $C_O = 2.2\ \mu\text{F}$  unless otherwise specified.)

| Symbol       | Parameter                 | Test Conditions                                                                          | Min.                 | Typ. | Max.  | Unit          |
|--------------|---------------------------|------------------------------------------------------------------------------------------|----------------------|------|-------|---------------|
| $V_O$        | Output Voltage            | $I_O = 50\ \text{mA}$ , $V_I = 5.5\ \text{V}$                                            | 3.465                | 3.5  | 3.535 | V             |
|              |                           | $I_O = 50\ \text{mA}$ , $V_I = 5.5\ \text{V}$ , $T_a = -25\ \text{to}\ 85^\circ\text{C}$ | 3.430                |      | 3.570 |               |
| $V_I$        | Operating Input Voltage   | $I_O = 500\ \text{mA}$                                                                   |                      |      | 16    | V             |
| $I_O$        | Output Current Limit      |                                                                                          |                      | 1    |       | A             |
| $\Delta V_O$ | Line Regulation           | $V_I = 4.5\ \text{to}\ 16\ \text{V}$ , $I_O = 5\ \text{mA}$                              |                      | 3    | 17    | mV            |
| $\Delta V_O$ | Load Regulation           | $V_I = 4.8\ \text{V}$ , $I_O = 5\ \text{to}\ 500\ \text{mA}$                             |                      | 3    | 17    | mV            |
| $I_d$        | Quiescent Current         | $V_I = 4.5\ \text{to}\ 16\ \text{V}$ , $I_O = 0\ \text{mA}$                              | ON MODE              | 0.5  | 1     | mA            |
|              |                           | $V_I = 4.8\ \text{to}\ 16\ \text{V}$ , $I_O = 500\ \text{mA}$                            |                      |      | 12    |               |
|              |                           | $V_I = 6\ \text{V}$                                                                      | OFF MODE             | 50   | 100   | $\mu\text{A}$ |
| SVR          | Supply Voltage Rejection  | $I_O = 5\ \text{mA}$<br>$V_I = 5.5 \pm 1\ \text{V}$                                      | $f = 120\ \text{Hz}$ | 79   |       | dB            |
|              |                           |                                                                                          | $f = 1\ \text{KHz}$  | 74   |       |               |
|              |                           |                                                                                          | $f = 10\ \text{KHz}$ | 60   |       |               |
| eN           | Output Noise Voltage      | $B = 10\ \text{Hz to}\ 100\ \text{KHz}$                                                  |                      | 50   |       | $\mu\text{V}$ |
| $V_d$        | Dropout Voltage           | $I_O = 200\ \text{mA}$                                                                   |                      | 0.2  | 0.35  | V             |
|              |                           | $I_O = 500\ \text{mA}$                                                                   |                      | 0.4  | 0.7   |               |
| $V_{IL}$     | Control Input Logic Low   | $T_a = -40\ \text{to}\ 125^\circ\text{C}$                                                |                      |      | 0.8   | V             |
| $V_{IH}$     | Control Input Logic High  | $T_a = -40\ \text{to}\ 125^\circ\text{C}$                                                | 2                    |      |       | V             |
| $I_I$        | Control Input Current     | $V_I = 6\ \text{V}$ , $V_C = 6\ \text{V}$                                                |                      | 10   |       | $\mu\text{A}$ |
| $C_O$        | Output Bypass Capacitance | $\text{ESR} = 0.1\ \text{to}\ 10\ \Omega$ , $I_O = 0\ \text{to}\ 500\ \text{mA}$         | 2                    | 10   |       | $\mu\text{F}$ |

## LF00 SERIES

**ELECTRICAL CHARACTERISTICS FOR LF35C** (refer to the test circuits,  $T_j = 25^\circ\text{C}$ ,  $C_1 = 0.1\ \mu\text{F}$ ,  $C_O = 2.2\ \mu\text{F}$  unless otherwise specified.)

| Symbol       | Parameter                 | Test Conditions                                                                          | Min.                 | Typ. | Max. | Unit          |
|--------------|---------------------------|------------------------------------------------------------------------------------------|----------------------|------|------|---------------|
| $V_O$        | Output Voltage            | $I_O = 50\ \text{mA}$ , $V_I = 5.5\ \text{V}$                                            | 3.43                 | 3.5  | 3.57 | V             |
|              |                           | $I_O = 50\ \text{mA}$ , $V_I = 5.5\ \text{V}$ , $T_a = -25\ \text{to}\ 85^\circ\text{C}$ | 3.36                 |      | 3.64 |               |
| $V_I$        | Operating Input Voltage   | $I_O = 500\ \text{mA}$                                                                   |                      |      | 16   | V             |
| $I_O$        | Output Current Limit      |                                                                                          |                      | 1    |      | A             |
| $\Delta V_O$ | Line Regulation           | $V_I = 4.5\ \text{to}\ 16\ \text{V}$ , $I_O = 5\ \text{mA}$                              |                      | 3    | 17   | mV            |
| $\Delta V_O$ | Load Regulation           | $V_I = 4.8\ \text{V}$ , $I_O = 5\ \text{to}\ 500\ \text{mA}$                             |                      | 3    | 17   | mV            |
| $I_d$        | Quiescent Current         | $V_I = 4.5\ \text{to}\ 16\ \text{V}$ , $I_O = 0\ \text{mA}$                              | ON MODE              | 0.5  | 1    | mA            |
|              |                           | $V_I = 4.8\ \text{to}\ 16\ \text{V}$ , $I_O = 500\ \text{mA}$                            |                      |      | 12   |               |
|              |                           | $V_I = 6\ \text{V}$                                                                      | OFF MODE             | 50   | 100  | $\mu\text{A}$ |
| SVR          | Supply Voltage Rejection  | $I_O = 5\ \text{mA}$<br>$V_I = 5.5 \pm 1\ \text{V}$                                      | $f = 120\ \text{Hz}$ | 79   |      | dB            |
|              |                           |                                                                                          | $f = 1\ \text{KHz}$  | 74   |      |               |
|              |                           |                                                                                          | $f = 10\ \text{KHz}$ | 60   |      |               |
| eN           | Output Noise Voltage      | $B = 10\ \text{Hz to}\ 100\ \text{KHz}$                                                  |                      | 50   |      | $\mu\text{V}$ |
| $V_d$        | Dropout Voltage           | $I_O = 200\ \text{mA}$                                                                   |                      | 0.2  | 0.35 | V             |
|              |                           | $I_O = 500\ \text{mA}$                                                                   |                      | 0.4  | 0.7  |               |
| $V_{IL}$     | Control Input Logic Low   | $T_a = -40\ \text{to}\ 125^\circ\text{C}$                                                |                      |      | 0.8  | V             |
| $V_{IH}$     | Control Input Logic High  | $T_a = -40\ \text{to}\ 125^\circ\text{C}$                                                | 2                    |      |      | V             |
| $I_I$        | Control Input Current     | $V_I = 6\ \text{V}$ , $V_C = 6\ \text{V}$                                                |                      | 10   |      | $\mu\text{A}$ |
| $C_O$        | Output Bypass Capacitance | $\text{ESR} = 0.1\ \text{to}\ 10\ \Omega$ , $I_O = 0\ \text{to}\ 500\ \text{mA}$         | 2                    | 10   |      | $\mu\text{F}$ |

**ELECTRICAL CHARACTERISTICS FOR LF40AB** (refer to the test circuits,  $T_j = 25^\circ\text{C}$ ,  $C_1 = 0.1\ \mu\text{F}$ ,  $C_O = 2.2\ \mu\text{F}$  unless otherwise specified.)

| Symbol       | Parameter                 | Test Conditions                                                                        | Min.                 | Typ. | Max. | Unit          |
|--------------|---------------------------|----------------------------------------------------------------------------------------|----------------------|------|------|---------------|
| $V_O$        | Output Voltage            | $I_O = 50\ \text{mA}$ , $V_I = 6\ \text{V}$                                            | 3.96                 | 4    | 4.04 | V             |
|              |                           | $I_O = 50\ \text{mA}$ , $V_I = 6\ \text{V}$ , $T_a = -25\ \text{to}\ 85^\circ\text{C}$ | 3.92                 |      | 4.08 |               |
| $V_I$        | Operating Input Voltage   | $I_O = 500\ \text{mA}$                                                                 |                      |      | 16   | V             |
| $I_O$        | Output Current Limit      |                                                                                        |                      | 1    |      | A             |
| $\Delta V_O$ | Line Regulation           | $V_I = 5\ \text{to}\ 16\ \text{V}$ , $I_O = 5\ \text{mA}$                              |                      | 4    | 20   | mV            |
| $\Delta V_O$ | Load Regulation           | $V_I = 5.3\ \text{V}$ , $I_O = 5\ \text{to}\ 500\ \text{mA}$                           |                      | 4    | 20   | mV            |
| $I_d$        | Quiescent Current         | $V_I = 5\ \text{to}\ 16\ \text{V}$ , $I_O = 0\ \text{mA}$                              | ON MODE              | 0.5  | 1    | mA            |
|              |                           | $V_I = 5.3\ \text{to}\ 16\ \text{V}$ , $I_O = 500\ \text{mA}$                          |                      |      | 12   |               |
|              |                           | $V_I = 6\ \text{V}$                                                                    | OFF MODE             | 50   | 100  | $\mu\text{A}$ |
| SVR          | Supply Voltage Rejection  | $I_O = 5\ \text{mA}$<br>$V_I = 6 \pm 1\ \text{V}$                                      | $f = 120\ \text{Hz}$ | 78   |      | dB            |
|              |                           |                                                                                        | $f = 1\ \text{KHz}$  | 73   |      |               |
|              |                           |                                                                                        | $f = 10\ \text{KHz}$ | 60   |      |               |
| eN           | Output Noise Voltage      | $B = 10\ \text{Hz to}\ 100\ \text{KHz}$                                                |                      | 50   |      | $\mu\text{V}$ |
| $V_d$        | Dropout Voltage           | $I_O = 200\ \text{mA}$                                                                 |                      | 0.2  | 0.35 | V             |
|              |                           | $I_O = 500\ \text{mA}$                                                                 |                      | 0.4  | 0.7  |               |
| $V_{IL}$     | Control Input Logic Low   | $T_a = -40\ \text{to}\ 125^\circ\text{C}$                                              |                      |      | 0.8  | V             |
| $V_{IH}$     | Control Input Logic High  | $T_a = -40\ \text{to}\ 125^\circ\text{C}$                                              | 2                    |      |      | V             |
| $I_I$        | Control Input Current     | $V_I = 6\ \text{V}$ , $V_C = 6\ \text{V}$                                              |                      | 10   |      | $\mu\text{A}$ |
| $C_O$        | Output Bypass Capacitance | $\text{ESR} = 0.1\ \text{to}\ 10\ \Omega$ , $I_O = 0\ \text{to}\ 500\ \text{mA}$       | 2                    | 10   |      | $\mu\text{F}$ |

**ELECTRICAL CHARACTERISTICS FOR LF40C** (refer to the test circuits,  $T_j = 25^\circ\text{C}$ ,  $C_1 = 0.1\ \mu\text{F}$ ,  $C_O = 2.2\ \mu\text{F}$  unless otherwise specified.)

| Symbol       | Parameter                 | Test Conditions                                                                        | Min.                 | Typ. | Max. | Unit          |
|--------------|---------------------------|----------------------------------------------------------------------------------------|----------------------|------|------|---------------|
| $V_O$        | Output Voltage            | $I_O = 50\ \text{mA}$ , $V_I = 6\ \text{V}$                                            | 3.92                 | 4    | 4.08 | V             |
|              |                           | $I_O = 50\ \text{mA}$ , $V_I = 6\ \text{V}$ , $T_a = -25\ \text{to}\ 85^\circ\text{C}$ | 3.84                 |      | 4.16 |               |
| $V_I$        | Operating Input Voltage   | $I_O = 500\ \text{mA}$                                                                 |                      |      | 16   | V             |
| $I_O$        | Output Current Limit      |                                                                                        |                      | 1    |      | A             |
| $\Delta V_O$ | Line Regulation           | $V_I = 5\ \text{to}\ 16\ \text{V}$ , $I_O = 5\ \text{mA}$                              |                      | 4    | 20   | mV            |
| $\Delta V_O$ | Load Regulation           | $V_I = 5.3\ \text{V}$ , $I_O = 5\ \text{to}\ 500\ \text{mA}$                           |                      | 4    | 20   | mV            |
| $I_d$        | Quiescent Current         | $V_I = 5\ \text{to}\ 16\ \text{V}$ , $I_O = 0\ \text{mA}$ ON MODE                      |                      | 0.5  | 1    | mA            |
|              |                           | $V_I = 5.3\ \text{to}\ 16\ \text{V}$ , $I_O = 500\ \text{mA}$                          |                      |      | 12   |               |
|              |                           | $V_I = 6\ \text{V}$ OFF MODE                                                           |                      | 50   | 100  | $\mu\text{A}$ |
| SVR          | Supply Voltage Rejection  | $I_O = 5\ \text{mA}$<br>$V_I = 6 \pm 1\ \text{V}$                                      | $f = 120\ \text{Hz}$ | 78   |      | dB            |
|              |                           |                                                                                        | $f = 1\ \text{KHz}$  | 73   |      |               |
|              |                           |                                                                                        | $f = 10\ \text{KHz}$ | 60   |      |               |
| eN           | Output Noise Voltage      | $B = 10\ \text{Hz to}\ 100\ \text{KHz}$                                                |                      | 50   |      | $\mu\text{V}$ |
| $V_d$        | Dropout Voltage           | $I_O = 200\ \text{mA}$                                                                 |                      | 0.2  | 0.35 | V             |
|              |                           | $I_O = 500\ \text{mA}$                                                                 |                      | 0.4  | 0.7  |               |
| $V_{IL}$     | Control Input Logic Low   | $T_a = -40\ \text{to}\ 125^\circ\text{C}$                                              |                      |      | 0.8  | V             |
| $V_{IH}$     | Control Input Logic High  | $T_a = -40\ \text{to}\ 125^\circ\text{C}$                                              | 2                    |      |      | V             |
| $I_I$        | Control Input Current     | $V_I = 6\ \text{V}$ , $V_C = 6\ \text{V}$                                              |                      | 10   |      | $\mu\text{A}$ |
| $C_O$        | Output Bypass Capacitance | $\text{ESR} = 0.1\ \text{to}\ 10\ \Omega$ , $I_O = 0\ \text{to}\ 500\ \text{mA}$       | 2                    | 10   |      | $\mu\text{F}$ |

**ELECTRICAL CHARACTERISTICS FOR LF45AB** (refer to the test circuits,  $T_j = 25^\circ\text{C}$ ,  $C_1 = 0.1\ \mu\text{F}$ ,  $C_O = 2.2\ \mu\text{F}$  unless otherwise specified.)

| Symbol       | Parameter                 | Test Conditions                                                                          | Min.                 | Typ. | Max.  | Unit          |
|--------------|---------------------------|------------------------------------------------------------------------------------------|----------------------|------|-------|---------------|
| $V_O$        | Output Voltage            | $I_O = 50\ \text{mA}$ , $V_I = 6.5\ \text{V}$                                            | 4.455                | 4.5  | 4.545 | V             |
|              |                           | $I_O = 50\ \text{mA}$ , $V_I = 6.5\ \text{V}$ , $T_a = -25\ \text{to}\ 85^\circ\text{C}$ | 4.41                 |      | 4.59  |               |
| $V_I$        | Operating Input Voltage   | $I_O = 500\ \text{mA}$                                                                   |                      |      | 16    | V             |
| $I_O$        | Output Current Limit      |                                                                                          |                      | 1    |       | A             |
| $\Delta V_O$ | Line Regulation           | $V_I = 5.5\ \text{to}\ 16\ \text{V}$ , $I_O = 5\ \text{mA}$                              |                      | 4    | 22    | mV            |
| $\Delta V_O$ | Load Regulation           | $V_I = 5.8\ \text{V}$ , $I_O = 5\ \text{to}\ 500\ \text{mA}$                             |                      | 4    | 22    | mV            |
| $I_d$        | Quiescent Current         | $V_I = 5.5\ \text{to}\ 16\ \text{V}$ , $I_O = 0\ \text{mA}$ ON MODE                      |                      | 0.5  | 1     | mA            |
|              |                           | $V_I = 5.8\ \text{to}\ 16\ \text{V}$ , $I_O = 500\ \text{mA}$                            |                      |      | 12    |               |
|              |                           | $V_I = 6\ \text{V}$ OFF MODE                                                             |                      | 50   | 100   | $\mu\text{A}$ |
| SVR          | Supply Voltage Rejection  | $I_O = 5\ \text{mA}$<br>$V_I = 6.5 \pm 1\ \text{V}$                                      | $f = 120\ \text{Hz}$ | 77   |       | dB            |
|              |                           |                                                                                          | $f = 1\ \text{KHz}$  | 72   |       |               |
|              |                           |                                                                                          | $f = 10\ \text{KHz}$ | 60   |       |               |
| eN           | Output Noise Voltage      | $B = 10\ \text{Hz to}\ 100\ \text{KHz}$                                                  |                      | 50   |       | $\mu\text{V}$ |
| $V_d$        | Dropout Voltage           | $I_O = 200\ \text{mA}$                                                                   |                      | 0.2  | 0.35  | V             |
|              |                           | $I_O = 500\ \text{mA}$                                                                   |                      | 0.4  | 0.7   |               |
| $V_{IL}$     | Control Input Logic Low   | $T_a = -40\ \text{to}\ 125^\circ\text{C}$                                                |                      |      | 0.8   | V             |
| $V_{IH}$     | Control Input Logic High  | $T_a = -40\ \text{to}\ 125^\circ\text{C}$                                                | 2                    |      |       | V             |
| $I_I$        | Control Input Current     | $V_I = 6\ \text{V}$ , $V_C = 6\ \text{V}$                                                |                      | 10   |       | $\mu\text{A}$ |
| $C_O$        | Output Bypass Capacitance | $\text{ESR} = 0.1\ \text{to}\ 10\ \Omega$ , $I_O = 0\ \text{to}\ 500\ \text{mA}$         | 2                    | 10   |       | $\mu\text{F}$ |

## LF00 SERIES

**ELECTRICAL CHARACTERISTICS FOR LF45C** (refer to the test circuits,  $T_j = 25^\circ\text{C}$ ,  $C_1 = 0.1\ \mu\text{F}$ ,  $C_O = 2.2\ \mu\text{F}$  unless otherwise specified.)

| Symbol       | Parameter                 | Test Conditions                                                                          | Min.                 | Typ. | Max. | Unit          |
|--------------|---------------------------|------------------------------------------------------------------------------------------|----------------------|------|------|---------------|
| $V_O$        | Output Voltage            | $I_O = 50\ \text{mA}$ , $V_I = 6.5\ \text{V}$                                            | 4.41                 | 4.5  | 4.59 | V             |
|              |                           | $I_O = 50\ \text{mA}$ , $V_I = 6.5\ \text{V}$ , $T_a = -25\ \text{to}\ 85^\circ\text{C}$ | 4.32                 |      | 4.68 |               |
| $V_I$        | Operating Input Voltage   | $I_O = 500\ \text{mA}$                                                                   |                      |      | 16   | V             |
| $I_O$        | Output Current Limit      |                                                                                          |                      | 1    |      | A             |
| $\Delta V_O$ | Line Regulation           | $V_I = 5.5\ \text{to}\ 16\ \text{V}$ , $I_O = 5\ \text{mA}$                              |                      | 4    | 22   | mV            |
| $\Delta V_O$ | Load Regulation           | $V_I = 5.8\ \text{V}$ , $I_O = 5\ \text{to}\ 500\ \text{mA}$                             |                      | 4    | 22   | mV            |
| $I_d$        | Quiescent Current         | $V_I = 5.5\ \text{to}\ 16\ \text{V}$ , $I_O = 0\ \text{mA}$                              | ON MODE              | 0.5  | 1    | mA            |
|              |                           | $V_I = 5.8\ \text{to}\ 16\ \text{V}$ , $I_O = 500\ \text{mA}$                            |                      |      | 12   |               |
|              |                           | $V_I = 6\ \text{V}$                                                                      | OFF MODE             | 50   | 100  | $\mu\text{A}$ |
| SVR          | Supply Voltage Rejection  | $I_O = 5\ \text{mA}$<br>$V_I = 6.5 \pm 1\ \text{V}$                                      | $f = 120\ \text{Hz}$ | 77   |      | dB            |
|              |                           |                                                                                          | $f = 1\ \text{KHz}$  | 72   |      |               |
|              |                           |                                                                                          | $f = 10\ \text{KHz}$ | 60   |      |               |
| eN           | Output Noise Voltage      | $B = 10\ \text{Hz to}\ 100\ \text{KHz}$                                                  |                      | 50   |      | $\mu\text{V}$ |
| $V_d$        | Dropout Voltage           | $I_O = 200\ \text{mA}$                                                                   |                      | 0.2  | 0.35 | V             |
|              |                           | $I_O = 500\ \text{mA}$                                                                   |                      | 0.4  | 0.7  |               |
| $V_{IL}$     | Control Input Logic Low   | $T_a = -40\ \text{to}\ 125^\circ\text{C}$                                                |                      |      | 0.8  | V             |
| $V_{IH}$     | Control Input Logic High  | $T_a = -40\ \text{to}\ 125^\circ\text{C}$                                                | 2                    |      |      | V             |
| $I_I$        | Control Input Current     | $V_I = 6\ \text{V}$ , $V_C = 6\ \text{V}$                                                |                      | 10   |      | $\mu\text{A}$ |
| $C_O$        | Output Bypass Capacitance | $\text{ESR} = 0.1\ \text{to}\ 10\ \Omega$ , $I_O = 0\ \text{to}\ 500\ \text{mA}$         | 2                    | 10   |      | $\mu\text{F}$ |

**ELECTRICAL CHARACTERISTICS FOR LF47AB** (refer to the test circuits,  $T_j = 25^\circ\text{C}$ ,  $C_1 = 0.1\ \mu\text{F}$ ,  $C_O = 2.2\ \mu\text{F}$  unless otherwise specified.)

| Symbol       | Parameter                 | Test Conditions                                                                          | Min.                 | Typ. | Max.  | Unit          |
|--------------|---------------------------|------------------------------------------------------------------------------------------|----------------------|------|-------|---------------|
| $V_O$        | Output Voltage            | $I_O = 50\ \text{mA}$ , $V_I = 6.7\ \text{V}$                                            | 4.653                | 4.7  | 4.747 | V             |
|              |                           | $I_O = 50\ \text{mA}$ , $V_I = 6.7\ \text{V}$ , $T_a = -25\ \text{to}\ 85^\circ\text{C}$ | 4.606                |      | 4.794 |               |
| $V_I$        | Operating Input Voltage   | $I_O = 500\ \text{mA}$                                                                   |                      |      | 16    | V             |
| $I_O$        | Output Current Limit      |                                                                                          |                      | 1    |       | A             |
| $\Delta V_O$ | Line Regulation           | $V_I = 5.7\ \text{to}\ 16\ \text{V}$ , $I_O = 5\ \text{mA}$                              |                      | 4    | 23    | mV            |
| $\Delta V_O$ | Load Regulation           | $V_I = 6\ \text{V}$ , $I_O = 5\ \text{to}\ 500\ \text{mA}$                               |                      | 4    | 23    | mV            |
| $I_d$        | Quiescent Current         | $V_I = 5.7\ \text{to}\ 16\ \text{V}$ , $I_O = 0\ \text{mA}$                              | ON MODE              | 0.5  | 1     | mA            |
|              |                           | $V_I = 6\ \text{to}\ 16\ \text{V}$ , $I_O = 500\ \text{mA}$                              |                      |      | 12    |               |
|              |                           | $V_I = 6\ \text{V}$                                                                      | OFF MODE             | 50   | 100   | $\mu\text{A}$ |
| SVR          | Supply Voltage Rejection  | $I_O = 5\ \text{mA}$<br>$V_I = 6.7 \pm 1\ \text{V}$                                      | $f = 120\ \text{Hz}$ | 77   |       | dB            |
|              |                           |                                                                                          | $f = 1\ \text{KHz}$  | 72   |       |               |
|              |                           |                                                                                          | $f = 10\ \text{KHz}$ | 60   |       |               |
| eN           | Output Noise Voltage      | $B = 10\ \text{Hz to}\ 100\ \text{KHz}$                                                  |                      | 50   |       | $\mu\text{V}$ |
| $V_d$        | Dropout Voltage           | $I_O = 200\ \text{mA}$                                                                   |                      | 0.2  | 0.35  | V             |
|              |                           | $I_O = 500\ \text{mA}$                                                                   |                      | 0.4  | 0.7   |               |
| $V_{IL}$     | Control Input Logic Low   | $T_a = -40\ \text{to}\ 125^\circ\text{C}$                                                |                      |      | 0.8   | V             |
| $V_{IH}$     | Control Input Logic High  | $T_a = -40\ \text{to}\ 125^\circ\text{C}$                                                | 2                    |      |       | V             |
| $I_I$        | Control Input Current     | $V_I = 6\ \text{V}$ , $V_C = 6\ \text{V}$                                                |                      | 10   |       | $\mu\text{A}$ |
| $C_O$        | Output Bypass Capacitance | $\text{ESR} = 0.1\ \text{to}\ 10\ \Omega$ , $I_O = 0\ \text{to}\ 500\ \text{mA}$         | 2                    | 10   |       | $\mu\text{F}$ |

**ELECTRICAL CHARACTERISTICS FOR LF47C** (refer to the test circuits,  $T_j = 25^\circ\text{C}$ ,  $C_1 = 0.1\ \mu\text{F}$ ,  $C_O = 2.2\ \mu\text{F}$  unless otherwise specified.)

| Symbol       | Parameter                 | Test Conditions                                                                          | Min.                 | Typ. | Max.  | Unit          |
|--------------|---------------------------|------------------------------------------------------------------------------------------|----------------------|------|-------|---------------|
| $V_O$        | Output Voltage            | $I_O = 50\ \text{mA}$ , $V_I = 6.7\ \text{V}$                                            | 4.606                | 4.7  | 4.794 | V             |
|              |                           | $I_O = 50\ \text{mA}$ , $V_I = 6.7\ \text{V}$ , $T_a = -25\ \text{to}\ 85^\circ\text{C}$ | 4.512                |      | 4.888 |               |
| $V_I$        | Operating Input Voltage   | $I_O = 500\ \text{mA}$                                                                   |                      |      | 16    | V             |
| $I_O$        | Output Current Limit      |                                                                                          |                      | 1    |       | A             |
| $\Delta V_O$ | Line Regulation           | $V_I = 5.7\ \text{to}\ 16\ \text{V}$ , $I_O = 5\ \text{mA}$                              |                      | 4    | 23    | mV            |
| $\Delta V_O$ | Load Regulation           | $V_I = 6\ \text{V}$ , $I_O = 5\ \text{to}\ 500\ \text{mA}$                               |                      | 4    | 23    | mV            |
| $I_d$        | Quiescent Current         | $V_I = 5.7\ \text{to}\ 16\ \text{V}$ , $I_O = 0\ \text{mA}$                              | ON MODE              | 0.5  | 1     | mA            |
|              |                           | $V_I = 6\ \text{to}\ 16\ \text{V}$ , $I_O = 500\ \text{mA}$                              |                      |      | 12    |               |
|              |                           | $V_I = 6\ \text{V}$                                                                      | OFF MODE             | 50   | 100   | $\mu\text{A}$ |
| SVR          | Supply Voltage Rejection  | $I_O = 5\ \text{mA}$<br>$V_I = 6.7 \pm 1\ \text{V}$                                      | $f = 120\ \text{Hz}$ | 77   |       | dB            |
|              |                           |                                                                                          | $f = 1\ \text{KHz}$  | 72   |       |               |
|              |                           |                                                                                          | $f = 10\ \text{KHz}$ | 60   |       |               |
| eN           | Output Noise Voltage      | $B = 10\ \text{Hz to}\ 100\ \text{KHz}$                                                  |                      | 50   |       | $\mu\text{V}$ |
| $V_d$        | Dropout Voltage           | $I_O = 200\ \text{mA}$                                                                   |                      | 0.2  | 0.35  | V             |
|              |                           | $I_O = 500\ \text{mA}$                                                                   |                      | 0.4  | 0.7   |               |
| $V_{IL}$     | Control Input Logic Low   | $T_a = -40\ \text{to}\ 125^\circ\text{C}$                                                |                      |      | 0.8   | V             |
| $V_{IH}$     | Control Input Logic High  | $T_a = -40\ \text{to}\ 125^\circ\text{C}$                                                | 2                    |      |       | V             |
| $I_I$        | Control Input Current     | $V_I = 6\ \text{V}$ , $V_C = 6\ \text{V}$                                                |                      | 10   |       | $\mu\text{A}$ |
| $C_O$        | Output Bypass Capacitance | $\text{ESR} = 0.1\ \text{to}\ 10\ \Omega$ , $I_O = 0\ \text{to}\ 500\ \text{mA}$         | 2                    | 10   |       | $\mu\text{F}$ |

**ELECTRICAL CHARACTERISTICS FOR LF50AB** (refer to the test circuits,  $T_j = 25^\circ\text{C}$ ,  $C_1 = 0.1\ \mu\text{F}$ ,  $C_O = 2.2\ \mu\text{F}$  unless otherwise specified.)

| Symbol       | Parameter                 | Test Conditions                                                                        | Min.                 | Typ. | Max. | Unit          |
|--------------|---------------------------|----------------------------------------------------------------------------------------|----------------------|------|------|---------------|
| $V_O$        | Output Voltage            | $I_O = 50\ \text{mA}$ , $V_I = 7\ \text{V}$                                            | 4.95                 | 5    | 5.05 | V             |
|              |                           | $I_O = 50\ \text{mA}$ , $V_I = 7\ \text{V}$ , $T_a = -25\ \text{to}\ 85^\circ\text{C}$ | 4.9                  |      | 5.1  |               |
| $V_I$        | Operating Input Voltage   | $I_O = 500\ \text{mA}$                                                                 |                      |      | 16   | V             |
| $I_O$        | Output Current Limit      |                                                                                        |                      | 1    |      | A             |
| $\Delta V_O$ | Line Regulation           | $V_I = 6\ \text{to}\ 16\ \text{V}$ , $I_O = 5\ \text{mA}$                              |                      | 5    | 25   | mV            |
| $\Delta V_O$ | Load Regulation           | $V_I = 6.3\ \text{V}$ , $I_O = 5\ \text{to}\ 500\ \text{mA}$                           |                      | 5    | 25   | mV            |
| $I_d$        | Quiescent Current         | $V_I = 6\ \text{to}\ 16\ \text{V}$ , $I_O = 0\ \text{mA}$                              | ON MODE              | 0.5  | 1    | mA            |
|              |                           | $V_I = 6.3\ \text{to}\ 16\ \text{V}$ , $I_O = 500\ \text{mA}$                          |                      |      | 12   |               |
|              |                           | $V_I = 6\ \text{V}$                                                                    | OFF MODE             | 50   | 100  | $\mu\text{A}$ |
| SVR          | Supply Voltage Rejection  | $I_O = 5\ \text{mA}$<br>$V_I = 7 \pm 1\ \text{V}$                                      | $f = 120\ \text{Hz}$ | 76   |      | dB            |
|              |                           |                                                                                        | $f = 1\ \text{KHz}$  | 71   |      |               |
|              |                           |                                                                                        | $f = 10\ \text{KHz}$ | 60   |      |               |
| eN           | Output Noise Voltage      | $B = 10\ \text{Hz to}\ 100\ \text{KHz}$                                                |                      | 50   |      | $\mu\text{V}$ |
| $V_d$        | Dropout Voltage           | $I_O = 200\ \text{mA}$                                                                 |                      | 0.2  | 0.35 | V             |
|              |                           | $I_O = 500\ \text{mA}$                                                                 |                      | 0.4  | 0.7  |               |
| $V_{IL}$     | Control Input Logic Low   | $T_a = -40\ \text{to}\ 125^\circ\text{C}$                                              |                      |      | 0.8  | V             |
| $V_{IH}$     | Control Input Logic High  | $T_a = -40\ \text{to}\ 125^\circ\text{C}$                                              | 2                    |      |      | V             |
| $I_I$        | Control Input Current     | $V_I = 6\ \text{V}$ , $V_C = 6\ \text{V}$                                              |                      | 10   |      | $\mu\text{A}$ |
| $C_O$        | Output Bypass Capacitance | $\text{ESR} = 0.1\ \text{to}\ 10\ \Omega$ , $I_O = 0\ \text{to}\ 500\ \text{mA}$       | 2                    | 10   |      | $\mu\text{F}$ |

## LF00 SERIES

**ELECTRICAL CHARACTERISTICS FOR LF50C** (refer to the test circuits,  $T_j = 25^\circ\text{C}$ ,  $C_1 = 0.1\ \mu\text{F}$ ,  $C_O = 2.2\ \mu\text{F}$  unless otherwise specified.)

| Symbol       | Parameter                 | Test Conditions                                                                        | Min.                 | Typ. | Max. | Unit          |
|--------------|---------------------------|----------------------------------------------------------------------------------------|----------------------|------|------|---------------|
| $V_O$        | Output Voltage            | $I_O = 50\ \text{mA}$ , $V_I = 7\ \text{V}$                                            | 4.9                  | 5    | 5.1  | V             |
|              |                           | $I_O = 50\ \text{mA}$ , $V_I = 7\ \text{V}$ , $T_a = -25\ \text{to}\ 85^\circ\text{C}$ | 4.8                  |      | 5.2  |               |
| $V_I$        | Operating Input Voltage   | $I_O = 500\ \text{mA}$                                                                 |                      |      | 16   | V             |
| $I_O$        | Output Current Limit      |                                                                                        |                      | 1    |      | A             |
| $\Delta V_O$ | Line Regulation           | $V_I = 6\ \text{to}\ 16\ \text{V}$ , $I_O = 5\ \text{mA}$                              |                      | 5    | 25   | mV            |
| $\Delta V_O$ | Load Regulation           | $V_I = 6.3\ \text{V}$ , $I_O = 5\ \text{to}\ 500\ \text{mA}$                           |                      | 5    | 25   | mV            |
| $I_d$        | Quiescent Current         | $V_I = 6\ \text{to}\ 16\ \text{V}$ , $I_O = 0\ \text{mA}$ ON MODE                      |                      | 0.5  | 1    | mA            |
|              |                           | $V_I = 6.3\ \text{to}\ 16\ \text{V}$ , $I_O = 500\ \text{mA}$                          |                      |      | 12   |               |
|              |                           | $V_I = 6\ \text{V}$ OFF MODE                                                           |                      | 50   | 100  | $\mu\text{A}$ |
| SVR          | Supply Voltage Rejection  | $I_O = 5\ \text{mA}$<br>$V_I = 7 \pm 1\ \text{V}$                                      | $f = 120\ \text{Hz}$ | 76   |      | dB            |
|              |                           |                                                                                        | $f = 1\ \text{KHz}$  | 71   |      |               |
|              |                           |                                                                                        | $f = 10\ \text{KHz}$ | 60   |      |               |
| eN           | Output Noise Voltage      | $B = 10\ \text{Hz to}\ 100\ \text{KHz}$                                                |                      | 50   |      | $\mu\text{V}$ |
| $V_d$        | Dropout Voltage           | $I_O = 200\ \text{mA}$                                                                 |                      | 0.2  | 0.35 | V             |
|              |                           | $I_O = 500\ \text{mA}$                                                                 |                      | 0.4  | 0.7  |               |
| $V_{IL}$     | Control Input Logic Low   | $T_a = -40\ \text{to}\ 125^\circ\text{C}$                                              |                      |      | 0.8  | V             |
| $V_{IH}$     | Control Input Logic High  | $T_a = -40\ \text{to}\ 125^\circ\text{C}$                                              | 2                    |      |      | V             |
| $I_I$        | Control Input Current     | $V_I = 6\ \text{V}$ , $V_C = 6\ \text{V}$                                              |                      | 10   |      | $\mu\text{A}$ |
| $C_O$        | Output Bypass Capacitance | $\text{ESR} = 0.1\ \text{to}\ 10\ \Omega$ $I_O = 0\ \text{to}\ 500\ \text{mA}$         | 2                    | 10   |      | $\mu\text{F}$ |

**ELECTRICAL CHARACTERISTICS FOR LF52AB** (refer to the test circuits,  $T_j = 25^\circ\text{C}$ ,  $C_1 = 0.1\ \mu\text{F}$ ,  $C_O = 2.2\ \mu\text{F}$  unless otherwise specified.)

| Symbol       | Parameter                 | Test Conditions                                                                          | Min.                 | Typ. | Max.  | Unit          |
|--------------|---------------------------|------------------------------------------------------------------------------------------|----------------------|------|-------|---------------|
| $V_O$        | Output Voltage            | $I_O = 50\ \text{mA}$ , $V_I = 7.2\ \text{V}$                                            | 5.148                | 5.2  | 5.252 | V             |
|              |                           | $I_O = 50\ \text{mA}$ , $V_I = 7.2\ \text{V}$ , $T_a = -25\ \text{to}\ 85^\circ\text{C}$ | 5.096                |      | 5.304 |               |
| $V_I$        | Operating Input Voltage   | $I_O = 500\ \text{mA}$                                                                   |                      |      | 16    | V             |
| $I_O$        | Output Current Limit      |                                                                                          |                      | 1    |       | A             |
| $\Delta V_O$ | Line Regulation           | $V_I = 6.2\ \text{to}\ 16\ \text{V}$ , $I_O = 5\ \text{mA}$                              |                      | 5    | 26    | mV            |
| $\Delta V_O$ | Load Regulation           | $V_I = 6.5\ \text{V}$ , $I_O = 5\ \text{to}\ 500\ \text{mA}$                             |                      | 5    | 26    | mV            |
| $I_d$        | Quiescent Current         | $V_I = 6.2\ \text{to}\ 16\ \text{V}$ , $I_O = 0\ \text{mA}$ ON MODE                      |                      | 0.5  | 1     | mA            |
|              |                           | $V_I = 6.5\ \text{to}\ 16\ \text{V}$ , $I_O = 500\ \text{mA}$                            |                      |      | 12    |               |
|              |                           | $V_I = 6\ \text{V}$ OFF MODE                                                             |                      | 50   | 100   | $\mu\text{A}$ |
| SVR          | Supply Voltage Rejection  | $I_O = 5\ \text{mA}$<br>$V_I = 7.2 \pm 1\ \text{V}$                                      | $f = 120\ \text{Hz}$ | 76   |       | dB            |
|              |                           |                                                                                          | $f = 1\ \text{KHz}$  | 71   |       |               |
|              |                           |                                                                                          | $f = 10\ \text{KHz}$ | 60   |       |               |
| eN           | Output Noise Voltage      | $B = 10\ \text{Hz to}\ 100\ \text{KHz}$                                                  |                      | 50   |       | $\mu\text{V}$ |
| $V_d$        | Dropout Voltage           | $I_O = 200\ \text{mA}$                                                                   |                      | 0.2  | 0.35  | V             |
|              |                           | $I_O = 500\ \text{mA}$                                                                   |                      | 0.4  | 0.7   |               |
| $V_{IL}$     | Control Input Logic Low   | $T_a = -40\ \text{to}\ 125^\circ\text{C}$                                                |                      |      | 0.8   | V             |
| $V_{IH}$     | Control Input Logic High  | $T_a = -40\ \text{to}\ 125^\circ\text{C}$                                                | 2                    |      |       | V             |
| $I_I$        | Control Input Current     | $V_I = 6\ \text{V}$ , $V_C = 6\ \text{V}$                                                |                      | 10   |       | $\mu\text{A}$ |
| $C_O$        | Output Bypass Capacitance | $\text{ESR} = 0.1\ \text{to}\ 10\ \Omega$ $I_O = 0\ \text{to}\ 500\ \text{mA}$           | 2                    | 10   |       | $\mu\text{F}$ |



**ELECTRICAL CHARACTERISTICS FOR LF52C** (refer to the test circuits,  $T_j = 25^\circ\text{C}$ ,  $C_1 = 0.1\ \mu\text{F}$ ,  $C_O = 2.2\ \mu\text{F}$  unless otherwise specified.)

| Symbol       | Parameter                 | Test Conditions                                                                          | Min.                 | Typ. | Max.  | Unit          |
|--------------|---------------------------|------------------------------------------------------------------------------------------|----------------------|------|-------|---------------|
| $V_O$        | Output Voltage            | $I_O = 50\ \text{mA}$ , $V_I = 7.2\ \text{V}$                                            | 5.096                | 5.2  | 5.304 | V             |
|              |                           | $I_O = 50\ \text{mA}$ , $V_I = 7.2\ \text{V}$ , $T_a = -25\ \text{to}\ 85^\circ\text{C}$ | 4.992                |      | 5.408 |               |
| $V_I$        | Operating Input Voltage   | $I_O = 500\ \text{mA}$                                                                   |                      |      | 16    | V             |
| $I_O$        | Output Current Limit      |                                                                                          |                      | 1    |       | A             |
| $\Delta V_O$ | Line Regulation           | $V_I = 6.2\ \text{to}\ 16\ \text{V}$ , $I_O = 5\ \text{mA}$                              |                      | 5    | 26    | mV            |
| $\Delta V_O$ | Load Regulation           | $V_I = 6.5\ \text{V}$ , $I_O = 5\ \text{to}\ 500\ \text{mA}$                             |                      | 5    | 26    | mV            |
| $I_d$        | Quiescent Current         | $V_I = 6.2\ \text{to}\ 16\ \text{V}$ , $I_O = 0\ \text{mA}$                              | ON MODE              | 0.5  | 1     | mA            |
|              |                           | $V_I = 6.5\ \text{to}\ 16\ \text{V}$ , $I_O = 500\ \text{mA}$                            |                      |      | 12    |               |
|              |                           | $V_I = 6\ \text{V}$                                                                      | OFF MODE             | 50   | 100   | $\mu\text{A}$ |
| SVR          | Supply Voltage Rejection  | $I_O = 5\ \text{mA}$<br>$V_I = 7.2 \pm 1\ \text{V}$                                      | $f = 120\ \text{Hz}$ | 76   |       | dB            |
|              |                           |                                                                                          | $f = 1\ \text{KHz}$  | 71   |       |               |
|              |                           |                                                                                          | $f = 10\ \text{KHz}$ | 60   |       |               |
| eN           | Output Noise Voltage      | $B = 10\ \text{Hz to}\ 100\ \text{KHz}$                                                  |                      | 50   |       | $\mu\text{V}$ |
| $V_d$        | Dropout Voltage           | $I_O = 200\ \text{mA}$                                                                   |                      | 0.2  | 0.35  | V             |
|              |                           | $I_O = 500\ \text{mA}$                                                                   |                      | 0.4  | 0.7   |               |
| $V_{IL}$     | Control Input Logic Low   | $T_a = -40\ \text{to}\ 125^\circ\text{C}$                                                |                      |      | 0.8   | V             |
| $V_{IH}$     | Control Input Logic High  | $T_a = -40\ \text{to}\ 125^\circ\text{C}$                                                | 2                    |      |       | V             |
| $I_I$        | Control Input Current     | $V_I = 6\ \text{V}$ , $V_C = 6\ \text{V}$                                                |                      | 10   |       | $\mu\text{A}$ |
| $C_O$        | Output Bypass Capacitance | $\text{ESR} = 0.1\ \text{to}\ 10\ \Omega$ , $I_O = 0\ \text{to}\ 500\ \text{mA}$         | 2                    | 10   |       | $\mu\text{F}$ |

**ELECTRICAL CHARACTERISTICS FOR LF55AB** (refer to the test circuits,  $T_j = 25^\circ\text{C}$ ,  $C_1 = 0.1\ \mu\text{F}$ ,  $C_O = 2.2\ \mu\text{F}$  unless otherwise specified.)

| Symbol       | Parameter                 | Test Conditions                                                                          | Min.                 | Typ. | Max.  | Unit          |
|--------------|---------------------------|------------------------------------------------------------------------------------------|----------------------|------|-------|---------------|
| $V_O$        | Output Voltage            | $I_O = 50\ \text{mA}$ , $V_I = 7.5\ \text{V}$                                            | 5.445                | 5.5  | 5.555 | V             |
|              |                           | $I_O = 50\ \text{mA}$ , $V_I = 7.5\ \text{V}$ , $T_a = -25\ \text{to}\ 85^\circ\text{C}$ | 5.39                 |      | 5.61  |               |
| $V_I$        | Operating Input Voltage   | $I_O = 500\ \text{mA}$                                                                   |                      |      | 16    | V             |
| $I_O$        | Output Current Limit      |                                                                                          |                      | 1    |       | A             |
| $\Delta V_O$ | Line Regulation           | $V_I = 6.5\ \text{to}\ 16\ \text{V}$ , $I_O = 5\ \text{mA}$                              |                      | 5    | 27    | mV            |
| $\Delta V_O$ | Load Regulation           | $V_I = 6.8\ \text{V}$ , $I_O = 5\ \text{to}\ 500\ \text{mA}$                             |                      | 5    | 27    | mV            |
| $I_d$        | Quiescent Current         | $V_I = 6.5\ \text{to}\ 16\ \text{V}$ , $I_O = 0\ \text{mA}$                              | ON MODE              | 0.5  | 1     | mA            |
|              |                           | $V_I = 6.8\ \text{to}\ 16\ \text{V}$ , $I_O = 500\ \text{mA}$                            |                      |      | 12    |               |
|              |                           | $V_I = 6\ \text{V}$                                                                      | OFF MODE             | 50   | 100   | $\mu\text{A}$ |
| SVR          | Supply Voltage Rejection  | $I_O = 5\ \text{mA}$<br>$V_I = 7.5 \pm 1\ \text{V}$                                      | $f = 120\ \text{Hz}$ | 76   |       | dB            |
|              |                           |                                                                                          | $f = 1\ \text{KHz}$  | 71   |       |               |
|              |                           |                                                                                          | $f = 10\ \text{KHz}$ | 60   |       |               |
| eN           | Output Noise Voltage      | $B = 10\ \text{Hz to}\ 100\ \text{KHz}$                                                  |                      | 50   |       | $\mu\text{V}$ |
| $V_d$        | Dropout Voltage           | $I_O = 200\ \text{mA}$                                                                   |                      | 0.2  | 0.35  | V             |
|              |                           | $I_O = 500\ \text{mA}$                                                                   |                      | 0.4  | 0.7   |               |
| $V_{IL}$     | Control Input Logic Low   | $T_a = -40\ \text{to}\ 125^\circ\text{C}$                                                |                      |      | 0.8   | V             |
| $V_{IH}$     | Control Input Logic High  | $T_a = -40\ \text{to}\ 125^\circ\text{C}$                                                | 2                    |      |       | V             |
| $I_I$        | Control Input Current     | $V_I = 6\ \text{V}$ , $V_C = 6\ \text{V}$                                                |                      | 10   |       | $\mu\text{A}$ |
| $C_O$        | Output Bypass Capacitance | $\text{ESR} = 0.1\ \text{to}\ 10\ \Omega$ , $I_O = 0\ \text{to}\ 500\ \text{mA}$         | 2                    | 10   |       | $\mu\text{F}$ |

## LF00 SERIES

**ELECTRICAL CHARACTERISTICS FOR LF55C** (refer to the test circuits,  $T_j = 25^\circ\text{C}$ ,  $C_1 = 0.1\ \mu\text{F}$ ,  $C_O = 2.2\ \mu\text{F}$  unless otherwise specified.)

| Symbol       | Parameter                 | Test Conditions                                                                          | Min.                 | Typ. | Max. | Unit          |
|--------------|---------------------------|------------------------------------------------------------------------------------------|----------------------|------|------|---------------|
| $V_O$        | Output Voltage            | $I_O = 50\ \text{mA}$ , $V_I = 7.5\ \text{V}$                                            | 5.39                 | 5.5  | 5.61 | V             |
|              |                           | $I_O = 50\ \text{mA}$ , $V_I = 7.5\ \text{V}$ , $T_a = -25\ \text{to}\ 85^\circ\text{C}$ | 5.28                 |      | 5.72 |               |
| $V_I$        | Operating Input Voltage   | $I_O = 500\ \text{mA}$                                                                   |                      |      | 16   | V             |
| $I_O$        | Output Current Limit      |                                                                                          |                      | 1    |      | A             |
| $\Delta V_O$ | Line Regulation           | $V_I = 6.5\ \text{to}\ 16\ \text{V}$ , $I_O = 5\ \text{mA}$                              |                      | 5    | 27   | mV            |
| $\Delta V_O$ | Load Regulation           | $V_I = 6.8\ \text{V}$ , $I_O = 5\ \text{to}\ 500\ \text{mA}$                             |                      | 5    | 27   | mV            |
| $I_d$        | Quiescent Current         | $V_I = 6.5\ \text{to}\ 16\ \text{V}$ , $I_O = 0\ \text{mA}$                              | ON MODE              | 0.5  | 1    | mA            |
|              |                           | $V_I = 6.8\ \text{to}\ 16\ \text{V}$ , $I_O = 500\ \text{mA}$                            |                      |      | 12   |               |
|              |                           | $V_I = 6\ \text{V}$                                                                      | OFF MODE             | 50   | 100  | $\mu\text{A}$ |
| SVR          | Supply Voltage Rejection  | $I_O = 5\ \text{mA}$<br>$V_I = 7.5 \pm 1\ \text{V}$                                      | $f = 120\ \text{Hz}$ | 76   |      | dB            |
|              |                           |                                                                                          | $f = 1\ \text{KHz}$  | 71   |      |               |
|              |                           |                                                                                          | $f = 10\ \text{KHz}$ | 60   |      |               |
| eN           | Output Noise Voltage      | $B = 10\ \text{Hz to}\ 100\ \text{KHz}$                                                  |                      | 50   |      | $\mu\text{V}$ |
| $V_d$        | Dropout Voltage           | $I_O = 200\ \text{mA}$                                                                   |                      | 0.2  | 0.35 | V             |
|              |                           | $I_O = 500\ \text{mA}$                                                                   |                      | 0.4  | 0.7  |               |
| $V_{IL}$     | Control Input Logic Low   | $T_a = -40\ \text{to}\ 125^\circ\text{C}$                                                |                      |      | 0.8  | V             |
| $V_{IH}$     | Control Input Logic High  | $T_a = -40\ \text{to}\ 125^\circ\text{C}$                                                | 2                    |      |      | V             |
| $I_I$        | Control Input Current     | $V_I = 6\ \text{V}$ , $V_C = 6\ \text{V}$                                                |                      | 10   |      | $\mu\text{A}$ |
| $C_O$        | Output Bypass Capacitance | $\text{ESR} = 0.1\ \text{to}\ 10\ \Omega$ , $I_O = 0\ \text{to}\ 500\ \text{mA}$         | 2                    | 10   |      | $\mu\text{F}$ |

**ELECTRICAL CHARACTERISTICS FOR LF60AB** (refer to the test circuits,  $T_j = 25^\circ\text{C}$ ,  $C_1 = 0.1\ \mu\text{F}$ ,  $C_O = 2.2\ \mu\text{F}$  unless otherwise specified.)

| Symbol       | Parameter                 | Test Conditions                                                                        | Min.                 | Typ. | Max. | Unit          |
|--------------|---------------------------|----------------------------------------------------------------------------------------|----------------------|------|------|---------------|
| $V_O$        | Output Voltage            | $I_O = 50\ \text{mA}$ , $V_I = 8\ \text{V}$                                            | 5.94                 | 6    | 6.06 | V             |
|              |                           | $I_O = 50\ \text{mA}$ , $V_I = 8\ \text{V}$ , $T_a = -25\ \text{to}\ 85^\circ\text{C}$ | 5.88                 |      | 6.12 |               |
| $V_I$        | Operating Input Voltage   | $I_O = 500\ \text{mA}$                                                                 |                      |      | 16   | V             |
| $I_O$        | Output Current Limit      |                                                                                        |                      | 1    |      | A             |
| $\Delta V_O$ | Line Regulation           | $V_I = 7\ \text{to}\ 16\ \text{V}$ , $I_O = 5\ \text{mA}$                              |                      | 6    | 30   | mV            |
| $\Delta V_O$ | Load Regulation           | $V_I = 7.3\ \text{V}$ , $I_O = 5\ \text{to}\ 500\ \text{mA}$                           |                      | 6    | 30   | mV            |
| $I_d$        | Quiescent Current         | $V_I = 7\ \text{to}\ 16\ \text{V}$ , $I_O = 0\ \text{mA}$                              | ON MODE              | 0.7  | 1.5  | mA            |
|              |                           | $V_I = 7.3\ \text{to}\ 16\ \text{V}$ , $I_O = 500\ \text{mA}$                          |                      |      | 12   |               |
|              |                           | $V_I = 9\ \text{V}$                                                                    | OFF MODE             | 70   | 140  | $\mu\text{A}$ |
| SVR          | Supply Voltage Rejection  | $I_O = 5\ \text{mA}$<br>$V_I = 8 \pm 1\ \text{V}$                                      | $f = 120\ \text{Hz}$ | 75   |      | dB            |
|              |                           |                                                                                        | $f = 1\ \text{KHz}$  | 70   |      |               |
|              |                           |                                                                                        | $f = 10\ \text{KHz}$ | 60   |      |               |
| eN           | Output Noise Voltage      | $B = 10\ \text{Hz to}\ 100\ \text{KHz}$                                                |                      | 50   |      | $\mu\text{V}$ |
| $V_d$        | Dropout Voltage           | $I_O = 200\ \text{mA}$                                                                 |                      | 0.2  | 0.35 | V             |
|              |                           | $I_O = 500\ \text{mA}$                                                                 |                      | 0.4  | 0.7  |               |
| $V_{IL}$     | Control Input Logic Low   | $T_a = -40\ \text{to}\ 125^\circ\text{C}$                                              |                      |      | 0.8  | V             |
| $V_{IH}$     | Control Input Logic High  | $T_a = -40\ \text{to}\ 125^\circ\text{C}$                                              | 2                    |      |      | V             |
| $I_I$        | Control Input Current     | $V_I = 9\ \text{V}$ , $V_C = 6\ \text{V}$                                              |                      | 10   |      | $\mu\text{A}$ |
| $C_O$        | Output Bypass Capacitance | $\text{ESR} = 0.1\ \text{to}\ 10\ \Omega$ , $I_O = 0\ \text{to}\ 500\ \text{mA}$       | 2                    | 10   |      | $\mu\text{F}$ |

**ELECTRICAL CHARACTERISTICS FOR LF60C** (refer to the test circuits,  $T_j = 25^\circ\text{C}$ ,  $C_1 = 0.1\ \mu\text{F}$ ,  $C_O = 2.2\ \mu\text{F}$  unless otherwise specified.)

| Symbol       | Parameter                 | Test Conditions                                                                        | Min.                 | Typ. | Max. | Unit          |
|--------------|---------------------------|----------------------------------------------------------------------------------------|----------------------|------|------|---------------|
| $V_O$        | Output Voltage            | $I_O = 50\ \text{mA}$ , $V_I = 8\ \text{V}$                                            | 5.88                 | 6    | 6.12 | V             |
|              |                           | $I_O = 50\ \text{mA}$ , $V_I = 8\ \text{V}$ , $T_a = -25\ \text{to}\ 85^\circ\text{C}$ | 5.76                 |      | 6.24 |               |
| $V_I$        | Operating Input Voltage   | $I_O = 500\ \text{mA}$                                                                 |                      |      | 16   | V             |
| $I_O$        | Output Current Limit      |                                                                                        |                      | 1    |      | A             |
| $\Delta V_O$ | Line Regulation           | $V_I = 7\ \text{to}\ 16\ \text{V}$ , $I_O = 5\ \text{mA}$                              |                      | 6    | 30   | mV            |
| $\Delta V_O$ | Load Regulation           | $V_I = 7.3\ \text{V}$ , $I_O = 5\ \text{to}\ 500\ \text{mA}$                           |                      | 6    | 30   | mV            |
| $I_d$        | Quiescent Current         | $V_I = 7\ \text{to}\ 16\ \text{V}$ , $I_O = 0\ \text{mA}$ ON MODE                      |                      | 0.7  | 1.5  | mA            |
|              |                           | $V_I = 7.3\ \text{to}\ 16\ \text{V}$ , $I_O = 500\ \text{mA}$                          |                      |      | 12   |               |
|              |                           | $V_I = 9\ \text{V}$ OFF MODE                                                           |                      | 70   | 140  | $\mu\text{A}$ |
| SVR          | Supply Voltage Rejection  | $I_O = 5\ \text{mA}$<br>$V_I = 8 \pm 1\ \text{V}$                                      | $f = 120\ \text{Hz}$ | 75   |      | dB            |
|              |                           |                                                                                        | $f = 1\ \text{KHz}$  | 70   |      |               |
|              |                           |                                                                                        | $f = 10\ \text{KHz}$ | 60   |      |               |
| eN           | Output Noise Voltage      | $B = 10\ \text{Hz to}\ 100\ \text{KHz}$                                                |                      | 50   |      | $\mu\text{V}$ |
| $V_d$        | Dropout Voltage           | $I_O = 200\ \text{mA}$                                                                 |                      | 0.2  | 0.35 | V             |
|              |                           | $I_O = 500\ \text{mA}$                                                                 |                      | 0.4  | 0.7  |               |
| $V_{IL}$     | Control Input Logic Low   | $T_a = -40\ \text{to}\ 125^\circ\text{C}$                                              |                      |      | 0.8  | V             |
| $V_{IH}$     | Control Input Logic High  | $T_a = -40\ \text{to}\ 125^\circ\text{C}$                                              | 2                    |      |      | V             |
| $I_I$        | Control Input Current     | $V_I = 9\ \text{V}$ , $V_C = 6\ \text{V}$                                              |                      | 10   |      | $\mu\text{A}$ |
| $C_O$        | Output Bypass Capacitance | $\text{ESR} = 0.1\ \text{to}\ 10\ \Omega$ , $I_O = 0\ \text{to}\ 500\ \text{mA}$       | 2                    | 10   |      | $\mu\text{F}$ |

**ELECTRICAL CHARACTERISTICS FOR LF80AB** (refer to the test circuits,  $T_j = 25^\circ\text{C}$ ,  $C_1 = 0.1\ \mu\text{F}$ ,  $C_O = 2.2\ \mu\text{F}$  unless otherwise specified.)

| Symbol       | Parameter                 | Test Conditions                                                                         | Min.                 | Typ. | Max. | Unit          |
|--------------|---------------------------|-----------------------------------------------------------------------------------------|----------------------|------|------|---------------|
| $V_O$        | Output Voltage            | $I_O = 50\ \text{mA}$ , $V_I = 10\ \text{V}$                                            | 7.92                 | 8    | 8.08 | V             |
|              |                           | $I_O = 50\ \text{mA}$ , $V_I = 10\ \text{V}$ , $T_a = -25\ \text{to}\ 85^\circ\text{C}$ | 7.84                 |      | 8.16 |               |
| $V_I$        | Operating Input Voltage   | $I_O = 500\ \text{mA}$                                                                  |                      |      | 16   | V             |
| $I_O$        | Output Current Limit      |                                                                                         |                      | 1    |      | A             |
| $\Delta V_O$ | Line Regulation           | $V_I = 9\ \text{to}\ 16\ \text{V}$ , $I_O = 5\ \text{mA}$                               |                      | 8    | 40   | mV            |
| $\Delta V_O$ | Load Regulation           | $V_I = 9.3\ \text{V}$ , $I_O = 5\ \text{to}\ 500\ \text{mA}$                            |                      | 8    | 40   | mV            |
| $I_d$        | Quiescent Current         | $V_I = 9\ \text{to}\ 16\ \text{V}$ , $I_O = 0\ \text{mA}$ ON MODE                       |                      | 0.7  | 1.5  | mA            |
|              |                           | $V_I = 9.3\ \text{to}\ 16\ \text{V}$ , $I_O = 500\ \text{mA}$                           |                      |      | 12   |               |
|              |                           | $V_I = 9\ \text{V}$ OFF MODE                                                            |                      | 70   | 140  | $\mu\text{A}$ |
| SVR          | Supply Voltage Rejection  | $I_O = 5\ \text{mA}$<br>$V_I = 10 \pm 1\ \text{V}$                                      | $f = 120\ \text{Hz}$ | 72   |      | dB            |
|              |                           |                                                                                         | $f = 1\ \text{KHz}$  | 67   |      |               |
|              |                           |                                                                                         | $f = 10\ \text{KHz}$ | 57   |      |               |
| eN           | Output Noise Voltage      | $B = 10\ \text{Hz to}\ 100\ \text{KHz}$                                                 |                      | 50   |      | $\mu\text{V}$ |
| $V_d$        | Dropout Voltage           | $I_O = 200\ \text{mA}$                                                                  |                      | 0.2  | 0.35 | V             |
|              |                           | $I_O = 500\ \text{mA}$                                                                  |                      | 0.4  | 0.7  |               |
| $V_{IL}$     | Control Input Logic Low   | $T_a = -40\ \text{to}\ 125^\circ\text{C}$                                               |                      |      | 0.8  | V             |
| $V_{IH}$     | Control Input Logic High  | $T_a = -40\ \text{to}\ 125^\circ\text{C}$                                               | 2                    |      |      | V             |
| $I_I$        | Control Input Current     | $V_I = 9\ \text{V}$ , $V_C = 6\ \text{V}$                                               |                      | 10   |      | $\mu\text{A}$ |
| $C_O$        | Output Bypass Capacitance | $\text{ESR} = 0.1\ \text{to}\ 10\ \Omega$ , $I_O = 0\ \text{to}\ 500\ \text{mA}$        | 2                    | 10   |      | $\mu\text{F}$ |

## LF00 SERIES

**ELECTRICAL CHARACTERISTICS FOR LF80C** (refer to the test circuits,  $T_j = 25^\circ\text{C}$ ,  $C_1 = 0.1\ \mu\text{F}$ ,  $C_O = 2.2\ \mu\text{F}$  unless otherwise specified.)

| Symbol       | Parameter                 | Test Conditions                                                                         | Min.                 | Typ. | Max. | Unit          |
|--------------|---------------------------|-----------------------------------------------------------------------------------------|----------------------|------|------|---------------|
| $V_O$        | Output Voltage            | $I_O = 50\ \text{mA}$ , $V_I = 10\ \text{V}$                                            | 7.84                 | 8    | 8.16 | V             |
|              |                           | $I_O = 50\ \text{mA}$ , $V_I = 10\ \text{V}$ , $T_a = -25\ \text{to}\ 85^\circ\text{C}$ | 7.68                 |      | 8.32 |               |
| $V_I$        | Operating Input Voltage   | $I_O = 500\ \text{mA}$                                                                  |                      |      | 16   | V             |
| $I_O$        | Output Current Limit      |                                                                                         |                      | 1    |      | A             |
| $\Delta V_O$ | Line Regulation           | $V_I = 9\ \text{to}\ 16\ \text{V}$ , $I_O = 5\ \text{mA}$                               |                      | 8    | 40   | mV            |
| $\Delta V_O$ | Load Regulation           | $V_I = 9.3\ \text{V}$ , $I_O = 5\ \text{to}\ 500\ \text{mA}$                            |                      | 8    | 40   | mV            |
| $I_d$        | Quiescent Current         | $V_I = 9\ \text{to}\ 16\ \text{V}$ , $I_O = 0\ \text{mA}$ ON MODE                       |                      | 0.7  | 1.5  | mA            |
|              |                           | $V_I = 9.3\ \text{to}\ 16\ \text{V}$ , $I_O = 500\ \text{mA}$                           |                      |      | 12   |               |
|              |                           | $V_I = 9\ \text{V}$ OFF MODE                                                            |                      | 70   | 140  | $\mu\text{A}$ |
| SVR          | Supply Voltage Rejection  | $I_O = 5\ \text{mA}$<br>$V_I = 10 \pm 1\ \text{V}$                                      | $f = 120\ \text{Hz}$ | 72   |      | dB            |
|              |                           |                                                                                         | $f = 1\ \text{KHz}$  | 67   |      |               |
|              |                           |                                                                                         | $f = 10\ \text{KHz}$ | 57   |      |               |
| eN           | Output Noise Voltage      | $B = 10\ \text{Hz to}\ 100\ \text{KHz}$                                                 |                      | 50   |      | $\mu\text{V}$ |
| $V_d$        | Dropout Voltage           | $I_O = 200\ \text{mA}$                                                                  |                      | 0.2  | 0.35 | V             |
|              |                           | $I_O = 500\ \text{mA}$                                                                  |                      | 0.4  | 0.7  |               |
| $V_{IL}$     | Control Input Logic Low   | $T_a = -40\ \text{to}\ 125^\circ\text{C}$                                               |                      |      | 0.8  | V             |
| $V_{IH}$     | Control Input Logic High  | $T_a = -40\ \text{to}\ 125^\circ\text{C}$                                               | 2                    |      |      | V             |
| $I_I$        | Control Input Current     | $V_I = 9\ \text{V}$ , $V_C = 6\ \text{V}$                                               |                      | 10   |      | $\mu\text{A}$ |
| $C_O$        | Output Bypass Capacitance | $\text{ESR} = 0.1\ \text{to}\ 10\ \Omega$ , $I_O = 0\ \text{to}\ 500\ \text{mA}$        | 2                    | 10   |      | $\mu\text{F}$ |

**ELECTRICAL CHARACTERISTICS FOR LF85AB** (refer to the test circuits,  $T_j = 25^\circ\text{C}$ ,  $C_1 = 0.1\ \mu\text{F}$ ,  $C_O = 2.2\ \mu\text{F}$  unless otherwise specified.)

| Symbol       | Parameter                 | Test Conditions                                                                           | Min.                 | Typ. | Max.  | Unit          |
|--------------|---------------------------|-------------------------------------------------------------------------------------------|----------------------|------|-------|---------------|
| $V_O$        | Output Voltage            | $I_O = 50\ \text{mA}$ , $V_I = 10.5\ \text{V}$                                            | 8.415                | 8.5  | 8.585 | V             |
|              |                           | $I_O = 50\ \text{mA}$ , $V_I = 10.5\ \text{V}$ , $T_a = -25\ \text{to}\ 85^\circ\text{C}$ | 8.33                 |      | 8.67  |               |
| $V_I$        | Operating Input Voltage   | $I_O = 500\ \text{mA}$                                                                    |                      |      | 16    | V             |
| $I_O$        | Output Current Limit      |                                                                                           |                      | 1    |       | A             |
| $\Delta V_O$ | Line Regulation           | $V_I = 9.5\ \text{to}\ 16\ \text{V}$ , $I_O = 5\ \text{mA}$                               |                      | 8    | 42    | mV            |
| $\Delta V_O$ | Load Regulation           | $V_I = 9.8\ \text{V}$ , $I_O = 5\ \text{to}\ 500\ \text{mA}$                              |                      | 8    | 42    | mV            |
| $I_d$        | Quiescent Current         | $V_I = 9.5\ \text{to}\ 16\ \text{V}$ , $I_O = 0\ \text{mA}$ ON MODE                       |                      | 0.7  | 1.5   | mA            |
|              |                           | $V_I = 9.8\ \text{to}\ 16\ \text{V}$ , $I_O = 500\ \text{mA}$                             |                      |      | 12    |               |
|              |                           | $V_I = 9\ \text{V}$ OFF MODE                                                              |                      | 70   | 140   | $\mu\text{A}$ |
| SVR          | Supply Voltage Rejection  | $I_O = 5\ \text{mA}$<br>$V_I = 10.5 \pm 1\ \text{V}$                                      | $f = 120\ \text{Hz}$ | 72   |       | dB            |
|              |                           |                                                                                           | $f = 1\ \text{KHz}$  | 67   |       |               |
|              |                           |                                                                                           | $f = 10\ \text{KHz}$ | 57   |       |               |
| eN           | Output Noise Voltage      | $B = 10\ \text{Hz to}\ 100\ \text{KHz}$                                                   |                      | 50   |       | $\mu\text{V}$ |
| $V_d$        | Dropout Voltage           | $I_O = 200\ \text{mA}$                                                                    |                      | 0.2  | 0.35  | V             |
|              |                           | $I_O = 500\ \text{mA}$                                                                    |                      | 0.4  | 0.7   |               |
| $V_{IL}$     | Control Input Logic Low   | $T_a = -40\ \text{to}\ 125^\circ\text{C}$                                                 |                      |      | 0.8   | V             |
| $V_{IH}$     | Control Input Logic High  | $T_a = -40\ \text{to}\ 125^\circ\text{C}$                                                 | 2                    |      |       | V             |
| $I_I$        | Control Input Current     | $V_I = 9\ \text{V}$ , $V_C = 6\ \text{V}$                                                 |                      | 10   |       | $\mu\text{A}$ |
| $C_O$        | Output Bypass Capacitance | $\text{ESR} = 0.1\ \text{to}\ 10\ \Omega$ , $I_O = 0\ \text{to}\ 500\ \text{mA}$          | 2                    | 10   |       | $\mu\text{F}$ |

**ELECTRICAL CHARACTERISTICS FOR LF85C** (refer to the test circuits,  $T_j = 25^\circ\text{C}$ ,  $C_1 = 0.1\ \mu\text{F}$ ,  $C_O = 2.2\ \mu\text{F}$  unless otherwise specified.)

| Symbol       | Parameter                 | Test Conditions                                                                           | Min.                 | Typ. | Max. | Unit          |
|--------------|---------------------------|-------------------------------------------------------------------------------------------|----------------------|------|------|---------------|
| $V_O$        | Output Voltage            | $I_O = 50\ \text{mA}$ , $V_I = 10.5\ \text{V}$                                            | 8.33                 | 8.5  | 8.67 | V             |
|              |                           | $I_O = 50\ \text{mA}$ , $V_I = 10.5\ \text{V}$ , $T_a = -25\ \text{to}\ 85^\circ\text{C}$ | 8.16                 |      | 8.84 |               |
| $V_I$        | Operating Input Voltage   | $I_O = 500\ \text{mA}$                                                                    |                      |      | 16   | V             |
| $I_O$        | Output Current Limit      |                                                                                           |                      | 1    |      | A             |
| $\Delta V_O$ | Line Regulation           | $V_I = 9.5\ \text{to}\ 16\ \text{V}$ , $I_O = 5\ \text{mA}$                               |                      | 8    | 42   | mV            |
| $\Delta V_O$ | Load Regulation           | $V_I = 9.8\ \text{V}$ , $I_O = 5\ \text{to}\ 500\ \text{mA}$                              |                      | 8    | 42   | mV            |
| $I_d$        | Quiescent Current         | $V_I = 9.5\ \text{to}\ 16\ \text{V}$ , $I_O = 0\ \text{mA}$                               | ON MODE              | 0.7  | 1.5  | mA            |
|              |                           | $V_I = 9.8\ \text{to}\ 16\ \text{V}$ , $I_O = 500\ \text{mA}$                             |                      |      | 12   |               |
|              |                           | $V_I = 9\ \text{V}$                                                                       | OFF MODE             | 70   | 140  | $\mu\text{A}$ |
| SVR          | Supply Voltage Rejection  | $I_O = 5\ \text{mA}$<br>$V_I = 10.5 \pm 1\ \text{V}$                                      | $f = 120\ \text{Hz}$ | 72   |      | dB            |
|              |                           |                                                                                           | $f = 1\ \text{KHz}$  | 67   |      |               |
|              |                           |                                                                                           | $f = 10\ \text{KHz}$ | 57   |      |               |
| eN           | Output Noise Voltage      | $B = 10\ \text{Hz to}\ 100\ \text{KHz}$                                                   |                      | 50   |      | $\mu\text{V}$ |
| $V_d$        | Dropout Voltage           | $I_O = 200\ \text{mA}$                                                                    |                      | 0.2  | 0.35 | V             |
|              |                           | $I_O = 500\ \text{mA}$                                                                    |                      | 0.4  | 0.7  |               |
| $V_{IL}$     | Control Input Logic Low   | $T_a = -40\ \text{to}\ 125^\circ\text{C}$                                                 |                      |      | 0.8  | V             |
| $V_{IH}$     | Control Input Logic High  | $T_a = -40\ \text{to}\ 125^\circ\text{C}$                                                 | 2                    |      |      | V             |
| $I_I$        | Control Input Current     | $V_I = 9\ \text{V}$ , $V_C = 6\ \text{V}$                                                 |                      | 10   |      | $\mu\text{A}$ |
| $C_O$        | Output Bypass Capacitance | $\text{ESR} = 0.1\ \text{to}\ 10\ \Omega$ , $I_O = 0\ \text{to}\ 500\ \text{mA}$          | 2                    | 10   |      | $\mu\text{F}$ |

**ELECTRICAL CHARACTERISTICS FOR LF90AB** (refer to the test circuits,  $T_j = 25^\circ\text{C}$ ,  $C_1 = 0.1\ \mu\text{F}$ ,  $C_O = 2.2\ \mu\text{F}$  unless otherwise specified.)

| Symbol       | Parameter                 | Test Conditions                                                                         | Min.                 | Typ. | Max. | Unit          |
|--------------|---------------------------|-----------------------------------------------------------------------------------------|----------------------|------|------|---------------|
| $V_O$        | Output Voltage            | $I_O = 50\ \text{mA}$ , $V_I = 11\ \text{V}$                                            | 8.91                 | 9    | 9.09 | V             |
|              |                           | $I_O = 50\ \text{mA}$ , $V_I = 11\ \text{V}$ , $T_a = -25\ \text{to}\ 85^\circ\text{C}$ | 8.82                 |      | 9.18 |               |
| $V_I$        | Operating Input Voltage   | $I_O = 500\ \text{mA}$                                                                  |                      |      | 16   | V             |
| $I_O$        | Output Current Limit      |                                                                                         |                      | 1    |      | A             |
| $\Delta V_O$ | Line Regulation           | $V_I = 10\ \text{to}\ 16\ \text{V}$ , $I_O = 5\ \text{mA}$                              |                      | 9    | 45   | mV            |
| $\Delta V_O$ | Load Regulation           | $V_I = 10.3\ \text{V}$ , $I_O = 5\ \text{to}\ 500\ \text{mA}$                           |                      | 9    | 45   | mV            |
| $I_d$        | Quiescent Current         | $V_I = 10\ \text{to}\ 16\ \text{V}$ , $I_O = 0\ \text{mA}$                              | ON MODE              | 0.7  | 1.5  | mA            |
|              |                           | $V_I = 10.3\ \text{to}\ 16\ \text{V}$ , $I_O = 500\ \text{mA}$                          |                      |      | 12   |               |
|              |                           | $V_I = 10\ \text{V}$                                                                    | OFF MODE             | 70   | 140  | $\mu\text{A}$ |
| SVR          | Supply Voltage Rejection  | $I_O = 5\ \text{mA}$<br>$V_I = 11 \pm 1\ \text{V}$                                      | $f = 120\ \text{Hz}$ | 71   |      | dB            |
|              |                           |                                                                                         | $f = 1\ \text{KHz}$  | 66   |      |               |
|              |                           |                                                                                         | $f = 10\ \text{KHz}$ | 56   |      |               |
| eN           | Output Noise Voltage      | $B = 10\ \text{Hz to}\ 100\ \text{KHz}$                                                 |                      | 50   |      | $\mu\text{V}$ |
| $V_d$        | Dropout Voltage           | $I_O = 200\ \text{mA}$                                                                  |                      | 0.2  | 0.35 | V             |
|              |                           | $I_O = 500\ \text{mA}$                                                                  |                      | 0.4  | 0.7  |               |
| $V_{IL}$     | Control Input Logic Low   | $T_a = -40\ \text{to}\ 125^\circ\text{C}$                                               |                      |      | 0.8  | V             |
| $V_{IH}$     | Control Input Logic High  | $T_a = -40\ \text{to}\ 125^\circ\text{C}$                                               | 2                    |      |      | V             |
| $I_I$        | Control Input Current     | $V_I = 10\ \text{V}$ , $V_C = 6\ \text{V}$                                              |                      | 10   |      | $\mu\text{A}$ |
| $C_O$        | Output Bypass Capacitance | $\text{ESR} = 0.1\ \text{to}\ 10\ \Omega$ , $I_O = 0\ \text{to}\ 500\ \text{mA}$        | 2                    | 10   |      | $\mu\text{F}$ |

## LF00 SERIES

**ELECTRICAL CHARACTERISTICS FOR LF90C** (refer to the test circuits,  $T_j = 25^\circ\text{C}$ ,  $C_I = 0.1\ \mu\text{F}$ ,  $C_O = 2.2\ \mu\text{F}$  unless otherwise specified.)

| Symbol       | Parameter                 | Test Conditions                                                                         | Min.                 | Typ. | Max. | Unit          |
|--------------|---------------------------|-----------------------------------------------------------------------------------------|----------------------|------|------|---------------|
| $V_O$        | Output Voltage            | $I_O = 50\ \text{mA}$ , $V_I = 11\ \text{V}$                                            | 8.82                 | 9    | 9.18 | V             |
|              |                           | $I_O = 50\ \text{mA}$ , $V_I = 11\ \text{V}$ , $T_a = -25\ \text{to}\ 85^\circ\text{C}$ | 8.64                 |      | 9.36 |               |
| $V_I$        | Operating Input Voltage   | $I_O = 500\ \text{mA}$                                                                  |                      |      | 16   | V             |
| $I_O$        | Output Current Limit      |                                                                                         |                      | 1    |      | A             |
| $\Delta V_O$ | Line Regulation           | $V_I = 10\ \text{to}\ 16\ \text{V}$ , $I_O = 5\ \text{mA}$                              |                      | 9    | 45   | mV            |
| $\Delta V_O$ | Load Regulation           | $V_I = 10.3\ \text{V}$ , $I_O = 5\ \text{to}\ 500\ \text{mA}$                           |                      | 9    | 45   | mV            |
| $I_d$        | Quiescent Current         | $V_I = 10\ \text{to}\ 16\ \text{V}$ , $I_O = 0\ \text{mA}$                              | ON MODE              | 0.7  | 1.5  | mA            |
|              |                           | $V_I = 10.3\ \text{to}\ 16\ \text{V}$ , $I_O = 500\ \text{mA}$                          |                      |      | 12   |               |
|              |                           | $V_I = 10\ \text{V}$                                                                    | OFF MODE             | 70   | 140  | $\mu\text{A}$ |
| SVR          | Supply Voltage Rejection  | $I_O = 5\ \text{mA}$<br>$V_I = 11 \pm 1\ \text{V}$                                      | $f = 120\ \text{Hz}$ | 71   |      | dB            |
|              |                           |                                                                                         | $f = 1\ \text{KHz}$  | 66   |      |               |
|              |                           |                                                                                         | $f = 10\ \text{KHz}$ | 56   |      |               |
| eN           | Output Noise Voltage      | $B = 10\ \text{Hz to}\ 100\ \text{KHz}$                                                 |                      | 50   |      | $\mu\text{V}$ |
| $V_d$        | Dropout Voltage           | $I_O = 200\ \text{mA}$                                                                  |                      | 0.2  | 0.35 | V             |
|              |                           | $I_O = 500\ \text{mA}$                                                                  |                      | 0.4  | 0.7  |               |
| $V_{IL}$     | Control Input Logic Low   | $T_a = -40\ \text{to}\ 125^\circ\text{C}$                                               |                      |      | 0.8  | V             |
| $V_{IH}$     | Control Input Logic High  | $T_a = -40\ \text{to}\ 125^\circ\text{C}$                                               | 2                    |      |      | V             |
| $I_I$        | Control Input Current     | $V_I = 10\ \text{V}$ , $V_C = 6\ \text{V}$                                              |                      | 10   |      | $\mu\text{A}$ |
| $C_O$        | Output Bypass Capacitance | $\text{ESR} = 0.1\ \text{to}\ 10\ \Omega$ , $I_O = 0\ \text{to}\ 500\ \text{mA}$        | 2                    | 10   |      | $\mu\text{F}$ |

**ELECTRICAL CHARACTERISTICS FOR LF120AB** (refer to the test circuits,  $T_j = 25^\circ\text{C}$ ,  $C_I = 0.1\ \mu\text{F}$ ,  $C_O = 2.2\ \mu\text{F}$  unless otherwise specified.)


| Symbol       | Parameter                 | Test Conditions                                                                         | Min.                 | Typ. | Max.  | Unit          |
|--------------|---------------------------|-----------------------------------------------------------------------------------------|----------------------|------|-------|---------------|
| $V_O$        | Output Voltage            | $I_O = 50\ \text{mA}$ , $V_I = 15\ \text{V}$                                            | 11.88                | 12   | 12.12 | V             |
|              |                           | $I_O = 50\ \text{mA}$ , $V_I = 15\ \text{V}$ , $T_a = -25\ \text{to}\ 85^\circ\text{C}$ | 11.76                |      | 12.24 |               |
| $V_I$        | Operating Input Voltage   | $I_O = 500\ \text{mA}$                                                                  |                      |      | 16    | V             |
| $I_O$        | Output Current Limit      |                                                                                         |                      | 1    |       | A             |
| $\Delta V_O$ | Line Regulation           | $V_I = 13\ \text{to}\ 16\ \text{V}$ , $I_O = 5\ \text{mA}$                              |                      | 12   | 60    | mV            |
| $\Delta V_O$ | Load Regulation           | $V_I = 13.3\ \text{V}$ , $I_O = 5\ \text{to}\ 500\ \text{mA}$                           |                      | 12   | 60    | mV            |
| $I_d$        | Quiescent Current         | $V_I = 13\ \text{to}\ 16\ \text{V}$ , $I_O = 0\ \text{mA}$                              | ON MODE              | 0.7  | 1.5   | mA            |
|              |                           | $V_I = 13.3\ \text{to}\ 16\ \text{V}$ , $I_O = 500\ \text{mA}$                          |                      |      | 12    |               |
|              |                           | $V_I = 13\ \text{V}$                                                                    | OFF MODE             | 70   | 140   | $\mu\text{A}$ |
| SVR          | Supply Voltage Rejection  | $I_O = 5\ \text{mA}$<br>$V_I = 14 \pm 1\ \text{V}$                                      | $f = 120\ \text{Hz}$ | 69   |       | dB            |
|              |                           |                                                                                         | $f = 1\ \text{KHz}$  | 64   |       |               |
|              |                           |                                                                                         | $f = 10\ \text{KHz}$ | 54   |       |               |
| eN           | Output Noise Voltage      | $B = 10\ \text{Hz to}\ 100\ \text{KHz}$                                                 |                      | 50   |       | $\mu\text{V}$ |
| $V_d$        | Dropout Voltage           | $I_O = 200\ \text{mA}$                                                                  |                      | 0.2  | 0.35  | V             |
|              |                           | $I_O = 500\ \text{mA}$                                                                  |                      | 0.4  | 0.7   |               |
| $V_{IL}$     | Control Input Logic Low   | $T_a = -40\ \text{to}\ 125^\circ\text{C}$                                               |                      |      | 0.8   | V             |
| $V_{IH}$     | Control Input Logic High  | $T_a = -40\ \text{to}\ 125^\circ\text{C}$                                               | 2                    |      |       | V             |
| $I_I$        | Control Input Current     | $V_I = 13\ \text{V}$ , $V_C = 6\ \text{V}$                                              |                      | 10   |       | $\mu\text{A}$ |
| $C_O$        | Output Bypass Capacitance | $\text{ESR} = 0.1\ \text{to}\ 10\ \Omega$ , $I_O = 0\ \text{to}\ 500\ \text{mA}$        | 2                    | 10   |       | $\mu\text{F}$ |

**ELECTRICAL CHARACTERISTICS FOR LF120C** (refer to the test circuits,  $T_j = 25^\circ\text{C}$ ,  $C_I = 0.1\ \mu\text{F}$ ,  $C_O = 2.2\ \mu\text{F}$  unless otherwise specified.)


| Symbol       | Parameter                 | Test Conditions                                                                         | Min.                 | Typ. | Max.  | Unit          |
|--------------|---------------------------|-----------------------------------------------------------------------------------------|----------------------|------|-------|---------------|
| $V_O$        | Output Voltage            | $I_O = 50\ \text{mA}$ , $V_I = 14\ \text{V}$                                            | 11.76                | 12   | 12.24 | V             |
|              |                           | $I_O = 50\ \text{mA}$ , $V_I = 14\ \text{V}$ , $T_a = -25\ \text{to}\ 85^\circ\text{C}$ | 11.52                |      | 12.48 |               |
| $V_I$        | Operating Input Voltage   | $I_O = 500\ \text{mA}$                                                                  |                      |      | 16    | V             |
| $I_O$        | Output Current Limit      |                                                                                         |                      | 1    |       | A             |
| $\Delta V_O$ | Line Regulation           | $V_I = 13\ \text{to}\ 16\ \text{V}$ , $I_O = 5\ \text{mA}$                              |                      | 12   | 60    | mV            |
| $\Delta V_O$ | Load Regulation           | $V_I = 13.3\ \text{V}$ , $I_O = 5\ \text{to}\ 500\ \text{mA}$                           |                      | 12   | 60    | mV            |
| $I_d$        | Quiescent Current         | $V_I = 13\ \text{to}\ 16\ \text{V}$ , $I_O = 0\ \text{mA}$ ON MODE                      |                      | 0.7  | 1.5   | mA            |
|              |                           | $V_I = 13.3\ \text{to}\ 16\ \text{V}$ , $I_O = 500\ \text{mA}$                          |                      |      | 12    |               |
|              |                           | $V_I = 13\ \text{V}$ OFF MODE                                                           |                      | 70   | 140   | $\mu\text{A}$ |
| SVR          | Supply Voltage Rejection  | $I_O = 5\ \text{mA}$<br>$V_I = 14 \pm 1\ \text{V}$                                      | $f = 120\ \text{Hz}$ | 69   |       | dB            |
|              |                           |                                                                                         | $f = 1\ \text{KHz}$  | 64   |       |               |
|              |                           |                                                                                         | $f = 10\ \text{KHz}$ | 54   |       |               |
| eN           | Output Noise Voltage      | $B = 10\ \text{Hz to}\ 100\ \text{KHz}$                                                 |                      | 50   |       | $\mu\text{V}$ |
| $V_d$        | Dropout Voltage           | $I_O = 200\ \text{mA}$                                                                  |                      | 0.2  | 0.35  | V             |
|              |                           | $I_O = 500\ \text{mA}$                                                                  |                      | 0.4  | 0.7   |               |
| $V_{IL}$     | Control Input Logic Low   | $T_a = -40\ \text{to}\ 125^\circ\text{C}$                                               |                      |      | 0.8   | V             |
| $V_{IH}$     | Control Input Logic High  | $T_a = -40\ \text{to}\ 125^\circ\text{C}$                                               | 2                    |      |       | V             |
| $I_I$        | Control Input Current     | $V_I = 13\ \text{V}$ , $V_C = 6\ \text{V}$                                              |                      | 10   |       | $\mu\text{A}$ |
| $C_O$        | Output Bypass Capacitance | $\text{ESR} = 0.1\ \text{to}\ 10\ \Omega$ $I_O = 0\ \text{to}\ 500\ \text{mA}$          | 2                    | 10   |       | $\mu\text{F}$ |

**TYPICAL PERFORMANCE CHARACTERISTICS** (unless otherwise specified  $V_{O(NOM)} = 3.3\text{ V}$ )


**Figure 1 : Dropout Voltage vs Output Current**

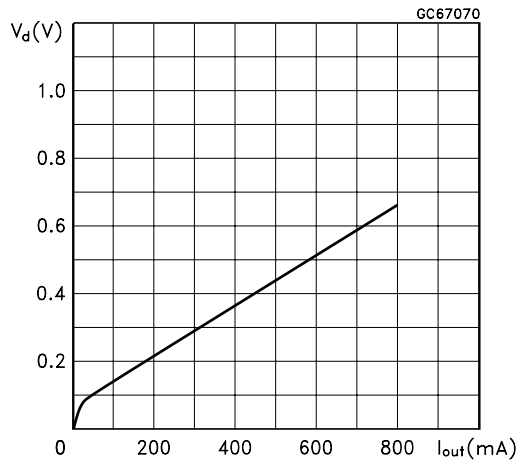


**Figure 2 : Dropout Voltage vs Temperature**

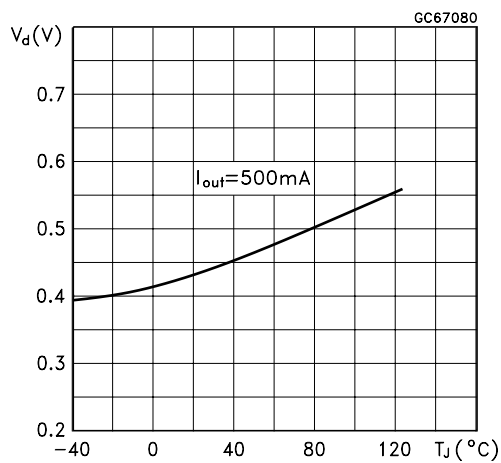


**Figure 3 : Supply Current vs Input Voltage**

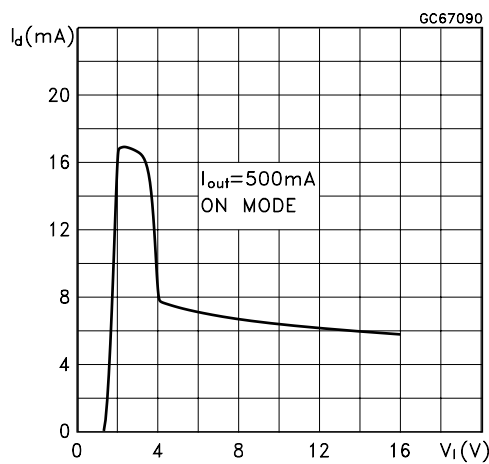


**Figure 4 : Supply Current vs Input Voltage**

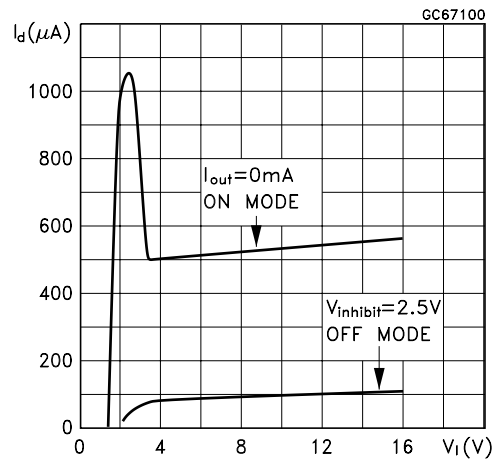

**Figure 5 : Short Circuit Current vs Input Voltage**

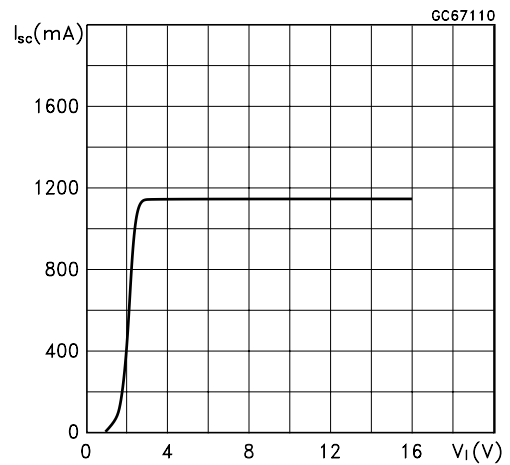


**Figure 6 : Supply Current vs Temperature**

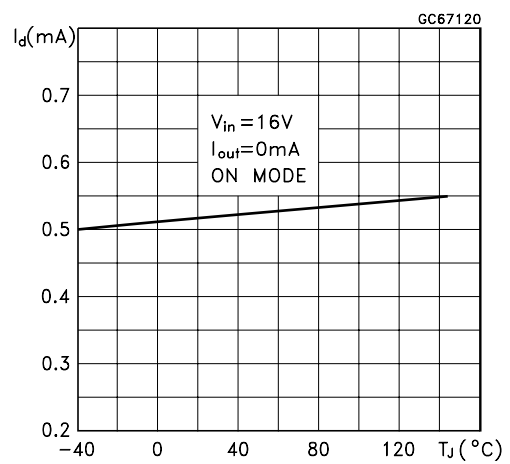





# Logic Controlled Precision 3.3/5.0V Selectable Output

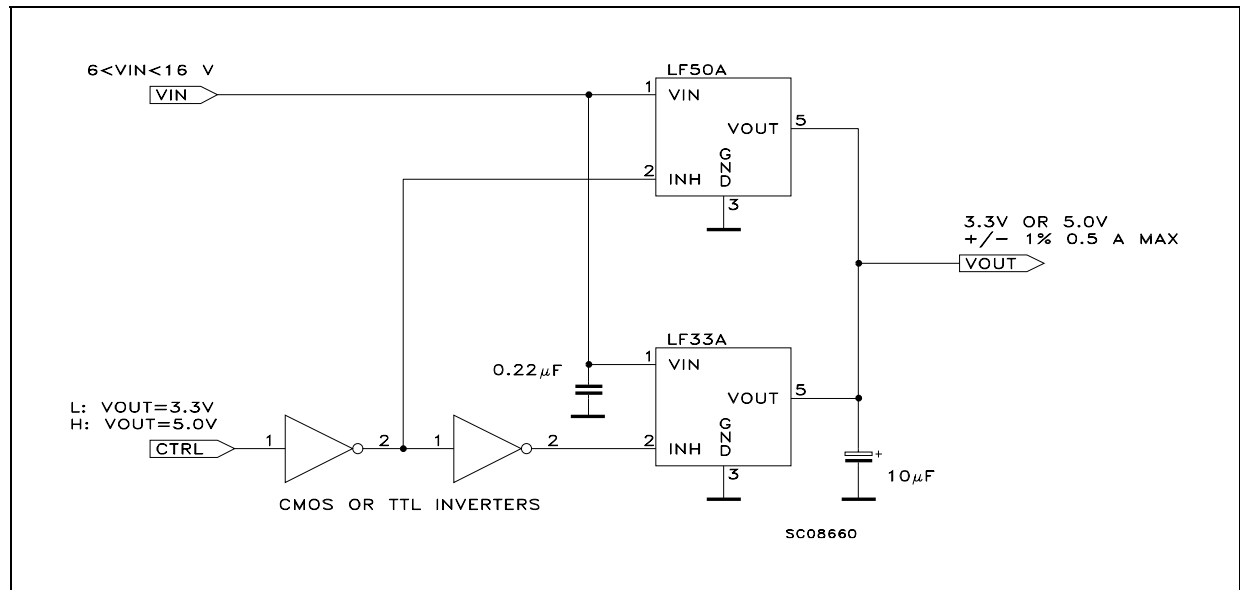


# Sequential Multi-Output Supply

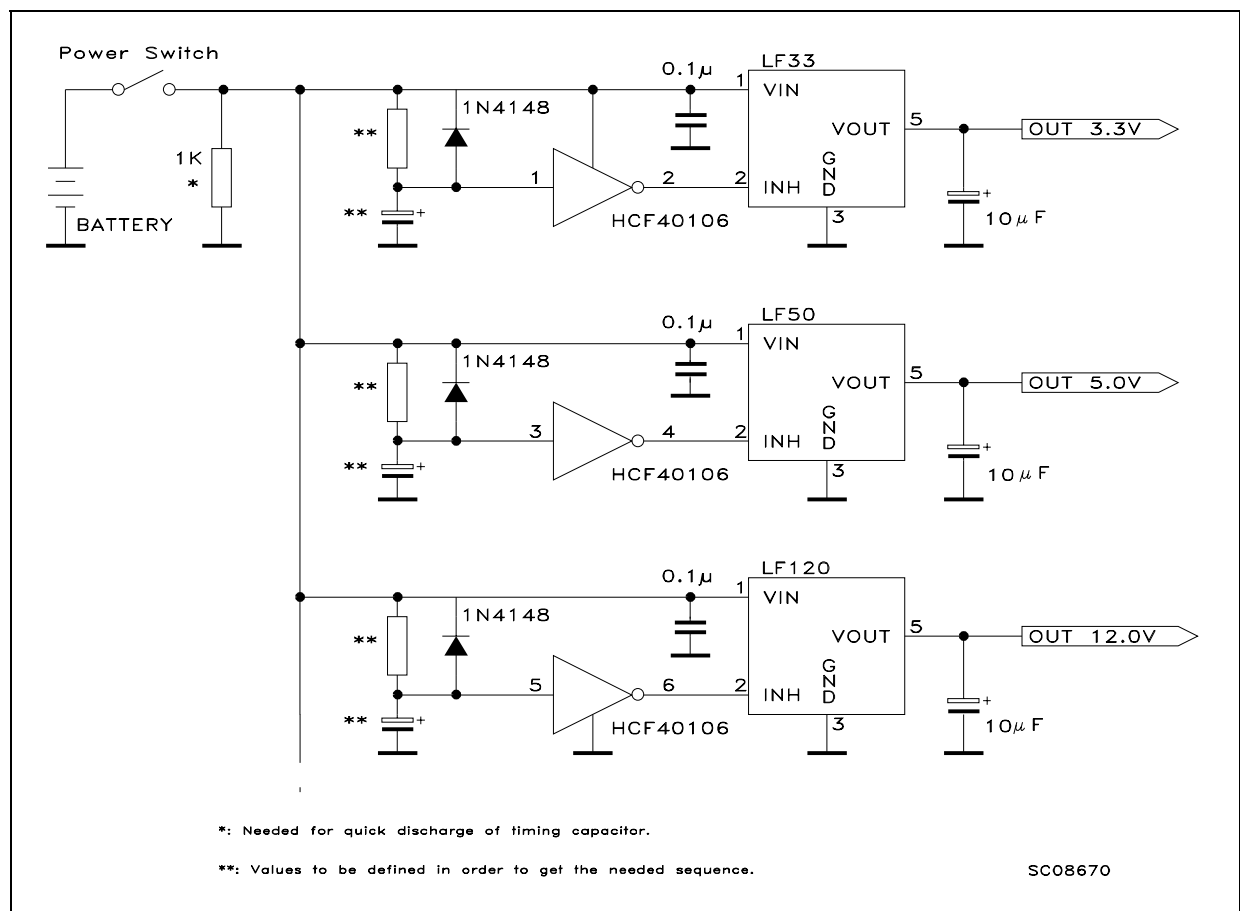


## Multiple Supply With ON/OFF Toggle Switch

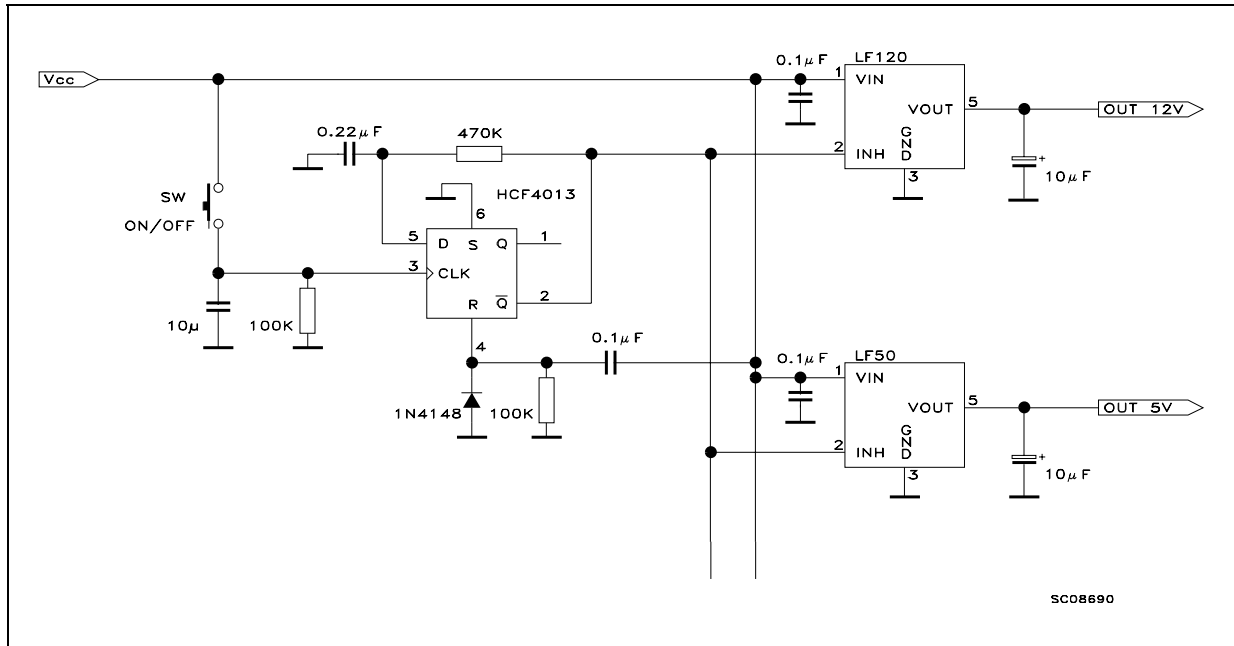


## Basic Inhibit Functions

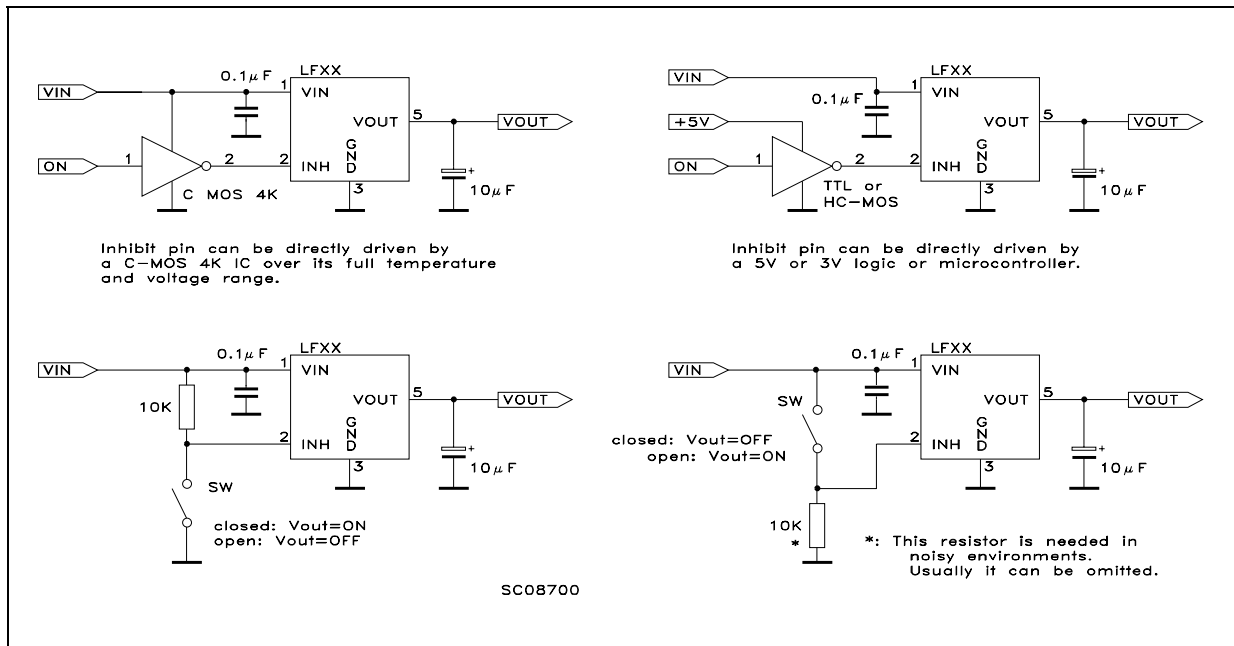

## Delayed Turn-On

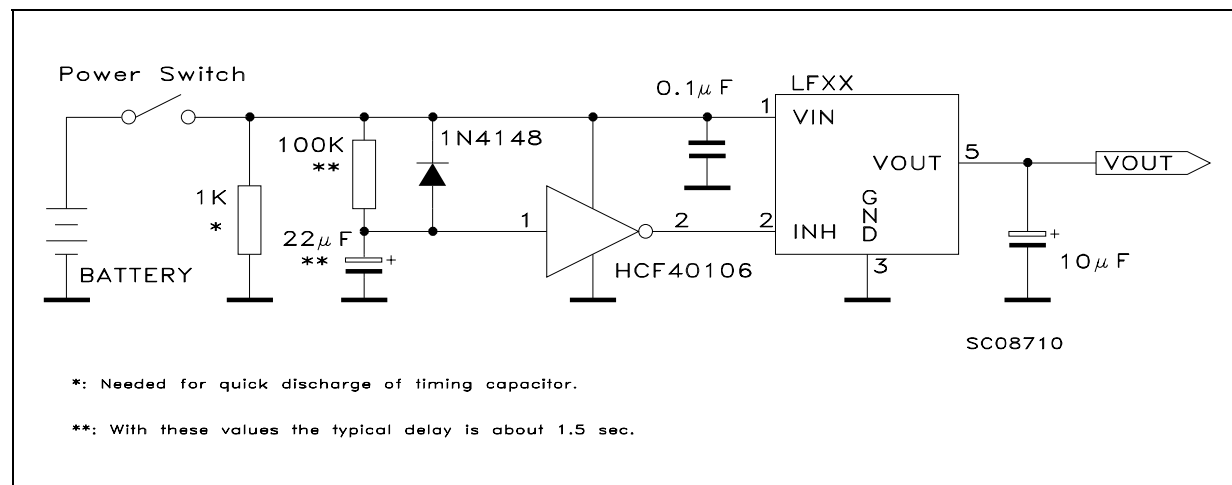


## Low Voltage Bulb Blinker

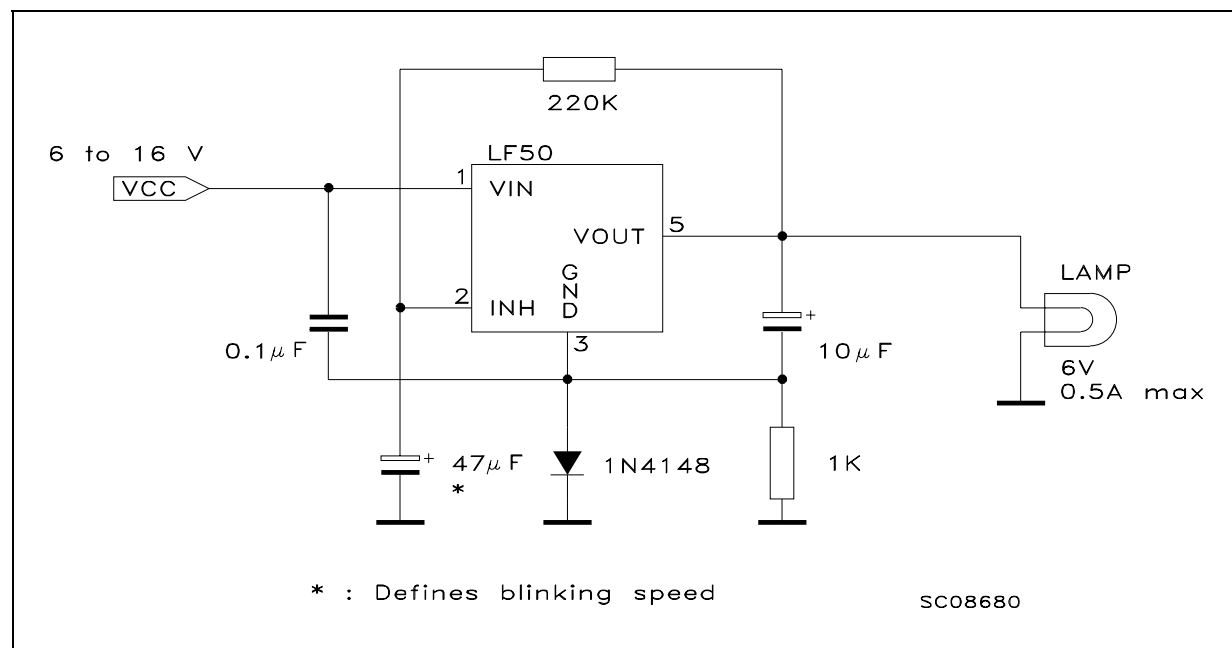

**PENTAW ATT (VERTICAL) MECHANICAL DATA**


| DIM. | mm.   |       |      | inch  |       |       |
|------|-------|-------|------|-------|-------|-------|
|      | MIN.  | TYP   | MAX. | MIN.  | TYP.  | MAX.  |
| A    |       |       | 4.8  |       |       | 0.189 |
| C    |       |       | 1.37 |       |       | 0.054 |
| D    | 2.4   |       | 2.8  | 0.094 |       | 0.110 |
| D1   | 1.2   |       | 1.35 | 0.047 |       | 0.053 |
| E    | 0.35  |       | 0.55 | 0.014 |       | 0.022 |
| F    | 0.8   |       | 1.05 | 0.031 |       | 0.041 |
| F1   | 1     |       | 1.4  | 0.039 |       | 0.055 |
| G    | 3.2   | 3.4   | 3.6  | 0.126 | 0.134 | 0.142 |
| G1   | 6.6   | 6.8   | 7    | 0.260 | 0.268 | 0.276 |
| H2   |       |       | 10.4 |       |       | 0.409 |
| H3   | 10.05 |       | 10.4 | 0.396 |       | 0.409 |
| L    |       | 17.85 |      |       | 0.703 |       |
| L1   |       | 15.75 |      |       | 0.620 |       |
| L2   |       | 21.4  |      |       | 0.843 |       |
| L3   |       | 22.5  |      |       | 0.886 |       |
| L5   | 2.6   |       | 3    | 0.102 |       | 0.118 |
| L6   | 15.1  |       | 15.8 | 0.594 |       | 0.622 |
| L7   | 6     |       | 6.6  | 0.236 |       | 0.260 |
| M    |       | 4.5   |      |       | 0.177 |       |
| M1   |       | 4     |      |       | 0.157 |       |
| Dia1 | 3.65  |       | 3.85 | 0.144 |       | 0.152 |

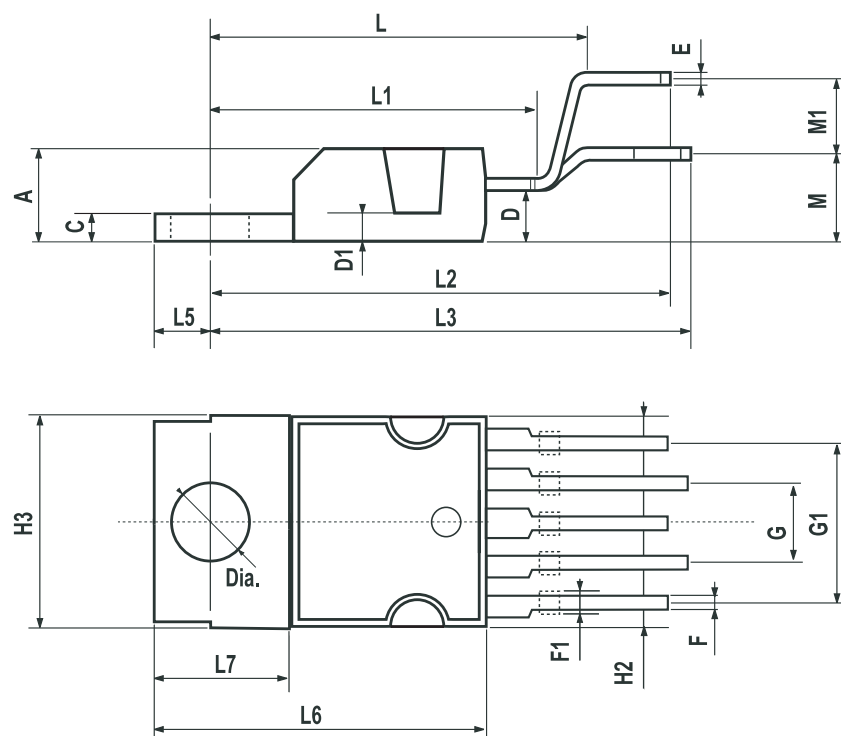

P010E


## TO-220 MECHANICAL DATA

| DIM. | mm.   |      |       | inch  |       |       |
|------|-------|------|-------|-------|-------|-------|
|      | MIN.  | TYP  | MAX.  | MIN.  | TYP.  | MAX.  |
| A    | 4.40  |      | 4.60  | 0.173 |       | 0.181 |
| C    | 1.23  |      | 1.32  | 0.048 |       | 0.051 |
| D    | 2.40  |      | 2.72  | 0.094 |       | 0.107 |
| D1   |       | 1.27 |       |       | 0.050 |       |
| E    | 0.49  |      | 0.70  | 0.019 |       | 0.027 |
| F    | 0.61  |      | 0.88  | 0.024 |       | 0.034 |
| F1   | 1.14  |      | 1.70  | 0.044 |       | 0.067 |
| F2   | 1.14  |      | 1.70  | 0.044 |       | 0.067 |
| G    | 4.95  |      | 5.15  | 0.194 |       | 0.203 |
| G1   | 2.4   |      | 2.7   | 0.094 |       | 0.106 |
| H2   | 10.0  |      | 10.40 | 0.393 |       | 0.409 |
| L2   |       | 16.4 |       |       | 0.645 |       |
| L4   | 13.0  |      | 14.0  | 0.511 |       | 0.551 |
| L5   | 2.65  |      | 2.95  | 0.104 |       | 0.116 |
| L6   | 15.25 |      | 15.75 | 0.600 |       | 0.620 |
| L7   | 6.2   |      | 6.6   | 0.244 |       | 0.260 |
| L9   | 3.5   |      | 3.93  | 0.137 |       | 0.154 |
| DIA. | 3.75  |      | 3.85  | 0.147 |       | 0.151 |

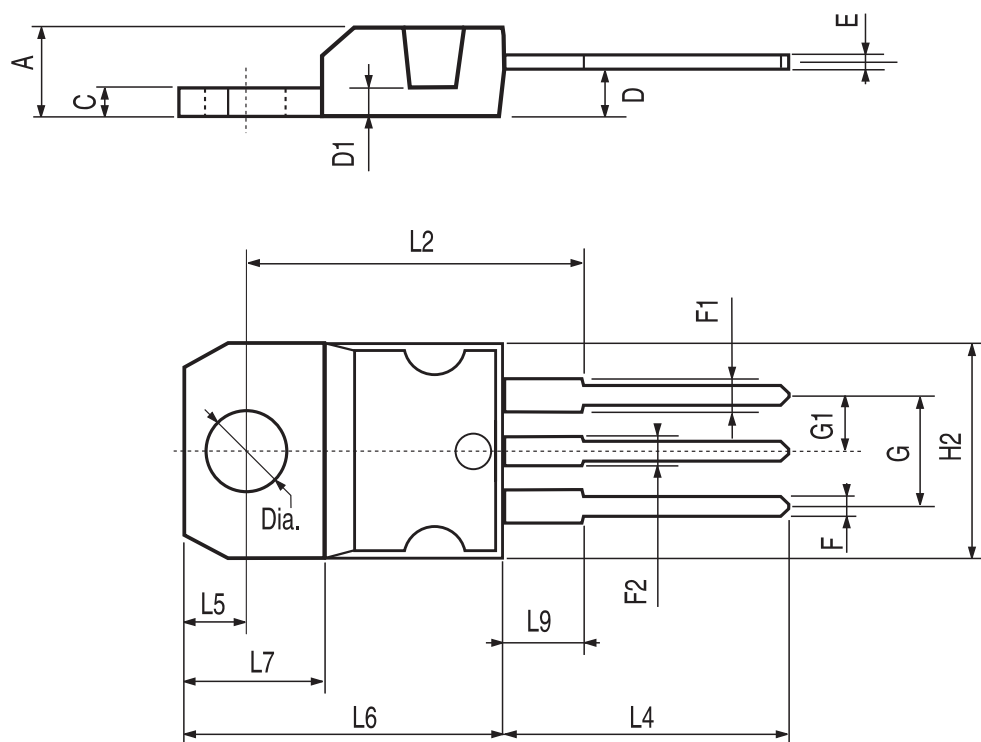

TO-220FP MECHANICAL DATA


| DIM. | mm.  |     |       | inch  |       |       |
|------|------|-----|-------|-------|-------|-------|
|      | MIN. | TYP | MAX.  | MIN.  | TYP.  | MAX.  |
| A    | 4.40 |     | 4.60  | 0.173 |       | 0.181 |
| B    | 2.5  |     | 2.7   | 0.098 |       | 0.106 |
| D    | 2.5  |     | 2.75  | 0.098 |       | 0.108 |
| E    | 0.45 |     | 0.70  | 0.017 |       | 0.027 |
| F    | 0.75 |     | 1     | 0.030 |       | 0.039 |
| F1   | 1.15 |     | 1.50  | 0.045 |       | 0.059 |
| F2   | 1.15 |     | 1.50  | 0.045 |       | 0.059 |
| G    | 4.95 |     | 5.2   | 0.194 |       | 0.204 |
| G1   | 2.4  |     | 2.7   | 0.094 |       | 0.106 |
| H    | 10.0 |     | 10.40 | 0.393 |       | 0.409 |
| L2   |      | 16  |       |       | 0.630 |       |
| L3   | 28.6 |     | 30.6  | 1.126 |       | 1.204 |
| L4   | 9.8  |     | 10.6  | 0.385 |       | 0.417 |
| L6   | 15.9 |     | 16.4  | 0.626 |       | 0.645 |
| L7   | 9    |     | 9.3   | 0.354 |       | 0.366 |
| DIA. | 3    |     | 3.2   | 0.118 |       | 0.126 |

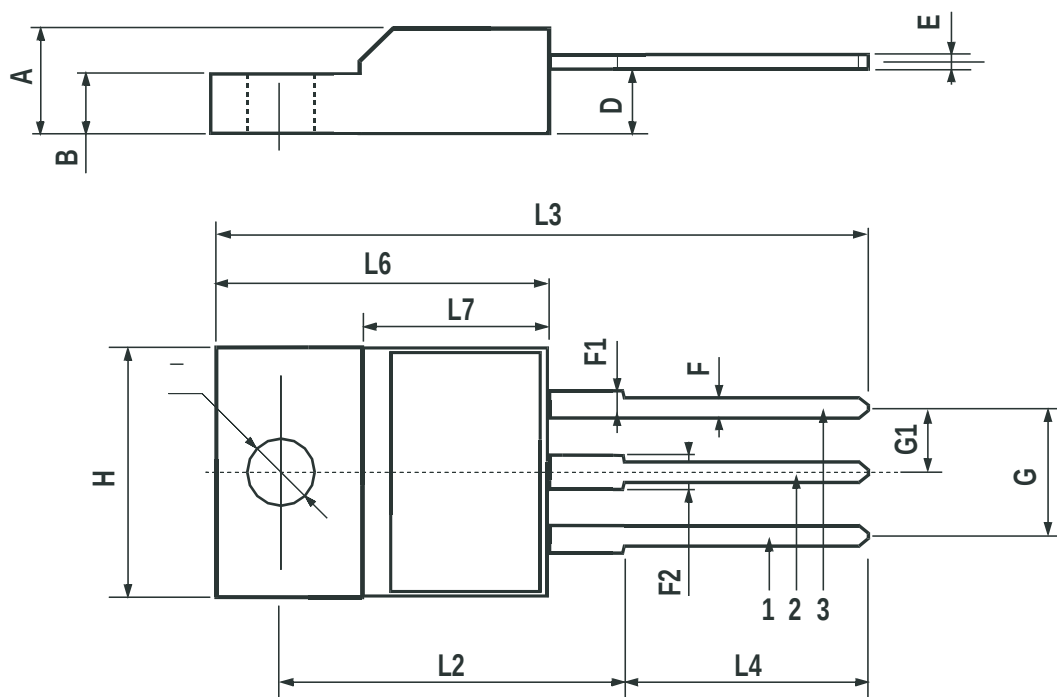

7012510/F


## DPAK MECHANICAL DATA

| DIM. | mm.  |     |      | inch  |       |       |
|------|------|-----|------|-------|-------|-------|
|      | MIN. | TYP | MAX. | MIN.  | TYP.  | MAX.  |
| A    | 2.2  |     | 2.4  | 0.086 |       | 0.094 |
| A1   | 0.9  |     | 1.1  | 0.035 |       | 0.043 |
| A2   | 0.03 |     | 0.23 | 0.001 |       | 0.009 |
| B    | 0.64 |     | 0.9  | 0.025 |       | 0.035 |
| B2   | 5.2  |     | 5.4  | 0.204 |       | 0.212 |
| C    | 0.45 |     | 0.6  | 0.017 |       | 0.023 |
| C2   | 0.48 |     | 0.6  | 0.019 |       | 0.023 |
| D    | 6    |     | 6.2  | 0.236 |       | 0.244 |
| E    | 6.4  |     | 6.6  | 0.252 |       | 0.260 |
| G    | 4.4  |     | 4.6  | 0.173 |       | 0.181 |
| H    | 9.35 |     | 10.1 | 0.368 |       | 0.397 |
| L2   |      | 0.8 |      |       | 0.031 |       |
| L4   | 0.6  |     | 1    | 0.023 |       | 0.039 |

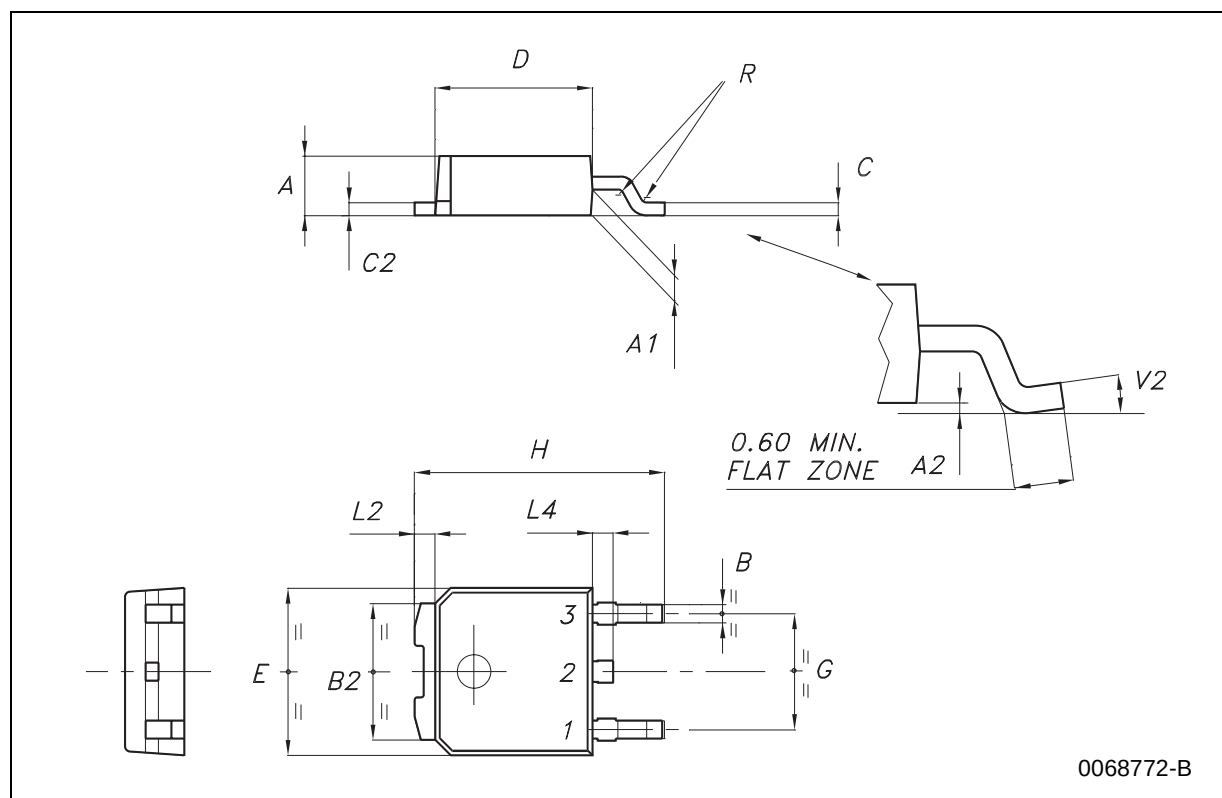

# PPAK MECHANICAL DATA

| DIM. | mm.  |     |      | inch  |       |       |
|------|------|-----|------|-------|-------|-------|
|      | MIN. | TYP | MAX. | MIN.  | TYP.  | MAX.  |
| A    | 2.2  |     | 2.4  | 0.086 |       | 0.094 |
| A1   | 0.9  |     | 1.1  | 0.035 |       | 0.043 |
| A2   | 0.03 |     | 0.23 | 0.001 |       | 0.009 |
| B    | 0.4  |     | 0.6  | 0.015 |       | 0.023 |
| B2   | 5.2  |     | 5.4  | 0.204 |       | 0.212 |
| C    | 0.45 |     | 0.6  | 0.017 |       | 0.023 |
| C2   | 0.48 |     | 0.6  | 0.019 |       | 0.023 |
| D    | 6    |     | 6.2  | 0.236 |       | 0.244 |
| E    | 6.4  |     | 6.6  | 0.252 |       | 0.260 |
| G    | 4.9  |     | 5.25 | 0.193 |       | 0.206 |
| G1   | 2.38 |     | 2.7  | 0.093 |       | 0.106 |
| H    | 9.35 |     | 10.1 | 0.368 |       | 0.397 |
| L2   |      | 0.8 |      |       | 0.031 |       |
| L4   | 0.6  |     | 1    | 0.023 |       | 0.039 |

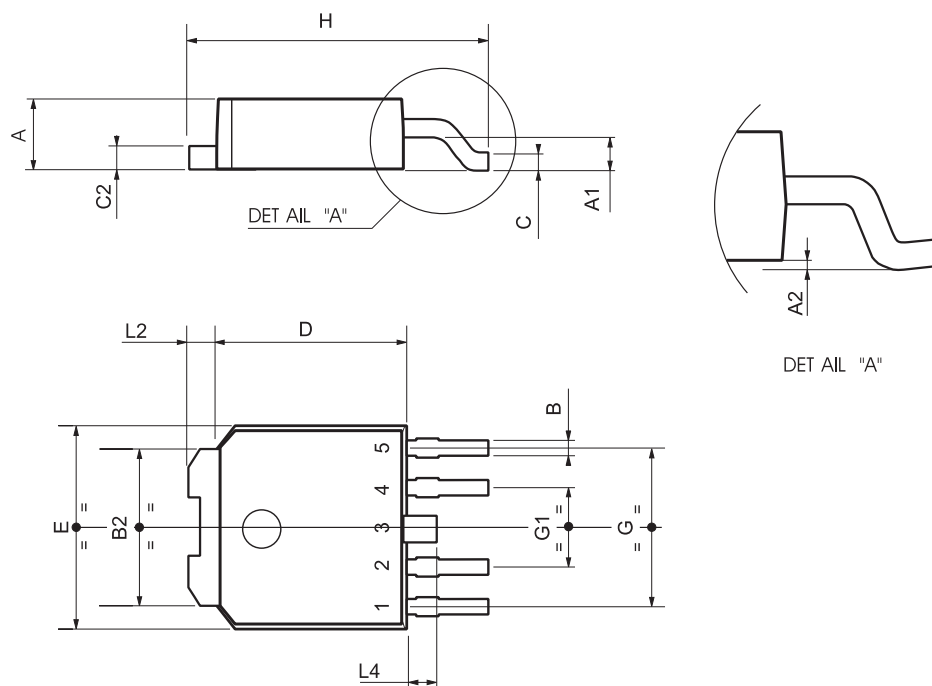


0078180-B



**Tape & Reel DPAK-PPAK MECHANICAL DATA**

| DIM. | mm.   |       |       | inch  |       |       |
|------|-------|-------|-------|-------|-------|-------|
|      | MIN.  | TYP   | MAX.  | MIN.  | TYP.  | MAX.  |
| A    |       |       | 180   |       |       | 7.086 |
| C    | 12.8  | 13.0  | 13.2  | 0.504 | 0.512 | 0.519 |
| D    | 20.2  |       |       | 0.795 |       |       |
| N    | 60    |       |       | 2.362 |       |       |
| T    |       |       | 14.4  |       |       | 0.567 |
| Ao   | 6.80  | 6.90  | 7.00  | 0.268 | 0.272 | 0.276 |
| Bo   | 10.40 | 10.50 | 10.60 | 0.409 | 0.413 | 0.417 |
| Ko   | 2.55  | 2.65  | 2.75  | 0.100 | 0.104 | 0.105 |
| Po   | 3.9   | 4.0   | 4.1   | 0.153 | 0.157 | 0.161 |
| P    | 7.9   | 8.0   | 8.1   | 0.311 | 0.315 | 0.319 |

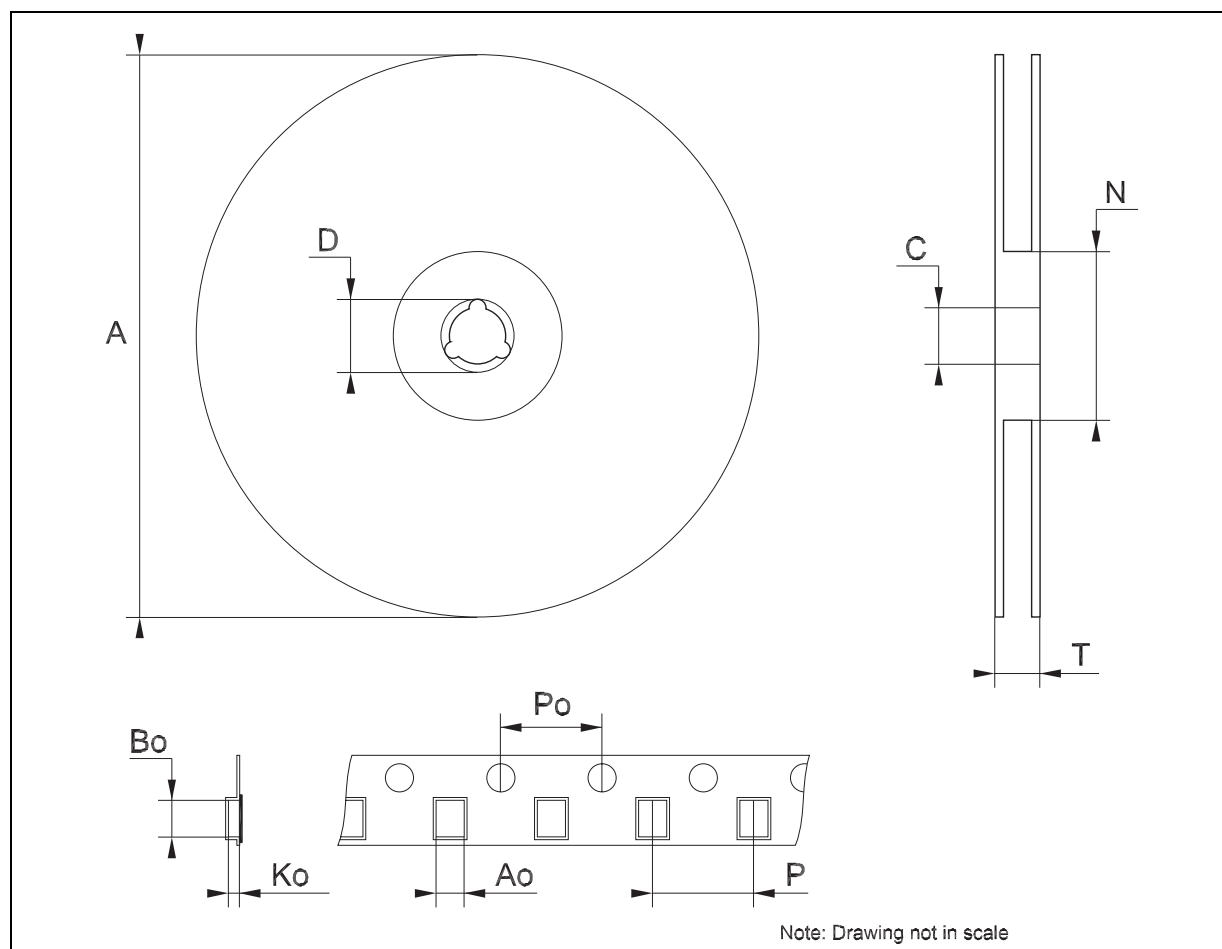

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

© The ST logo is a registered trademark of STMicroelectronics

© 2003 STMicroelectronics - Printed in Italy - All Rights Reserved  
STMicroelectronics GROUP OF COMPANIES

Australia - Brazil - Canada - China - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco  
Singapore - Spain - Sweden - Switzerland - United Kingdom - United States.

© <http://www.st.com>