


INTEGRATED T-1 RESISTOR LAMPS
5 VOLT and 12 VOLT SERIES

RED MR5060 TINTED/MR5660 UNTINTED
HIGH EFFICIENCY RED MR5760/MR5761 TINTED
YELLOW MR5360/MR5361 TINTED
HIGH EFFICIENCY GREEN MR5460/MR5461 TINTED

PACKAGE DIMENSIONS

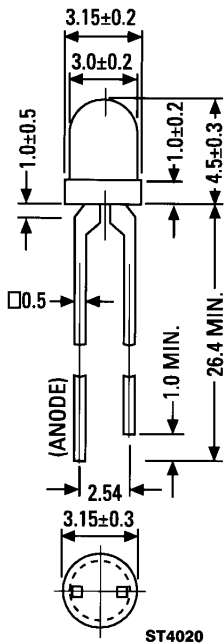

NOTES:
1. ALL DIMENSIONS ARE IN MM.
2. LEAD SPACING IS MEASURED WHERE THE LEADS EMERGE FROM THE PACKAGE.
3. PROTRUDED RESIN UNDER THE FLANGE IS 1.5 mm (0.059\") MAX.

DESCRIPTION

This group of T-1 size LED lamps contain integral resistors. Operation at 5 volts (MR5X60 Part Nos.) or 12 volts (MR5X61 Part Nos.) is possible without the use of external current limiting resistors. Color tinted, diffused epoxy packages are used for all the lamps in this group; with the exception of the MR5660, which is no tint - but diffused.

FEATURES

- Integral Current Limiting Resistor (No external resistor required)
- TTL Compatible
- Operate with 5 Volt & 12 Volt Supplies
- All Colors - Red, HER, Yellow, Green
- Wide Viewing Angle
- Solid-State Reliability

PHYSICAL CHARACTERISTICS

TYPE	SOURCE COLOR	LENS COLOR
MR5060	Red	Red Diffused
MR5660	Red	Clear Diffused
MR5760	High Efficiency Red	Red Diffused
MR5761	High Efficiency Red	Red Diffused
MR5360	Yellow	Yellow Diffused
MR5361	Yellow	Yellow Diffused
MR5460	High Efficiency Green	Green Diffused
MR5461	High Efficiency Green	Green Diffused

INTEGRATED T-1 RESISTOR LAMPS
5 VOLT and 12 VOLT SERIES


ELECTRO-OPTICAL CHARACTERISTICS (TA = 25°C Unless Otherwise Specified)														
RED								HIGH EFFICIENCY RED		UNITS		TEST CONDITION		
PARAMETER	SYMBOL	MR5060			MR5660			MR5760		MR5761				
		MIN.	TYP.	MAX.	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.	
Luminous Intensity	I _v										1.5	4.0	mcd	V _F = 12 V
Luminous Intensity	I _v	0.8	1.5		0.8	1.5		1.5	4.0				mcd	V _F = 5 V
Total Viewing Angle	2θ _{1/2}	60			60			60		60			Deg	
Peak Wavelength	λ _p	655			655			635		635			nm	
Spectral Line Halfwidth	Δ λ _{1/2}	24			24			40		40			nm	
Forward Current 12V Devices	I _F										13	20	mA	V _F = 12 V
Forward Current 5V Devices	I _F		13	20		13	20		10	15			mA	V _F = 5 V
Reverse Breakdown Voltage	V _R	5.0			5.0			5.0			5.0			I _R = 100μA

ELECTRO-OPTICAL CHARACTERISTICS (TA = 25°C Unless Otherwise Specified)														
YELLOW						HIGH EFFICIENCY GREEN				UNITS		TEST CONDITION		
PARAMETER	SYMBOL	MR5360			MR5361			MR5460			MR5461			
		MIN.	TYP.	MAX.	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.	
Luminous Intensity	I _v				1.5	4.0					1.5	4.0	mcd	V _F = 12 V
Luminous Intensity	I _v	1.5	4.0					1.5	4.0				mcd	V _F = 5 V
Total Viewing Angle	2θ _{1/2}	60			60			60			60		Deg	
Peak Wavelength	λ _p	583			583			565			565		nm	
Spectral Line Halfwidth	Δ λ _{1/2}	36			36			28			28		nm	
Forward Current 12V Devices	I _F				13	20					13	20	mA	V _F = 12 V
Forward Current 5V Devices	I _F		10	15				12	15				mA	V _F = 5 V
Reverse Breakdown Voltage	V _R	5.0			5.0			5.0			5.0			I _R = 100μA

ABSOLUTE MAXIMUM RATINGS (TA = 25°C Unless Otherwise Specified)				
	RED/HER/YELLOW 5 VOLT LAMPS	RED/HER/YELLOW 12 VOLT LAMPS	GREEN 5 VOLT LAMPS	GREEN 12 VOLT LAMPS
DC Forward Voltage (T _A = 25°C)	7.5 Volts	15 Volts	7.5 Volts	15 Volts
Reverse Voltage (I _R = 100 μA)	5 Volts	5 Volts	5 Volts	5 Volts
Operating Temperature Range	-40°C to +85°C	-40°C to +85°C	-20°C to +85°C	-20°C to +85°C
Storage Temperature Range	-55°C to +100°C	-55°C to +100°C	-55°C to +100°C	-55°C to +100°C
Lead Soldering Temperature	260°C for 5 seconds			


TYPICAL ELECTRO-OPTICAL CHARACTERISTIC CURVES

(TA = 25°C Unless Otherwise Specified)




V_{cc} - APPLIED FORWARD VOLTAGE - V

Fig. 1. Forward Current vs. Applied Forward Voltage 5 Volt Devices




V_{cc} - APPLIED FORWARD VOLTAGE - V

Fig. 2. Forward Current vs. Applied Forward Voltage 12 Volt Devices



T_A - AMBIENT TEMPERATURE - °C

Fig. 3. Maximum Allowed Applied Forward Voltage vs. Ambient Temperature
R_{θJA} = 175°C/W 5 Volt Devices

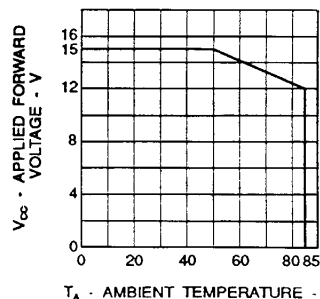

T_A - AMBIENT TEMPERATURE - °C

Fig. 4. Maximum Allowed Applied Forward Voltage vs. Ambient Temperature
R_{θJA} = 175°C/W 12 Volt Devices

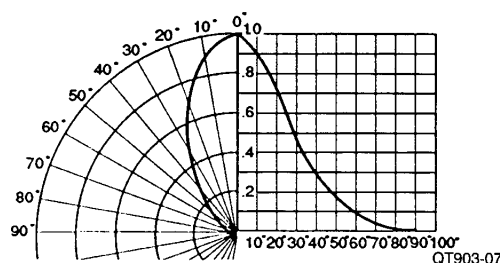


Fig. 5. Relative Luminous Intensity vs. Angular Displacement for T-1 Package




Fig. 6. Relative Luminous Intensity vs. Applied Forward Voltage 5 Volt Devices




Fig. 7. Relative Luminous Intensity vs. Applied Forward Voltage 12 Volt Devices



INTEGRATED T-1 REISTOR LAMPS 5 VOLT and 12 VOLT SERIES

DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
2. A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.