

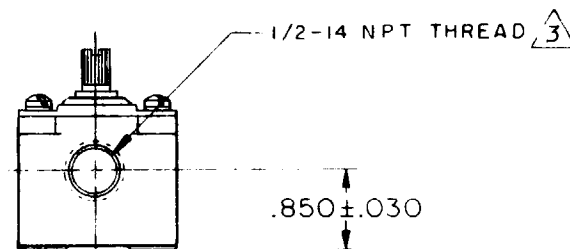
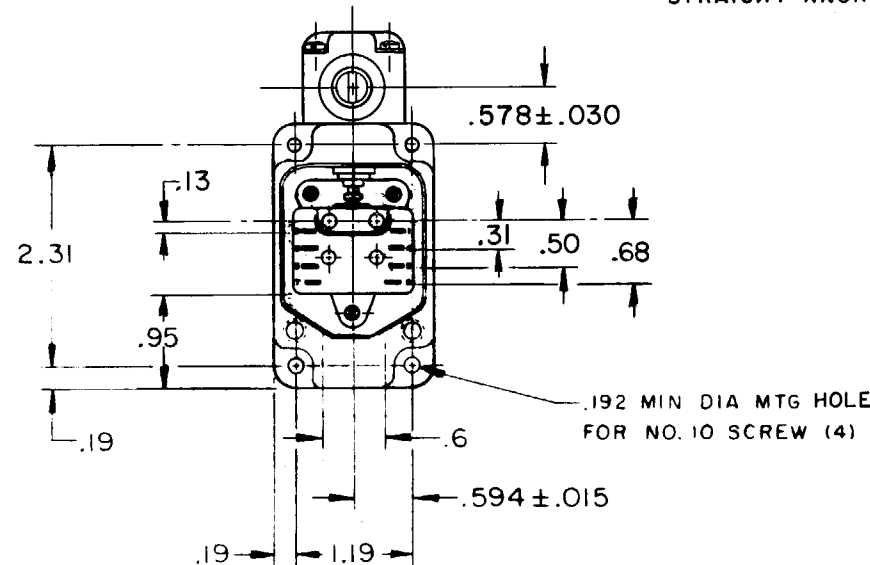




OPERATING HEAD MOUNTS
IN ANY OF FOUR
POSITIONS

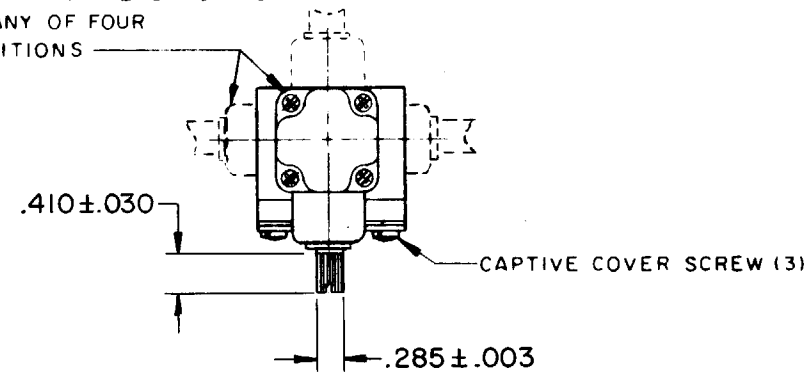


HARDENED CORROSION
RESISTANT STEEL SHAFT
STRAIGHT KNURL

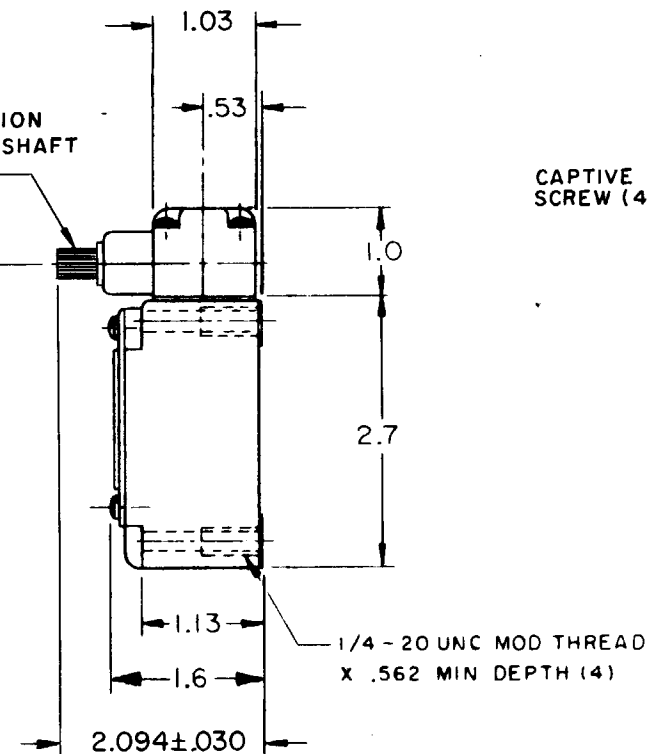

CAPTIVE HEAD
SCREW (4)

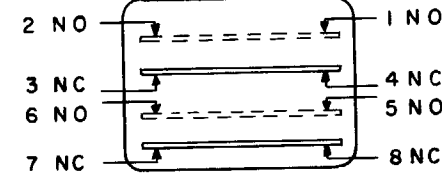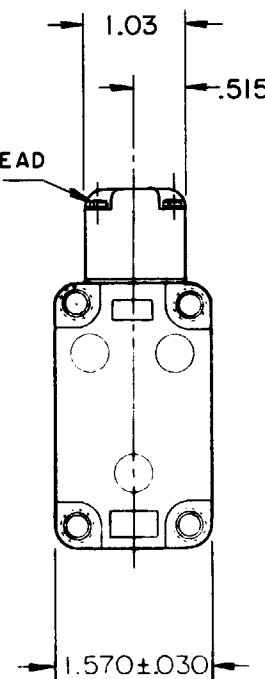

CIRCUIT DIAGRAM

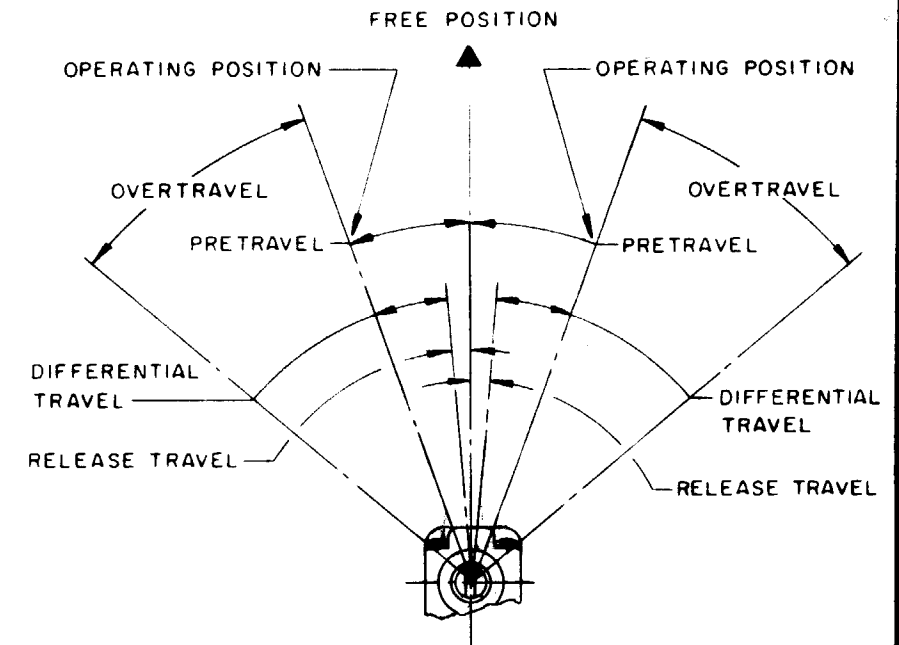

NOTE -

- 1- SWITCH IS ASSEMBLED FOR ACTUATION IN BOTH DIRECTIONS BUT MAY BE ADJUSTED TO ACTUATE IN EITHER THE CLOCKWISE DIRECTION ONLY OR THE COUNTERCLOCKWISE DIRECTION ONLY
- 2- TO CONVERT SWITCH FOR ACTUATION IN EITHER THE CLOCKWISE OR COUNTERCLOCKWISE DIRECTION ONLY, REMOVE ACTUATOR HEAD AND ROTATE THE NOTCHED PLUNGER 90° TO THE RIGHT FOR CLOCKWISE ACTUATION OR 90° TO THE LEFT FOR COUNTERCLOCKWISE ACTUATION

(3) SEAL TO BE FURNISHED BY USER

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS	ELECTRICAL DATA	SCALE 1/2 TO 1
OPERATING TORQUE ----- 4 1/2 IN LB MAX	CONTACT ARRANGEMENT (SEE CIRCUIT DIAGRAM)	DO NOT SCALE PRINT
FULL OVERTRAVEL TORQUE ----- 6 IN LB MAX		UNLESS OTHERWISE NOTED
RELEASE TORQUE ----- 3/4 IN LB MIN		DIMENSIONS ARE IN INCHES
PRETRAVEL ----- 23° MAX		TOLERANCES ARE:
DIFFERENTIAL TRAVEL ----- 16° MAX		ONE PLACE (.0) $\pm .030$
OVERTRAVEL ----- 23° MIN		TWO PLACE (.00) $\pm .015$
RELEASE TRAVEL ----- 4° MIN		THREE PLACE (.000) $\pm .005$
SWITCH - BASIC REPLACEMENT ----- 8AS42		ANGLES $\pm$
		WEIGHT

(A)

10A-125 OR 250 VAC
1/2 HP-125 VAC

WEIGHT

11LS2

M

DRAWING
NUMBER

ISSUE
X 2
X 5

REVISIONS

A	CO24962	RER	DEC 68
B	CO32809	RER	DEC 73
C	CO50952	CJH	JUN 83
D	CO-77031	JDB	DEC 93

FO-50378-003

DRAWN

OMW 27 AUG 68

REPLACES

RELEASE NO. PR-341

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK