


# Type 160 Metallized Polyester Radial Lead Capacitors

## Radial Box Metallized Polyester Capacitors



The Type 160 series radial lead metallized polyester box capacitors are constructed in rugged rectangular plastic cases with lead spacings that are standard in the electronics industry. All Type 160 capacitors are available in bulk with a .217"  $\pm$ .039" lead length, and they are good for general purpose applications such as bypass, decoupling, energy storage/discharge and arc suppression.

### Highlights

- RoHS compliant
- Rugged plastic case
- Case and epoxy fill meets UL94V0
- 10 mm through 27.5 mm lead spacings
- Non-inductively wound
- Non-polar
- Wire lead material, tinned copper clad steel

### RoHS Compliant

### Specifications

**Capacitance Range:** 0.0022  $\mu$ F to 10.0  $\mu$ F

**Voltage Range:** 63 Vdc to 1000 Vdc

**Capacitance Tolerance:**  $\pm$ 5%,  $\pm$ 10%,  $\pm$ 20%

**Operating Temperature Range:** -55  $^{\circ}$ C to +125  $^{\circ}$ C (derating voltage to 1.25% per  $^{\circ}$ C above 85  $^{\circ}$ C)

**Dielectric Withstand Voltage:** 1.6 x rated voltage for 2 sec @ +25  $^{\circ}$ C  $\pm$ 5  $^{\circ}$ C

**Dissipation Factor (DF):**  $\tan \delta \times 10^{-4}$  at 25  $^{\circ}$ C  $\pm$ 5  $^{\circ}$ C

| kHz | C $\leq$ 1 $\mu$ F | C > 1 $\mu$ F |
|-----|--------------------|---------------|
| 1   | $\leq$ 100         | $\leq$ 100    |
| 10  | $\geq$ 150         |               |

**Total Self Inductance (L):**

| Pitch (mm)       | 10 | 15 | 22.5 | 27.5 |
|------------------|----|----|------|------|
| L (nH) $\approx$ | 9  | 10 | 18   | 18   |

**Long Term Stability (after two years):** Capacitance change  $\Delta C/C \leq \pm 3\%$  under standard environmental conditions

**Corona (Partial Discharge Inception Voltage):** 200 Vac for 100 Vdc, 200 Vdc  
250 Vac for 400 Vdc, 630 Vdc  
300 Vac for 1000 Vdc


**Maximum Pulse Rise Time (dv/dt):**

| Vn      | Pitch (mm) |     |      |      |
|---------|------------|-----|------|------|
|         | 10         | 15  | 22.5 | 27.5 |
| 63      | 3          | 1.5 | 1    | 1    |
| 100/160 | 6/8        | 3   | 2    | 1    |
| 250     | 11         | 7   | 4    | 3    |
| 400     | 20         | 10  | 5.5  | 5    |
| 630     | 30         | 15  | 8    | 7    |
| 1000    | 60         | 25  | 15   | 10   |

If the working voltage (V) is less than the nominal voltage (Vn), the capacitor can work at higher dv/dt. In this case, the maximum value allowed is obtained by multiplying the above value with the ratio Vn/V.

# Type 160 Metallized Polyester Radial Lead Capacitors

## Capacitor Outline Drawing

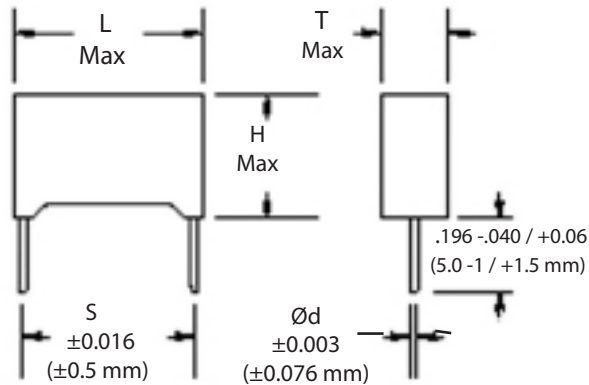

**Note:** The lead diameter is a maximum dimension for lead spacing  $\leq 15$  mm and a nominal for lead spacing  $> 15$  mm

## Test Method and Performance

| Soldering                       |                                                                                                                    |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------|
| <b>Test Conditions</b>          |                                                                                                                    |
| Soldering Temperature           | 260 °C $\pm 5$ °C                                                                                                  |
| Soldering Duration              | 10 sec $\pm 1$ sec                                                                                                 |
| <b>Performance</b>              |                                                                                                                    |
| Capacitance Change $\Delta C/C$ | $\leq \pm 2\%$                                                                                                     |
| DF Change $\Delta \tan \delta$  | $\leq 30 \times 10^{-4}$ at 10 kHz for $C \leq 1.0 \mu F$<br>$\leq 20 \times 10^{-4}$ at 1 kHz for $C > 1.0 \mu F$ |

| Insulation Resistance           |                                                                                                                    |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------|
| <b>Test Conditions</b>          |                                                                                                                    |
| Temperature                     | 25 °C $\pm 5$ °C                                                                                                   |
| Voltage Charge Time             | 1 minute                                                                                                           |
| Voltage Charge                  | 50 Vdc for $V_n < 100$ Vdc<br>100 Vdc for $V_n \geq 100$ Vdc                                                       |
| <b>Performance</b>              |                                                                                                                    |
| For $V_n > 100$ Vdc             | $\geq 30,000 M\Omega$ for $\leq 0.33 \mu F$<br>$\geq 10,000 M\Omega \times \mu F$ for $C > 0.33 \mu F$             |
| For $V_n \leq 100$ Vdc          | $\geq 10,000 M\Omega$ for $C \leq 0.1 \mu F$<br>$\geq 1,000 M\Omega \times \mu F$ for $C \leq 0.1 \mu F$           |
| Damp Heat Test                  |                                                                                                                    |
| <b>Test Conditions</b>          |                                                                                                                    |
| Temperature                     | +40 °C                                                                                                             |
| Relative Humidity               | 95%                                                                                                                |
| Test Duration                   | 21 days                                                                                                            |
| <b>Performance</b>              |                                                                                                                    |
| Capacitance Change $\Delta C/C$ | $\leq \pm 5\%$                                                                                                     |
| DF Change $\Delta \tan \delta$  | $\leq 50 \times 10^{-4}$ at 1 kHz                                                                                  |
| Insulation Resistance           | $\geq 50\%$ of limit value                                                                                         |
| Life Test                       |                                                                                                                    |
| <b>Test Conditions</b>          |                                                                                                                    |
| Temperature                     | +85 °C                                                                                                             |
| Test Duration                   | 1000 hrs                                                                                                           |
| Voltage Applied                 | 1.25 $\times V_n$                                                                                                  |
| <b>Performance</b>              |                                                                                                                    |
| Capacitance Change $\Delta C/C$ | $\leq \pm 5\%$                                                                                                     |
| DF Change $\Delta \tan \delta$  | $\leq 30 \times 10^{-4}$ at 10 kHz for $C \leq 1.0 \mu F$<br>$\leq 20 \times 10^{-4}$ at 1 kHz for $C > 1.0 \mu F$ |
| Insulation Resistance           | $\geq 50\%$ of limit value                                                                                         |

## Ratings

## RoHS Compliant

| Cap<br>(μF) | Catalog<br>Part Number | Inches |       |       |       |       | Millimeters |      |      |      |     |
|-------------|------------------------|--------|-------|-------|-------|-------|-------------|------|------|------|-----|
|             |                        | L      | T     | H     | S     | Ød    | L           | T    | H    | S    | Ød  |
|             | 63 Vdc                 |        |       |       |       |       |             |      |      |      |     |
| .22         | 160224*63D-F           | 0.512  | 0.157 | 0.374 | 0.394 | 0.031 | 13.0        | 5.0  | 11.0 | 10.0 | 0.8 |
| .27         | 160274*63D-F           | 0.512  | 0.157 | 0.374 | 0.394 | 0.031 | 13.0        | 5.0  | 11.0 | 10.0 | 0.8 |
| .33         | 160334*63E-F           | 0.512  | 0.157 | 0.374 | 0.394 | 0.031 | 13.0        | 6.0  | 12.0 | 10.0 | 0.8 |
| .39         | 160394*63E-F           | 0.512  | 0.157 | 0.374 | 0.394 | 0.031 | 13.0        | 6.0  | 12.0 | 10.0 | 0.8 |
| .47         | 160474*63E-F           | 0.512  | 0.197 | 0.433 | 0.394 | 0.031 | 13.0        | 6.0  | 12.0 | 10.0 | 0.8 |
| .56         | 160564*63D-F           | 0.512  | 0.197 | 0.433 | 0.394 | 0.031 | 13.0        | 5.0  | 11.0 | 10.0 | 0.8 |
| .68         | 160684*63D-F           | 0.512  | 0.197 | 0.433 | 0.394 | 0.031 | 13.0        | 5.0  | 11.0 | 10.0 | 0.8 |
| .68         | 160684*63G-F           | 0.709  | 0.236 | 0.472 | 0.591 | 0.031 | 18.0        | 6.0  | 12.0 | 15.0 | 0.8 |
| .82         | 160824*63E-F           | 0.512  | 0.236 | 0.472 | 0.394 | 0.031 | 13.0        | 6.0  | 12.0 | 10.0 | 0.8 |
| .82         | 160824*63H-F           | 0.709  | 0.197 | 0.433 | 0.591 | 0.031 | 18.0        | 7.5  | 13.5 | 15.0 | 0.8 |
| 1.0         | 160105*63H-F           | 0.709  | 0.197 | 0.433 | 0.591 | 0.031 | 18.0        | 7.5  | 13.5 | 15.0 | 0.8 |
| 1.5         | 160155*63G-F           | 0.709  | 0.236 | 0.472 | 0.591 | 0.031 | 18.0        | 6.0  | 12.5 | 15.0 | 0.8 |
| 2.2         | 160225*63H-F           | 0.709  | 0.295 | 0.531 | 0.591 | 0.031 | 18.0        | 7.5  | 14.0 | 15.0 | 0.8 |
| 3.3         | 160335*63M-F           | 1.043  | 0.276 | 0.650 | 0.886 | 0.031 | 18.0        | 10.0 | 16.0 | 15.0 | 0.8 |
| 4.7         | 160475*63N-F           | 1.043  | 0.335 | 0.669 | 0.886 | 0.031 | 26.5        | 8.5  | 17.0 | 22.5 | 0.8 |
| 6.8         | 160685*63O-F           | 1.043  | 0.394 | 0.748 | 0.886 | 0.031 | 26.5        | 10.0 | 19.0 | 22.5 | 0.8 |
| 10.0        | 160106*63P-F           | 1.260  | 0.433 | 0.787 | 1.083 | 0.031 | 26.5        | 13.0 | 23.0 | 22.5 | 0.8 |

\* Indicates capacitance tolerance: J =  $\pm 5\%$ , K =  $\pm 10\%$ , M =  $\pm 20\%$

# Type 160 Metallized Polyester Radial Lead Capacitors

**RoHS Compliant**

| Cap<br>(μF) | Catalog<br>Part Number | Inches |       |       |       |       | Millimeters |      |      |      |     |
|-------------|------------------------|--------|-------|-------|-------|-------|-------------|------|------|------|-----|
|             |                        | L      | T     | H     | S     | Ød    | L           | T    | H    | S    | Ød  |
| 100 Vdc     |                        |        |       |       |       |       |             |      |      |      |     |
| .10         | 160104*100C-F          | 0.512  | 0.157 | 0.374 | 0.394 | 0.031 | 13.0        | 4.0  | 9.5  | 10.0 | 0.8 |
| .12         | 160124*100C-F          | 0.512  | 0.157 | 0.374 | 0.394 | 0.031 | 13.0        | 4.0  | 9.5  | 10.0 | 0.8 |
| .15         | 160154*100C-F          | 0.512  | 0.157 | 0.374 | 0.394 | 0.031 | 13.0        | 4.0  | 9.5  | 10.0 | 0.8 |
| .18         | 160184*100C-F          | 0.512  | 0.157 | 0.374 | 0.394 | 0.031 | 13.0        | 4.0  | 9.5  | 10.0 | 0.8 |
| .22         | 160224*100D-F          | 0.512  | 0.197 | 0.433 | 0.394 | 0.031 | 13.0        | 5.0  | 11.0 | 10.0 | 0.8 |
| .27         | 160274*100D-F          | 0.512  | 0.197 | 0.433 | 0.394 | 0.031 | 13.0        | 5.0  | 11.0 | 10.0 | 0.8 |
| .33         | 160334*100E-F          | 0.512  | 0.236 | 0.472 | 0.394 | 0.031 | 13.0        | 6.0  | 12.0 | 10.0 | 0.8 |
| .33         | 160334*100F-F          | 0.709  | 0.197 | 0.433 | 0.591 | 0.031 | 18.0        | 5.0  | 11.0 | 15.0 | 0.8 |
| .39         | 160394*100E-F          | 0.512  | 0.236 | 0.472 | 0.394 | 0.031 | 13.0        | 6.0  | 12.0 | 10.0 | 0.8 |
| .39         | 160394*100F-F          | 0.709  | 0.197 | 0.433 | 0.591 | 0.031 | 18.0        | 5.0  | 11.0 | 15.0 | 0.8 |
| .47         | 160474*100E-F          | 0.512  | 0.236 | 0.472 | 0.394 | 0.031 | 13.0        | 6.0  | 12.0 | 10.0 | 0.8 |
| .47         | 160474*100F-F          | 0.709  | 0.197 | 0.433 | 0.591 | 0.031 | 18.0        | 5.0  | 11.0 | 15.0 | 0.8 |
| .56         | 160564*100G-F          | 0.709  | 0.236 | 0.472 | 0.591 | 0.031 | 18.0        | 6.0  | 12.0 | 15.0 | 0.8 |
| .68         | 160684*100G-F          | 0.709  | 0.236 | 0.472 | 0.591 | 0.031 | 18.0        | 6.0  | 12.0 | 15.0 | 0.8 |
| .82         | 160824*100H-F          | 0.709  | 0.295 | 0.531 | 0.591 | 0.031 | 18.0        | 7.5  | 13.5 | 15.0 | 0.8 |
| 1.0         | 160105*100H-F          | 0.709  | 0.295 | 0.531 | 0.591 | 0.031 | 18.0        | 7.5  | 13.5 | 15.0 | 0.8 |
| 1.5         | 160155*100M-F          | 1.043  | 0.276 | 0.650 | 0.886 | 0.031 | 26.5        | 7.0  | 16.5 | 22.5 | 0.8 |
| 2.2         | 160225*100N-F          | 1.043  | 0.335 | 0.669 | 0.886 | 0.031 | 26.5        | 8.5  | 17.0 | 22.5 | 0.8 |
| 3.3         | 160335*100O-F          | 1.043  | 0.394 | 0.748 | 0.886 | 0.031 | 26.5        | 10.0 | 19.0 | 22.5 | 0.8 |
| 4.7         | 160475*100P-F          | 1.260  | 0.433 | 0.787 | 1.083 | 0.031 | 32.0        | 11.0 | 20.0 | 27.5 | 0.8 |
| 6.8         | 160685*100Q-F          | 1.260  | 0.512 | 0.886 | 1.083 | 0.031 | 32.0        | 13.0 | 22.5 | 27.5 | 0.8 |
| 10.0        | 160106*100S-F          | 1.457  | 0.709 | 1.299 | 1.083 | 0.031 | 37.0        | 18.0 | 33.0 | 27.5 | 0.8 |
| 160 Vdc     |                        |        |       |       |       |       |             |      |      |      |     |
| .10         | 160104*160C-F          | 0.512  | 0.157 | 0.374 | 0.394 | 0.031 | 13.0        | 4.0  | 9.5  | 10.0 | 0.8 |
| 250 Vdc     |                        |        |       |       |       |       |             |      |      |      |     |
| .033        | 160333*250C-F          | 0.512  | 0.157 | 0.374 | 0.394 | 0.031 | 13.0        | 4.0  | 9.5  | 10.0 | 0.8 |
| .039        | 160393*250C-F          | 0.512  | 0.157 | 0.374 | 0.394 | 0.031 | 13.0        | 4.0  | 9.5  | 10.0 | 0.8 |
| .047        | 160473*250C-F          | 0.512  | 0.157 | 0.374 | 0.394 | 0.031 | 13.0        | 4.0  | 9.5  | 10.0 | 0.8 |
| .056        | 160563*250C-F          | 0.512  | 0.157 | 0.374 | 0.394 | 0.031 | 13.0        | 4.0  | 9.5  | 10.0 | 0.8 |
| .068        | 160683*250C-F          | 0.512  | 0.157 | 0.374 | 0.394 | 0.031 | 13.0        | 4.0  | 9.5  | 10.0 | 0.8 |
| .082        | 160823*250D-F          | 0.512  | 0.197 | 0.433 | 0.394 | 0.031 | 13.0        | 5.0  | 11.0 | 10.0 | 0.8 |
| .10         | 160104*250D-F          | 0.512  | 0.197 | 0.433 | 0.394 | 0.031 | 13.0        | 5.0  | 11.0 | 10.0 | 0.8 |
| .10         | 160104*250F-F          | 0.709  | 0.197 | 0.433 | 0.591 | 0.031 | 18.0        | 5.0  | 11.0 | 15.0 | 0.8 |
| .12         | 160124*250D-F          | 0.512  | 0.236 | 0.472 | 0.394 | 0.031 | 13.0        | 6.0  | 12.0 | 10.0 | 0.8 |
| .12         | 160124*250F-F          | 0.709  | 0.197 | 0.433 | 0.591 | 0.031 | 18.0        | 5.0  | 11.0 | 15.0 | 0.8 |
| .15         | 160154*250E-F          | 0.512  | 0.236 | 0.472 | 0.394 | 0.031 | 13.0        | 6.0  | 12.0 | 10.0 | 0.8 |
| .15         | 160154*250F-F          | 0.709  | 0.197 | 0.433 | 0.591 | 0.031 | 18.0        | 5.0  | 11.0 | 15.0 | 0.8 |
| .18         | 160184*250E-F          | 0.512  | 0.236 | 0.472 | 0.394 | 0.031 | 13.0        | 6.0  | 12.0 | 10.0 | 0.8 |
| .18         | 160184*250F-F          | 0.709  | 0.197 | 0.433 | 0.591 | 0.031 | 18.0        | 5.0  | 11.0 | 15.0 | 0.8 |
| .22         | 160224*250F-F          | 0.709  | 0.197 | 0.433 | 0.591 | 0.031 | 18.0        | 5.0  | 11.0 | 15.0 | 0.8 |
| .27         | 160274*250G-F          | 0.709  | 0.236 | 0.472 | 0.591 | 0.031 | 18.0        | 6.0  | 12.0 | 15.0 | 0.8 |
| .33         | 160334*250G-F          | 0.709  | 0.236 | 0.472 | 0.591 | 0.031 | 18.0        | 6.0  | 12.0 | 15.0 | 0.8 |
| .39         | 160394*250H-F          | 0.709  | 0.295 | 0.531 | 0.591 | 0.031 | 18.0        | 7.5  | 13.5 | 15.0 | 0.8 |
| .47         | 160474*250H-F          | 0.709  | 0.295 | 0.531 | 0.591 | 0.031 | 18.0        | 7.5  | 13.5 | 15.0 | 0.8 |
| .47         | 160474*250L-F          | 1.043  | 0.236 | 0.591 | 0.886 | 0.031 | 26.5        | 6.0  | 15.0 | 22.5 | 0.8 |
| .56         | 160564*250I-F          | 0.709  | 0.335 | 0.571 | 0.591 | 0.031 | 18.0        | 8.5  | 14.5 | 15.0 | 0.8 |
| .56         | 160564*250M-F          | 1.043  | 0.276 | 0.650 | 0.886 | 0.031 | 26.5        | 7.0  | 16.5 | 22.5 | 0.8 |
| .68         | 160684*250I-F          | 0.709  | 0.335 | 0.571 | 0.591 | 0.031 | 18.0        | 8.5  | 14.5 | 15.0 | 0.8 |
| .68         | 160684*250M-F          | 1.043  | 0.276 | 0.650 | 0.886 | 0.031 | 26.5        | 7.0  | 16.5 | 22.5 | 0.8 |
| .82         | 160824*250M-F          | 1.043  | 0.335 | 0.669 | 0.886 | 0.031 | 26.5        | 8.5  | 17.0 | 22.5 | 0.8 |

\* Indicates capacitance tolerance: J =  $\pm 5\%$ , K =  $\pm 10\%$ , M =  $\pm 20\%$

# Type 160 Metallized Polyester Radial Lead Capacitors

**RoHS Compliant**

| Cap<br>(μF) | Catalog<br>Part Number | Inches |       |       |       |       | Millimeters |      |      |      |     |
|-------------|------------------------|--------|-------|-------|-------|-------|-------------|------|------|------|-----|
|             |                        | L      | T     | H     | S     | Ød    | L           | T    | H    | S    | Ød  |
| 250 Vdc     |                        |        |       |       |       |       |             |      |      |      |     |
| 1.0         | 160105*250N-F          | 1.043  | 0.335 | 0.669 | 0.886 | 0.031 | 26.5        | 8.5  | 17.0 | 22.5 | 0.8 |
| 1.5         | 160155*250O-F          | 1.043  | 0.394 | 0.748 | 0.886 | 0.031 | 26.5        | 10.0 | 19.0 | 22.5 | 0.8 |
| 2.2         | 160225*250P-F          | 1.260  | 0.433 | 0.787 | 1.083 | 0.031 | 32.0        | 11.0 | 20.0 | 27.5 | 0.8 |
| 3.3         | 160335*250Q-F          | 1.260  | 0.512 | 0.886 | 1.083 | 0.031 | 32.0        | 13.0 | 22.5 | 27.5 | 0.8 |
| 4.7         | 160475*250R-F          | 1.260  | 0.591 | 1.181 | 1.083 | 0.031 | 32.0        | 15.0 | 30.0 | 27.5 | 0.8 |
| 6.8         | 160685*250S-F          | 1.457  | 0.709 | 1.299 | 1.083 | 0.031 | 37.0        | 18.0 | 33.0 | 27.5 | 0.8 |
| 400 Vdc     |                        |        |       |       |       |       |             |      |      |      |     |
| .012        | 160123*400C-F          | 0.512  | 0.157 | 0.374 | 0.394 | 0.031 | 13.0        | 4.0  | 9.5  | 10.0 | 0.8 |
| .015        | 160153*400C-F          | 0.512  | 0.157 | 0.374 | 0.394 | 0.031 | 13.0        | 4.0  | 9.5  | 10.0 | 0.8 |
| .018        | 160183*400C-F          | 0.512  | 0.157 | 0.374 | 0.394 | 0.031 | 13.0        | 4.0  | 9.5  | 10.0 | 0.8 |
| .022        | 160223*400C-F          | 0.512  | 0.157 | 0.374 | 0.394 | 0.031 | 13.0        | 4.0  | 9.5  | 10.0 | 0.8 |
| .027        | 160273*400C-F          | 0.512  | 0.157 | 0.374 | 0.394 | 0.031 | 13.0        | 4.0  | 9.5  | 10.0 | 0.8 |
| .033        | 160333*400D-F          | 0.512  | 0.197 | 0.433 | 0.394 | 0.031 | 13.0        | 5.0  | 11.0 | 10.0 | 0.8 |
| .039        | 160393*400D-F          | 0.512  | 0.197 | 0.433 | 0.394 | 0.031 | 13.0        | 5.0  | 11.0 | 10.0 | 0.8 |
| .047        | 160473*400E-F          | 0.512  | 0.236 | 0.472 | 0.394 | 0.031 | 13.0        | 6.0  | 12.0 | 10.0 | 0.8 |
| .047        | 160473*400F-F          | 0.709  | 0.197 | 0.433 | 0.591 | 0.031 | 18.0        | 5.0  | 11.0 | 15.0 | 0.8 |
| .056        | 160563*400F-F          | 0.709  | 0.197 | 0.433 | 0.591 | 0.031 | 18.0        | 5.0  | 11.0 | 15.0 | 0.8 |
| .068        | 160683*400F-F          | 0.709  | 0.197 | 0.433 | 0.591 | 0.031 | 18.0        | 5.0  | 11.0 | 15.0 | 0.8 |
| .082        | 160823*400F-F          | 0.709  | 0.197 | 0.433 | 0.591 | 0.031 | 18.0        | 5.0  | 11.0 | 15.0 | 0.8 |
| .10         | 160104*400G-F          | 0.709  | 0.236 | 0.472 | 0.591 | 0.031 | 18.0        | 6.0  | 12.0 | 15.0 | 0.8 |
| .12         | 160124*400G-F          | 0.709  | 0.236 | 0.472 | 0.591 | 0.031 | 18.0        | 6.0  | 12.0 | 15.0 | 0.8 |
| .15         | 160154*400H-F          | 0.709  | 0.295 | 0.531 | 0.591 | 0.031 | 18.0        | 7.5  | 13.5 | 15.0 | 0.8 |
| .15         | 160154*400L-F          | 1.043  | 0.236 | 0.591 | 0.886 | 0.031 | 26.5        | 6.0  | 15.0 | 22.5 | 0.8 |
| .18         | 160184*400L-F          | 1.043  | 0.236 | 0.591 | 0.886 | 0.031 | 26.5        | 6.0  | 15.0 | 22.5 | 0.8 |
| .22         | 160224*400L-F          | 1.043  | 0.236 | 0.591 | 0.886 | 0.031 | 26.5        | 6.0  | 15.0 | 22.5 | 0.8 |
| .27         | 160274*400M-F          | 1.043  | 0.276 | 0.650 | 0.886 | 0.031 | 26.5        | 7.0  | 16.5 | 22.5 | 0.8 |
| .33         | 160334*400M-F          | 1.043  | 0.276 | 0.650 | 0.886 | 0.031 | 26.5        | 7.0  | 16.5 | 22.5 | 0.8 |
| .39         | 160394*400N-F          | 1.043  | 0.335 | 0.669 | 0.886 | 0.031 | 26.5        | 8.5  | 17.0 | 22.5 | 0.8 |
| .47         | 160474*400N-F          | 1.043  | 0.335 | 0.669 | 0.886 | 0.031 | 26.5        | 8.5  | 17.0 | 22.5 | 0.8 |
| .56         | 160564*400O-F          | 1.043  | 0.394 | 0.748 | 0.886 | 0.031 | 26.5        | 10.0 | 19.0 | 22.5 | 0.8 |
| .68         | 160684*400P-F          | 1.260  | 0.433 | 0.787 | 1.083 | 0.031 | 32.0        | 11.0 | 20.0 | 27.5 | 0.8 |
| .82         | 160824*400P-F          | 1.260  | 0.433 | 0.787 | 1.083 | 0.031 | 32.0        | 11.0 | 20.0 | 27.5 | 0.8 |
| 1.0         | 160105*400P-F          | 1.260  | 0.433 | 0.787 | 1.083 | 0.031 | 32.0        | 11.0 | 20.0 | 27.5 | 0.8 |
| 1.0         | 160105*400Q-F          | 1.260  | 0.512 | 0.886 | 1.083 | 0.031 | 32.0        | 13.0 | 22.5 | 27.5 | 0.8 |
| 630 Vdc     |                        |        |       |       |       |       |             |      |      |      |     |
| .0039       | 160392*630C-F          | 0.512  | 0.157 | 0.374 | 0.394 | 0.031 | 13.0        | 4.0  | 9.5  | 10.0 | 0.8 |
| .0047       | 160472*630C-F          | 0.512  | 0.157 | 0.374 | 0.394 | 0.031 | 13.0        | 4.0  | 9.5  | 10.0 | 0.8 |
| .0056       | 160562*630C-F          | 0.512  | 0.157 | 0.374 | 0.394 | 0.031 | 13.0        | 4.0  | 9.5  | 10.0 | 0.8 |
| .0068       | 160682*630C-F          | 0.512  | 0.157 | 0.374 | 0.394 | 0.031 | 13.0        | 4.0  | 9.5  | 10.0 | 0.8 |
| .0082       | 160822*630C-F          | 0.512  | 0.157 | 0.374 | 0.394 | 0.031 | 13.0        | 4.0  | 9.5  | 10.0 | 0.8 |
| .010        | 160103*630C-F          | 0.512  | 0.157 | 0.374 | 0.394 | 0.031 | 13.0        | 4.0  | 9.5  | 10.0 | 0.8 |
| .012        | 160123*630D-F          | 0.512  | 0.197 | 0.433 | 0.394 | 0.031 | 13.0        | 5.0  | 11.0 | 10.0 | 0.8 |
| .015        | 160153*630D-F          | 0.512  | 0.197 | 0.433 | 0.394 | 0.031 | 13.0        | 5.0  | 11.0 | 10.0 | 0.8 |
| .018        | 160183*630D-F          | 0.512  | 0.197 | 0.433 | 0.394 | 0.031 | 13.0        | 5.0  | 11.0 | 10.0 | 0.8 |
| .022        | 160223*630E-F          | 0.512  | 0.236 | 0.472 | 0.394 | 0.031 | 13.0        | 6.0  | 12.0 | 10.0 | 0.8 |
| .027        | 160273*630F-F          | 0.709  | 0.197 | 0.433 | 0.591 | 0.031 | 18.0        | 5.0  | 11.0 | 15.0 | 0.8 |
| .033        | 160333*630F-F          | 0.709  | 0.197 | 0.433 | 0.591 | 0.031 | 18.0        | 5.0  | 11.0 | 15.0 | 0.8 |
| .039        | 160393*630G-F          | 0.709  | 0.236 | 0.472 | 0.591 | 0.031 | 18.0        | 6.0  | 12.0 | 15.0 | 0.8 |
| .047        | 160473*630G-F          | 0.709  | 0.236 | 0.472 | 0.591 | 0.031 | 18.0        | 6.0  | 12.0 | 15.0 | 0.8 |
| .056        | 160563*630G-F          | 0.709  | 0.236 | 0.472 | 0.591 | 0.031 | 18.0        | 6.0  | 12.0 | 15.0 | 0.8 |

\* Indicates capacitance tolerance: J =  $\pm 5\%$ , K =  $\pm 10\%$ , M =  $\pm 20\%$

# Type 160 Metallized Polyester Radial Lead Capacitors

**RoHS Compliant**

| Cap<br>(µF) | Catalog<br>Part Number | Inches |       |       |       |       | Millimeters |      |      |      |     |
|-------------|------------------------|--------|-------|-------|-------|-------|-------------|------|------|------|-----|
|             |                        | L      | T     | H     | S     | Ød    | L           | T    | H    | S    | Ød  |
| 630 Vdc     |                        |        |       |       |       |       |             |      |      |      |     |
| .068        | 160683*630H-F          | 0.709  | 0.295 | 0.531 | 0.591 | 0.031 | 18.0        | 7.5  | 13.5 | 15.0 | 0.8 |
| .068        | 160683*630L-F          | 1.043  | 0.236 | 0.591 | 0.886 | 0.031 | 26.5        | 6.0  | 15.0 | 22.5 | 0.8 |
| .082        | 160823*630L-F          | 1.043  | 0.236 | 0.591 | 0.886 | 0.031 | 26.5        | 6.0  | 15.0 | 22.5 | 0.8 |
| .10         | 160104*630L-F          | 1.043  | 0.236 | 0.591 | 0.886 | 0.031 | 26.5        | 6.0  | 15.0 | 22.5 | 0.8 |
| .12         | 160124*630M-F          | 1.043  | 0.276 | 0.650 | 0.886 | 0.031 | 26.5        | 7.0  | 16.5 | 22.5 | 0.8 |
| .15         | 160154*630M-F          | 1.043  | 0.276 | 0.650 | 0.886 | 0.031 | 26.5        | 7.0  | 16.5 | 22.5 | 0.8 |
| .18         | 160184*630N-F          | 1.043  | 0.335 | 0.669 | 0.886 | 0.031 | 26.5        | 8.5  | 17.0 | 22.5 | 0.8 |
| .22         | 160224*630N-F          | 1.043  | 0.335 | 0.669 | 0.886 | 0.031 | 26.5        | 8.5  | 17.0 | 22.5 | 0.8 |
| .27         | 160274*630Q-F          | 1.260  | 0.512 | 0.886 | 1.083 | 0.031 | 32.0        | 13.0 | 22.5 | 27.5 | 0.8 |
| .33         | 160334*630P-F          | 1.260  | 0.433 | 0.787 | 1.083 | 0.031 | 32.0        | 11.0 | 20.0 | 27.5 | 0.8 |
| .39         | 160394*630P-F          | 1.260  | 0.433 | 0.787 | 1.083 | 0.031 | 32.0        | 11.0 | 20.0 | 27.5 | 0.8 |
| .47         | 160474*630Q-F          | 1.260  | 0.512 | 0.886 | 1.083 | 0.031 | 32.0        | 13.0 | 22.5 | 27.5 | 0.8 |
| 1000 Vdc    |                        |        |       |       |       |       |             |      |      |      |     |
| .0022       | 160222*1000C-F         | 0.512  | 0.157 | 0.374 | 0.394 | 0.031 | 13.0        | 4.0  | 9.5  | 10.0 | 0.8 |
| .0027       | 160272*1000C-F         | 0.512  | 0.157 | 0.374 | 0.394 | 0.031 | 13.0        | 4.0  | 9.5  | 10.0 | 0.8 |
| .0033       | 160332*1000C-F         | 0.512  | 0.157 | 0.374 | 0.394 | 0.031 | 13.0        | 4.0  | 9.5  | 10.0 | 0.8 |
| .0039       | 160392*1000D-F         | 0.512  | 0.197 | 0.433 | 0.394 | 0.031 | 13.0        | 5.0  | 11.0 | 10.0 | 0.8 |
| .0047       | 160472*1000D-F         | 0.512  | 0.197 | 0.433 | 0.394 | 0.031 | 13.0        | 5.0  | 11.0 | 10.0 | 0.8 |
| .0056       | 160562*1000D-F         | 0.512  | 0.197 | 0.433 | 0.394 | 0.031 | 13.0        | 5.0  | 11.0 | 10.0 | 0.8 |
| .0068       | 160682*1000D-F         | 0.512  | 0.197 | 0.433 | 0.394 | 0.031 | 13.0        | 5.0  | 11.0 | 10.0 | 0.8 |
| .0082       | 160822*1000D-F         | 0.512  | 0.197 | 0.433 | 0.394 | 0.031 | 13.0        | 5.0  | 11.0 | 10.0 | 0.8 |
| .010        | 160103*1000F-F         | 0.709  | 0.197 | 0.433 | 0.591 | 0.031 | 18.0        | 5.0  | 11.0 | 15.0 | 0.8 |
| .012        | 160123*1000F-F         | 0.709  | 0.197 | 0.433 | 0.591 | 0.031 | 18.0        | 5.0  | 11.0 | 15.0 | 0.8 |
| .015        | 160153*1000F-F         | 0.709  | 0.236 | 0.472 | 0.591 | 0.031 | 18.0        | 6.0  | 12.0 | 15.0 | 0.8 |
| .018        | 160183*1000G-F         | 0.709  | 0.236 | 0.472 | 0.591 | 0.031 | 18.0        | 6.0  | 12.0 | 15.0 | 0.8 |
| .022        | 160223*1000G-F         | 0.709  | 0.236 | 0.472 | 0.591 | 0.031 | 18.0        | 6.0  | 12.0 | 15.0 | 0.8 |
| .027        | 160273*1000H-F         | 0.709  | 0.295 | 0.531 | 0.591 | 0.031 | 18.0        | 7.5  | 13.5 | 15.0 | 0.8 |
| .033        | 160333*1000L-F         | 1.043  | 0.236 | 0.591 | 0.886 | 0.031 | 26.5        | 6.0  | 15.0 | 22.5 | 0.8 |
| .039        | 160393*1000L-F         | 1.043  | 0.236 | 0.591 | 0.886 | 0.031 | 26.5        | 6.0  | 15.0 | 22.5 | 0.8 |
| .047        | 160473*1000L-F         | 1.043  | 0.236 | 0.591 | 0.886 | 0.031 | 26.5        | 6.0  | 15.0 | 22.5 | 0.8 |
| .056        | 160563*1000M-F         | 1.043  | 0.276 | 0.650 | 0.886 | 0.031 | 26.5        | 7.0  | 16.5 | 22.5 | 0.8 |
| .068        | 160683*1000M-F         | 1.043  | 0.276 | 0.650 | 0.886 | 0.031 | 26.5        | 7.0  | 16.5 | 22.5 | 0.8 |
| .082        | 160823*1000N-F         | 1.043  | 0.335 | 0.669 | 0.886 | 0.031 | 26.5        | 8.5  | 17.0 | 22.5 | 0.8 |
| .10         | 160104*1000N-F         | 1.043  | 0.335 | 0.669 | 0.886 | 0.031 | 26.5        | 8.5  | 17.0 | 22.5 | 0.8 |
| .12         | 160124*1000O-F         | 1.043  | 0.394 | 0.748 | 0.886 | 0.031 | 26.5        | 10.0 | 19.0 | 22.5 | 0.8 |
| .15         | 160154*1000P-F         | 1.260  | 0.433 | 0.787 | 1.083 | 0.031 | 32.0        | 11.0 | 20.0 | 27.5 | 0.8 |
| .18         | 160184*1000Q-F         | 1.260  | 0.512 | 0.886 | 1.083 | 0.031 | 32.0        | 13.0 | 22.5 | 27.5 | 0.8 |
| .22         | 160224*1000Q-F         | 1.260  | 0.512 | 0.886 | 1.083 | 0.031 | 32.0        | 13.0 | 22.5 | 27.5 | 0.8 |

\* Indicates capacitance tolerance: J =  $\pm 5\%$ , K =  $\pm 10\%$ , M =  $\pm 20\%$

## Part Numbering System

|               |                    |                  |                 |                  |                       |
|---------------|--------------------|------------------|-----------------|------------------|-----------------------|
| <b>160</b>    | <b>104</b>         | <b>K</b>         | <b>100</b>      | <b>C</b>         | <b>-F</b>             |
|               |                    |                  |                 |                  |                       |
| <b>Series</b> | <b>Capacitance</b> | <b>Tolerance</b> | <b>Voltage</b>  | <b>Case Code</b> | <b>ROHS Compliant</b> |
| 160           | 392 = .0039 µF     | J = $\pm 5\%$    | 100 = 100 Vdc   | C                |                       |
|               | 103 = .01 µF       | K = $\pm 10\%$   | 250 = 250 Vdc   | D                |                       |
|               | 104 = .1 µF        | M = $\pm 20\%$   | 630 = 630 Vdc   | E                |                       |
|               | 105 = 1.0 µF       |                  | 1000 = 1000 Vdc | F                |                       |
|               |                    |                  |                 | etc.             |                       |

## Type 160 Metallized Polyester Radial Lead Capacitors

---

**Notice and Disclaimer:** All product drawings, descriptions, specifications, statements, information and data (collectively, the "Information") in this datasheet or other publication are subject to change. The customer is responsible for checking, confirming and verifying the extent to which the Information contained in this datasheet or other publication is applicable to an order at the time the order is placed. All Information given herein is believed to be accurate and reliable, but it is presented without any guarantee, warranty, representation or responsibility of any kind, expressed or implied. Statements of suitability for certain applications are based on the knowledge that the Cornell Dubilier company providing such statements ("Cornell Dubilier") has of operating conditions that such Cornell Dubilier company regards as typical for such applications, but are not intended to constitute any guarantee, warranty or representation regarding any such matter – and Cornell Dubilier specifically and expressly disclaims any guarantee, warranty or representation concerning the suitability for a specific customer application, use, storage, transportation, or operating environment. The Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by Cornell Dubilier with reference to the use of any Cornell Dubilier products is given gratis (unless otherwise specified by Cornell Dubilier), and Cornell Dubilier assumes no obligation or liability for the advice given or results obtained. Although Cornell Dubilier strives to apply the most stringent quality and safety standards regarding the design and manufacturing of its products, in light of the current state of the art, isolated component failures may still occur. Accordingly, customer applications which require a high degree of reliability or safety should employ suitable designs or other safeguards (such as installation of protective circuitry or redundancies or other appropriate protective measures) in order to ensure that the failure of an electrical component does not result in a risk of personal injury or property damage. Although all product-related warnings, cautions and notes must be observed, the customer should not assume that all safety measures are indicated in such warnings, cautions and notes, or that other safety measures may not be required.