


### Preliminary Data

#### Features

- Output voltage tolerance  $\leq \pm 2\%$
- Very low standby current consumption
- Input voltage up to 42 V
- Reset function down to 1 V output voltage
- ESD protection up to 2000 V
- Adjustable reset time
- On/Off logic
- Overtemperature protection
- Reverse polarity protection
- Short-circuit proof
- Very wide temperature range
- Very small output capacitor

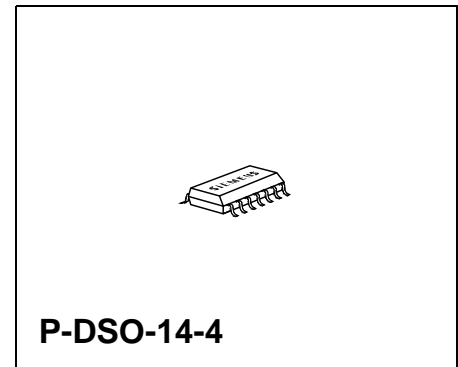

Type	Ordering Code	Package
▼ TLE 4287 G	Q67006-A9286	P-DSO-14-4 (SMD)

▼ New type

#### Functional Description

The **TLE 4287 G** is a monolithic integrated 5-V voltage regulator in **P-DSO-14-4** package. It supplies an output current  $I_Q > 250$  mA. The IC is short circuit proof and incorporates temperature protection that disables it at overtemperature.

The input voltage  $V_I$  is regulated in the range of  $7.5 \text{ V} < V_I < 40 \text{ V}$  to  $V_{Q\text{rated}} = 5 \text{ V}$ .

Therefore a reference voltage, which is kept highly accurate by resistance adjustment, is compared via a control amplifier to a voltage that is proportional to the output voltage. The control amplifier drives the base of the series transistor by a buffer.

A comparator in the reset-generator block compares a reference voltage that is independent of the input voltage to the scaled-down output voltage. In the case of an output voltage  $V_Q < 4.5 \text{ V}$  the reset delay capacitor is discharged and a reset signal is generated by setting the reset output LOW. The reset delay time can be set by an external capacitor within a wide range. When the output voltage rises above  $V_Q \geq 4.5 \text{ V}$  the reset delay capacitor is charged again. As soon as the delay capacitor voltage reaches the upper switching threshold the reset output pin is set HIGH again.

The device has two logic inputs, *EN* and *H*. It is turned ON by a voltage > 4 V at *EN*, for example by the ignition and remains active in case *H* is set LOW, even if the voltage at *EN* goes LOW. This makes it possible to implement a self-holding circuit without external components. When the device is turned OFF, the output voltage drops to 0 V and current consumption tends towards 0  $\mu$ A. (Please see following truth table).

### Design Notes for External Components


The input capacitor  $C_1$  is necessary for compensation line influences. The resonant circuit consisting of lead inductance and input capacitance can be damped by a resistor of approx. 1  $\Omega$  in series with  $C_1$ . The output capacitor is necessary for the stability of the regulating circuit. Stability is guaranteed for  $C_Q \geq 100$  nF within the operating temperature range.

**Table 1**  
**Truth Table for Turn-On/Turn-Off Logic**

Enable <i>EN</i>	Hold <i>H</i>	$V_Q$	Remarks
L	X	0 V	Initial state, pin 9 internally pulled up
H	X	5 V	Regulator switched on via pin 6, by ignition for example
H	L	5 V	Pin 9 clamped active to GND by controller while pin 6 is still HIGH
X	L	5 V	Previous state remains, even ignition is shut off: self-holding state
L	L	5 V	Ignition shut off while regulator is in self-holding state
L	H	0 V	Regulator shut down by releasing of pin 9 while pin 6 remains LOW, final state. No active clamping required by external self-holding circuit ( $\mu$ C) to keep regulator shut off


## Pin Configuration

(top view)

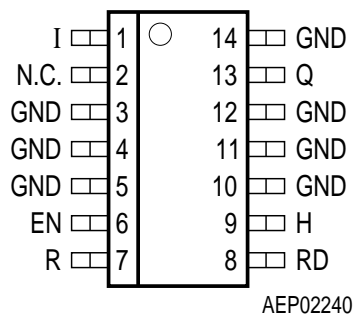

## Pin Definitions and Functions

Pin No.	Symbol	Function
1	I	<b>Input</b> ; block to ground directly at the IC by a ceramic capacitor
2	N.C.	Not connected
3, 4, 5, 10, 11, 12, 14	GND	<b>Ground</b>
9	H	<b>Hold</b> and release; active low, see truth table above for function, connected to Q via a pull-up resistor of 50 kΩ
7	R	<b>Reset Output</b> ; open-collector output, internally connected to Q via a pull-up resistor of 30 kΩ
8	RD	<b>Reset Delay</b> ; connect to GND via external delay capacitor for setting delay time
6	EN	<b>Enable</b> ; active high, device is turned ON by HIGH signal at this pin, internally connected to GND via pull-down resistor of 100 kΩ
13	Q	<b>Output</b> ; block to GND with a capacitor $C_Q \geq 100 \text{ nF}$

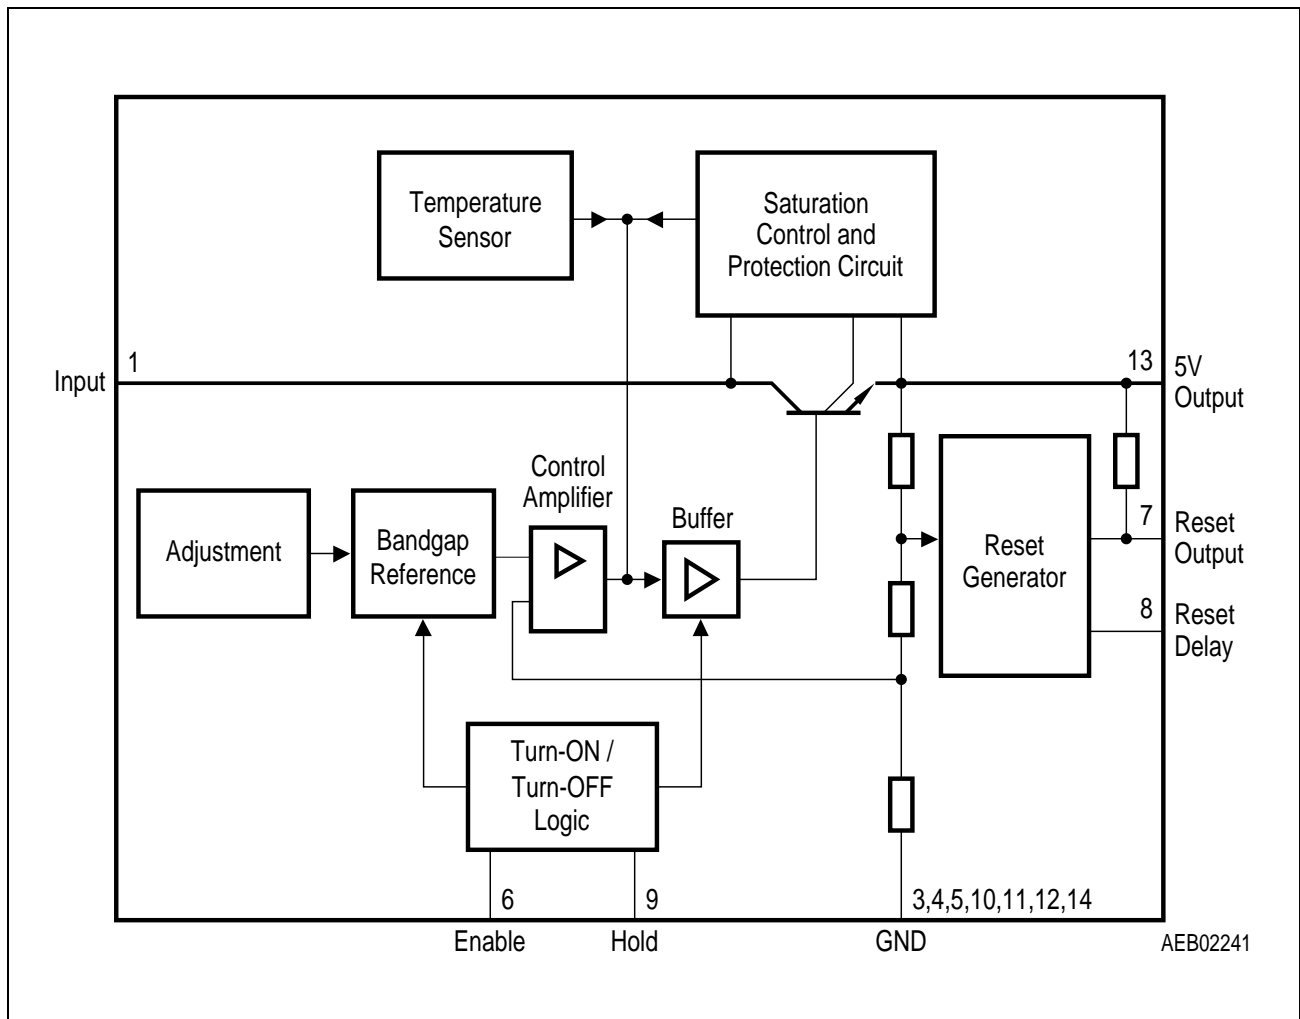

**Figure 1**  
**Block Diagram**

**Absolute Maximum Ratings** $T_j = -40$  to  $165\text{ }^{\circ}\text{C}$ 

Parameter	Symbol	Limit Values		Unit	Remarks
		min.	max.		

**Input I**

Voltage	$V_I$	- 0.5	42	V	–
Current	$I_I$	–	–	mA	internally limited

**Output Q**

Voltage	$V_Q$	- 0.3	7	V	–
Current	$I_Q$	–	–	–	internally limited

**Reset Output R**

Voltage	$V_R$	- 0.3	7	V	–
Current	$I_R$	–	–	–	internally limited

**Reset Delay**

Voltage	$V_d$	- 0.3	42	V	–
Current	$I_d$	–	–	–	–

**Enable**

Voltage	$V_{EN}$	- 42	42	V	–
Current	$I_{EN}$	- 5	5	mA	$t \leq 400\text{ ms}$

**Hold**

Voltage	$V_H$	- 2	7	V	–
Current	$I_H$	–	–	–	internally limited

**Absolute Maximum Ratings** (cont'd) $T_j = -40$  to  $165\text{ }^{\circ}\text{C}$ 

Parameter	Symbol	Limit Values		Unit	Remarks
		min.	max.		

**Ground GND**

Current	$I_{\text{GND}}$	- 0.5	—	A	—
---------	------------------	-------	---	---	---

**Temperatures**

Junction temperature	$T_j$	- 40	165	$^{\circ}\text{C}$	—
Junction temperature	$T_j$	- 40	175	$^{\circ}\text{C}$	max. 15 min
Storage temperature	$T_{\text{stg}}$	- 50	150	$^{\circ}\text{C}$	—

*Note: Maximum ratings are absolute ratings; exceeding any one of these values may cause irreversible damage to the integrated circuit.*

**Operating Range**

Parameter	Symbol	Limit Values		Unit	Remarks
		min.	max.		
Input voltage	$V_I$	7.5	42	V	—
Junction temperature	$T_j$	- 40	165	$^{\circ}\text{C}$	—

**Thermal Resistances**

Junction pin	$R_{\text{thjc}}$	—	30	K/W	—
Junction ambient	$R_{\text{thja}}$	—	70	K/W	—

*Note: ESD-Protection according to MIL Std. 883:  $\pm 2\text{ kV}$ .*

**Electrical Characteristics**

$7.5\text{ V} \leq V_I \leq 40\text{ V}$ ;  $-40\text{ °C} < T_j < 150\text{ °C}$ ;  $V_{EN} > 4\text{ V}$  (unless otherwise specified)

Parameter	Symbol	Limit Values			Unit	Test Condition
		min.	typ.	max.		
Output voltage	$V_Q$	4.90	5.0	5.10	V	$5\text{ mA} < I_Q < 200\text{ mA}$ $7.5\text{ V} < V_I < 22\text{ V}$
Output voltage	$V_Q$	4.90	5.0	5.10	V	$5\text{ mA} < I_Q < 80\text{ mA}$ $7.5\text{ V} < V_I < 36\text{ V}$
Output current limitation	$I_Q$	250	—	—	mA	$V_I < 22\text{ V}$
Drop voltage	$V_{DR}$	—	1.8	2.5	V	$I_Q = 200\text{ mA}^{1)}$
Current consumption $I_q = I_I - I_Q$	$I_q$	—	—	50	$\mu\text{A}$	Regulator OFF: $V_{EN} = 0\text{ V}$ , H = open
Current consumption $I_q = I_I - I_Q$	$I_q$	—	1.0	10	$\mu\text{A}$	$T_j = 25\text{ °C}$ , $V_{EN} = 0\text{ V}$ , H = open
Current consumption $I_q = I_I - I_Q$	$I_q$	—	2.3	5	mA	$5\text{ mA} < I_Q < 200\text{ mA}$
Load regulation	$\Delta V_Q$	— 25	—	+ 25	mV	$5\text{ mA} < I_Q < 200\text{ mA}$
Line regulation	$\Delta V_Q$	— 25	—	+ 25	V	$7.5\text{ V} < V_I < 22\text{ V}$ $I_Q = 20\text{ mA}$
Power-Supply-Ripple-Rejection	PSRR	—	55	—	dB	$f_r = 100\text{ Hz}$ ; $V_r = 0.5\text{ V}_{SS}$
Temperature output voltage drift	$\Delta V_Q / \Delta T$	—	0.5	—	mV/K	—
Output capacitance	$C_Q$	100	—	—	nF	—

**Reset Generator**

Reset switching threshold	$V_{rt}$	4.50	4.65	4.80	V	—
Reset output low voltage	$V_{R,low}$	—	0.1	0.4	V	$R_R = 4.7\text{ k}\Omega$ to $V_Q^{2)}$
Reset output high voltage	$V_{R,high}$	4.5	—	5.05	V	$R_R = \infty$
Reset pull up resistor	$R_R$	20	30	40	k $\Omega$	internally connected to Q
Reset charging current	$I_d$	10	15	38	$\mu\text{A}$	$V_D = 1.5\text{ V}$
Delay switching threshold	$V_{dt}$	2.2	3	3.6	V	—
Delay switching threshold	$V_{st}$	0.1	0.43	0.8	V	—

## Electrical Characteristics (cont'd)

7.5 V ≤ V<sub>I</sub> ≤ 40 V; −40 °C < T<sub>j</sub> < 150 °C; V<sub>EN</sub> > 4 V (unless otherwise specified)

Parameter	Symbol	Limit Values			Unit	Test Condition
		min.	typ.	max.		
Delay saturation voltage	V <sub>d,sat</sub>	–	50	–	mV	V <sub>Q</sub> < V <sub>rt</sub>
Reset delay time, low ' high	t <sub>d</sub>	7.5	20	30	ms	C <sub>D</sub> = 100 nF
Reset delay time, high ' low	t <sub>t</sub>	0.5	2.0	4.0	μs	C <sub>D</sub> = 100 nF


## Enable EN, Hold H

Enable turn-ON voltage	V <sub>EN</sub>	2.3	3.0	4.0	V	IC turned-ON
Enable turn-OFF voltage	V <sub>EN</sub>	2.0	2.5	3.5	V	IC turned-OFF
Enable pull-down resistor	R <sub>EN</sub>	50	100	200	kΩ	internally connected to GND
Enable hysteresis	ΔV <sub>EN</sub>	0.2	0.4	0.8	V	–
Enable input current	I <sub>EN</sub>	–	35	100	μA	V <sub>EN</sub> = 4 V
Hold keep on voltage	V <sub>H</sub>	30	35	50	%	referred to V <sub>Q</sub> ; V <sub>Q</sub> > 4.5 V
Hold release voltage	V <sub>H</sub>	60	70	80	%	referred to V <sub>Q</sub> ; V <sub>Q</sub> > 4.5 V
Hold pull-up resistor	R <sub>H</sub>	20	50	100	kΩ	internally connected to Q


1) Measured when the output voltage V<sub>O</sub> has dropped 100 mV from the nominal value

2) The reset output is LOW between V<sub>Q</sub> = 1 V and V<sub>rt</sub>




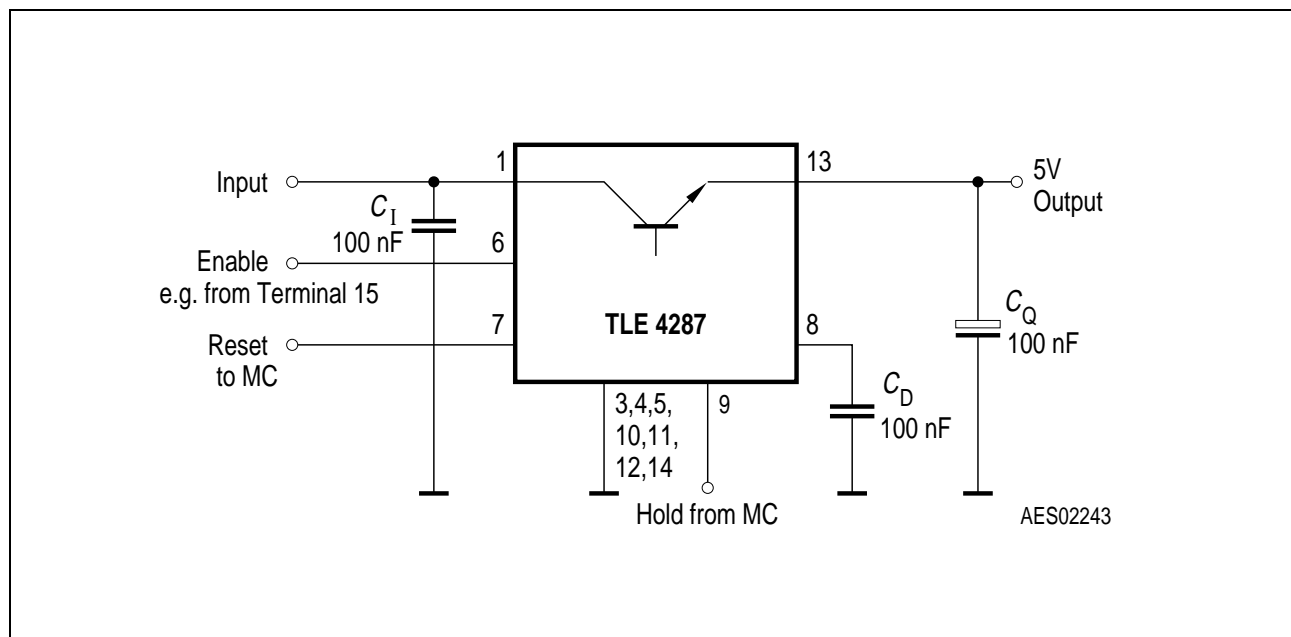

**Figure 2**  
**Application Circuit**

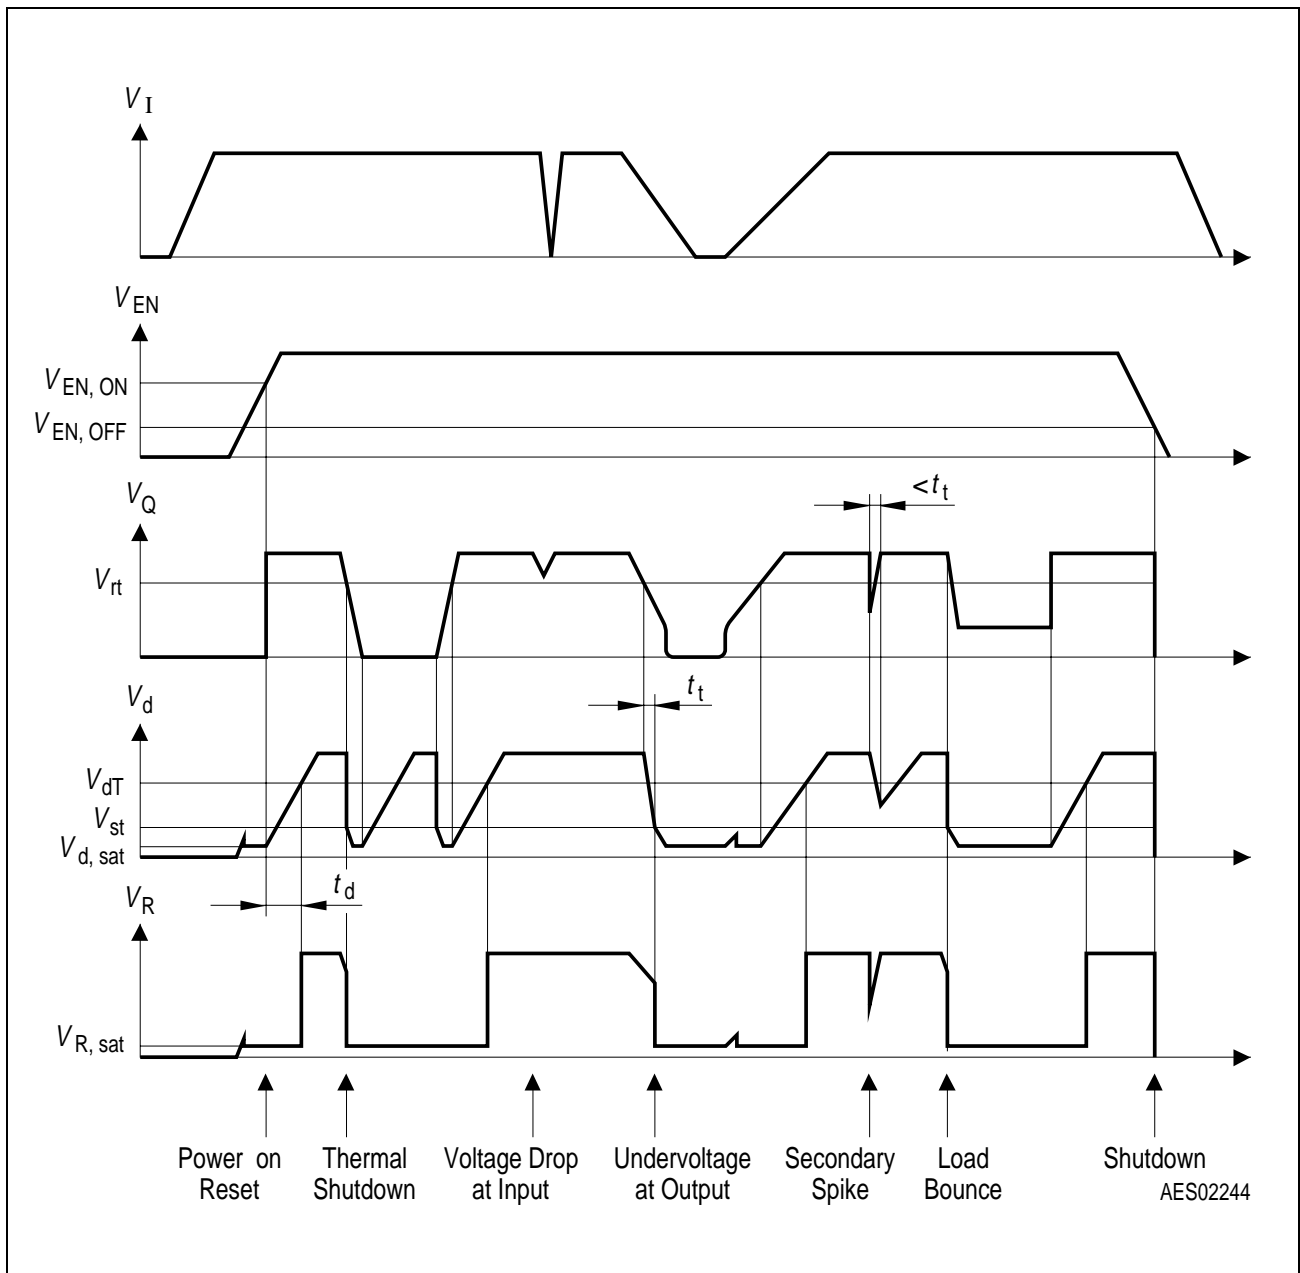

**Figure 3**  
**Time Response**

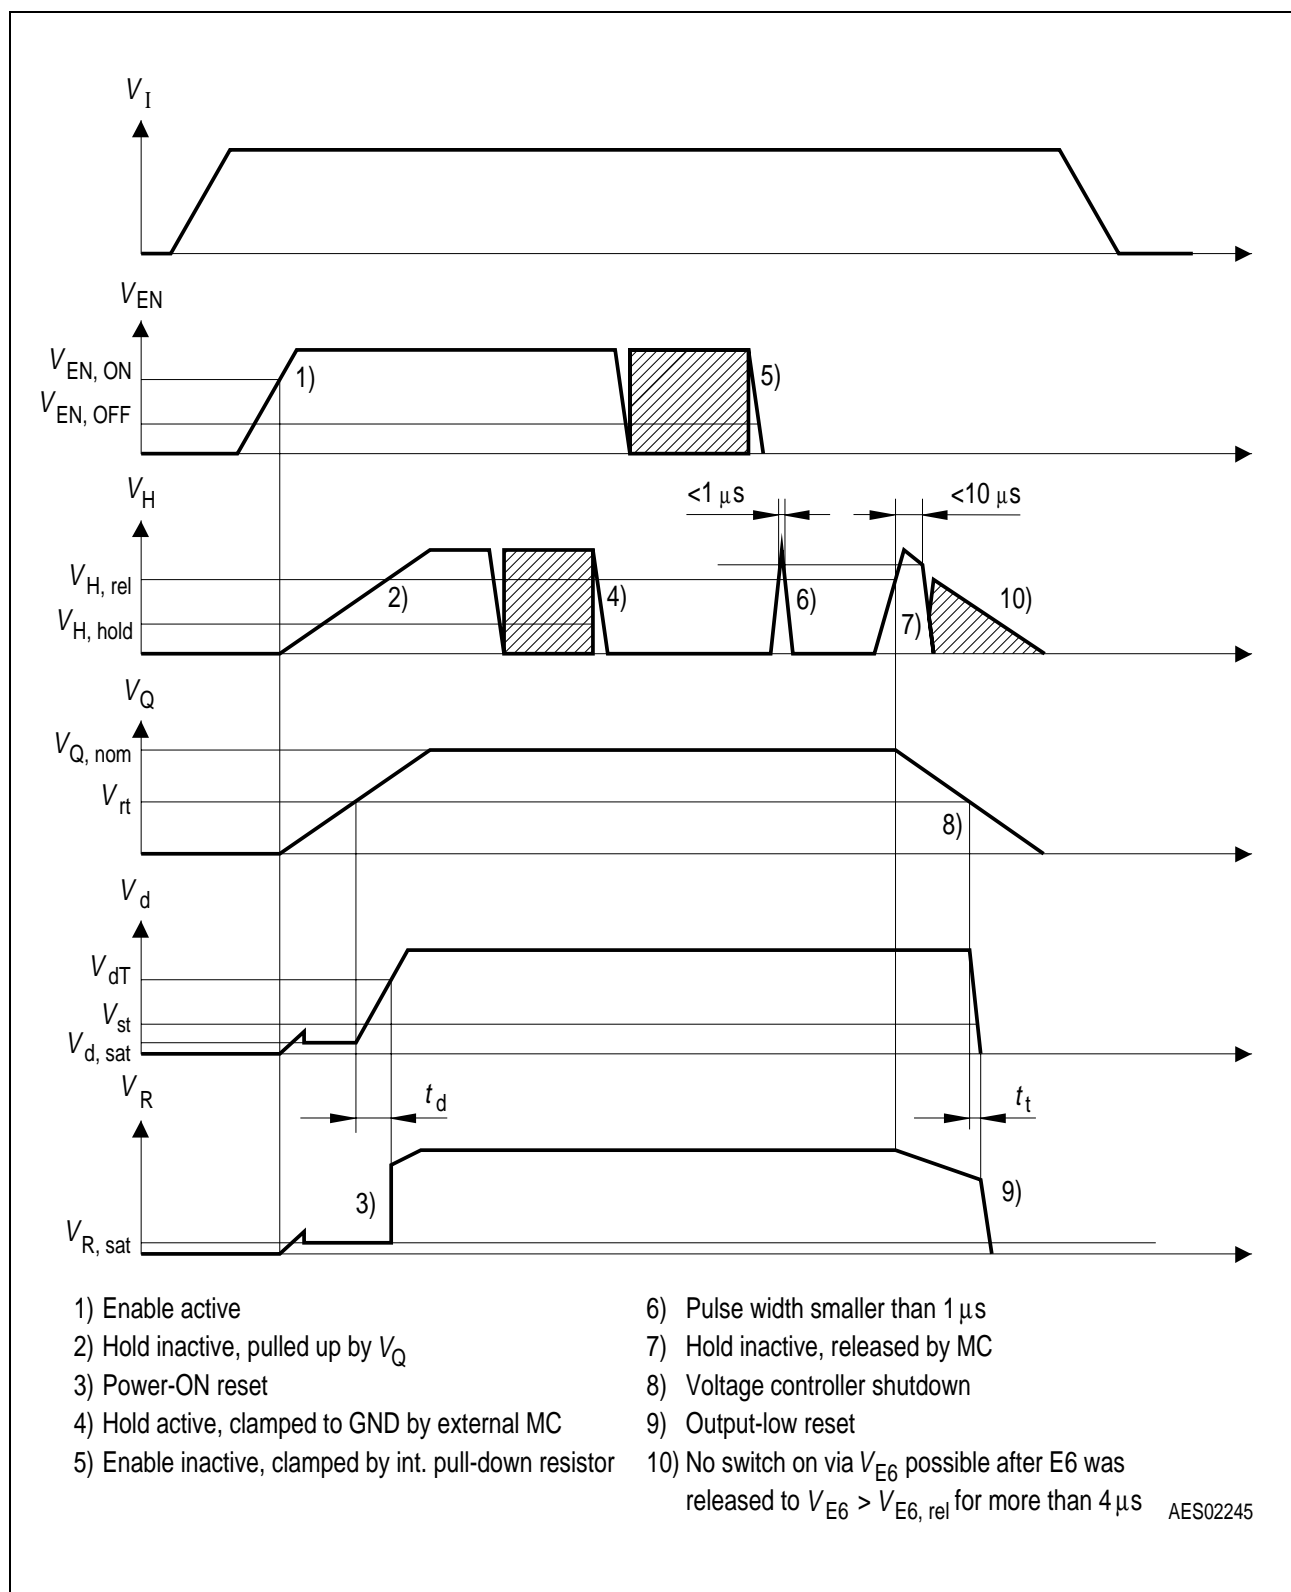


**Figure 4**  
**Enable and Hold Behavior**

## Package Outlines

### P-DSO-14-4

(Plastic Dual Small Outline)

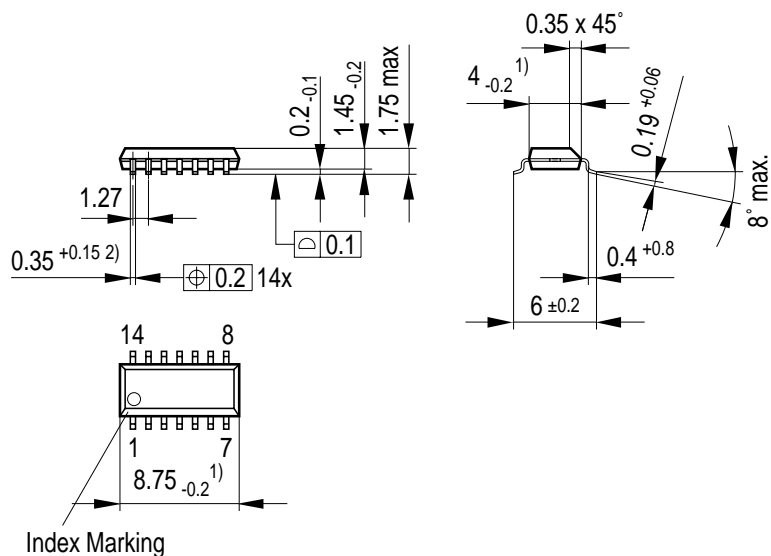

1) Does not include plastic or metal protrusion of 0.15 max. per side

2) Does not include dambar protrusion of 0.05 max. per side

GPS05093

## Sorts of Packing

Package outlines for tubes, trays etc. are contained in our Data Book "Package Information".

SMD = Surface Mounted Device

Dimensions in mm