

Construction

- RM 6 ferrite core
- 8 gullwing terminals

Features

- Complies with CCITT G.961
- Use in NT and local central office
- Remote power feeding to NT
- Transmission codes:
B78386-A1118: 2B1Q
B78386-A1119: 4B3T
- Matched to the following Siemens ICs:
B78386-A1118: PEB 2091
B78386-A1119: PEB 20901, PEB 20902

Packing

- 520-mm stick magazine
- Packing unit: 300 pcs.





Transformation ratio

B78386-A1118:

$$N_1 : N_2 : N_3 = 0,8 : 0,8 : 1$$

B78386-A1119:

$$N_1 : N_2 : N_3 = 0,66 : 0,66 : 1$$

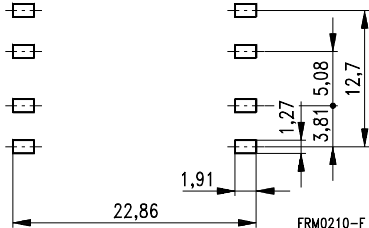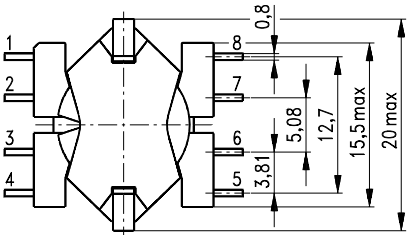

Recommended pad arrangement

Technical data

Type	I_{DC} mA	L_H mH	L_S μ H	C_K pF	R_{CuN} Ω	R_{CuC} Ω	V_P kV _{AC}	Ordering code
RM 6	50	14,5 $\pm$ 10 %	87	130	5,8	4,2	1,0	B78386-A1118-A2
	80	5,50 $\pm$ 10 %	22	130	3,6	3,0	1,0	B78386-A1119-A2