

CONTACTOR, 75KW/400V/AC-3,  
AC(40...60HZ)/DC OPERATION UC 110...127V AUXIL.  
CONTACTS 2NO+2NC LATERAL,  
PERMANENT. JOINTED 3-POLE,  
SIZE S6 BAR CONNECTIONS CONVENTIONAL  
OPERATING MECHAN. FOR SUVA APPLICATIONS

### General technical data:

product brand name		SIRIUS
Size of the contactor		S6
Protection class IP / on the front		IP00
Degree of pollution		3
Installation altitude / at a height over sea level / maximum	m	2,000
Ambient temperature / during operating	°C	-25 ... +60
Mechanical operating cycles as operating time		
• of the contactor / typical		10,000,000
• of the contactor with added auxiliary switch block / typical		10,000,000
• of the contactor with added electronics-compatible auxiliary switch block / typical		5,000,000

### Main circuit:

Number of NC contacts / for main contacts		0
Number of NO contacts / for main contacts		3
Operating current		
• at AC-1 / at 400 V		
• at 40 °C ambient temperature / rated value	A	185
• at 60 °C ambient temperature / rated value	A	160
• at AC-3 / at 400 V / rated value	A	150
• at AC-4 / at 400 V / rated value	A	132
• with 1 current path / at DC-1		
• at 24 V / rated value	A	160
• at 110 V / rated value	A	18
• with 2 current paths in series / at DC-1		
• at 24 V / rated value	A	160
• at 110 V / rated value	A	160
• with 3 current paths in series / at DC-1		
• at 24 V / rated value	A	160

• at 110 V / rated value	A	160
• with 1 current path / at DC-3 / at DC-5		
• at 24 V / rated value	A	160
• at 110 V / rated value	A	2.5
• with 2 current paths in series / at DC-3 / at DC-5		
• at 24 V / rated value	A	160
• at 110 V / rated value	A	160
• with 3 current paths in series / at DC-3 / at DC-5		
• at 24 V / rated value	A	160
• at 110 V / rated value	A	160
<b>Service power</b>		
• at AC-2 / at 400 V / rated value	kW	84
• at AC-3 / at 400 V / rated value	kW	84
• at AC-4 / at 400 V / rated value	W	75,000
<b>Active power loss / per conductor / typical</b>	W	9

<b>Control circuit:</b>		
<b>Design of the surge suppressor</b>		with varistor
<b>Type of voltage / of the controlled supply voltage</b>		AC/DC
<b>Control supply voltage / 1</b>		
• for DC		
• initial rated value	V	110
• final rated value	V	127
• at 50 Hz / for AC		
• initial rated value	V	110
• final rated value	V	127
• at 60 Hz / for AC		
• initial rated value	V	110
• final rated value	V	127
<b>Operating range factor control supply voltage rated value / of the magnet coil</b>		
• at 50 Hz		
• for AC		0.8 ... 1.1
• at 60 Hz		
• for AC		0.8 ... 1.1
• for DC		0.8 ... 1.1
<b>Apparent pull-in power / of the solenoid / for AC</b>	V·A	300
<b>Apparent holding power / of the solenoid / for AC</b>	V·A	5.8
<b>Inductive power factor / with the pull-in power of the coil</b>		0.9
<b>Inductive power factor / with the pull-in power of the coil</b>		0.8

<b>Pull-in power / of the solenoid / for DC</b>	W	360
<b>Holding power / of the solenoid / for DC</b>	W	5.2

#### Auxiliary circuit:

<b>Contact reliability / of the auxiliary contacts</b>		1 faulty switching per 100 million (17 V, 1 mA)
<b>Number of NC contacts / for auxiliary contacts / instantaneous switching</b>		2
<b>Number of NO contacts / for auxiliary contacts / instantaneous switching</b>		2
<b>Operating current / of the auxiliary contacts</b>		
• at AC-12 / maximum	A	10
• at AC-15		
• at 230 V	A	6
• at 400 V	A	3
• at DC-12		
• at 60 V	A	6
• at 110 V	A	3
• at 220 V	A	1
• at DC-13		
• at 24 V	A	10
• at 60 V	A	2
• at 110 V	A	1
• at 220 V	A	0.3

#### Short-circuit:

<b>Design of the fuse link</b>		
• for short-circuit protection of the auxiliary switch / required		fuse gL/gG: 10 A
• for short-circuit protection of the main circuit		
• with type of assignment 1 / required		fuse gL/gG: 355 A
• at type of coordination 2 / required		fuse gL/gG: 315 A

#### Installation/mounting/dimensions:










<b>Type of mounting</b>		screw fixing
<b>series installation</b>		Yes
<b>Width</b>	mm	120
<b>Height</b>	mm	172
<b>Depth</b>	mm	180
<b>Distance, to be maintained, to earthed part / sideways</b>	mm	10

#### Connection type:

<b>Design of the electrical connection</b>		
• for main current circuit		screw-type terminals

<ul style="list-style-type: none"> <li>• for auxiliary and control current circuit</li> </ul>	screw-type terminals
<b>Type of the connectable conductor cross-section</b> <ul style="list-style-type: none"> <li>• for AWG conductors / for main contacts</li> <li>• for auxiliary contacts <ul style="list-style-type: none"> <li>• finely stranded <ul style="list-style-type: none"> <li>• with conductor end processing</li> </ul> </li> </ul> </li> <li>• for AWG conductors / for auxiliary contacts</li> </ul>	4 ... 250 kcmil  2x (0.5 ... 1.5 mm <sup>2</sup> ), 2x (0.75 ... 2.5 mm <sup>2</sup> )  2x (20 ... 16), 2x (18 ... 14), 1x 12

#### Certificates/approvals:

General Product Approval				Functional Safety / Safety of Machinery	Declaration of Conformity
 CCC	 CSA	 GOST	 UL	<a href="#">Type Examination</a>	 EG-Konf.
Test Certificates		Shipping Approval			
<a href="#">other</a>	<a href="#">Special Test Certificate</a>	 ABS	 DNV	 GL	
other					
<a href="#">Confirmation</a>	<a href="#">other</a>	 UL			

#### Further information:

##### Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

##### Industry Mall (Online ordering system)

<http://www.siemens.com/industrial-controls/mall>

##### Cax online generator:


<http://www.siemens.com/cax>

##### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3RT1055-6AF36-3PA0/all>

##### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3RT1055-6AF36-3PA0](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3RT1055-6AF36-3PA0)

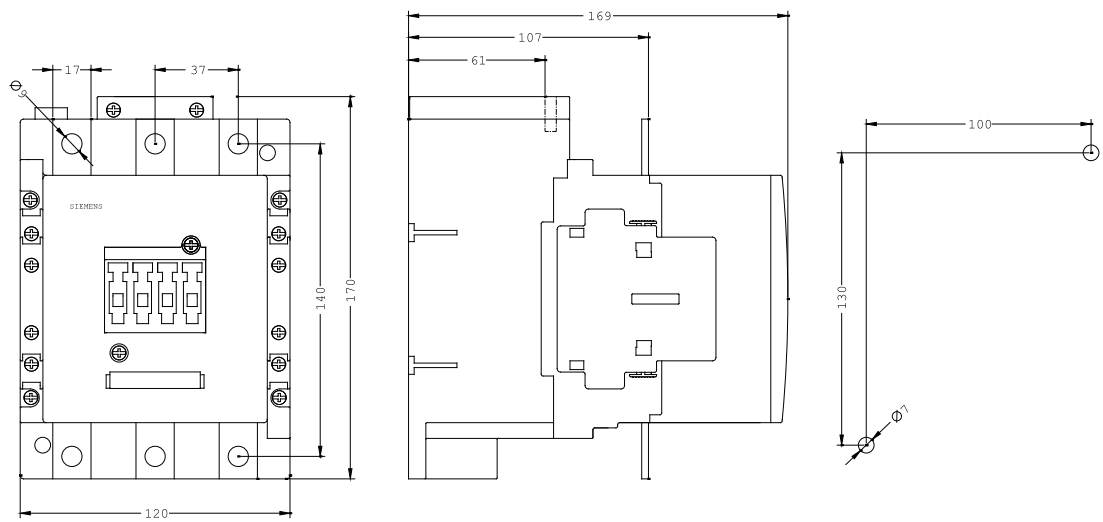

last change:

Jul 27, 2012