

**High-accuracy  
Low current consumption**

**General-purpose  
RESET IC**

**BD47XXG series**

● Description

BD47XXG is a series of RESET ICs developed to prevent system error at transient state when the power of CPU and logic circuit switches ON/OFF or shutdown. These ICs consist of Power, GND, and reset output to detect power supply voltage of various systems and to output reset signal. These ICs are more practical for portable products because of their ultra-small package and low current consumption.

● Features


- 1) Detection voltage: 0.1V step line up 1.9~4.6V(Typ.)
- 2) High-accuracy voltage detection Vs±2%(Max.)
- 3) Low current consumption
- 4) "L" reset output of open collector
- 5) Small SMP5 package

● Applications

Portable products, Equipments with CPU and logic circuit

● Series characteristics

| Part No. | Detection voltage Vs (V) |       |       | Consumption current (μA Typ.) |      | Hysteresis voltage (mV) | Operating output current (mA) | Package |
|----------|--------------------------|-------|-------|-------------------------------|------|-------------------------|-------------------------------|---------|
|          | Min                      | Typ.  | Max.  | ICCL                          | ICCH |                         |                               |         |
| BD4746G  | 4.508                    | 4.600 | 4.692 | 1.5                           | 1.6  | 50                      | 15                            | SMP5    |
| BD4745G  | 4.410                    | 4.500 | 4.590 | 1.5                           | 1.6  | 50                      | 15                            | SMP5    |
| BD4744G  | 4.312                    | 4.400 | 4.488 | 1.5                           | 1.6  | 50                      | 15                            | SMP5    |
| BD4743G  | 4.214                    | 4.300 | 4.386 | 1.5                           | 1.6  | 50                      | 15                            | SMP5    |
| BD4742G  | 4.116                    | 4.200 | 4.284 | 1.5                           | 1.6  | 50                      | 15                            | SMP5    |
| BD4741G  | 4.018                    | 4.100 | 4.182 | 1.5                           | 1.6  | 50                      | 15                            | SMP5    |
| BD4740G  | 3.920                    | 4.000 | 4.080 | 1.5                           | 1.6  | 50                      | 15                            | SMP5    |
| BD4739G  | 3.822                    | 3.900 | 3.978 | 1.5                           | 1.6  | 50                      | 15                            | SMP5    |
| BD4738G  | 3.724                    | 3.800 | 3.876 | 1.5                           | 1.6  | 50                      | 15                            | SMP5    |
| BD4737G  | 3.626                    | 3.700 | 3.774 | 1.5                           | 1.6  | 50                      | 15                            | SMP5    |
| BD4736G  | 3.528                    | 3.600 | 3.672 | 1.5                           | 1.6  | 50                      | 15                            | SMP5    |
| BD4735G  | 3.430                    | 3.500 | 3.570 | 1.5                           | 1.6  | 50                      | 15                            | SMP5    |
| BD4734G  | 3.332                    | 3.400 | 3.468 | 1.5                           | 1.6  | 50                      | 15                            | SMP5    |
| BD4733G  | 3.234                    | 3.300 | 3.366 | 1.5                           | 1.6  | 50                      | 15                            | SMP5    |
| BD4732G  | 3.136                    | 3.200 | 3.264 | 1.5                           | 1.6  | 50                      | 15                            | SMP5    |
| BD4731G  | 3.038                    | 3.100 | 3.162 | 1.5                           | 1.6  | 50                      | 15                            | SMP5    |
| BD4730G  | 2.940                    | 3.000 | 3.060 | 1.5                           | 1.6  | 50                      | 15                            | SMP5    |
| BD4729G  | 2.842                    | 2.900 | 2.958 | 1.5                           | 1.6  | 50                      | 15                            | SMP5    |
| BD4728G  | 2.744                    | 2.800 | 2.856 | 1.5                           | 1.6  | 50                      | 15                            | SMP5    |
| BD4727G  | 2.646                    | 2.700 | 2.754 | 1.5                           | 1.6  | 50                      | 15                            | SMP5    |
| BD4726G  | 2.548                    | 2.600 | 2.652 | 1.5                           | 1.6  | 50                      | 15                            | SMP5    |
| BD4725G  | 2.450                    | 2.500 | 2.550 | 1.5                           | 1.6  | 50                      | 15                            | SMP5    |
| BD4724G  | 2.352                    | 2.400 | 2.448 | 1.5                           | 1.6  | 50                      | 15                            | SMP5    |
| BD4723G  | 2.254                    | 2.300 | 2.346 | 1.5                           | 1.6  | 50                      | 15                            | SMP5    |
| BD4722G  | 2.156                    | 2.200 | 2.244 | 1.5                           | 1.6  | 50                      | 15                            | SMP5    |
| BD4721G  | 2.058                    | 2.100 | 2.142 | 1.5                           | 1.6  | 50                      | 15                            | SMP5    |
| BD4720G  | 1.960                    | 2.000 | 2.040 | 1.5                           | 1.6  | 50                      | 15                            | SMP5    |
| BD4719G  | 1.862                    | 1.900 | 1.938 | 1.5                           | 1.6  | 50                      | 15                            | SMP5    |

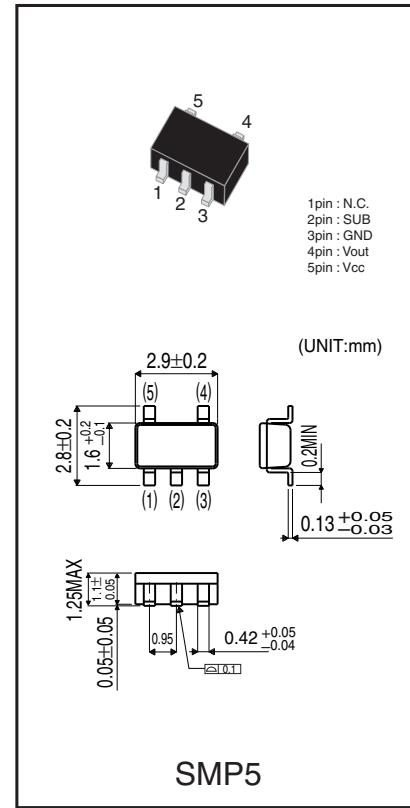

### ● Absolute Maximum Ratings(Ta=25°C)

| Parameter                   | Symbol | Limits     | Unit |
|-----------------------------|--------|------------|------|
| Power supply voltage        | Vcc    | -0.3 ~ +10 | V    |
| Output voltage              | Po     | -0.3 ~ +10 | V    |
| Power dissipation (SMP5)    | Pd     | 150 *      | mW   |
| Operating temperature range | Topr   | -20 ~ +75  | °C   |
| Storage temperature range   | Tstg   | -40 ~ +125 | °C   |

Note) The ratings shown above indicate breakdown limit of the pin and should not be regarded as the values that guarantee the operation.

\* Derating : 1.5mW/°C for operation above Ta=25°C


### ● Electrical characteristics(Unless otherwise noted; Ta=25°C)

| Parameter                                 | Symbol | Min. | Typ.    | Max. | Unit | Conditions                 |
|---|--------|------|---------|------|------|----------------------------|
| Detection voltage                         | Vs     | -2%  | 1.9~4.6 | +2%  | V    | RL=4.7kΩ, Vcc=HÆL          |
| Detection voltage temperature coefficient | Vs/ΔT  | —    | ±0.01   | —    | %/°C | RL=4.7KΩ, Ta=-20~+75°C     |
| Hysteresis voltage                        | ΔVs    | 30   | 50      | 100  | mV   | RL=4.7KΩ, Vcc=LÆHÆL        |
| "H" transfer delay time                   | TPLH   | —    | 20      | 50   | μS   | CL=100PF, RL=4.7KΩ *1      |
| "L" transfer delay time                   | TPHL   | —    | 60      | 120  | μS   | CL=100PF, RL=4.7KΩ *2      |
| "L" output voltage                        | VOL    | —    | 0.1     | 0.4  | V    | Vcc=VsMIN.-0.05V, RL=4.7KΩ |
| Circuit current (At ON mode)              | Icc1   | —    | 1.5     | 3.0  | μA   | Vcc=VsMIN.-0.05V, RL=∞     |
| Circuit current (At OFF mode)             | Icc2   | —    | 1.6     | 3.2  | μA   | Vcc=VsTYP./0.85V, RL=∞     |
| Operating limit voltage                   | VOPL   | —    | 0.65    | 0.85 | V    | RL=4.7KΩ, VOL≥0.4V         |
| Output leak current                       | IL     | —    | —       | 0.1  | μA   | Vcc=Vout=10V               |
| "L" output current                        | IOL    | 3.0  | 15.0    | —    | mA   | Vo=0.4V, Vcc=VsMIN.-0.05V  |


\*1 TPLH : Vcc=(Vs typ.-0.4V)/Æ(Vs typ.+0.4V)

\*2 TPHL : Vcc=(Vs typ.+0.4V)/Æ(Vs typ.-0.4V)


### ● Timing waveform

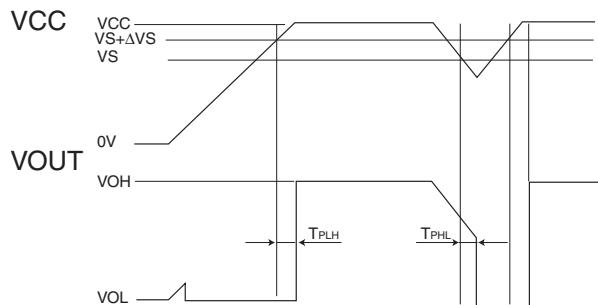

### ● Transfer delay time measurement circuit

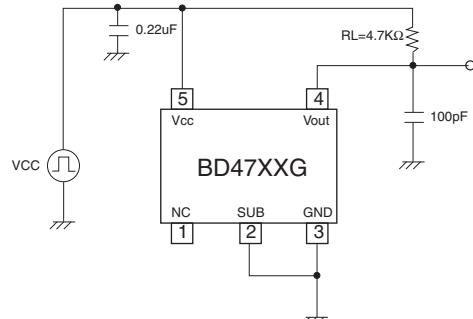


### ● Application Circuit



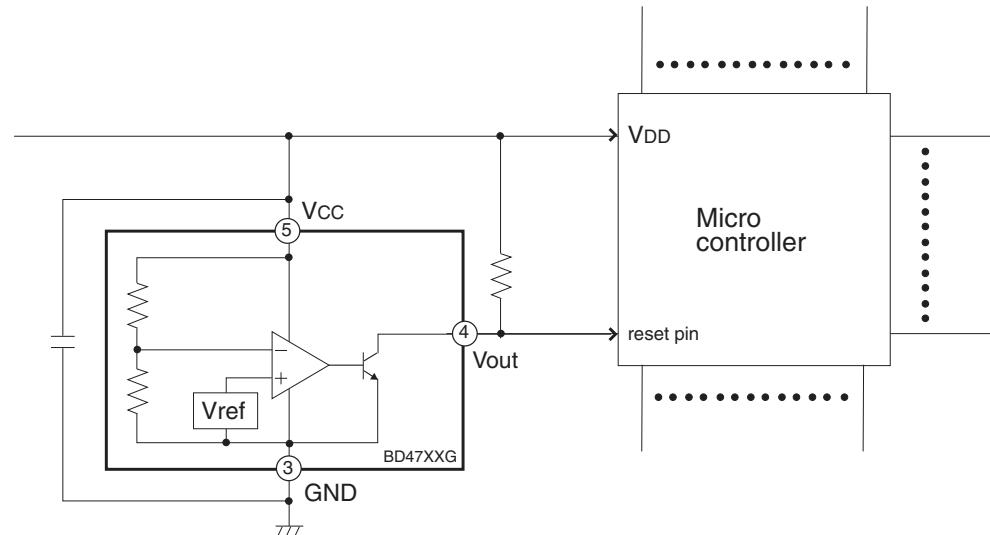


● Characteristic diagram and Measurement circuit (When BD4729G is measured.)


Current consumption

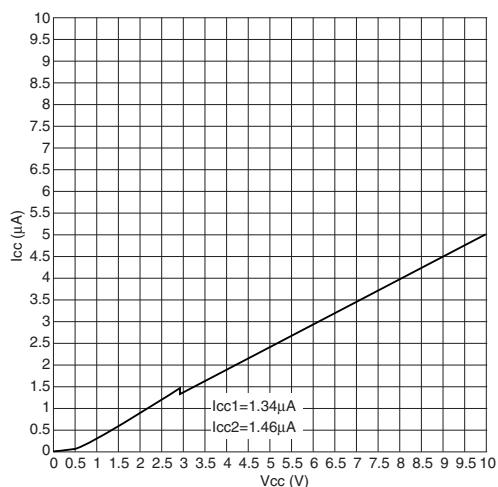




I/O characteristic

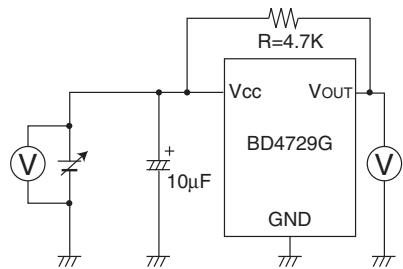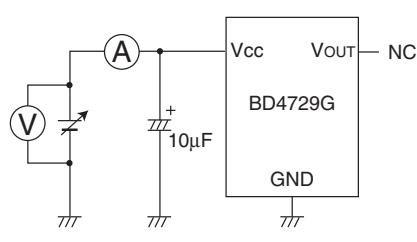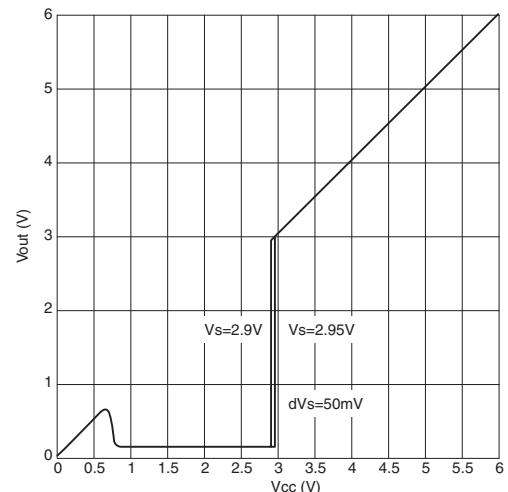

Operating limit voltage

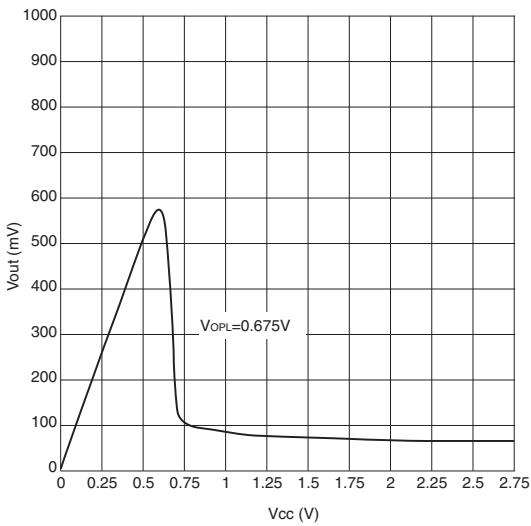


'L' output current

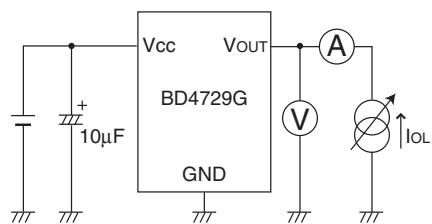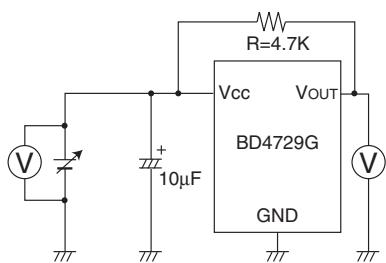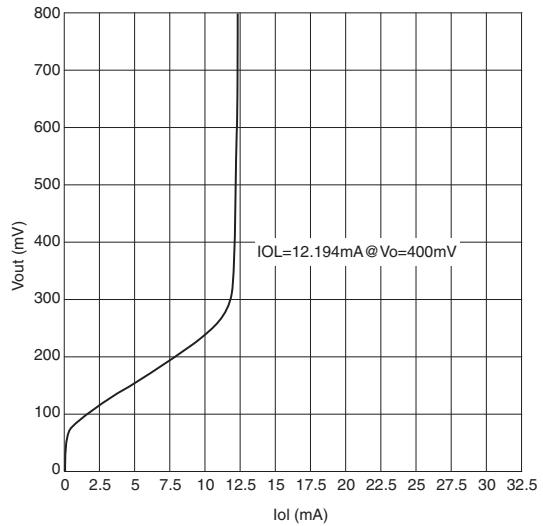


## ● Setting of the RESET signal delay time

Delay time can be set by capacitor  $C_L$  and resistance  $R_L$  connected to the output pin as shown below.  $C_L$  is charged by  $R_L$  when  $V_{CC}$  is rising. The delay time caused by charging is determined by the time constant of  $C_L$ ,  $R_L$  and the threshold voltage of RESET pin. RESET IC discharges  $C_L$  forcedly when  $V_{CC}$  is falling. The delay time of RESET signal is determined by adding the delay time of single RESET IC to each time.

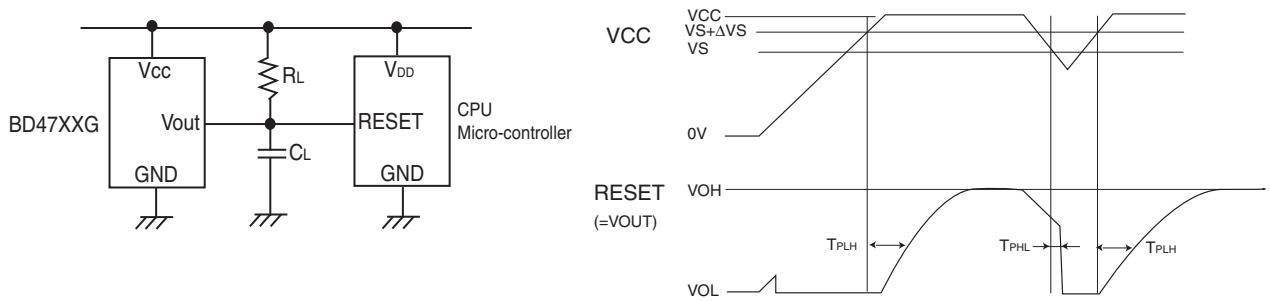

## Part number and Marking of samples

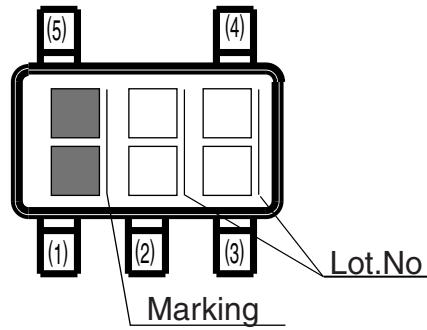

| Marking | Voltage | Part No. | Marking | Voltage | Part No. | Marking | Voltage | Part No. |
|---------|---------|----------|---------|---------|----------|---------|---------|----------|
| BA      | 1.9V    | BD4719   | BK      | 2.9V    | BD4729   | BU      | 3.9V    | BD4739   |
| BB      | 2.0V    | BD4720   | BL      | 3.0V    | BD4730   | BV      | 4.0V    | BD4740   |
| BC      | 2.1V    | BD4721   | BM      | 3.1V    | BD4731   | BW      | 4.1V    | BD4741   |
| BD      | 2.2V    | BD4722   | BN      | 3.2V    | BD4732   | BX      | 4.2V    | BD4742   |
| BE      | 2.3V    | BD4723   | B4      | 3.3V    | BD4733   | BY      | 4.3V    | BD4743   |
| BF      | 2.4V    | BD4724   | BP      | 3.4V    | BD4734   | BZ      | 4.4V    | BD4744   |
| BG      | 2.5V    | BD4725   | BQ      | 3.5V    | BD4735   | B1      | 4.5V    | BD4745   |
| BH      | 2.6V    | BD4726   | BR      | 3.6V    | BD4736   | B2      | 4.6V    | BD4746   |
| B3      | 2.7V    | BD4727   | BS      | 3.7V    | BD4737   |         |         |          |
| BJ      | 2.8V    | BD4728   | BT      | 3.8V    | BD4738   |         |         |          |

## Appendix

---

### Notes

- No technical content pages of this document may be reproduced in any form or transmitted by any means without prior permission of ROHM CO.,LTD.
- The contents described herein are subject to change without notice. The specifications for the product described in this document are for reference only. Upon actual use, therefore, please request that specifications to be separately delivered.
- Application circuit diagrams and circuit constants contained herein are shown as examples of standard use and operation. Please pay careful attention to the peripheral conditions when designing circuits and deciding upon circuit constants in the set.
- Any data, including, but not limited to application circuit diagrams information, described herein are intended only as illustrations of such devices and not as the specifications for such devices. ROHM CO.,LTD. disclaims any warranty that any use of such devices shall be free from infringement of any third party's intellectual property rights or other proprietary rights, and further, assumes no liability of whatsoever nature in the event of any such infringement, or arising from or connected with or related to the use of such devices.
- Upon the sale of any such devices, other than for buyer's right to use such devices itself, resell or otherwise dispose of the same, no express or implied right or license to practice or commercially exploit any intellectual property rights or other proprietary rights owned or controlled by
- ROHM CO., LTD. is granted to any such buyer.
- Products listed in this document use silicon as a basic material.

Products listed in this document are no antiradiation design.

The products listed in this document are designed to be used with ordinary electronic equipment or devices (such as audio visual equipment, office-automation equipment, communications devices, electrical appliances and electronic toys).

Should you intend to use these products with equipment or devices which require an extremely high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), please be sure to consult with our sales representative in advance.

#### About Export Control Order in Japan

Products described herein are the objects of controlled goods in Annex 1 (Item 16) of Export Trade Control Order in Japan.

In case of export from Japan, please confirm if it applies to "objective" criteria or an "informed" (by MITI clause) on the basis of "catch all controls for Non-Proliferation of Weapons of Mass Destruction.