

AN7353S


Record Equalizer Amp. for Stereo Cassette Deck

■ Overview


The AN7353S is a bipolar IC developed as a record equalizer amp. of analogue cassette deck. Particularly in order to support the automatic adjustment, it incorporates various volume filter circuits and control functions. Also, it has realized great reduction of external parts required.

■ Features

- Fine adjustment of equalizer characteristics (frequency characteristics and gain) in medium and high frequency band by DC control
- Volume for total gain adjustment built-in ($\pm 11\text{dB}$)
- With pin for low frequency band boost
- Drive circuit for current output built-in

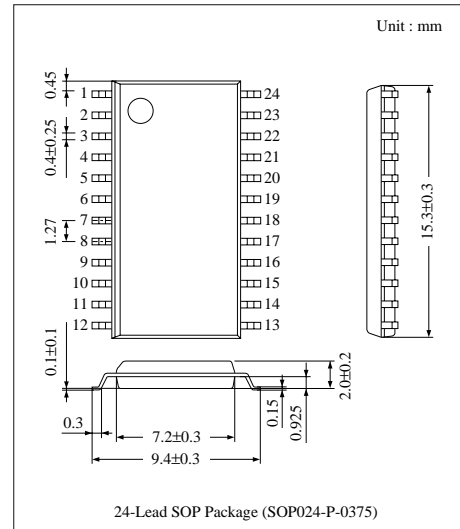

■ Block Diagram

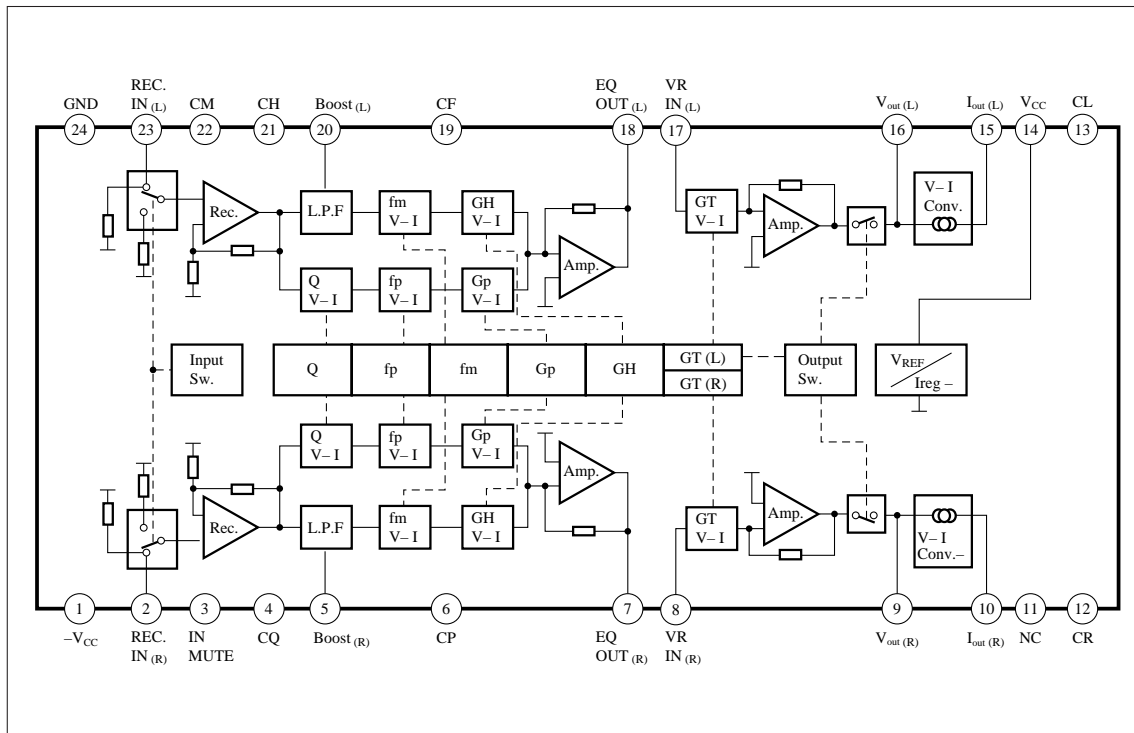

■ Absolute Maximum Ratings (Ta=25°C)

Parameter	Symbol	Rating	Unit
Supply Voltage	V _{CC}	±6.7	V
Supply Current	I _{CC} (+)	26	mA
	I _{CC} (–)	23	mA
Power Dissipation	P _D	521	mW
Operating Ambient Temperature	T _{opr}	–25 ~ + 75	°C
Storage Temperature	T _{stg}	–55 ~ + 125	°C

■ Recommended Operating Range (Ta= 25°C)

Parameter	Symbol	Range
Operating Supply Voltage Range	V _{CC}	± 4.5V ~ ± 6.5V


■ Electrical Characteristics (V_{CC}= ±6V, Ta=25±2°C)

Parameter		Symbol	Condition	min.	typ.	max.	Unit
Reference Output (EQ Output)		VEQ	f _{in} = 400Hz, V _{in} = –6dBv	– 4	–1.5	+1	dBv
Medium/High Frequency Band Gain	HIGH	GHH	f _{in} = 10kHz, V _{in} = –12dBv, V _{EQ} = 0dB	3.5	5.5	7.5	dB
	LOW	GHL		–8.5	–6.5	– 4.5	
High Frequency Band Peak Gain	HIGH	GPH	V _{in} = –30dBv	16	18	20	dB
	LOW	GPL	V _{in} = –18dBv	7	9	11	
High Frequency Band Peak Band Width (10kHz Output)	WIDE	GQW	f _{in} = 10kHz, V _{in} = –18dBv, V _{EQ} = 0dB	2	4.5	7	dB
	NALLOW	GQL		–2.5	0	+2.5	
High Frequency Band Peak Frequency Control Voltage	HIGH	VfPH	f _{in} = 35kHz	3.85	4.25	4.65	V
	LOW	VfPL	f _{in} = 10kHz	1	1.2	1.4	
Volume Amp. Gain (VOL Output)	HIGH	GTH	V _{in} = –18dBv	16.5	18.5	20.5	dB
	LOW	GTL	V _{in} = 0dBv	–5.5	–3.5	–1.5	
Total Harmonics Distortion	VOL	THD _(RU)	V _{in} = –14dBv RL _V = 10kΩ	—	0.3	0.8	%
	CULL	THD _(RC)	V _{in} = –14dBv RL _V = 1kΩ	—	0.3	0.8	
Maximum Output Voltage	VOL	V _{O (RU)}	RL _V = 10kΩ	2.2	3.2	—	V _{rms}
	CULL	V _{O (RC)}	RL _V = 1kΩ	1	1.5	—	
Output Noise Voltage (CURR Output)		VN _(RC)	R _g = 0Ω RL _V = 1kΩ, DIN/AUDIO	—	0.6	2	mV · rms
Input Muting Attenuation (EQ Output)		IM _(EQ)	f _{in} = 1kHz, 3p : OPEN V _{in} = – 6dBv	40	—	—	dB
Output Muting Attenuation (VOL Output)		OM _(RU)	f _{in} = 1kHz, V _{CL} = 0.3V V _{in (VR)} = 0dBv	60	—	—	dB
Output Offset Voltage (EQ Output)		V _{off (EQ)}	R _g = 0Ω	–900	—	+500	mV
Output Offset Current (CURR Output)		V _{off (RC)}	RL _V = 1kΩ RL _V = 100kΩ	–25	—	+25	μA
Pulse Noise Current (CURR Output)		VPN _(RC)	R _g = 0Ω	–9	—	+9	mV _{P-O}
Muting Control Voltage	Input Side	VIM	Pin3 threshold value voltage (Mute ON voltage)	3.9	—	V _{CC}	V
	Output Side	VOM	Pin13 threshold value voltage (Mute ON voltage)	GND	—	0.3	
Consumption Current		I _{tot}	No signal	20	23	26	mA

■ Pin Description

Pin No.	Pin Name	Pin No.	Pin Name
1	Main Circuit $-V_{CC}$	13	Volume Amp. Gain (L ch.)/Output Mute Control
2	Record Amp. Input (R ch.)	14	Main Circuit $+V_{CC}$
3	Record Amp. Input Mute Control	15	Record Amp. Current Output (L ch.)
4	High Frequency Band Peak Band Width Control	16	Record Amp. Voltage Output (L ch.)
5	Low Frequency Band Boost (R ch.)	17	Volume Amp. Input (L ch.)
6	High Frequency Band Peak Gain Control	18	Equalizer Amp. Output (L ch.)
7	Equalizer Amp. Output (R ch.)	19	High Frequency Band Peak Frequency Control
8	Volume Amp. Input (R ch.)	20	Low Frequency Band Boost (L ch.)
9	Record Amp. Voltage Output (R ch.)	21	Medium/High Frequency Band Gain Control
10	Record Amp. Current Output (R ch.)	22	Medium Frequency Band Cutoff Frequency Control
11	NC	23	Record Amp. Input (L ch.)
12	Volume Amp. Gain Control (R ch.)	24	GND

■ Application Circuit

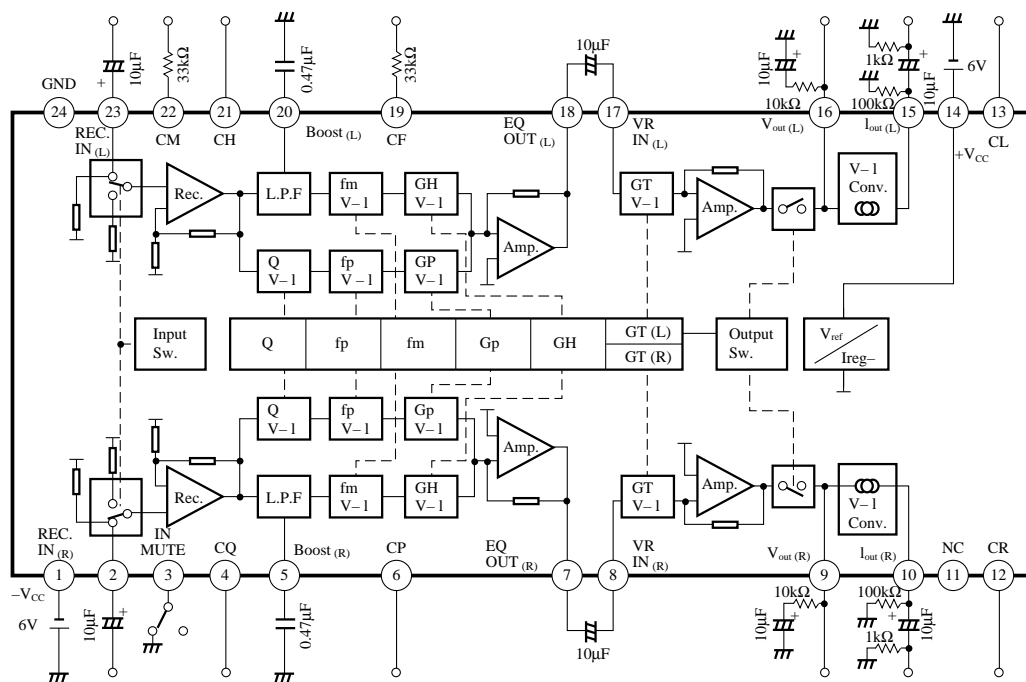

Request for your special attention and precautions in using the technical information and semiconductors described in this material

- (1) An export permit needs to be obtained from the competent authorities of the Japanese Government if any of the products or technologies described in this material and controlled under the "Foreign Exchange and Foreign Trade Law" is to be exported or taken out of Japan.
- (2) The technical information described in this material is limited to showing representative characteristics and applied circuit examples of the products. It does not constitute the warranting of industrial property, the granting of relative rights, or the granting of any license.
- (3) The products described in this material are intended to be used for standard applications or general electronic equipment (such as office equipment, communications equipment, measuring instruments and household appliances).
Consult our sales staff in advance for information on the following applications:
 - Special applications (such as for airplanes, aerospace, automobiles, traffic control equipment, combustion equipment, life support systems and safety devices) in which exceptional quality and reliability are required, or if the failure or malfunction of the products may directly jeopardize life or harm the human body.
 - Any applications other than the standard applications intended.
- (4) The products and product specifications described in this material are subject to change without notice for reasons of modification and/or improvement. At the final stage of your design, purchasing, or use of the products, therefore, ask for the most up-to-date Product Standards in advance to make sure that the latest specifications satisfy your requirements.
- (5) When designing your equipment, comply with the guaranteed values, in particular those of maximum rating, the range of operating power supply voltage and heat radiation characteristics. Otherwise, we will not be liable for any defect which may arise later in your equipment.
Even when the products are used within the guaranteed values, redundant design is recommended, so that such equipment may not violate relevant laws or regulations because of the function of our products.
- (6) When using products for which dry packing is required, observe the conditions (including shelf life and after-unpacking standby time) agreed upon when specification sheets are individually exchanged.
- (7) No part of this material may be reprinted or reproduced by any means without written permission from our company.

Please read the following notes before using the datasheets

- A. These materials are intended as a reference to assist customers with the selection of Panasonic semiconductor products best suited to their applications.
Due to modification or other reasons, any information contained in this material, such as available product types, technical data, and so on, is subject to change without notice.
Customers are advised to contact our semiconductor sales office and obtain the latest information before starting precise technical research and/or purchasing activities.
- B. Panasonic is endeavoring to continually improve the quality and reliability of these materials but there is always the possibility that further rectifications will be required in the future. Therefore, Panasonic will not assume any liability for any damages arising from any errors etc. that may appear in this material.
- C. These materials are solely intended for a customer's individual use.
Therefore, without the prior written approval of Panasonic, any other use such as reproducing, selling, or distributing this material to a third party, via the Internet or in any other way, is prohibited.