


# Industrial Connectors CA-COM



COM-7/0300

Cannon

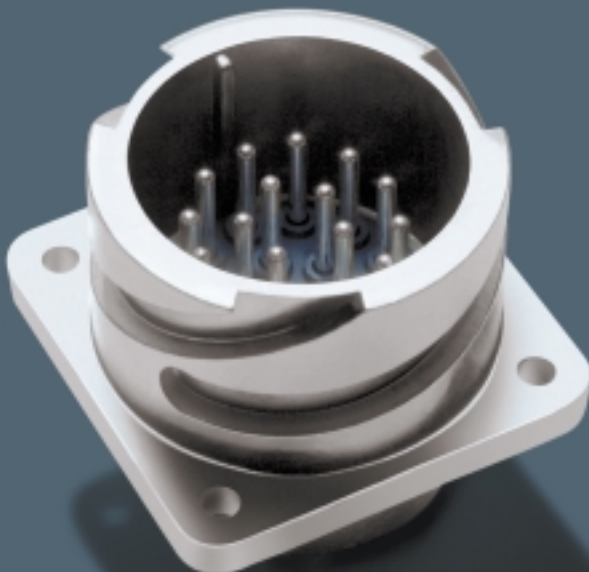

**ITT Industries**  
*Engineered for life*

Introduction

ITT Industries, Cannon connectors series CA-COM and CA-COM-B are derivations of connectors according to MIL-C-5015 or VG95234. They were developed especially for industrial applications. Connectors of both CA-COM series are interchangeable with the corresponding types as per MIL-C-5015 and VG95234, as they offer the same mounting dimensions and contact arrangements.

The CA-COM and CA-COM-B connector series offer


- Wall mounting receptacles
- Cable connecting plugs
- Box mounting receptacles
- Straight plugs
- Plugs 90°

Wall mounting receptacles and cable connecting plugs (straight and 90°) are available with

- Endbell with cable clamp
- Endbell for flex tubes
- Adapter combined for PG terminations acc. to DIN 46320
- Adapter for heat shrink boots

Furthermore Cannon also provides the appropriate accessories like

- Protective metal caps
- Sash chains
- Cable clamps
- Cable bushings
- Sealing gaskets

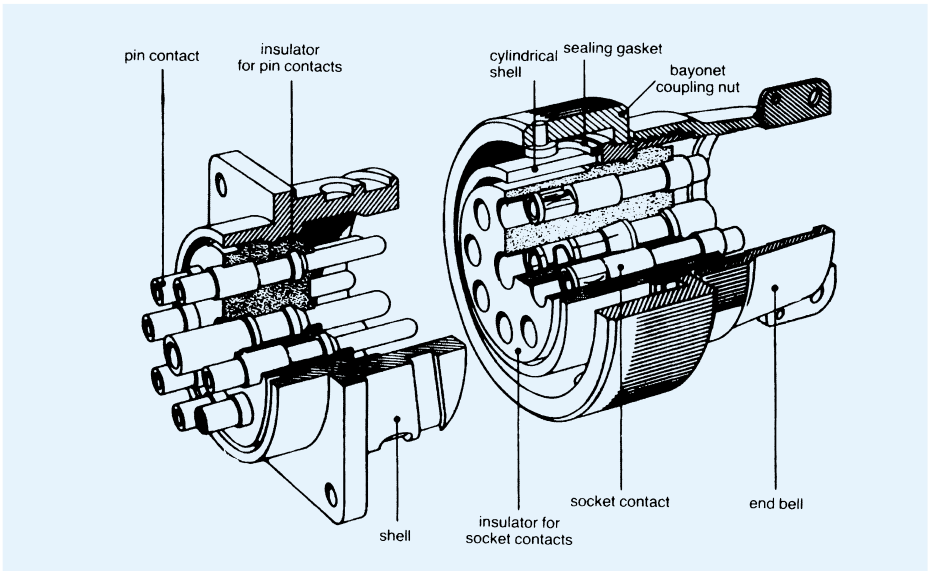

CA-COM

- Threaded coupling
- Mateable with all connectors according to MIL-C-5015 and series CA respectively
- Either solder or crimp contacts
- Contact arrangements with 1 to 37 contacts
- Wire sizes from 0,14 up to 2,5 mm<sup>2</sup>
- Shells made of aluminum alloy enable to withstand high mechanical strain\*
- Surface protected by nickel plating
- Resilient insulator (polychloroprene) for wide temperature range (-55/125°C)
- Resistant against aggressive fluids like fuel, oil, etc.
- Environmental by means of an adapter for PG termination, universal endbell and heat shrink boots
- Min 500 mating cycles
- Spray-waterproof IP67

CA-COM-B

- Bayonet coupling
- Mateable with all connectors according to VG95234 and series CA-B respectively
- Either solder or crimp contacts
- Contact arrangements with 1 to 37 contacts
- Wire sizes from 0,14 to 2,5 mm<sup>2</sup>
- Shells made of aluminum alloy enable to withstand high mechanical strain\*
- Surface protected by nickel plating
- Resilient insulator (polychloroprene) for wide temperature range (-55/125°C)
- Resistant against aggressive fluids like fuel, oil, etc.
- Environmental by means of an adapter for PG termination, universal endbell and heat shrink boots
- Min 500 mating cycles
- Waterproof (1 bar, 12 hours)

Contents

Introduction ..... 2

Connector design ..... 2

Technical data ..... 3

How to order ..... 4

Contact arrangements. .... 5

Mounting dimensions ..... 10

Separating and coupling dimensions .... 11

Shell styles and dimensions ..... 12

Accessories ..... 33

Contact dimensions ..... 37

Tools ..... 38

Product safety information ..... 40

**Note:** \* Receptacle size 14S and barrels size 18 + 20 are made of Zinc diecast material.

## Electrical data


### Rated current

20°C ambient temperature

| Contact size<br>AWG / metric | Rated current<br>A max <sup>1)</sup> |
|------------------------------|--------------------------------------|
| 15S                          | 22                                   |
| 15                           | 22                                   |
| 25                           | 41                                   |
| 100                          | 74                                   |

<sup>1)</sup> This applies only to the max. rated current for one contact. If several contacts in one contact arrangement are loaded with higher current the specific heat and the ambient temperature may not exceed +125°C.

### Rated current vs. ambient temperature

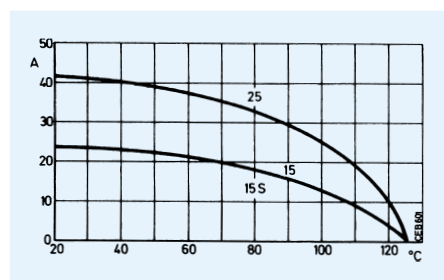

### Contact resistance (Millivolt test)

| Contact size<br>metric | Contact resistance<br>mΩ max |
|------------------------|------------------------------|
| 15S                    | 6                            |
| 15                     | 6                            |
| 25                     | 3                            |
| 100                    | 1                            |

### Insulation resistance > 1000 MΩ

### Air and creepage paths mm (min)

| Voltage class    | Instr. | A   | D   |
|------------------|--------|-----|-----|
| Air path mm      | 0,7    | 1,1 | 2,8 |
| Creepage path mm | 0,7    | 1,1 | 2,8 |

### Operating Voltage and connector usage

When the connectors in this catalogue are used for voltages greater than 50 Volts and have touchable conductive shell parts they must be used in accordance with the safety regulations DIN VDE Part 410; IEC 60364-4-41. This regulation basically dictates that the power source should be turned off before any mating and unmating of the connector, this regulation does not provide for protection against electrical shock when mating and unmating the connectors in the live condition.

## Mechanical data

### Max operating temperature

acc. to DIN IEC 68, part 1 -55/125°C

**Mating cycles** min 500

### Min separating force per contact

| Contact size<br>metric | Separating force<br>N |
|------------------------|-----------------------|
| 15S                    | 1,0                   |
| 15                     | 1,0                   |
| 25                     | 1,5                   |
| 100                    | 3,0                   |

### Contact retention

Test force to be applied in mating direction

| Contact size<br>metric | Test force<br>N |
|------------------------|-----------------|
| 15S                    | 35              |
| 15                     | 35              |
| 25                     | 55              |
| 100                    | 80              |

### Coupling torque

The allowable coupling torque has to be tested under harnessed conditions

| Shell<br>size | Allowable coupling torque                |                                |                                        |
|---------------|------------------------------------------|--------------------------------|----------------------------------------|
|               | Closing and opening<br>(N max)<br>CA-COM | Opening<br>(N min)<br>CA-COM-B | Opening<br>(N min)<br>CA-COM, CA-COM-B |
| 10SL          | 3,0                                      | 2,6                            | 0,15                                   |
| 12S           | 2,8                                      | 2,8                            | 0,23                                   |
| 14S           | 5,9                                      | 3,0                            | 0,35                                   |
| 16S/16        | 7,0                                      | 3,5                            | 0,46                                   |
| 18            | 8,0                                      | 4,0                            | 0,58                                   |
| 20            | 9,0                                      | 4,5                            | 0,7                                    |
| 22            | 10,6                                     | 5,0                            | 0,8                                    |
| 24            | 12,9                                     | 6,0                            | 0,8                                    |
| 28            | 16,7                                     | 7,0                            | 0,92                                   |
| 32            | 18,1                                     | 8,5                            | 1,02                                   |
| 36            | 23,9                                     | 10,0                           | 1,05                                   |

## Materials

|           |                                            |
|-----------|--------------------------------------------|
| Shell     | Aluminum alloy, Zinc diecast nickel plated |
| Contacts  | Copper alloy, silver plated                |
| Insulator | Polychloroprene                            |

How to order

|                                                                                                                          | CA | 06 | COM-E | 18-1 | P | W | - | B | - | xx |
|--------------------------------------------------------------------------------------------------------------------------|----|----|-------|------|---|---|---|---|---|----|
|                                                                                                                          | CA | 06 | COM-E | 18-1 | P | W | - | B | - | xx |
| <b>Series</b> _____                                                                                                      |    |    |       |      |   |   |   |   |   |    |
| CA - Cannon designation                                                                                                  |    |    |       |      |   |   |   |   |   |    |
| <b>Shell style</b> _____                                                                                                 |    |    |       |      |   |   |   |   |   |    |
| 00 - Wall mount receptacle                                                                                               |    |    |       |      |   |   |   |   |   |    |
| 01 - Cable connecting plug                                                                                               |    |    |       |      |   |   |   |   |   |    |
| 02 - Box mount receptacle                                                                                                |    |    |       |      |   |   |   |   |   |    |
| 20 - Box mount receptacle for rear wall mounting (Bayonet coupling only)                                                 |    |    |       |      |   |   |   |   |   |    |
| 06 - Plug, straight                                                                                                      |    |    |       |      |   |   |   |   |   |    |
| 08 - Plug 90°                                                                                                            |    |    |       |      |   |   |   |   |   |    |
| <b>Class</b> _____                                                                                                       |    |    |       |      |   |   |   |   |   |    |
| COM-E - Endbell with cable clamp <sup>1)</sup>                                                                           |    |    |       |      |   |   |   |   |   |    |
| COM-F - Endbell for flex tube                                                                                            |    |    |       |      |   |   |   |   |   |    |
| COM-PG - Adapter for PG termination, environmental                                                                       |    |    |       |      |   |   |   |   |   |    |
| COM-L - PCB Solder termination                                                                                           |    |    |       |      |   |   |   |   |   |    |
| COM-IN - universal endbell                                                                                               |    |    |       |      |   |   |   |   |   |    |
| <b>Shell size</b> _____                                                                                                  |    |    |       |      |   |   |   |   |   |    |
| 10SL, 12S, 14S, 16, 16S, 18, 20, 22, 24, 28, 32*, 36* (* = upon request)                                                 |    |    |       |      |   |   |   |   |   |    |
| <b>Contact arrangement</b> _____                                                                                         |    |    |       |      |   |   |   |   |   |    |
| see pages 6 – 8                                                                                                          |    |    |       |      |   |   |   |   |   |    |
| <b>Contact type</b> _____                                                                                                |    |    |       |      |   |   |   |   |   |    |
| P - Pin contact                                                                                                          |    |    |       |      |   |   |   |   |   |    |
| S - Socket contact                                                                                                       |    |    |       |      |   |   |   |   |   |    |
| <b>Alternate insert position</b> _____                                                                                   |    |    |       |      |   |   |   |   |   |    |
| Insert insulator position – see page 9                                                                                   |    |    |       |      |   |   |   |   |   |    |
| <b>Coupling</b> _____                                                                                                    |    |    |       |      |   |   |   |   |   |    |
| B - Bayonet coupling                                                                                                     |    |    |       |      |   |   |   |   |   |    |
| - without designation: threaded coupling                                                                                 |    |    |       |      |   |   |   |   |   |    |
| <b>Modification</b> _____                                                                                                |    |    |       |      |   |   |   |   |   |    |
| 01 - metric crimp contacts                                                                                               |    |    |       |      |   |   |   |   |   |    |
| 03 - Adapter for heat shrink boots and metric crimp contacts (only for bayonet coupling by shell style 01 + 06 class -E) |    |    |       |      |   |   |   |   |   |    |
| 06 - Adapter for heat shrink boots and solder contacts (only for bayonet coupling by shell style 01 + 06 class -E)       |    |    |       |      |   |   |   |   |   |    |
| 44 - with end ring and grommet (for class E and F only)                                                                  |    |    |       |      |   |   |   |   |   |    |
| 48 - F-Endbell with O-ring                                                                                               |    |    |       |      |   |   |   |   |   |    |
| DN - Adapter for heat shrink boots and solder contacts (Mod. for threaded coupling)                                      |    |    |       |      |   |   |   |   |   |    |
| F0 - without contacts (to be ordered separately)                                                                         |    |    |       |      |   |   |   |   |   |    |

<sup>1)</sup> except shell style 02 / 20

## Contact arrangements

On pages 6 – 8 the contact arrangements are shown by shell sizes. The table below gives an overview on the number of contacts, recommended contact and wire sizes and the service rating class. Other contact arrangements acc. to MIL-C-5015 and VG 95234 upon request.

| Shell size | Contact arrangement | Number of contacts | Contact size metric | Wire size mm <sup>2</sup> | Service rating nach IEC              |
|------------|---------------------|--------------------|---------------------|---------------------------|--------------------------------------|
| 10SL       | 10SL-3              | 3                  | 15S                 | 0,75 – 1,5                | A                                    |
|            | 10SL-4              | 2                  | 15S                 | 0,75 – 1,5                | A                                    |
| 12S        | 12SA10              | 4                  | 15S                 | 0,75 – 1,5                | A                                    |
| 14S        | 14S-2               | 4                  | 15S                 | 0,75 – 1,5                | Inst.                                |
|            | 14S-5               | 5                  | 15S                 | 0,75 – 1,5                | Inst.                                |
|            | 14S-6               | 6                  | 15S                 | 0,75 – 1,5                | Inst.                                |
|            | 14SA7               | 7                  | 15S                 | 0,75 – 1,5                | Inst.                                |
| 16         | 16-10               | 3                  | 25                  | 2,0 – 3,0                 | A                                    |
| 16S        | 16S-1               | 7                  | 15S                 | 0,75 – 1,5                | A                                    |
| 18         | 18-1                | 10                 | 15                  | 0,75 – 1,5                | A (B, C, F, G)<br>Inst. (all others) |
|            | 18-8                | 7 + 1              | 15 + 25             | 1 – 1,5 + 2,5             | A                                    |
|            | 18-10               | 4                  | 25                  | 2,0 – 3,0                 | A                                    |
|            | 18-11               | 5                  | 25                  | 2,0 – 3,0                 | A                                    |
|            | 18-12               | 6                  | 15                  | 0,75 – 1,5                | A                                    |
| 20         | 20-15               | 7                  | 25                  | 2,0 – 3,0                 | A                                    |
|            | 20-17               | 1                  | 15                  | 0,75 – 1,5                | A                                    |
|            |                     | 5                  | 25                  | 2,0 – 3,0                 | A                                    |
|            | 20-19               | 3                  | 100                 | 10                        | A                                    |
|            | 20-27               | 14                 | 15                  | 0,75 – 1,5                | A                                    |
|            | 20-29               | 17                 | 15                  | 0,75 – 1,5                | A                                    |
|            |                     |                    |                     |                           |                                      |
| 22         | 22-14               | 19                 | 15                  | 0,75 – 1,5                | A                                    |
|            | 22-19               | 14                 | 15                  | 0,75 – 1,5                | A                                    |
|            | 22-23               | 8                  | 25                  | 2,0 – 3,0                 | D (H)                                |
| 24         | 24-28               | 24                 | 15                  | 0,75 – 1,5                | Inst.                                |
| 28         | 28-15               | 35                 | 15                  | 0,75 – 1,5                | A                                    |

Additional contact arrangements (per MIL-C-5015 and VG95234) upon request.

## Wire selection

| Contact size<br>Metric | Wire sizes for crimp and solder contacts |                                |
|------------------------|------------------------------------------|--------------------------------|
|                        | Metric<br>mm <sup>2</sup>                | Conductor<br>Ø mm <sup>2</sup> |
| 15S                    | 0,75 – 1,5                               | 1,6 – 3,3                      |
| 15                     | 0,75 – 1,5                               | 1,6 – 3,3                      |
| 25                     | 2,0 – 3,0                                | 2,9 – 4,3                      |
| 100                    | 10,0                                     | 4,2 – 6,5                      |

## Stripping lengths of wires

Strip wires carefully. Do not damage conductors and insulation.

For solder connections, wires have to be pretinned. Do not twist conductors used in crimp contacts, otherwise no perfect crimp connection will be achieved. Do not touch conductors before crimping. Film of grease or lubricants on the strands will cause poor crimp quality.

Stripping length for contacts sizes 15S, 15 and 25 is 6,2 mm.






## Contact Arrangements

|                                                                                     | No. of contacts | Contact arrangement<br>Contact size metric | Service rating | Insulator position |     |     |   | Insulator weight (g) including contacts |        |
|-------------------------------------------------------------------------------------|-----------------|--------------------------------------------|----------------|--------------------|-----|-----|---|-----------------------------------------|--------|
|                                                                                     |                 |                                            |                | W                  | X   | Y   | Z | pin                                     | socket |
|    | 3               | 10SL-3<br>15S                              | A              | -                  | -   | -   | - | 6                                       | 9      |
|    | 2               | 10SL-4<br>15S                              | A              | -                  | -   | -   | - | 4                                       | 6      |
|    | 4               | 12SA10<br>15S                              | A              | -                  | -   | -   | - | 6                                       | 8      |
|    | 4               | 14S-2<br>15S                               | Inst.          | -                  | 120 | 240 | - | 7                                       | 11     |
|  | 5               | 14S-5<br>15S                               | Inst.          | -                  | 110 | -   | - | 9                                       | 13     |
|  | 6               | 14S-6<br>15S                               | Inst.          | -                  | -   | -   | - | 11                                      | 15     |
|  | 7               | 14SA7<br>15S                               | Inst.          | -                  | -   | -   | - | 10                                      | 15     |
|  | 7               | 16S-1<br>15S                               | A              | -                  | -   | -   | - | 14                                      | 19     |
|  | 3               | 16-10<br>25                                | A              | 90                 | 180 | 270 | - | 17                                      | 24     |

## Contact Arrangements


|                                                                                     | No. of contacts | Contact arrangement<br>Contact size metric | Service rating    | Insulator position |     |     |     | Insulator weight (g) including contacts |        |
|-------------------------------------------------------------------------------------|-----------------|--------------------------------------------|-------------------|--------------------|-----|-----|-----|-----------------------------------------|--------|
|                                                                                     |                 |                                            |                   | W                  | X   | Y   | Z   | pin                                     | socket |
|    | 10              | 18-1<br>15                                 | A<br>(B, C, F, G) | 70                 | 145 | -   | 290 | 24                                      | 37     |
|    | 8<br>1<br>7     | 18-8<br>15<br>25                           | A                 | 70                 | -   | -   | 290 | 18                                      | 30     |
|    | 4               | 18-10<br>25                                | A                 | -                  | 120 | 240 | -   | 13                                      | 22     |
|   | 5               | 18-11<br>25                                | A                 | -                  | 170 | 265 | -   | 31                                      | 40     |
|  | 6               | 18-12<br>15                                | A                 | 80                 | -   | -   | 280 | 15                                      | 25     |
|  | 7               | 20-15<br>25                                | A                 | 80                 | -   | -   | 280 | 27                                      | 46     |
|  | 6<br>1<br>5     | 20-17<br>15<br>25                          | A                 | 90                 | 180 | 270 | -   | 20                                      | 33     |
|  | 3               | 20-19<br>100                               | A                 | 90                 | 180 | 270 | -   | 33                                      | 46     |
|  | 14              | 20-27<br>15                                | A                 | 35                 | 110 | 250 | 325 | 26                                      | 42     |

## Contact Arrangements

|                                                                                     | No. of contacts | Contact arrangement<br>Contact size metric | Service rating         | Insulator positions |     |     | Z   | Insulator weight (g) including contacts |        |
|-------------------------------------------------------------------------------------|-----------------|--------------------------------------------|------------------------|---------------------|-----|-----|-----|-----------------------------------------|--------|
|                                                                                     |                 |                                            |                        | W                   | X   | Y   |     | pin                                     | socket |
|    | 17              | 20-29<br>15                                | A                      | 80                  | -   | -   | 280 | 29                                      | 47     |
|    | 19              | 22-14<br>15                                | A                      | 80                  | -   | -   | 280 | 30                                      | 50     |
|    | 14              | 22-19<br>15                                | A                      | 80                  | 110 | 250 | 280 | 28                                      | 47     |
|   | 8               | 22-23<br>25                                | D(H)<br>A (all others) | 35                  | -   | 250 | -   | 34                                      | 54     |
|  | 24              | 24-28<br>15                                | Inst.                  | 80                  | 110 | 250 | 280 | 40                                      | 65     |
|  | 35              | 28-15<br>15                                | A                      | 80                  | 110 | 250 | 280 | 54                                      | 90     |
|  | 37              | 28-21<br>15                                | A                      | 80                  | 110 | 250 | 280 | 58                                      | 93     |

## Alternate insert positions

Alternate insert positions are available to prevent cross-plugging of adjacent connectors. The standard position is without designation. All other insert positions are designated W, X, Y and Z. See table below.




View on mating face of pin insert

| Contact arrangement | W  | X   | Y   | Z   |
|---------------------|----|-----|-----|-----|
| 10SL-3              | -  | -   | -   | -   |
| 10SL-4              | -  | -   | -   | -   |
| 12SA10              | -  | -   | -   | -   |
| 14S-2               | -  | 120 | 240 | -   |
| 14S-5               | -  | 110 | -   | -   |
| 14S-6               | -  | -   | -   | -   |
| 14SA7               | -  | -   | -   | -   |
| 16S-1               | -  | -   | -   | -   |
| 16-10               | 90 | 180 | 270 | -   |
| 18-1                | 70 | 145 | -   | 290 |
| 18-8                | 70 | -   | -   | 290 |
| 18-10               | -  | 120 | 240 | -   |
| 18-11               | -  | 170 | 265 | -   |
| 18-12               | 80 | -   | -   | 280 |
| 20-15               | 80 | -   | -   | 280 |
| 20-17               | 90 | 180 | 270 | -   |
| 20-19               | 90 | 180 | 270 | -   |
| 20-27               | 35 | 110 | 250 | 325 |
| 20-29               | 80 | -   | -   | 280 |
| 22-14               | 80 | -   | -   | 280 |
| 22-19               | 80 | 110 | 250 | 280 |
| 22-23               | 35 | -   | 250 | -   |
| 24-28               | 80 | 110 | 250 | 280 |
| 28-15               | 80 | 110 | 250 | 280 |
| 28-21               | 80 | 110 | 250 | 280 |

Mounting dimensions

Mounting holes for connectors styles  
CA00COM/CA00COM-B, CA02COM/  
CA02COM-B and CA20COM-B




| Shell<br>size | CA-COM Threaded                         |         |                   | E-0,15 | CA-COM-Bayonet                          |         |                   |
|---------------|-----------------------------------------|---------|-------------------|--------|-----------------------------------------|---------|-------------------|
|               | D H <sub>12</sub><br>CA00...<br>CA20... | CA02... | d H <sub>13</sub> |        | D H <sub>12</sub><br>CA00...<br>CA20... | CA02... | d H <sub>13</sub> |
| 10SL          | 16,0                                    | 16,4    | 3,4               | 18,2   | 18,5                                    | 16,4    | 3,4               |
| 12S           | 19,1                                    | 16,4    | 3,4               | 20,6   | 21,7                                    | 16,4    | 3,4               |
| 14S           | 22,3                                    | 19,7    | 3,4               | 23,0   | 24,9                                    | 19,7    | 3,4               |
| 16S/16        | 25,5                                    | 22,9    | 3,4               | 24,6   | 27,7                                    | 22,9    | 3,4               |
| 18            | 28,7                                    | 26,1    | 3,4               | 27,0   | 31,1                                    | 26,1    | 3,4               |
| 20            | 31,8                                    | 29,5    | 3,4               | 29,4   | 34,5                                    | 29,5    | 3,4               |
| 22            | 35,0                                    | 32,7    | 3,4               | 31,8   | 37,8                                    | 32,7    | 3,4               |
| 24            | 38,2                                    | 36,0    | 3,9               | 34,9   | 41,3                                    | 36,0    | 3,9               |
| 28            | 44,5                                    | 42,0    | 3,9               | 39,7   | 47,1                                    | 42,0    | 3,9               |
| 32            | 50,9                                    | 48,3    | 4,6               | 44,5   | 53,8                                    | 48,3    | 4,6               |
| 36            | 57,2                                    | 53,1    | 4,6               | 49,2   | 60,0                                    | 53,1    | 4,6               |

# CA-COM

## Separating and coupling dimensions


CA06COM-E  
CA06COM-E-B

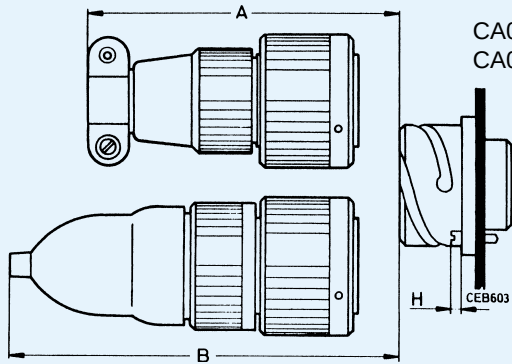

CA02COM-E  
CA02COM-E-B

CA06COM-E-DN  
CA06COM-E-B-03/-06


CA06COM-F  
CA06COM-F-B

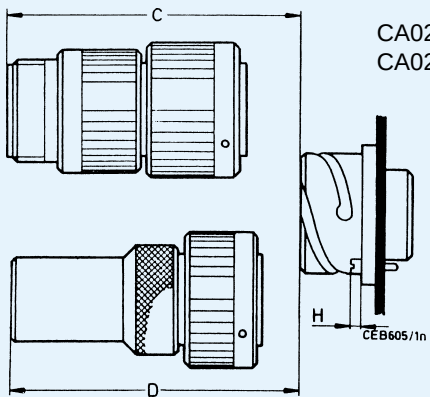

CA02COM-E  
CA02COM-E-B

CA06COM-PG  
CA06COM-PG-B

CA08COM-E  
CA08COM-E-B

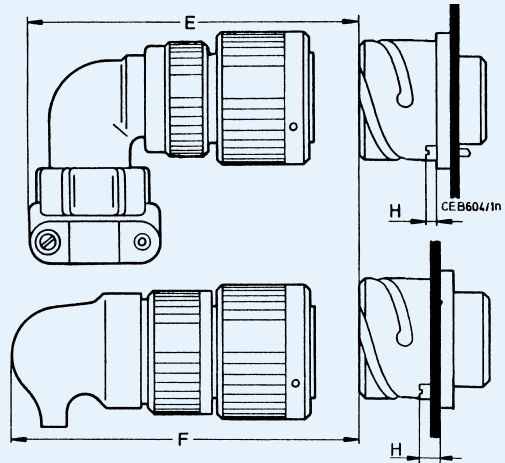

CA06COM-E-DN  
CA06COM-E-B

CA02COM-E  
CA20COM-E  
CA02COM-E-B  
CA20COM-E-B


| Shell size | A min | B min | C min | D min | E min | F min | H max |
|------------|-------|-------|-------|-------|-------|-------|-------|
| 10SL       | 70    | 70    | 65    | 80    | 70    | 65    | 3,5   |
| 12S        | 70    | 75    | 65    | 80    | 75    | 70    | 3,5   |
| 14S        | 70    | 75    | 65    | 80    | 75    | 80    | 3,5   |
| 16S        | 70    | 90    | 65    | 80    | 65    | 80    | 3,5   |
| 16         | 80    | 100   | 70    | 100   | 90    | 100   | 3,5   |
| 18         | 80    | 100   | 70    | 110   | 95    | 110   | 3,5   |
| 20         | 80    | 100   | 70    | 110   | 95    | 110   | 3,5   |
| 22         | 80    | 100   | 70    | 110   | 95    | 110   | 3,5   |
| 24         | 110   | 120   | 90    | 120   | 105   | 120   | 5,0   |
| 28         | 110   | 120   | 90    | 120   | 105   | 120   | 5,0   |
| 32         | 110   | 180   | 90    | 120   | 115   | 120   | 6,0   |
| 36         | 110   | 190   | 100   | 130   | 120   | 130   | 6,0   |

## Wall mounting receptacle, Class PG



### CA00COM-PG-B with bayonet coupling

CA00COM-PG-B is a wall mounting receptacle for usage of PG terminations. It mates with plugs CA06COM-B and CA08COM-B.

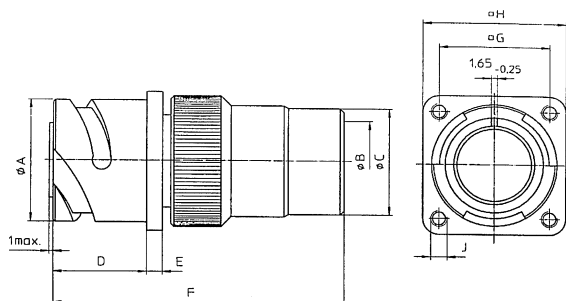


| Part No.<br>Pin insert* | A     | B      | C   | D     | E     | F   | G     | H     | J  |
|-------------------------|-------|--------|-----|-------|-------|-----|-------|-------|----|
| CA00COM-PG10SL-**-P*-B- | -0,15 | Thread | max | +0,4  | ± 0,2 | max | ± 0,1 | ± 0,3 |    |
| CA00COM-PG12S-**-P*-B-  | 18,2  | PG9    | 18  | 18,2  | 2,8   | 56  | 18,2  | 25,4  | M4 |
| CA00COM-PG12S-**-P*-B-  | 21,4  | PG9    | 18  | 18,2  | 3,2   | 56  | 20,6  | 28,0  | M4 |
| CA00COM-PG14S-**-P*-B-  | 24,6  | PG11   | 22  | 18,2  | 3,2   | 56  | 23,0  | 30,0  | M4 |
| CA00COM-PG16S-**-P*-B-  | 27,4  | PG13,5 | 24  | 18,2  | 3,2   | 58  | 24,6  | 32,5  | M4 |
| CA00COM-PG16-**-P*-B-   | 27,4  | PG13,5 | 24  | 21,5  | 3,2   | 66  | 24,6  | 32,5  | M4 |
| CA00COM-PG18-**-P*-B-   | 30,8  | PG13,5 | 25  | 23,05 | 4,0   | 73  | 27,0  | 35,0  | M4 |
| CA00COM-PG20-**-P*-B-   | 34,2  | PG16   | 27  | 23,05 | 4,0   | 74  | 29,4  | 38,0  | M4 |
| CA00COM-PG22-**-P*-B-   | 37,4  | PG16   | 27  | 23,05 | 4,0   | 77  | 31,8  | 41,0  | M4 |
| CA00COM-PG24-**-P*-B-   | 40,9  | PG16   | 27  | 23,05 | 4,0   | 77  | 34,9  | 44,5  | M4 |
| CA00COM-PG28-**-P*-B-   | 46,7  | PG21   | 32  | 24,05 | 4,0   | 78  | 39,7  | 50,8  | M5 |
| CA00COM-PG32-**-P*-B-   | 53,4  | PG29   | 41  | 24,05 | 4,0   | 78  | 44,5  | 57,0  | M5 |
| CA00COM-PG36-**-P*-B-   | 59,6  | PG29   | 41  | 24,05 | 4,0   | 89  | 49,2  | 63,5  | M5 |



### CA00COM-PG with threaded coupling

CA00COM-PG is a wall mounting receptacle for usage of PG terminations. It mates with plugs CA06COM and CA08COM.

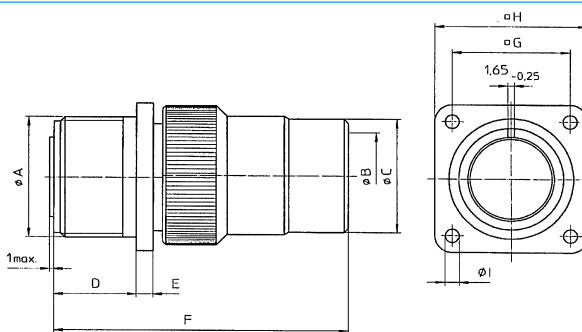

| Part No.<br>Pin insert* | A               | B      | C   | D    | E     | F   | G     | H     | I         |
|-------------------------|-----------------|--------|-----|------|-------|-----|-------|-------|-----------|
| CA00COM-PG10SL-**-P*    | Thread          | Thread | max | +0,4 | ± 0,3 | max | ± 0,1 | ± 0,3 | +0,2/-0,1 |
| CA00COM-PG10SL-**-P*    | 5/8-24UNEF-2A   | PG9    | 18  | 14,2 | 2,8   | 52  | 18,2  | 25,4  | 3,1       |
| CA00COM-PG12S-**-P*     | 3/4-20UNEF-2A   | PG9    | 19  | 14,2 | 3,2   | 52  | 20,6  | 28,0  | 3,1       |
| CA00COM-PG14S-**-P*     | 7/8-20UNEF-2A   | PG11   | 22  | 14,2 | 3,2   | 52  | 23,0  | 30,0  | 3,1       |
| CA00COM-PG16S-**-P*     | 1-20UNEF-2A     | PG13,5 | 24  | 14,2 | 3,2   | 54  | 24,6  | 32,5  | 3,1       |
| CA00COM-PG16-**-P*      | 1-20UNEF-2A     | PG13,5 | 24  | 19,0 | 3,2   | 64  | 24,6  | 32,5  | 3,1       |
| CA00COM-PG18-**-P*      | 1-1/8-18UNEF-2A | PG13,5 | 25  | 19,0 | 4,0   | 69  | 27,0  | 35,0  | 3,1       |
| CA00COM-PG20-**-P*      | 1-1/4-18UNEF-2A | PG16   | 27  | 19,0 | 4,0   | 70  | 29,4  | 38,0  | 3,1       |
| CA00COM-PG22-**-P*      | 1-3/8-18UNEF-2A | PG16   | 27  | 19,0 | 4,0   | 73  | 31,8  | 41,0  | 3,1       |
| CA00COM-PG24-**-P*      | 1-1/2-18UNEF-2A | PG16   | 27  | 20,6 | 4,0   | 74  | 34,9  | 44,5  | 3,7       |
| CA00COM-PG28-**-P*      | 1-3/4-18UNS-2A  | PG21   | 32  | 20,6 | 4,0   | 74  | 39,7  | 50,8  | 3,7       |
| CA00COM-PG32-**-P*      | 2-18UNS-2A      | PG29   | 41  | 22,2 | 4,0   | 76  | 44,5  | 57,0  | 4,4       |
| CA00COM-PG36-**-P*      | 2-1/4-16UN-2A   | PG29   | 41  | 22,2 | 4,0   | 87  | 49,2  | 63,5  | 4,4       |

\* For socket inserts substitute "S" for "P"


\*\* Add contact arrangement number (see pages 6 – 8)

## Wall mounting receptacle, Class E



### CA00COM-E-B with bayonet coupling

CA00COM-E-B is a wall mounting receptacle with endbell and cable clamp. It mates with plugs CA06COM-B and CA08COM-B.

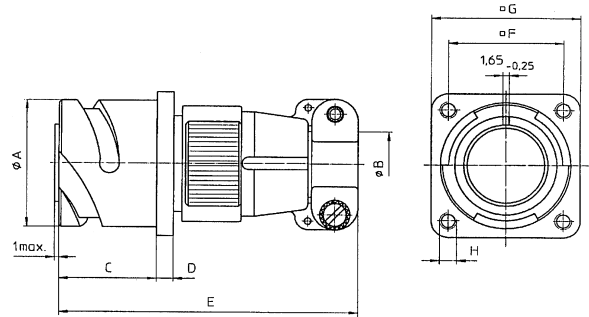


| Part No.               | A     | B <sup>1)</sup> | C     | D    | E   | F     | G     | H  |
|------------------------|-------|-----------------|-------|------|-----|-------|-------|----|
| Pin Insert*            | -0,15 | +0,4            | +0,4  | +0,2 | max | ± 0,1 | ± 0,3 |    |
| CA00COM-E10SL-**-P*-B- | 18,2  | 7,9             | 18,2  | 2,8  | 57  | 18,2  | 25,4  | M4 |
| CA00COM-E12S-**-P*-B-  | 21,4  | 7,9             | 18,2  | 3,2  | 57  | 20,6  | 28,0  | M4 |
| CA00COM-E14S-**-P*-B-  | 24,6  | 11,1            | 18,2  | 3,2  | 59  | 23,0  | 30,0  | M4 |
| CA00COM-E16S-**-P*-B-  | 27,4  | 14,2            | 18,2  | 3,2  | 60  | 24,6  | 32,5  | M4 |
| CA00COM-E16-**-P*-B-   | 27,4  | 14,2            | 21,5  | 3,2  | 68  | 24,6  | 32,5  | M4 |
| CA00COM-E18-**-P*-B-   | 30,8  | 15,8            | 23,05 | 4,0  | 72  | 27,0  | 35,0  | M4 |
| CA00COM-E20-**-P*-B-   | 34,2  | 19,0            | 23,05 | 4,0  | 72  | 29,4  | 38,0  | M4 |
| CA00COM-E22-**-P*-B-   | 37,4  | 19,0            | 23,05 | 4,0  | 72  | 31,8  | 41,0  | M4 |
| CA00COM-E24-**-P*-B-   | 40,9  | 23,7            | 23,05 | 4,0  | 78  | 34,9  | 44,5  | M4 |
| CA00COM-E28-**-P*-B-   | 46,7  | 23,7            | 24,05 | 4,0  | 79  | 39,7  | 50,8  | M5 |
| CA00COM-E32-**-P*-B-   | 53,4  | 31,8            | 24,05 | 4,0  | 78  | 44,5  | 57,0  | M5 |
| CA00COM-E36-**-P*-B-   | 59,6  | 34,6            | 24,05 | 4,0  | 78  | 49,2  | 63,5  | M5 |



### CA00COM-E with threaded coupling

CA00COM-E is a wall mounting receptacle with endbell and cable clamp. It mates with plugs CA06COM and CA08COM.

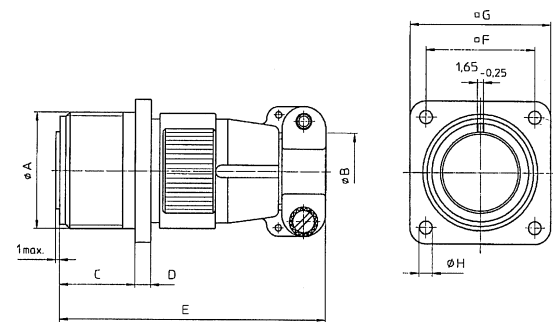

| Part No.            | A               | B <sup>1)</sup> | C     | D   | E     | F     | G          | H   |
|---------------------|-----------------|-----------------|-------|-----|-------|-------|------------|-----|
| Pin Insert*         | Thread          | +0,4            | ± 0,3 | max | ± 0,1 | ± 0,3 | +0,2 /-0,1 |     |
| CA00COM-E10SL-**-P* | 5/8-24UNEF-2A   | 7,9             | 14,2  | 2,8 | 53    | 18,2  | 25,4       | 3,1 |
| CA00COM-E12S-**-P*  | 3/4-20UNEF-2A   | 7,9             | 14,2  | 3,2 | 53    | 20,6  | 28,0       | 3,1 |
| CA00COM-E14S-**-P*  | 7/8-20UNEF-2A   | 11,1            | 14,2  | 3,2 | 55    | 23,0  | 30,0       | 3,1 |
| CA00COM-E16S-**-P*  | 1-20UNEF-2A     | 14,2            | 14,2  | 3,2 | 56    | 24,6  | 32,5       | 3,1 |
| CA00COM-E16-**-P*   | 1-20UNEF-2A     | 14,2            | 19,0  | 3,2 | 66    | 24,6  | 32,5       | 3,1 |
| CA00COM-E18-**-P*   | 1-1/8-18UNEF-2A | 15,8            | 19,0  | 4,0 | 68    | 27,0  | 35,0       | 3,1 |
| CA00COM-E20-**-P*   | 1-1/4-18UNEF-2A | 19,0            | 19,0  | 4,0 | 68    | 29,4  | 38,0       | 3,1 |
| CA00COM-E22-**-P*   | 1-3/8-18UNEF-2A | 19,0            | 19,0  | 4,0 | 68    | 31,8  | 41,0       | 3,1 |
| CA00COM-E24-**-P*   | 1-1/2-18UNEF-2A | 23,7            | 20,6  | 4,0 | 76    | 34,9  | 44,5       | 3,7 |
| CA00COM-E28-**-P*   | 1-3/4-18UNS-2A  | 23,7            | 20,6  | 4,0 | 76    | 39,7  | 50,8       | 3,7 |
| CA00COM-E32-**-P*   | 2-18UNS-2A      | 31,8            | 22,2  | 4,0 | 76    | 44,5  | 57,0       | 4,4 |
| CA00COM-E36-**-P*   | 2-1/4-16UN-2A   | 34,6            | 22,2  | 4,0 | 76    | 49,2  | 63,5       | 4,4 |

\* For socket inserts substitute "S" for "P"

\*\* Add contact arrangement number (see pages 6 – 8)


<sup>1)</sup> max cable dia

## Wall mounting receptacle, Class F



### CA00COM-F-B with bayonet coupling

CA00COM-F-B is a wall mounting receptacle with endbell for flex tubes. It mates with plugs CA06COM-B and CA08COM-B.

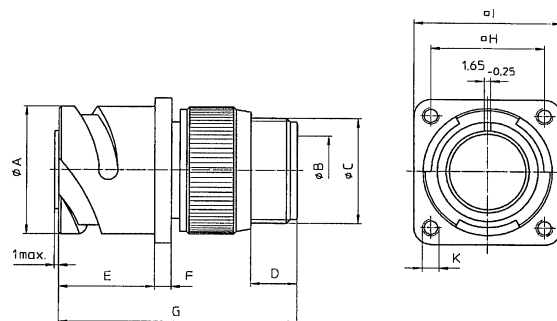


| Part No.<br>Pin insert* | A     | B <sup>1)</sup> | C                | D    | E     | F     | G   | H     | I     | K  |
|-------------------------|-------|-----------------|------------------|------|-------|-------|-----|-------|-------|----|
|                         | -0,15 |                 | Thread           | min  | +0,4  | ± 0,2 | max | ± 0,1 | ± 0,3 |    |
| CA00COM-F10SL-**-P*-B-  | 18,2  | 8,2             | 5/8-24UNEF-2A    | 9,5  | 18,2  | 2,8   | 50  | 18,2  | 25,4  | M4 |
| CA00COM-F12S-**-P*-B-   | 21,4  | 8,2             | 5/8-24UNEF-2A    | 9,5  | 18,2  | 3,2   | 50  | 20,6  | 28,0  | M4 |
| CA00COM-F14S-**-P*-B-   | 24,6  | 11,1            | 3/4-20UNEF-2A    | 9,5  | 18,2  | 3,2   | 50  | 23,0  | 30,0  | M4 |
| CA00COM-F16S-**-P*-B-   | 27,4  | 14,3            | 7/8-20UNEF-2A    | 9,5  | 18,2  | 3,2   | 50  | 24,6  | 32,5  | M4 |
| CA00COM-F16-**-P*-B-    | 27,4  | 14,3            | 7/8-20UNEF-2A    | 9,5  | 21,5  | 3,2   | 57  | 24,6  | 32,5  | M4 |
| CA00COM-F18-**-P*-B-    | 30,8  | 16,7            | 1-20UNEF-2A      | 9,5  | 23,05 | 4,0   | 59  | 27,0  | 35,0  | M4 |
| CA00COM-F20-**-P*-B-    | 34,2  | 19,8            | 1-3/16-18UNEF-2A | 9,5  | 23,05 | 4,0   | 59  | 29,4  | 38,0  | M4 |
| CA00COM-F22-**-P*-B-    | 37,4  | 19,8            | 1-3/16-18UNEF-2A | 9,5  | 23,05 | 4,0   | 62  | 31,8  | 41,0  | M4 |
| CA00COM-F24-**-P*-B-    | 40,9  | 25,4            | 1-7/16-18UNEF-2A | 9,5  | 23,05 | 4,0   | 62  | 34,9  | 44,5  | M4 |
| CA00COM-F28-**-P*-B-    | 46,7  | 27,0            | 1-7/16-18UNEF-2A | 9,5  | 24,05 | 4,0   | 64  | 39,7  | 50,8  | M5 |
| CA00COM-F32-**-P*-B-    | 53,4  | 32,5            | 1-3/4-18UNS-2A   | 11,0 | 24,05 | 4,0   | 64  | 44,5  | 57,0  | M5 |
| CA00COM-F36-**-P*-B-    | 59,6  | 35,7            | 2-18UNS-2A       | 11,8 | 24,05 | 4,0   | 66  | 49,2  | 63,5  | M5 |



### CA00COM-F with threaded coupling

CA00COM-F is a wall mounting receptacle with endbell for flex tubes. It mates with plugs CA06COM and CA08COM.

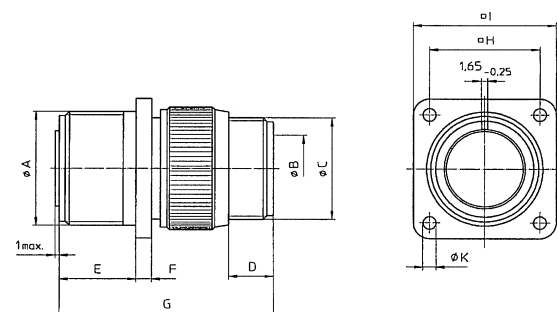

| Part No.<br>Pin Insert* | A               | B <sup>1)</sup> | C                | D    | E    | F     | G   | H     | I     | K         |
|-------------------------|-----------------|-----------------|------------------|------|------|-------|-----|-------|-------|-----------|
|                         | Thread          |                 | Thread           | min  | +0,4 | ± 0,3 | max | ± 0,1 | ± 0,3 | +0,2/-0,1 |
| CA00COM-F10SL-**-P*     | 5/8-24UNEF-2A   | 8,2             | 5/8-24UNEF-2A    | 9,5  | 14,2 | 2,8   | 45  | 18,2  | 25,4  | 3,1       |
| CA00COM-F12S-**-P*      | 3/4-20UNEF-2A   | 8,2             | 5/8-24UNEF-2A    | 9,5  | 14,2 | 3,2   | 45  | 20,6  | 28,0  | 3,1       |
| CA00COM-F14S-**-P*      | 7/8-20UNEF-2A   | 11,1            | 3/4-20UNEF-2A    | 9,5  | 14,2 | 3,2   | 45  | 23,0  | 30,0  | 3,1       |
| CA00COM-F16S-**-P*      | 1-20UNEF-2A     | 14,3            | 7/8-20UNEF-2A    | 9,5  | 14,2 | 3,2   | 45  | 24,6  | 32,5  | 3,1       |
| CA00COM-F16-**-P*       | 1-20UNEF-2A     | 14,3            | 7/8-20UNEF-2A    | 9,5  | 19,0 | 3,2   | 54  | 24,6  | 32,5  | 3,1       |
| CA00COM-F18-**-P*       | 1-1/8-18UNEF-2A | 16,7            | 1-20UNEF-2A      | 9,5  | 19,0 | 4,0   | 54  | 27,0  | 35,0  | 3,1       |
| CA00COM-F20-**-P*       | 1-1/4-18UNEF-2A | 19,8            | 1-3/16-18UNEF-2A | 9,5  | 19,0 | 4,0   | 55  | 29,4  | 38,0  | 3,1       |
| CA00COM-F22-**-P*       | 1-3/8-18UNEF-2A | 19,8            | 1-3/16-18UNEF-2A | 9,5  | 19,0 | 4,0   | 58  | 31,8  | 41,0  | 3,1       |
| CA00COM-F24-**-P*       | 1-1/2-18UNEF-2A | 25,4            | 1-7/16-18UNEF-2A | 9,5  | 20,6 | 4,0   | 59  | 34,9  | 44,5  | 3,7       |
| CA00COM-F28-**-P*       | 1-3/4-18UNS-2A  | 27,0            | 1-7/16-18UNEF-2A | 9,5  | 20,6 | 4,0   | 60  | 39,7  | 50,8  | 3,7       |
| CA00COM-F32-**-P*       | 2-18UNS-2A      | 32,5            | 1-3/4-18UNS-2A   | 11,0 | 22,2 | 4,0   | 62  | 44,5  | 57,0  | 4,4       |
| CA00COM-F36-**-P*       | 2-1/4-16UN-2A   | 35,7            | 2-18UNS-2A       | 11,8 | 22,2 | 4,0   | 64  | 49,2  | 63,5  | 4,4       |

\* For socket inserts substitute "S" for "P"

\*\* Add contact arrangement number (see pages 6 – 8)

<sup>1)</sup> max cable dia


# CA-COM

## Wall mounting receptacle, Class E



### CA00COM-E-B/-03/-06 with bayonet coupling

CA00COM-E-B/-03/-06 is a wall mounting receptacle (wire sealing) for heat shrink boots. It mates with plugs CA06COM-B and CA08COM-B.

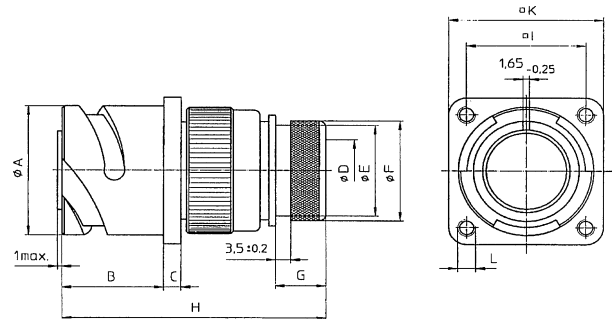


| Part No.<br>Pin Insert* | A    | B     | C   | D <sup>1)</sup> | E    | F    | G    | H  | I    | K    | L  |
|-------------------------|------|-------|-----|-----------------|------|------|------|----|------|------|----|
| CA00COM-E10SL-**-P*-B-  | 18,2 | 18,2  | 2,8 | 7,7             | 13,3 | 15,5 | 11,7 | 53 | 18,2 | 25,4 | M4 |
| CA00COM-E12S-**-P*-B-   | 21,4 | 18,2  | 3,2 | 7,9             | 13,3 | 15,5 | 11,7 | 53 | 20,6 | 28,0 | M4 |
| CA00COM-E14S-**-P*-B-   | 24,6 | 18,2  | 3,2 | 10,6            | 17,0 | 19,1 | 11,7 | 53 | 23,0 | 30,0 | M4 |
| CA00COM-E16S-**-P*-B-   | 27,4 | 18,2  | 3,2 | 13,5            | 21,9 | 23,9 | 11,7 | 53 | 24,6 | 32,5 | M4 |
| CA00COM-E16-**-P*-B-    | 27,4 | 21,5  | 3,2 | 13,5            | 21,9 | 23,9 | 11,5 | 61 | 24,6 | 32,5 | M4 |
| CA00COM-E18-**-P*-B-    | 30,8 | 23,05 | 4,0 | 14,6            | 21,9 | 23,9 | 11,5 | 62 | 27,0 | 35,0 | M4 |
| CA00COM-E20-**-P*-B-    | 34,2 | 23,05 | 4,0 | 18,7            | 26,2 | 29,6 | 12,7 | 64 | 29,4 | 38,0 | M4 |
| CA00COM-E22-**-P*-B-    | 37,4 | 23,05 | 4,0 | 20,8            | 26,2 | 29,6 | 12,7 | 64 | 31,8 | 41,0 | M4 |
| CA00COM-E24-**-P*-B-    | 40,9 | 23,05 | 4,0 | 24,6            | 34,5 | 37,8 | 12,7 | 64 | 34,9 | 44,5 | M4 |
| CA00COM-E28-**-P*-B-    | 45,7 | 24,05 | 4,0 | 27,0            | 34,5 | 37,8 | 12,7 | 66 | 39,7 | 50,8 | M5 |
| CA00COM-E32-**-P*-B-    | 53,4 | 24,05 | 4,0 | 33,3            | 43,6 | 47,8 | 15,2 | 69 | 44,5 | 57,0 | M5 |
| CA00COM-E36-**-P*-B-    | 59,6 | 24,05 | 4,0 | 38,5            | 43,6 | 47,8 | 15,2 | 70 | 49,2 | 63,5 | M5 |



### CA00COM-E-DN with threaded coupling

CA00COM-E-DN is a wall mounting receptacle with endbell (wire sealing) for heat shrink boots. It mates with plugs CA06COM and CA08COM.

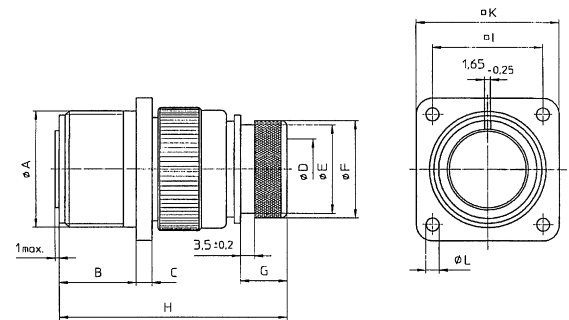


| Part No.<br>Pin Insert* | A               | B    | C     | D <sup>1)</sup> | E    | F     | G     | H   | I     | K     | L         |
|-------------------------|-----------------|------|-------|-----------------|------|-------|-------|-----|-------|-------|-----------|
| CA00COM-E10SL-**-P*-DN  | Thread          | +0,4 | ± 0,3 |                 | max  | ± 0,2 | ± 0,5 | max | ± 0,1 | ± 0,3 | +0,2/-0,1 |
| CA00COM-E12S-**-P*-DN   | 5/8-24UNEF-2A   | 14,2 | 2,8   | 7,7             | 13,3 | 15,5  | 11,7  | 49  | 18,2  | 25,4  | 3,1       |
| CA00COM-E14S-**-P*-DN   | 3/4-20UNEF-2A   | 14,2 | 3,2   | 7,9             | 13,3 | 15,5  | 11,7  | 49  | 20,6  | 28,0  | 3,1       |
| CA00COM-E16S-**-P*-DN   | 7/8-20UNEF-2A   | 14,2 | 3,2   | 10,6            | 17,0 | 19,1  | 11,7  | 49  | 23,0  | 30,0  | 3,1       |
| CA00COM-E16-**-P*-DN    | 1-20UNEF-2A     | 14,2 | 3,2   | 13,5            | 21,9 | 23,9  | 11,7  | 49  | 24,6  | 32,5  | 3,1       |
| CA00COM-E18-**-P*-DN    | 1-20UNEF-2A     | 19,0 | 3,2   | 13,5            | 21,9 | 23,9  | 11,5  | 58  | 24,6  | 32,5  | 3,1       |
| CA00COM-E18-**-P*-DN    | 1-1/8-18UNEF-2A | 19,0 | 4,0   | 14,6            | 21,9 | 23,9  | 11,5  | 58  | 27,0  | 35,0  | 3,1       |
| CA00COM-E20-**-P*-DN    | 1-1/4-18UNEF-2A | 19,0 | 4,0   | 14,6            | 26,2 | 23,9  | 12,7  | 60  | 27,0  | 35,0  | 3,1       |
| CA00COM-E22-**-P*-DN    | 1-3/8-18UNEF-2A | 19,0 | 4,0   | 20,8            | 26,2 | 29,6  | 12,7  | 60  | 31,8  | 41,0  | 3,1       |
| CA00COM-E24-**-P*-DN    | 1-1/2-18UNEF-2A | 20,6 | 4,0   | 24,6            | 34,5 | 37,8  | 12,7  | 63  | 34,9  | 44,5  | 3,7       |
| CA00COM-E28-**-P*-DN    | 1-3/4-18UNS-2A  | 20,6 | 4,0   | 27,0            | 34,5 | 37,8  | 12,7  | 63  | 39,7  | 50,8  | 3,7       |
| CA00COM-E32-**-P*-DN    | 2-18UNS-2A      | 22,2 | 4,0   | 33,3            | 43,6 | 47,8  | 15,2  | 67  | 44,5  | 57,0  | 4,4       |
| CA00COM-E36-**-P*-DN    | 2-1/4-16UN-2A   | 22,2 | 4,0   | 38,5            | 43,6 | 47,8  | 15,2  | 68  | 49,2  | 63,5  | 4,4       |

\* For socket inserts substitute "S" for "P"


\*\* Add contact arrangement number (see pages 6 – 8)

<sup>1)</sup> max cable dia

## Cable connecting plug, Class PG


**CA01COM-PG-B**  
 with bayonet coupling


CA01COM-PG-B is a cable connecting plug for usage of PG terminations. It mates with plugs CA06COM-B and CA08COM-B.

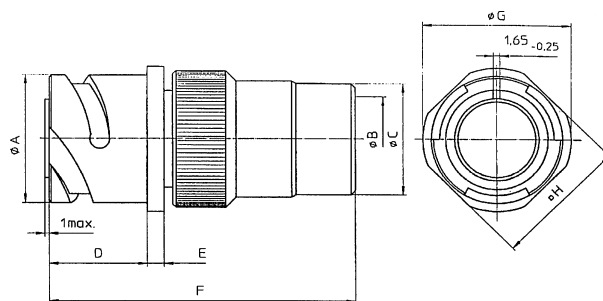

| Part No.<br>Pin Insert* | A     | B      | C   | D     | E     | F   | G    | H     |
|-------------------------|-------|--------|-----|-------|-------|-----|------|-------|
|                         | -0,15 | Thread | max | +0,4  | ± 0,2 | max | max  | ± 0,2 |
| CA01COM-PG10SL-**-P*-B  | 18,2  | PG9    | 18  | 18,2  | 2,8   | 56  | 25,2 | 20,6  |
| CA01COM-PG12S-**-P*-B   | 21,4  | PG9    | 19  | 18,2  | 3,2   | 56  | 27,8 | 23,8  |
| CA01COM-PG14S-**-P*-B   | 24,6  | PG11   | 22  | 18,2  | 3,2   | 56  | 29,8 | 25,4  |
| CA01COM-PG16S-**-P*-B   | 27,4  | PG13,5 | 24  | 18,2  | 3,2   | 58  | 32,3 | 28,6  |
| CA01COM-PG16-**-P*-B    | 27,4  | PG13,5 | 24  | 18,2  | 3,2   | 66  | 32,3 | 28,6  |
| CA01COM-PG18-**-P*-B    | 30,8  | PG13,5 | 25  | 23,05 | 4,0   | 73  | 34,8 | 31,7  |
| CA01COM-PG20-**-P*-B    | 34,2  | PG16   | 27  | 23,05 | 4,0   | 74  | 37,8 | 34,9  |
| CA01COM-PG22-**-P*-B    | 37,4  | PG16   | 27  | 23,05 | 4,0   | 77  | 41,1 | 38,1  |
| CA01COM-PG24-**-P*-B    | 40,9  | PG16   | 27  | 23,05 | 4,0   | 77  | 44,6 | 41,3  |
| CA01COM-PG28-**-P*-B    | 46,7  | PG21   | 32  | 24,05 | 4,0   | 78  | 50,9 | 47,6  |
| CA01COM-PG32-**-P*-B    | 53,4  | PG29   | 41  | 24,05 | 4,0   | 78  | 57,1 | 54,0  |
| CA01COM-PG36-**-P*-B    | 59,6  | PG29   | 41  | 24,05 | 4,0   | 89  | 63,6 | 60,6  |


**CA01COM-PG**  
 with threaded coupling

CA01COM-PG is a cable connecting plug for usage of PG terminations. It mates with plugs CA06COM and CA08COM.

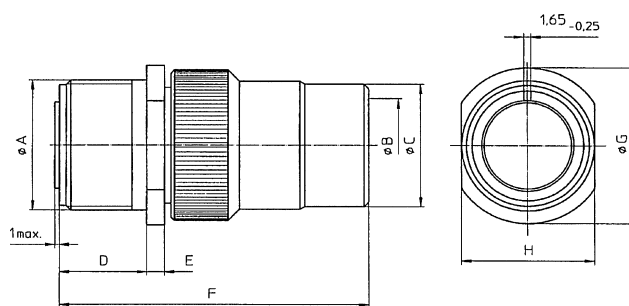

| Part No.<br>Pin Insert* | A               | B      | C   | D    | E     | F   | G    | H    |
|-------------------------|-----------------|--------|-----|------|-------|-----|------|------|
|                         | Thread          | Thread | max | +0,4 | ± 0,3 | max | max  | max  |
| CA01COM-PG10SL-**-P*    | 5/8-24UNEF-2A   | PG9    | 18  | 14,2 | 2,8   | 52  | 21,8 | 16,2 |
| CA01COM-PG12S-**-P*     | 3/4-20UNEF-2A   | PG9    | 19  | 14,2 | 3,2   | 52  | 25,0 | 19,4 |
| CA01COM-PG14S-**-P*     | 7/8-20UNEF-2A   | PG11   | 22  | 14,2 | 3,2   | 52  | 28,2 | 22,5 |
| CA01COM-PG16S-**-P*     | 1-20UNEF-2A     | PG13,5 | 24  | 14,2 | 3,2   | 54  | 31,4 | 25,7 |
| CA01COM-PG16-**-P*      | 1-20UNEF-2A     | PG13,5 | 24  | 19,0 | 3,2   | 64  | 31,4 | 25,7 |
| CA01COM-PG18-**-P*      | 1-1/8-18UNEF-2A | PG13,5 | 25  | 19,0 | 4,0   | 69  | 34,5 | 28,9 |
| CA01COM-PG20-**-P*      | 1-1/4-18UNEF-2A | PG16   | 27  | 19,0 | 4,0   | 70  | 37,7 | 32,1 |
| CA01COM-PG22-**-P*      | 1-3/8-18UNEF-2A | PG16   | 27  | 19,0 | 4,0   | 73  | 40,9 | 35,2 |
| CA01COM-PG24-**-P*      | 1-1/2-18UNEF-2A | PG16   | 27  | 20,6 | 4,0   | 74  | 43,8 | 38,4 |
| CA01COM-PG28-**-P*      | 1-3/4-18UNS-2A  | PG21   | 32  | 20,6 | 4,0   | 74  | 50,4 | 44,8 |
| CA01COM-PG32-**-P*      | 2-18UNS-2A      | PG29   | 41  | 22,2 | 4,0   | 76  | 56,8 | 51,1 |
| CA01COM-PG36-**-P*      | 2-1/4-16UN-2A   | PG29   | 41  | 22,2 | 4,0   | 87  | 63,1 | 57,5 |

\* For socket inserts substitute "S" for "P"

\*\* Add contact arrangement number (see pages 6 – 8)


# CA-COM

## Cable connecting plug, Class E



### CA01COM-E-B with bayonet coupling

CA01COM-E-B is a cable connecting plug with endbell and cable clamp. It mates with plugs CA06COM-B and CA08COM-B.

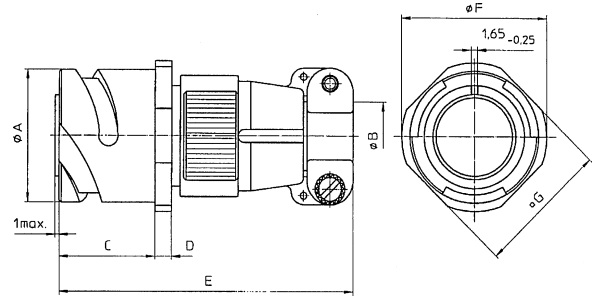


| Part No.              | A     | B <sup>1)</sup> | C     | D     | E   | F    | G     |
|-----------------------|-------|-----------------|-------|-------|-----|------|-------|
| Pin insert*           | -0,15 |                 | +0,4  | ± 0,2 | max | max  | ± 0,2 |
| CA01COM-E10SL-**-P*-B | 18,2  | 7,9             | 18,2  | 2,8   | 57  | 25,2 | 20,6  |
| CA01COM-E12S**-P*-B   | 21,4  | 7,9             | 18,2  | 3,2   | 57  | 27,8 | 23,8  |
| CA01COM-E14S**-P*-B   | 24,6  | 11,1            | 18,2  | 3,2   | 59  | 29,8 | 25,4  |
| CA01COM-E16S**-P*-B   | 27,4  | 14,2            | 18,2  | 3,2   | 60  | 32,3 | 28,6  |
| CA01COM-E16**-P*-B    | 27,4  | 14,2            | 21,5  | 3,2   | 68  | 32,3 | 28,6  |
| CA01COM-E18**-P*-B    | 30,8  | 15,8            | 23,05 | 4,0   | 72  | 34,8 | 31,7  |
| CA01COM-E20**-P*-B    | 34,2  | 19,0            | 23,05 | 4,0   | 72  | 37,8 | 34,9  |
| CA01COM-E22**-P*-B    | 37,4  | 19,0            | 23,05 | 4,0   | 72  | 41,1 | 38,1  |
| CA01COM-E24**-P*-B    | 40,9  | 23,7            | 23,05 | 4,0   | 78  | 44,6 | 41,3  |
| CA01COM-E28**-P*-B    | 46,7  | 23,7            | 24,05 | 4,0   | 79  | 50,9 | 47,6  |
| CA01COM-E32**-P*-B    | 53,4  | 31,8            | 24,05 | 4,0   | 78  | 57,1 | 54,0  |
| CA01COM-E36**-P*-B    | 59,6  | 34,6            | 24,05 | 4,0   | 78  | 63,6 | 60,6  |



### CA01COM-E with threaded coupling

CA01COM-E is a cable connecting plug with endbell and cable clamp. It mates with plugs CA06COM and CA08COM.

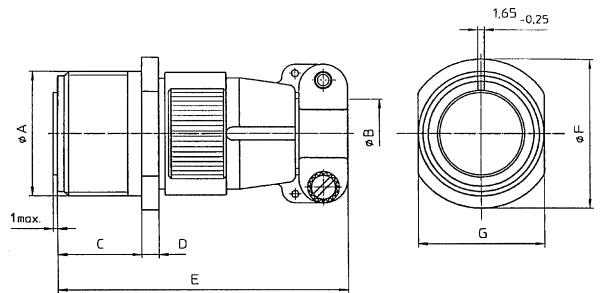

| Part No.            | A               | B <sup>1)</sup> | C    | D     | E   | F    | G    |
|---------------------|-----------------|-----------------|------|-------|-----|------|------|
| Pin Insert*         | Thread          |                 | +0,4 | ± 0,3 | max | max  | max  |
| CA01COM-E10SL-**-P* | 5/8-24UNEF-2A   | 7,9             | 14,2 | 2,8   | 53  | 21,8 | 16,2 |
| CA01COM-E12S**-P*   | 3/4-20UNEF-2A   | 7,9             | 14,2 | 3,2   | 53  | 25,0 | 19,4 |
| CA01COM-E14S**-P*   | 7/8-20UNEF-2A   | 11,1            | 14,2 | 3,2   | 55  | 28,2 | 22,5 |
| CA01COM-E16S**-P*   | 1-20UNEF-2A     | 14,2            | 14,2 | 3,2   | 56  | 31,4 | 25,7 |
| CA01COM-E16**-P*    | 1-20UNEF-2A     | 14,2            | 19,0 | 3,2   | 66  | 31,4 | 25,7 |
| CA01COM-E18**-P*    | 1-1/8-18UNEF-2A | 15,8            | 19,0 | 4,0   | 68  | 34,5 | 28,9 |
| CA01COM-E20**-P*    | 1-1/4-18UNEF-2A | 19,0            | 19,0 | 4,0   | 68  | 37,3 | 32,1 |
| CA01COM-E22**-P*    | 1-3/8-18UNEF-2A | 19,0            | 19,0 | 4,0   | 68  | 40,9 | 35,2 |
| CA01COM-E24**-P*    | 1-1/2-18UNEF-2A | 23,7            | 20,6 | 4,0   | 76  | 43,8 | 38,4 |
| CA01COM-E28**-P*    | 1-3/4-18UNS-2A  | 23,7            | 20,6 | 4,0   | 76  | 50,4 | 44,8 |
| CA01COM-E32**-P*    | 2-18UNS-2A      | 31,8            | 22,2 | 4,0   | 76  | 56,8 | 51,1 |
| CA01COM-E36**-P*    | 2-1/4-16UN-2A   | 34,6            | 22,2 | 4,0   | 76  | 63,1 | 57,5 |

\* For socket inserts substitute "S" for "P"

\*\* Add contact arrangement number (see pages 6 – 8)


<sup>1)</sup> max cable dia

## Cable connecting plug, Class E



### CA01COM-E-B/-03/-06 with bayonet coupling

CA01COM-E-B/-03/-06 is a cable connecting plug with endbell (wire sealing) for heat shrink boots. It mates with plugs CA06COM-B and CA08COM-B.

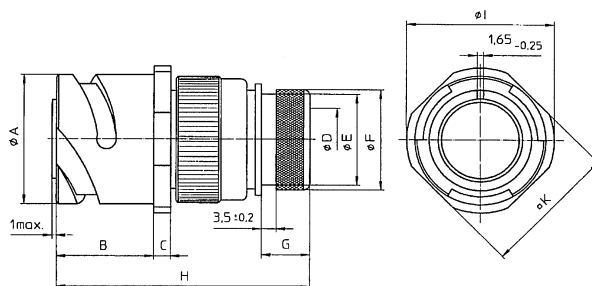


| Part No.<br>Pin insert* | A     | B     | C     | D <sup>1)</sup> | E    | F     | G     | H   | I    | K     |
|-------------------------|-------|-------|-------|-----------------|------|-------|-------|-----|------|-------|
|                         | -0,15 | +0,4  | ± 0,3 |                 | max  | ± 0,2 | ± 0,5 | max | max  | ± 0,2 |
| CA01COM-E10SL-**-P*-B-  | 18,2  | 18,2  | 2,8   | 7,7             | 13,3 | 15,5  | 11,7  | 53  | 25,2 | 20,6  |
| CA01COM-E12S-**-P*-B-   | 21,4  | 18,2  | 3,2   | 7,9             | 13,3 | 15,5  | 11,7  | 53  | 27,8 | 23,8  |
| CA01COM-E14S-**-P*-B-   | 24,6  | 18,2  | 3,2   | 10,6            | 17,0 | 19,1  | 11,7  | 53  | 29,8 | 25,4  |
| CA01COM-E16S-**-P*-B-   | 27,4  | 18,2  | 3,2   | 13,5            | 21,9 | 23,9  | 11,7  | 53  | 32,3 | 28,6  |
| CA01COM-E16-**-P*-B-    | 27,4  | 21,5  | 3,2   | 13,5            | 21,9 | 23,9  | 11,5  | 61  | 32,3 | 28,6  |
| CA01COM-E18-**-P*-B-    | 30,8  | 23,05 | 4,0   | 14,6            | 21,9 | 23,9  | 11,5  | 62  | 34,8 | 31,7  |
| CA01COM-E20-**-P*-B-    | 34,2  | 23,05 | 4,0   | 18,7            | 26,2 | 29,6  | 12,7  | 64  | 37,8 | 34,9  |
| CA01COM-E22-**-P*-B-    | 37,4  | 23,05 | 4,0   | 20,8            | 26,2 | 29,6  | 12,7  | 64  | 41,1 | 38,1  |
| CA01COM-E24-**-P*-B-    | 40,9  | 23,05 | 4,0   | 24,6            | 34,5 | 37,8  | 12,7  | 64  | 44,6 | 41,3  |
| CA01COM-E28-**-P*-B-    | 46,7  | 24,05 | 4,0   | 27,0            | 34,5 | 37,8  | 12,7  | 66  | 50,9 | 47,6  |
| CA01COM-E32-**-P*-B-    | 53,4  | 24,05 | 4,0   | 33,3            | 43,6 | 47,8  | 15,2  | 69  | 57,1 | 54,0  |
| CA01COM-E36-**-P*-B-    | 59,6  | 24,05 | 4,0   | 38,5            | 43,6 | 47,8  | 15,2  | 70  | 63,6 | 60,6  |



### CA01COM-E-DN with threaded coupling

CA01COM-E-DN is a cable connecting plug with endbell (wire sealing) for heat shrink boots. It mates with plugs CA06COM and CA08COM.

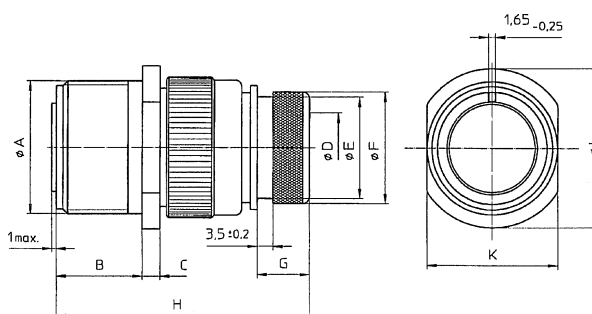

| Part No.<br>Pin insert* | A               | B     | C     | D <sup>1)</sup> | E     | F     | G    | H   | I    | K     |
|-------------------------|-----------------|-------|-------|-----------------|-------|-------|------|-----|------|-------|
|                         | Thread          | ± 0,3 | ± 0,3 | max             | ± 0,2 | ± 0,5 | max  | max | max  | ± 0,2 |
| CA01COM-E10SL-**-P*-DN  | 5/8-24UNEF-2A   | 14,2  | 2,8   | 7,7             | 13,3  | 15,5  | 11,7 | 49  | 21,8 | 16,2  |
| CA01COM-E12S-**-P*-DN   | 3/4-20UNEF-2A   | 14,2  | 3,2   | 7,9             | 13,3  | 15,5  | 11,7 | 49  | 25,0 | 19,4  |
| CA01COM-E14S-**-P*-DN   | 7/8-20UNEF-2A   | 14,2  | 3,2   | 10,6            | 17,0  | 19,1  | 11,7 | 49  | 28,2 | 22,5  |
| CA01COM-E16S-**-P*-DN   | 1-20UNEF-2A     | 14,1  | 3,2   | 13,5            | 21,9  | 23,9  | 11,7 | 49  | 31,4 | 25,7  |
| CA01COM-E16-**-P*-DN    | 1-20UNEF-2A     | 19,0  | 3,2   | 13,5            | 21,9  | 23,9  | 11,5 | 58  | 31,4 | 25,7  |
| CA01COM-E18-**-P*-DN    | 1-1/8-18UNEF-2A | 19,0  | 4,0   | 14,6            | 21,9  | 23,9  | 11,5 | 58  | 34,5 | 28,9  |
| CA01COM-E20-**-P*-DN    | 1-1/4-18UNEF-2A | 19,0  | 4,0   | 18,7            | 26,2  | 29,6  | 12,7 | 60  | 37,7 | 32,1  |
| CA01COM-E22-**-P*-DN    | 1-3/8-18UNEF-2A | 19,0  | 4,0   | 20,8            | 26,2  | 29,6  | 12,7 | 60  | 40,9 | 35,2  |
| CA01COM-E24-**-P*-DN    | 1-1/2-18UNEF-2A | 20,6  | 4,0   | 24,6            | 34,5  | 37,8  | 12,7 | 63  | 43,8 | 38,4  |
| CA01COM-E28-**-P*-DN    | 1-3/4-18UNS-2A  | 20,6  | 4,0   | 27,0            | 34,5  | 37,8  | 12,7 | 63  | 50,4 | 44,8  |
| CA01COM-E32-**-P*-DN    | 2-18UNS-2A      | 22,2  | 4,0   | 33,3            | 43,6  | 47,8  | 15,2 | 67  | 56,8 | 51,1  |
| CA01COM-E36-**-P*-DN    | 2-1/4-16UN-2A   | 22,2  | 4,0   | 38,5            | 43,6  | 47,8  | 15,2 | 68  | 63,1 | 57,5  |

\* For socket inserts substitute "S" for "P"

\*\* Add contact arrangement number (see pages 6 – 8)

<sup>1)</sup> max cable dia


# CA-COM

## Cable connecting plug, Class F




### CA01COM-F-B with bayonet coupling

CA01COM-F-B is a cable connecting plug for flex tube. It mates with plugs CA06COM-B and CA08COM-B.

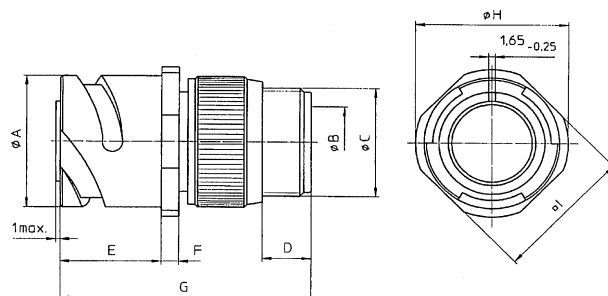


| Part No.<br>Pin Insert* | A     | B <sup>1)</sup> | C                | D    | E     | F     | G   | H    | I     |
|-------------------------|-------|-----------------|------------------|------|-------|-------|-----|------|-------|
|                         | -0,15 |                 | Thread           | min  | +0,4  | ± 0,2 | max | max  | ± 0,2 |
| CA01COM-F10SL-**-P*-B   | 18,2  | 8,2             | 5/8-24UNEF-2A    | 9,5  | 18,2  | 2,8   | 50  | 25,2 | 20,6  |
| CA01COM-F12S-**-P*-B    | 18,2  | 8,2             | 5/8-24UNEF-2A    | 9,5  | 18,2  | 3,2   | 50  | 27,8 | 23,8  |
| CA01COM-F14S-**-P*-B    | 24,6  | 11,1            | 3/4-20UNEF-2A    | 9,5  | 18,2  | 3,2   | 50  | 29,8 | 25,4  |
| CA01COM-F16S-**-P*-B    | 27,4  | 14,3            | 7/8-20UNEF-2A    | 9,5  | 18,2  | 3,2   | 50  | 32,3 | 28,6  |
| CA01COM-F16-**-P*-B     | 27,4  | 14,3            | 7/8-20UNEF-2A    | 9,5  | 21,5  | 3,2   | 57  | 32,3 | 28,6  |
| CA01COM-F18-**-P*-B     | 30,8  | 16,7            | 1-20UNEF-2A      | 9,5  | 23,05 | 4,0   | 59  | 34,8 | 31,7  |
| CA01COM-F20-**-P*-B     | 34,2  | 19,8            | 1-3/16-18UNEF-2A | 9,5  | 32,05 | 4,0   | 59  | 37,8 | 34,9  |
| CA01COM-F22-**-P*-B     | 37,4  | 19,8            | 1-3/16-18UNEF-2A | 9,5  | 32,05 | 4,0   | 62  | 41,1 | 38,1  |
| CA01COM-F24-**-P*-B     | 40,9  | 25,4            | 1-7/16-18UNEF    | 9,5  | 23,05 | 4,0   | 62  | 44,6 | 41,3  |
| CA01COM-F28-**-P*-B     | 46,7  | 27,0            | 1-7/16-18UNEF    | 9,5  | 24,05 | 4,0   | 64  | 50,9 | 47,6  |
| CA01COM-F32-**-P*-B     | 53,4  | 32,5            | 1-3/4-18UNS-2A   | 11,0 | 24,05 | 4,0   | 64  | 57,1 | 54,0  |
| CA01COM-F36-**-P*-B     | 59,6  | 35,7            | 2-18UNS-2A       | 11,8 | 24,05 | 4,0   | 66  | 63,6 | 60,6  |



### CA01COM-F with threaded coupling

CA01COM-F is a cable connecting plug for flex tube. It mates with plugs CA06COM and CA08COM.

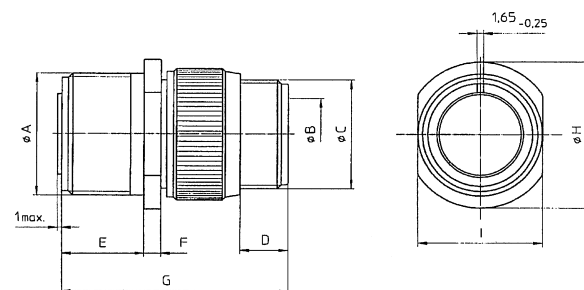

| Part No.<br>Pin Insert* | A               | B <sup>1)</sup> | C                | D    | E    | F     | G   | H    | I    |
|-------------------------|-----------------|-----------------|------------------|------|------|-------|-----|------|------|
|                         | Thread          |                 | Thread           | min  | +0,4 | ± 0,3 | max | max  | max  |
| CA01COM-F10SL-**-P*     | 5/8-24UNEF-2A   | 8,2             | 5/8-24UNEF-2A    | 9,5  | 14,2 | 2,8   | 45  | 21,8 | 16,2 |
| CA01COM-F12S-**-P*      | 3/4-20UNEF-2A   | 8,2             | 5/8-24UNEF-2A    | 9,5  | 14,2 | 3,2   | 45  | 25,0 | 19,4 |
| CA01COM-F14S-**-P*      | 7/8-20UNEF-2A   | 11,1            | 3/4-20UNEF-2A    | 9,5  | 14,2 | 3,2   | 45  | 28,2 | 22,5 |
| CA01COM-F16S-**-P*      | 1-20UNEF-2A     | 14,3            | 7/8-20UNEF-2A    | 9,5  | 14,2 | 3,2   | 45  | 31,4 | 25,7 |
| CA01COM-F16-**-P*       | 1-20UNEF-2A     | 14,3            | 7/8-20UNEF-2A    | 9,5  | 14,2 | 3,2   | 54  | 31,4 | 25,7 |
| CA01COM-F18-**-P*       | 1-1/8-18UNEF-2A | 16,7            | 1-20UNEF-2A      | 9,5  | 19,0 | 4,0   | 54  | 34,5 | 28,9 |
| CA01COM-F20-**-P*       | 1-1/4-18UNEF-2A | 19,8            | 1-3/16-18UNEF-2A | 9,5  | 19,0 | 4,0   | 55  | 37,7 | 32,1 |
| CA01COM-F22-**-P*       | 1-3/8-18UNEF-2A | 19,8            | 1-3/16-18UNEF-2A | 9,5  | 20,6 | 4,0   | 58  | 40,9 | 35,2 |
| CA01COM-F24-**-P*       | 1-1/2-18UNEF-2A | 25,4            | 1-7/16-18UNEF-2A | 9,5  | 20,6 | 4,0   | 59  | 43,8 | 38,4 |
| CA01COM-F28-**-P*       | 1-3/4-18UNS-2A  | 27,0            | 1-7/16-18UNEF-2A | 9,5  | 20,6 | 4,0   | 60  | 50,4 | 44,8 |
| CA01COM-F32-**-P*       | 2-18UNS-2A      | 32,5            | 1-3/4-18UNS-2A   | 11,0 | 22,2 | 4,0   | 62  | 56,8 | 51,1 |
| CA01COM-F36-**-P*       | 2-1/4-16UN-2A   | 35,7            | 2-18UNS-2A       | 11,8 | 22,2 | 4,0   | 64  | 63,1 | 57,5 |

\* For socket inserts substitute "S" for "P"


\*\* Add contact arrangement number (see pages 6 – 8)

<sup>1)</sup> max cable dia

## Box mounting receptacle, Class E


**CA02COM-E-B**  
 with bayonet coupling


CA02COM-E-B is a box mounting receptacle for front panel mounting. It mates with plugs CA06COM-B and CA08COM-B.

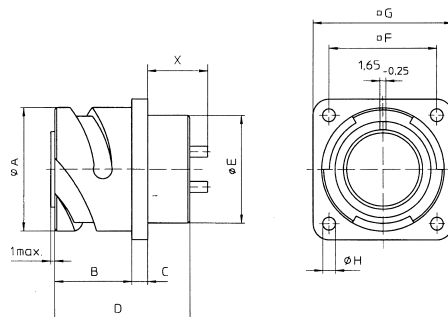

| Part No.             | A     | B    | C     | D     | E    | F     | G     | H               | X / Contact size |      |      |
|----------------------|-------|------|-------|-------|------|-------|-------|-----------------|------------------|------|------|
| Pin Insert*          | -0,15 | +0,4 | ± 0,2 | ± 0,3 | max  | ± 0,1 | ± 0,3 | H <sub>13</sub> | 15               | 25   | 100  |
| CA02COM-E10SL**-P*-B | 18,2  | 14,2 | 2,8   | 24,7  | 16,2 | 18,2  | 25,4  | 3,2             | 13,6             | -    | -    |
| CA02COM-E12S**-P*-B  | 21,4  | 14,2 | 3,2   | 24,7  | 16,2 | 20,6  | 28,0  | 3,2             | 13,2             | -    | -    |
| CA02COM-E14S**-P*-B  | 24,6  | 14,2 | 3,2   | 24,7  | 19,2 | 23,0  | 30,0  | 3,2             | 13,2             | -    | -    |
| CA02COM-E16S**-P*-B  | 27,4  | 14,2 | 3,2   | 24,7  | 22,4 | 24,6  | 32,5  | 3,2             | 13,2             | -    | -    |
| CA02COM-E16**-P*-B   | 27,4  | 19,0 | 3,2   | 33,8  | 22,4 | 24,6  | 32,5  | 3,2             | 17,9             | 17,9 | 19,5 |
| CA02COM-E18**-P*-B   | 30,8  | 19,0 | 4,0   | 33,8  | 25,6 | 27,0  | 35,0  | 3,2             | 17,1             | 17,1 | 18,7 |
| CA02COM-E20**-P*-B   | 34,2  | 19,0 | 4,0   | 33,8  | 29,0 | 29,4  | 38,0  | 3,2             | 17,1             | 17,1 | 18,7 |
| CA02COM-E22**-P*-B   | 37,4  | 19,0 | 4,0   | 33,8  | 32,2 | 31,8  | 41,0  | 3,2             | 17,1             | 17,1 | 18,7 |
| CA02COM-E24**-P*-B   | 40,9  | 20,6 | 4,0   | 33,8  | 35,3 | 34,9  | 44,5  | 3,7             | 15,5             | 15,5 | 17,1 |
| CA02COM-E28**-P*-B   | 46,7  | 20,6 | 4,0   | 33,8  | 41,4 | 39,7  | 50,8  | 3,7             | 15,5             | 15,5 | 17,1 |
| CA02COM-E32**-P*-B   | 53,4  | 22,2 | 4,0   | 33,8  | 47,8 | 44,5  | 57,0  | 4,3             | 13,9             | 15,5 | 15,5 |
| CA02COM-E36**-P*-B   | 59,6  | 22,2 | 4,0   | 33,8  | 52,6 | 49,2  | 63,5  | 4,3             | 13,9             | 15,5 | 15,5 |


**CA02COM-E**  
 with threaded coupling

CA02COM-E is a box mounting receptacle for front panel mounting. It mates with plugs CA06COM and CA08COM.

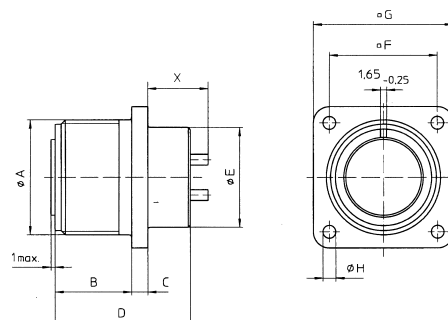

| Part No.           | A               | B    | C     | D    | E    | F     | G     | H    | X / Contact size |      |      |
|--------------------|-----------------|------|-------|------|------|-------|-------|------|------------------|------|------|
| Pin Insert*        | Thread          | +0,4 | ± 0,3 | max  | max  | ± 0,1 | ± 0,3 | +0,2 | 15               | 25   | 100  |
| CA02COM-E10SL**-P* | 5/8-24UNEF-2A   | 14,2 | 2,8   | 25,1 | 15,9 | 18,2  | 25,4  | 3,1  | 13,6             | -    | -    |
| CA02COM-E12S**-P*  | 3/4-20UNEF-2A   | 14,2 | 3,2   | 25,1 | 15,9 | 20,6  | 28,0  | 3,1  | 13,2             | -    | -    |
| CA02COM-E14S**-P*  | 7/8-20UNEF-2A   | 14,2 | 3,2   | 25,1 | 19,0 | 23,0  | 30,0  | 3,1  | 13,2             | -    | -    |
| CA02COM-E16S**-P*  | 1-20UNEF-2A     | 14,2 | 3,2   | 25,1 | 22,2 | 24,6  | 32,5  | 3,1  | 13,2             | -    | -    |
| CA02COM-E16**-P*   | 1-20UNEF-2A     | 19,0 | 3,2   | 34,2 | 22,2 | 24,6  | 32,5  | 3,1  | 17,9             | 17,9 | 19,5 |
| CA02COM-E18**-P*   | 1-1/8-18UNEF-2A | 19,0 | 4,0   | 34,2 | 25,4 | 27,0  | 35,0  | 3,1  | 17,1             | 17,1 | 18,7 |
| CA02COM-E20**-P*   | 1-1/4-18UNEF-2A | 19,0 | 4,0   | 34,2 | 29,0 | 29,4  | 38,0  | 3,1  | 17,1             | 17,1 | 18,7 |
| CA02COM-E22**-P*   | 1-3/8-18UNEF-2A | 19,0 | 4,0   | 34,2 | 32,2 | 31,8  | 41,0  | 3,1  | 17,1             | 17,1 | 18,7 |
| CA02COM-E24**-P*   | 1-1/2-18UNEF-2A | 20,6 | 4,0   | 34,2 | 35,3 | 34,9  | 44,5  | 3,7  | 15,5             | 15,5 | 17,1 |
| CA02COM-E28**-P*   | 1-3/4-18UNEF-2A | 20,6 | 4,0   | 34,2 | 41,2 | 39,7  | 50,8  | 3,7  | 15,5             | 15,5 | 17,1 |
| CA02COM-E32**-P*   | 2-18UNS-2A      | 22,2 | 4,0   | 34,2 | 47,6 | 44,5  | 57,0  | 4,4  | 13,9             | 13,9 | 15,5 |
| CA02COM-E36**-P*   | 2-1/4-16UN-2A   | 22,2 | 4,0   | 34,2 | 52,4 | 49,2  | 63,5  | 4,4  | 13,9             | 13,9 | 15,5 |

\* For socket inserts substitute "S" for "P"


\*\* Add contact arrangement number (see pages 6 – 8)

## Box mounting receptacle, Class E




### CA20COM-E-B with bayonet coupling

CA20COM-E-B is a box mounting receptacle for rear panel mounting. It mates with plugs CA06COM-B and CA08COM-B.

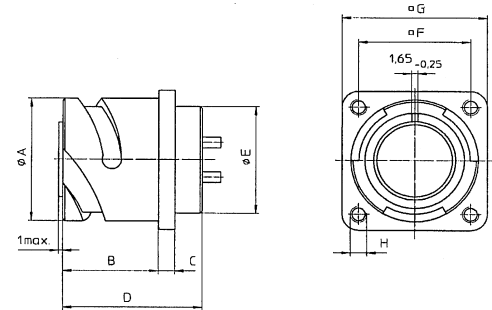


| Part No.<br>Pin Insert* | A     | B     | C     | D     | E    | F     | G     | H  |
|-------------------------|-------|-------|-------|-------|------|-------|-------|----|
| CA20COM-E10SL-**-P*-B   | -0,15 | +0,4  | ± 0,2 | ± 0,3 | max  | ± 0,1 | ± 0,3 | M4 |
| CA20COM-E12S-**-P*-B    | 18,2  | 18,2  | 2,8   | 24,7  | 16,2 | 18,2  | 25,4  | M4 |
| CA20COM-E14S-**-P*-B    | 21,4  | 18,2  | 3,2   | 24,7  | 16,2 | 20,6  | 28,0  | M4 |
| CA20COM-E16S-**-P*-B    | 24,6  | 18,2  | 3,2   | 24,7  | 19,2 | 23,0  | 30,0  | M4 |
| CA20COM-E16S-**-P*-B    | 27,4  | 18,2  | 3,2   | 24,7  | 22,4 | 24,6  | 32,5  | M4 |
| CA20COM-E16-**-P*-B     | 27,4  | 21,5  | 3,2   | 33,8  | 22,4 | 24,6  | 32,5  | M4 |
| CA20COM-E18-**-P*-B     | 30,8  | 23,05 | 4,0   | 33,8  | 25,6 | 27,0  | 35,0  | M4 |
| CA20COM-E20-**-P*-B     | 34,2  | 23,05 | 4,0   | 33,8  | 29,0 | 29,4  | 38,0  | M4 |
| CA20COM-E22-**-P*-B     | 37,4  | 23,05 | 4,0   | 33,8  | 32,2 | 31,8  | 41,0  | M4 |
| CA20COM-E24-**-P*-B     | 40,9  | 23,05 | 4,0   | 33,8  | 35,3 | 34,9  | 44,5  | M4 |
| CA20COM-E28-**-P*-B     | 46,7  | 24,05 | 4,0   | 33,8  | 41,4 | 39,7  | 50,8  | M5 |
| CA20COM-E32-**-P*-B     | 53,4  | 24,05 | 4,0   | 33,8  | 47,8 | 44,5  | 57,0  | M5 |
| CA20COM-E36-**-P*-B     | 59,6  | 24,05 | 4,0   | 33,8  | 54,1 | 49,2  | 63,5  | M5 |



### CA20COM-E with threaded coupling

CA20COM-E is a box mounting receptacle for rear panel mounting. It mates with plugs CA06COM and CA08COM.

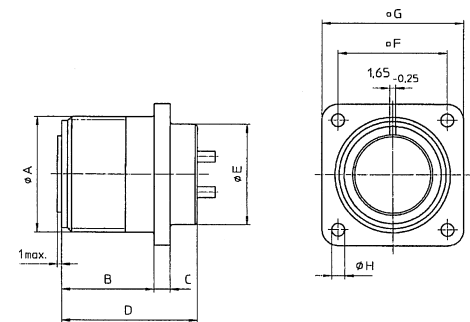

| Part No.<br>Pin insert* | A<br>Thread     | B<br>+0,4 | C<br>± 0,3 | D<br>max | E<br>max | F<br>± 0,1 | G<br>± 0,3 | H<br>H <sub>13</sub><br>Std | BM29 |
|-------------------------|-----------------|-----------|------------|----------|----------|------------|------------|-----------------------------|------|
| CA20COM-E10SL-**-P*     | 5/8-24UNEF-2A   | 18,2      | 2,8        | 25,1     | 14,5     | 18,2       | 25,4       | 3,2                         | M4   |
| CA20COM-E12S-**-P*      | 3/4-20UNEF-2A   | 18,2      | 3,2        | 25,1     | 16,1     | 20,6       | 28,0       | 3,2                         | M4   |
| CA20COM-E14S-**-P*      | 7/8-20UNEF-2A   | 18,2      | 3,2        | 25,1     | 19,2     | 23,0       | 30,0       | 3,2                         | M4   |
| CA20COM-E16S-**-P*      | 1-20UNEF-2A     | 18,2      | 3,2        | 25,1     | 22,4     | 24,6       | 32,5       | 3,2                         | M4   |
| CA20COM-E16-**-P*       | 1-20UNEF-2A     | 21,5      | 3,2        | 34,2     | 22,4     | 24,6       | 32,5       | 3,2                         | M4   |
| CA20COM-E18-**-P*       | 1-1/8-18UNEF-2A | 23,05     | 4,0        | 34,2     | 25,6     | 27,0       | 35,0       | 3,2                         | M4   |
| CA20COM-E20-**-P*       | 1-1/4-18UNEF-2A | 23,05     | 4,0        | 34,2     | 29,0     | 29,4       | 38,0       | 3,2                         | M4   |
| CA20COM-E22-**-P*       | 1-3/8-18UNEF-2A | 23,05     | 4,0        | 34,2     | 32,2     | 31,8       | 41,0       | 3,2                         | M4   |
| CA20COM-E24-**-P*       | 1-1/2-18UNEF-2A | 24,05     | 4,0        | 34,2     | 35,3     | 34,9       | 44,5       | 3,7                         | M5   |
| CA20COM-E28-**-P*       | 1-3/4-18UNEF-2A | 24,05     | 4,0        | 34,2     | 41,4     | 39,7       | 50,8       | 3,7                         | M5   |
| CA20COM-E32-**-P*       | 2-18UNS-2A      | 24,05     | 4,0        | 34,2     | 47,8     | 44,5       | 57,0       | 4,4                         | M6   |
| CA20COM-E36-**-P*       | 2-1/4-16UN-2A   | 24,05     | 4,0        | 34,2     | 54,1     | 49,2       | 63,5       | 4,4                         | M6   |

\* For socket inserts substitute "S" for "P"


\*\* Add contact arrangement number (see pages 6 – 8)

## Box mounting receptacle, Class L, with pcb termination



### CA02COM-L-B with bayonet coupling

CA02COM-L-B is a box mounting receptacle for front panel mounting. It mates with plugs CA06COM-B and CA08COM-B.

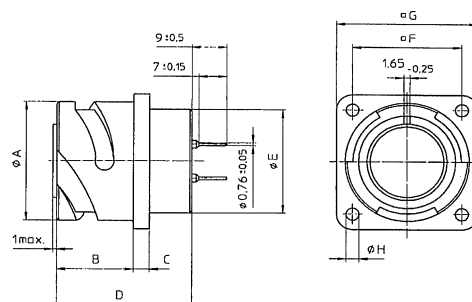


| Part No.<br>Pin Insert* | A    | B    | C   | D    | E    | F    | G    | H   |
|-------------------------|------|------|-----|------|------|------|------|-----|
| CA02COM-L10SL**-P*-B    | 18,2 | 14,2 | 2,8 | 24,7 | 16,2 | 18,2 | 25,4 | 3,2 |
| CA02COM-L12S**-P*-B     | 21,4 | 14,2 | 3,2 | 24,7 | 16,2 | 20,6 | 28,0 | 3,2 |
| CA02COM-L14S**-P*-B     | 24,6 | 14,2 | 3,2 | 24,7 | 19,2 | 23,0 | 30,0 | 3,2 |
| CA02COM-L16S**-P*-B     | 27,4 | 14,2 | 3,2 | 24,7 | 22,4 | 24,6 | 32,5 | 3,2 |
| CA02COM-L16**-P*-B      | 27,4 | 19,0 | 3,2 | 33,8 | 22,4 | 24,6 | 32,5 | 3,2 |
| CA02COM-L18**-P*-B      | 30,8 | 19,0 | 4,0 | 33,8 | 25,6 | 27,0 | 35,0 | 3,2 |
| CA02COM-L20**-P*-B      | 34,2 | 19,0 | 4,0 | 33,8 | 29,0 | 29,4 | 38,0 | 3,2 |
| CA02COM-L22**-P*-B      | 37,4 | 19,0 | 4,0 | 33,8 | 32,2 | 31,8 | 41,0 | 3,2 |
| CA02COM-L24**-P*-B      | 40,9 | 20,6 | 4,0 | 33,8 | 35,3 | 34,9 | 44,5 | 3,7 |
| CA02COM-L28**-P*-B      | 46,7 | 20,6 | 4,0 | 33,8 | 41,4 | 39,7 | 50,8 | 3,7 |
| CA02COM-L32**-P*-B      | 53,4 | 22,2 | 4,0 | 33,8 | 47,8 | 44,5 | 57,0 | 4,3 |
| CA02COM-L36**-P*-B      | 59,6 | 22,2 | 4,0 | 33,8 | 52,6 | 49,2 | 63,5 | 4,3 |



### CA02COM-L with threaded coupling

CA02COM-L is a box mounting receptacle for front panel mounting. It mates with plugs CA06COM and CA08COM.

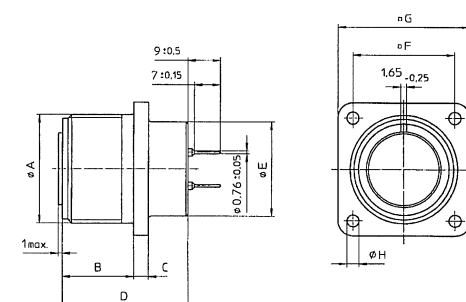

| Part No.<br>Pin Insert* | A               | B    | C   | D    | E    | F    | G    | H   |
|-------------------------|-----------------|------|-----|------|------|------|------|-----|
| CA02COM-L10SL**-P*      | 5/8-24UNEF-2A   | 14,2 | 2,8 | 25,1 | 15,9 | 18,2 | 25,4 | 3,1 |
| CA02COM-L12S**-P*       | 3/4-20UNEF-2A   | 14,2 | 3,2 | 25,1 | 15,9 | 20,6 | 28,0 | 3,1 |
| CA02COM-L14S**-P*       | 7/8-20UNEF-2A   | 14,2 | 3,2 | 25,1 | 19,0 | 23,0 | 30,0 | 3,1 |
| CA02COM-L16S**-P*       | 1-20UNEF-2A     | 14,2 | 3,2 | 25,1 | 22,2 | 24,6 | 32,5 | 3,1 |
| CA02COM-L16**-P*        | 1-20UNEF-2A     | 19,0 | 3,2 | 34,2 | 22,2 | 24,6 | 32,5 | 3,1 |
| CA02COM-L18**-P*        | 1-1/8-18UNEF-2A | 19,0 | 4,0 | 34,2 | 25,4 | 27,0 | 35,0 | 3,1 |
| CA02COM-L20**-P*        | 1-1/4-18UNEF-2A | 19,0 | 4,0 | 34,2 | 29,0 | 29,4 | 38,0 | 3,1 |
| CA02COM-L22**-P*        | 1-3/8-18UNEF-2A | 19,0 | 4,0 | 34,2 | 32,2 | 31,8 | 41,0 | 3,1 |
| CA02COM-L24**-P*        | 1-1/2-18UNEF-2A | 20,6 | 4,0 | 34,2 | 35,3 | 34,9 | 44,5 | 3,7 |
| CA02COM-L28**-P*        | 1-3/4-18UNEF-2A | 20,6 | 4,0 | 34,2 | 41,2 | 39,7 | 50,8 | 3,7 |
| CA02COM-L32**-P*        | 2-18UNS-2A      | 22,2 | 4,0 | 34,2 | 47,6 | 44,5 | 57,0 | 4,4 |
| CA02COM-L36**-P*        | 2-1/4-16UN-2A   | 22,2 | 4,0 | 34,2 | 52,4 | 49,2 | 63,5 | 4,4 |

\* For socket inserts substitute "S" for "P"

\*\* Add contact arrangement number (see pages 6 – 8)


## CA-COM

### Box mounting receptacle, Class L, with pcb termination




#### CA20COM-L-B with bayonet coupling

CA20COM-L-B is a box mounting receptacle for rear panel mounting. It mates with plugs CA06COM-B and CA08COM-B.

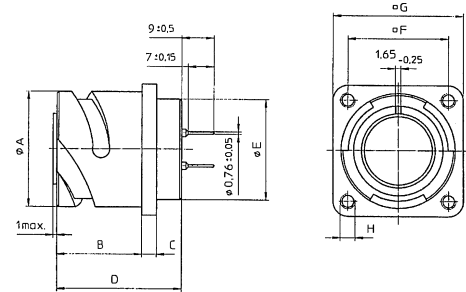


| Part No.<br>Pin Insert* | A     | B     | C     | D     | E    | F     | G     | H  |
|-------------------------|-------|-------|-------|-------|------|-------|-------|----|
| CA20COM-L10SL-**-P*-B   | -0,15 | +0,4  | ± 0,2 | ± 0,3 | max  | ± 0,1 | ± 0,3 |    |
| CA20COM-L12S-**-P*-B    | 18,2  | 18,2  | 2,8   | 24,7  | 16,2 | 18,2  | 25,4  | M4 |
| CA20COM-L14S-**-P*-B    | 21,4  | 18,2  | 3,2   | 24,7  | 16,2 | 20,6  | 28,0  | M4 |
| CA20COM-L16S-**-P*-B    | 24,6  | 18,2  | 3,2   | 24,7  | 19,2 | 23,0  | 30,0  | M4 |
| CA20COM-L16S-**-P*-B    | 27,4  | 18,2  | 3,2   | 24,7  | 22,4 | 24,6  | 32,5  | M4 |
| CA20COM-L16-**-P*-B     | 27,4  | 21,5  | 3,2   | 33,8  | 22,4 | 24,6  | 32,5  | M4 |
| CA20COM-L18-**-P*-B     | 30,8  | 23,05 | 4,0   | 33,8  | 25,6 | 27,0  | 35,0  | M4 |
| CA20COM-L20-**-P*-B     | 34,2  | 23,05 | 4,0   | 33,8  | 29,0 | 29,4  | 38,0  | M4 |
| CA20COM-L22-**-P*-B     | 37,4  | 23,05 | 4,0   | 33,8  | 32,2 | 31,8  | 41,0  | M4 |
| CA20COM-L24-**-P*-B     | 40,9  | 23,05 | 4,0   | 33,8  | 35,3 | 34,9  | 44,5  | M4 |
| CA20COM-L28-**-P*-B     | 46,7  | 24,05 | 4,0   | 33,8  | 41,4 | 39,7  | 50,8  | M5 |
| CA20COM-L32-**-P*-B     | 53,4  | 24,05 | 4,0   | 33,8  | 47,8 | 44,5  | 57,0  | M5 |
| CA20COM-L36-**-P*-B     | 59,6  | 24,05 | 4,0   | 33,8  | 54,1 | 49,2  | 63,5  | M5 |



#### CA20COM-L with threaded coupling

CA20COM-L is a box mounting receptacle for rear panel mounting. It mates with plugs CA06COM and CA08COM.

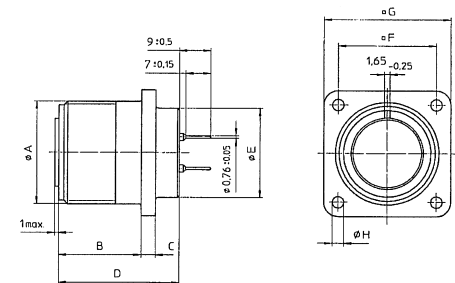

| Part No.<br>Pin insert* | A<br>Thread     | B<br>+0,4 | C<br>± 0,3 | D<br>max | E<br>max | F<br>± 0,1 | G<br>± 0,3 | H<br>H <sub>13</sub><br>Std | BM29 |
|-------------------------|-----------------|-----------|------------|----------|----------|------------|------------|-----------------------------|------|
| CA20COM-L10SL-**-P*     | 5/8-24UNEF-2A   | 18,2      | 2,8        | 25,1     | 14,5     | 18,2       | 25,4       | 3,2                         | M4   |
| CA20COM-L12S-**-P*      | 3/4-20UNEF-2A   | 18,2      | 3,2        | 25,1     | 16,1     | 20,6       | 28,0       | 3,2                         | M4   |
| CA20COM-L14S-**-P*      | 7/8-20UNEF-2A   | 18,2      | 3,2        | 25,1     | 19,2     | 23,0       | 30,0       | 3,2                         | M4   |
| CA20COM-L16S-**-P*      | 1-20UNEF-2A     | 18,2      | 3,2        | 25,1     | 22,4     | 24,6       | 32,5       | 3,2                         | M4   |
| CA20COM-L16-**-P*       | 1-20UNEF-2A     | 21,5      | 3,2        | 34,2     | 22,4     | 24,6       | 32,5       | 3,2                         | M4   |
| CA20COM-L18-**-P*       | 1-1/8-18UNEF-2A | 23,05     | 4,0        | 34,2     | 25,6     | 27,0       | 35,0       | 3,2                         | M4   |
| CA20COM-L20-**-P*       | 1-1/4-18UNEF-2A | 23,05     | 4,0        | 34,2     | 29,0     | 29,4       | 38,0       | 3,2                         | M4   |
| CA20COM-L22-**-P*       | 1-3/8-18UNEF-2A | 23,05     | 4,0        | 34,2     | 32,2     | 31,8       | 41,0       | 3,2                         | M4   |
| CA20COM-L24-**-P*       | 1-1/2-18UNEF-2A | 24,05     | 4,0        | 34,2     | 35,3     | 34,9       | 44,5       | 3,7                         | M5   |
| CA20COM-L28-**-P*       | 1-3/4-18UNEF-2A | 24,05     | 4,0        | 34,2     | 41,4     | 39,7       | 50,8       | 3,7                         | M5   |
| CA20COM-L32-**-P*       | 2-18UNS-2A      | 24,05     | 4,0        | 34,2     | 47,8     | 44,5       | 57,0       | 4,4                         | M6   |
| CA20COM-L36-**-P*       | 2-1/4-16UN-2A   | 24,05     | 4,0        | 34,2     | 54,1     | 49,2       | 63,5       | 4,4                         | M6   |

\* For socket inserts substitute "S" for "P"


\*\* Add contact arrangement number (see pages 6 – 8)

## Straight plug, Class PG



### CA06COM-PG-B with bayonet coupling

CA06COM-PG-B is a straight plug for usage of PG terminations. It mates with receptacles CA00COM-B, CA01COM-B and CA02COM-E-B.

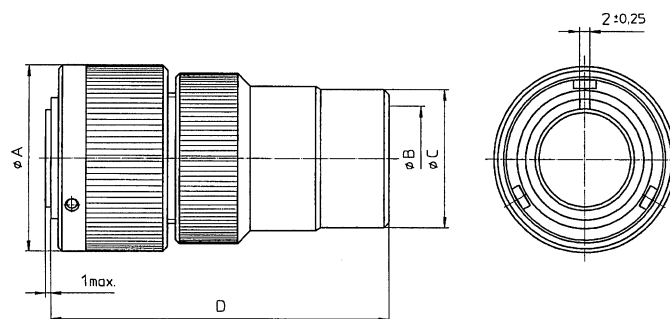


| Part No.<br>Pin Insert* | A<br>max | B<br>Thread | C<br>max | D<br>max |
|-------------------------|----------|-------------|----------|----------|
| CA06COM-PG10SL-**-P*-B  | 22,8     | PG9         | 18       | 52       |
| CA06COM-PG12S-**-P*-B   | 26,0     | PG9         | 19       | 52       |
| CA06COM-PG14S-**-P*-B   | 29,2     | PG11        | 22       | 52       |
| CA06COM-PG16S-**-P*-B   | 32,0     | PG13,5      | 24       | 54       |
| CA06COM-PG16-**-P*-B    | 32,0     | PG13,5      | 24       | 64       |
| CA06COM-PG18-**-P*-B    | 36,5     | PG13,5      | 25       | 69       |
| CA06COM-PG20-**-P*-B    | 39,9     | PG16        | 27       | 70       |
| CA06COM-PG22-**-P*-B    | 43,1     | PG16        | 27       | 73       |
| CA06COM-PG24-**-P*-B    | 46,6     | PG16        | 27       | 74       |
| CA06COM-PG28-**-P*-B    | 53,4     | PG21        | 32       | 74       |
| CA06COM-PG32-**-P*-B    | 60,1     | PG29        | 41       | 76       |
| CA06COM-PG36-**-P*-B    | 66,3     | PG29        | 41       | 87       |



### CA06COM-PG with threaded coupling

CA06COM-PG is a straight plug for usage of PG terminations. It mates with receptacles CA00COM, CA01COM and CA02COM-E.

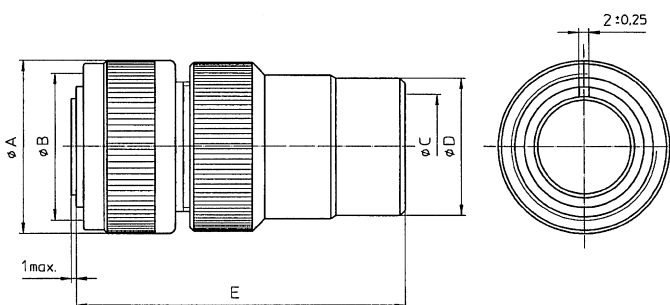

| Part No.<br>Pin Insert* | A<br>max | B<br>Thread     | C<br>Thread | D<br>max | E<br>max |
|-------------------------|----------|-----------------|-------------|----------|----------|
| CA06COM-PG10SL-**-P*    | 24,1     | 5/8-24UNEF-2B   | PG9         | 18       | 52       |
| CA06COM-PG12S-**-P*     | 25,8     | 3/4-20UNEF-2B   | PG9         | 19       | 52       |
| CA06COM-PG14S-**-P*     | 28,8     | 7/8-20UNEF-2B   | PG11        | 22       | 52       |
| CA06COM-PG16S-**-P*     | 31,8     | 1-20UNEF-2B     | PG13,5      | 24       | 54       |
| CA06COM-PG16-**-P*      | 31,8     | 1-20UNEF-2B     | PG13,5      | 24       | 64       |
| CA06COM-PG18-**-P*      | 34,1     | 1-1/8-18UNEF-2B | PG13,5      | 25       | 69       |
| CA06COM-PG20-**-P*      | 37,4     | 1-1/4-18UNEF-2B | PG16        | 27       | 70       |
| CA06COM-PG22-**-P*      | 40,5     | 1-3/8-18UNEF-2B | PG16        | 27       | 73       |
| CA06COM-PG24-**-P*      | 43,8     | 1-1/2-18UNEF-2B | PG16        | 27       | 74       |
| CA06COM-PG28-**-P*      | 50,2     | 1-3/4-18UNS-2B  | PG21        | 32       | 74       |
| CA06COM-PG32-**-P*      | 56,4     | 2-18UNS-2B      | PG29        | 41       | 76       |
| CA06COM-PG36-**-P*      | 62,8     | 2-1/4-16UN-2B   | PG29        | 41       | 87       |

\* For socket inserts substitute "S" for "P"

\*\* Add contact arrangement number (see pages 6 – 8)


# CA-COM

## Straight plug, Class E



### CA06COM-E-B with bayonet coupling

CA06COM-E-B is a straight plug with endbell and cable clamp. It mates with receptacles CA00COM-B, CA01COM-B and CA02COM-E-B.

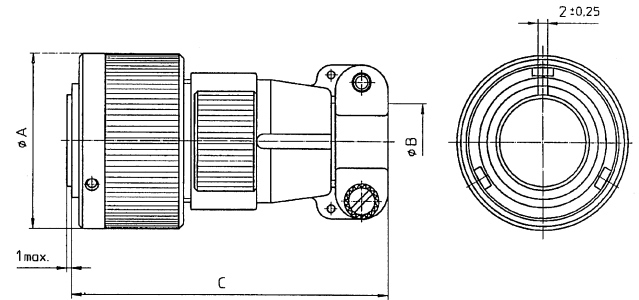


| Part No.<br>Pin Insert* | A    | B <sup>1)</sup> | C   |
|-------------------------|------|-----------------|-----|
|                         | max  |                 | max |
| CA06COM-E10SL-**-P*-B   | 22,8 | 7,9             | 53  |
| CA06COM-E12S-**-P*-B    | 26,0 | 7,9             | 53  |
| CA06COM-E14S-**-P*-B    | 29,2 | 11,1            | 55  |
| CA06COM-E16S-**-P*-B    | 32,0 | 14,2            | 56  |
| CA06COM-E16-**-P*-B     | 32,0 | 14,2            | 66  |
| CA06COM-E18-**-P*-B     | 36,5 | 15,8            | 68  |
| CA06COM-E20-**-P*-B     | 39,9 | 19,0            | 68  |
| CA06COM-E22-**-P*-B     | 43,1 | 19,0            | 68  |
| CA06COM-E24-**-P*-B     | 46,6 | 23,7            | 76  |
| CA06COM-E28-**-P*-B     | 53,4 | 23,7            | 76  |
| CA06COM-E32-**-P*-B     | 60,1 | 31,8            | 76  |
| CA06COM-E36-**-P*-B     | 66,3 | 34,6            | 76  |



### CA06COM-E with threaded coupling

CA06COM-E is a straight plug with endbell and cable clamp. It mates with receptacles CA00COM, CA01COM and CA02COM-E.

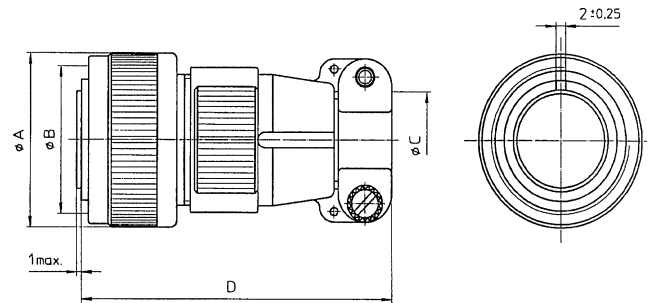

| Part No.<br>Pin insert* | A    | B               | C <sup>1)</sup> | D   |
|-------------------------|------|-----------------|-----------------|-----|
|                         | max  | Thread          |                 | max |
| CA06COM-E10SL-**-P*     | 24,1 | 5/8-24UNEF-2B   | 7,9             | 53  |
| CA06COM-E12S-**-P*      | 25,8 | 3/4-20UNEF-2B   | 7,9             | 53  |
| CA06COM-E14S-**-P*      | 28,8 | 7/8-20UNEF-2B   | 11,1            | 55  |
| CA06COM-E16S-**-P*      | 31,8 | 1-20UNEF-2B     | 14,2            | 56  |
| CA06COM-E16-**-P*       | 31,8 | 1-20UNEF-2B     | 14,2            | 66  |
| CA06COM-E18-**-P*       | 34,1 | 1-1/8-18UNEF-2B | 15,8            | 68  |
| CA06COM-E20-**-P*       | 37,4 | 1-1/4-18UNEF-2B | 19,0            | 68  |
| CA06COM-E22-**-P*       | 40,5 | 1-3/8-18UNEF-2B | 19,0            | 68  |
| CA06COM-E24-**-P*       | 43,8 | 1-1/2-18UNEF-2B | 23,7            | 76  |
| CA06COM-E28-**-P*       | 50,2 | 1-3/4-18UNS-2B  | 23,7            | 76  |
| CA06COM-E32-**-P*       | 56,4 | 2-18UNS-2B      | 31,8            | 76  |
| CA06COM-E36-**-P*       | 62,8 | 2-1/4-16UN-2B   | 34,6            | 76  |

\* For socket inserts substitute "S" for "P"

\*\* Add contact arrangement number (see pages 6 – 8)


<sup>1)</sup> max cable dia

## Straight plug, Class F



### CA06COM-F-B with bayonet coupling

CA06COM-F-B is a straight plug with endbell for flex tubes. It mates with receptacles CA00COM-B, CA01COM-B and CA02COM-E-B.

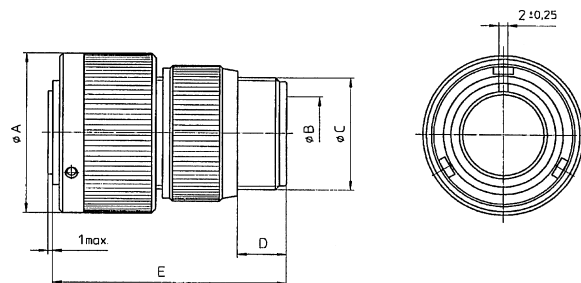


| Part No.<br>Pin Insert* | A<br>max | B <sup>1)</sup> | C<br>Thread      | D<br>min | E<br>max |
|-------------------------|----------|-----------------|------------------|----------|----------|
| CA06COM-F10SL-**-P*-B   | 22,8     | 8,2             | 5/8-24UNEF-2A    | 9,5      | 45       |
| CA06COM-F12S-**-P*-B    | 26,0     | 8,2             | 5/8-24UNEF-2A    | 9,5      | 45       |
| CA06COM-F14S-**-P*-B    | 29,2     | 11,1            | 3/4-20UNEF-2A    | 9,5      | 45       |
| CA06COM-F16S-**-P*-B    | 32,0     | 14,3            | 7/8-20UNEF-2A    | 9,5      | 45       |
| CA06COM-F16-**-P*-B     | 32,0     | 14,3            | 7/8-20UNEF-2A    | 9,5      | 54       |
| CA06COM-F18-**-P*-B     | 36,5     | 16,7            | 1-20UNEF-2A      | 9,5      | 54       |
| CA06COM-F20-**-P*-B     | 39,9     | 19,8            | 1-3/16-18UNEF-2A | 9,5      | 55       |
| CA06COM-F22-**-P*-B     | 43,1     | 19,8            | 1-3/16-18UNEF-2A | 9,5      | 58       |
| CA06COM-F24-**-P*-B     | 46,6     | 25,4            | 1-7/16-18UNEF-2A | 9,5      | 59       |
| CA06COM-F28-**-P*-B     | 53,4     | 27,0            | 1-7/16-18UNEF-2A | 9,5      | 60       |
| CA06COM-F32-**-P*-B     | 60,1     | 32,5            | 1-3/4-18UNS-2A   | 11,0     | 62       |
| CA06COM-F36-**-P*-B     | 66,3     | 35,7            | 2-18UNS-2A       | 11,8     | 64       |



### CA06COM-F with threaded coupling

CA06COM-F is a straight plug with endbell for flex tubes. It mates with receptacles CA00COM, CA01COM and CA02COM-E.

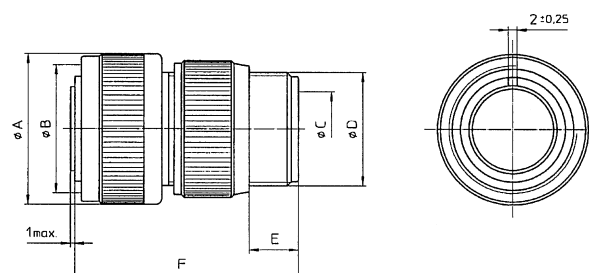

| Part No.<br>Pin Insert* | A<br>max | B<br>Thread     | C <sup>1)</sup> | D<br>Thread      | E<br>min | F<br>max |
|-------------------------|----------|-----------------|-----------------|------------------|----------|----------|
| CA06COM-F10SL-**-P*     | 24,1     | 5/8-24UNEF-2B   | 8,2             | 5/8-24UNEF-2A    | 9,5      | 45       |
| CA06COM-F12S-**-P*      | 25,8     | 3/4-20UNEF-2B   | 8,2             | 5/8-24UNEF-2A    | 9,5      | 45       |
| CA06COM-F14S-**-P*      | 28,8     | 7/8-20UNEF-2B   | 11,1            | 3/4-20UNEF-2A    | 9,5      | 45       |
| CA06COM-F16S-**-P*      | 31,8     | 1-20UNEF-2B     | 14,3            | 7/8-20UNEF       | 9,5      | 45       |
| CA06COM-F16-**-P*       | 31,8     | 1-20UNEF-2B     | 14,3            | 7/8-20UNEF       | 9,5      | 54       |
| CA06COM-F18-**-P*       | 34,1     | 1-1/8-18UNEF-2B | 16,7            | 1-20UNEF-2A      | 9,5      | 54       |
| CA06COM-F20-**-P*       | 37,4     | 1-1/4-18UNEF-2B | 19,8            | 1-3/16-18UNEF-2A | 9,5      | 55       |
| CA06COM-F22-**-P*       | 40,5     | 1-3/8-18UNEF-2B | 19,8            | 1-3/16-18UNEF-2A | 9,5      | 58       |
| CA06COM-F24-**-P*       | 43,8     | 1-1/2-18UNEF-2B | 25,4            | 1-7/16-18UNEF-2A | 9,5      | 59       |
| CA06COM-F28-**-P*       | 50,2     | 1-3/4-18UNS-2B  | 27,0            | 1-7/16-18UNEF-2A | 9,5      | 60       |
| CA06COM-F32-**-P*       | 56,4     | 2-18UNS-2B      | 32,5            | 1-3/4-18UNS-2A   | 11,0     | 62       |
| CA06COM-F36-**-P*       | 62,8     | 2-1/4-16UN-2B   | 35,7            | 2-18UNS-2A       | 11,8     | 64       |

\* For socket inserts substitute "S" for "P"

\*\* Add contact arrangement number (see pages 6 – 8)


<sup>1)</sup> max cable dia

## Straight plug, Class E



### CA06COM-E-B/-03/-06 with bayonet coupling

CA06COM-E-B/-03/-06 is a straight plug with endbell (wire sealing) for heat shrink boots. It mates with receptacles CA00COM-B, CA01COM-B and CA02COM-E-B.

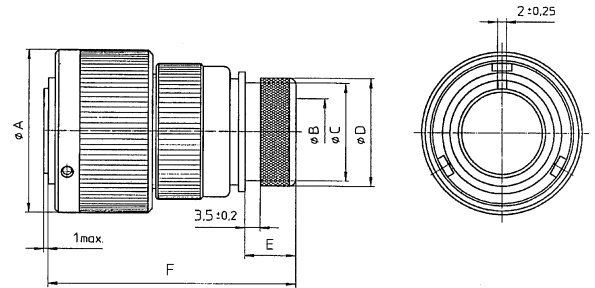


| Part No.               | A    | B <sup>1)</sup> | C    | D     | E     | F   |
|------------------------|------|-----------------|------|-------|-------|-----|
| Pin Insert*            | max  |                 | max  | ± 0,2 | ± 0,5 | max |
| CA06COM-E10SL-**-P*-B- | 22,8 | 7,7             | 13,3 | 15,5  | 11,7  | 49  |
| CA06COM-E12S-**-P*-B-  | 26,0 | 7,9             | 13,3 | 15,5  | 11,7  | 49  |
| CA06COM-E14S-**-P*-B-  | 29,2 | 10,6            | 17,0 | 19,1  | 11,7  | 49  |
| CA06COM-E16S-**-P*-B-  | 32,0 | 13,5            | 21,9 | 23,9  | 11,7  | 49  |
| CA06COM-E16-**-P*-B-   | 32,0 | 13,5            | 21,9 | 23,9  | 11,5  | 58  |
| CA06COM-E18-**-P*-B-   | 36,5 | 14,6            | 21,9 | 23,9  | 11,5  | 58  |
| CA06COM-E20-**-P*-B-   | 39,9 | 18,7            | 26,2 | 29,6  | 12,7  | 60  |
| CA06COM-E22-**-P*-B-   | 43,1 | 20,8            | 26,2 | 29,6  | 12,7  | 60  |
| CA06COM-E24-**-P*-B-   | 46,6 | 24,6            | 34,5 | 37,8  | 12,7  | 63  |
| CA06COM-E28-**-P*-B-   | 53,4 | 27,0            | 34,5 | 37,8  | 12,7  | 63  |
| CA06COM-E32-**-P*-B-   | 60,1 | 33,3            | 43,6 | 47,8  | 15,2  | 67  |
| CA06COM-E36-**-P*-B-   | 66,3 | 38,5            | 43,6 | 47,8  | 15,2  | 68  |



### CA06COM-E-DN with threaded coupling

CA06COM-E-DN is a straight plug with endbell (wire sealing) for heat shrink boots. It mates with receptacles CA00COM, CA01COM and CA02COM-E.

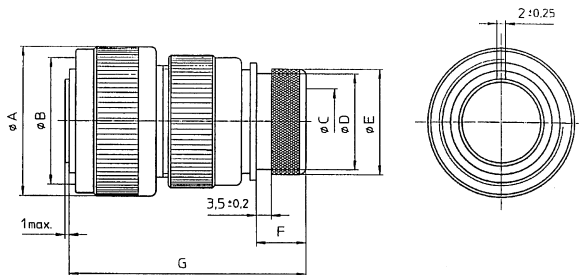

| Part No.               | A    | B               | C <sup>1)</sup> | D    | E     | F     | G   |
|------------------------|------|-----------------|-----------------|------|-------|-------|-----|
| Pin Insert*            | max  | Thread          |                 | max  | ± 0,2 | ± 0,5 | max |
| CA06COM-E10SL-**-P*-DN | 24,1 | 5/8-24UNEF-2B   | 7,7             | 13,3 | 15,5  | 11,7  | 49  |
| CA06COM-E12S-**-P*-DN  | 25,8 | 3/4-20UNEF-2B   | 7,9             | 13,3 | 15,5  | 11,7  | 49  |
| CA06COM-E14S-**-P*-DN  | 28,8 | 7/8-20UNEF-2B   | 10,6            | 17,0 | 19,1  | 11,7  | 49  |
| CA06COM-E16S-**-P*-DN  | 31,8 | 1-20UNEF-2B     | 13,5            | 21,9 | 23,9  | 11,7  | 49  |
| CA06COM-E16-**-P*-DN   | 31,8 | 1-20UNEF-2B     | 13,5            | 21,9 | 23,9  | 11,5  | 58  |
| CA06COM-E18-**-P*-DN   | 34,1 | 1-1/8-18UNEF-2B | 14,6            | 21,9 | 23,9  | 11,5  | 58  |
| CA06COM-E20-**-P*-DN   | 37,4 | 1-1/4-18UNEF-2B | 18,7            | 26,2 | 29,6  | 12,7  | 60  |
| CA06COM-E22-**-P*-DN   | 40,5 | 1-3/8-18UNEF-2B | 20,8            | 26,2 | 29,6  | 12,7  | 60  |
| CA06COM-E24-**-P*-DN   | 43,8 | 1-1/2-18UNEF-2B | 24,6            | 34,5 | 37,8  | 12,7  | 63  |
| CA06COM-E28-**-P*-DN   | 50,2 | 1-3/4-18UNS-2B  | 27,0            | 34,5 | 37,8  | 12,7  | 63  |
| CA06COM-E32-**-P*-DN   | 56,4 | 2-18UNS-2B      | 33,3            | 43,6 | 47,8  | 15,2  | 67  |
| CA06COM-E36-**-P*-DN   | 62,8 | 2-1/4-16UN-2B   | 38,5            | 43,6 | 47,8  | 15,2  | 68  |

\* For socket inserts substitute "S" for "P"

\*\* Add contact arrangement number (see pages 6 – 8)


<sup>1)</sup> max cable dia

Staright plug, Class IN



CA06COM-IN-B  
with bayonet coupling

CA06COM-IN-B is a straight plug with universal endbell. It mates with receptacles CA00COM-B, CA01COM-B and CA02COM-E-B.

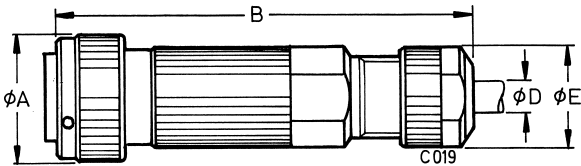


| Part No.<br>Pin Insert* | A    | B   | E   | D                    |
|-------------------------|------|-----|-----|----------------------|
|                         |      | max | max | Cable sealing area   |
| CA06COM-IN10SL-**-P*-B  | 24,1 | 84  | 18  | D07 = 4,5 – 7,2 mm   |
| CA06COM-IN14S-**-P*-B   | 28,8 | 85  | 18  | D07 = 4,5 – 7,2 mm   |
| CA06COM-IN20-**-P*-B    | 37,4 | 92  | 24  | D11 = 7,0 – 11,2 mm  |
| CA06COM-IN22-**-P*-B    | 40,5 | 96  | 34  | D17 = 14,5 – 17,5 mm |



CA06COM-IN  
with threaded coupling

CA06COM-IN is a straight plug with universal endbell. It mates with receptacles CA00COM, CA01COM and CA02COM-E.

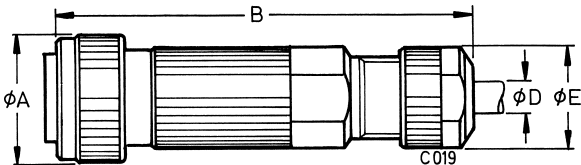

| Part No.<br>Pin Insert* | A    | B   | E   | D                    |
|-------------------------|------|-----|-----|----------------------|
|                         |      | max | max | Cable sealing area   |
| CA06COM-IN10SL-**-P*    | 24,1 | 84  | 18  | D07 = 4,5 – 7,2 mm   |
| CA06COM-IN14S-**-P*     | 28,8 | 85  | 18  | D07 = 4,5 – 7,2 mm   |
| CA06COM-IN20-**-P*      | 37,4 | 92  | 24  | D11 = 7,0 – 11,2 mm  |
| CA06COM-IN22-**-P*      | 40,5 | 96  | 34  | D17 = 14,5 – 17,5 mm |

\* For socket inserts substitute "S" for "P"  
\*\* Add contact arrangement number (see pages 6 – 8)


# CA-COM

## 90° Plug, Class E



### CA08COM-E-B with bayonet coupling

CA08COM-E-B is a 90° plug with cable clamp. It mates with receptacles CA00COM-B, CA01COM-B and CA02COM-E-B.

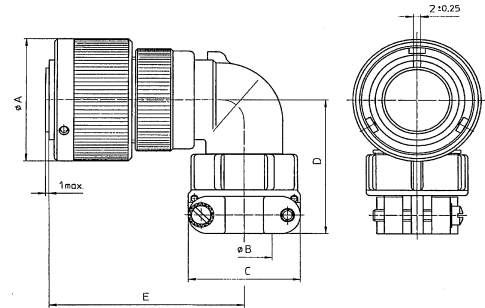


| Part No.<br>Pin Insert* | A    | B <sup>1)</sup> | C    | D   | E   |
|-------------------------|------|-----------------|------|-----|-----|
|                         | max  |                 | max  | max | max |
| CA08COM-E10SL-**-P*-B   | 22,8 | 7,9             | 22,7 | 42  | 45  |
| CA08COM-E12S-**-P*-B    | 26,0 | 7,9             | 22,7 | 42  | 45  |
| CA08COM-E14S-**-P*-B    | 29,2 | 11,1            | 27,5 | 42  | 47  |
| CA08COM-E16S-**-P*-B    | 32,0 | 14,2            | 30,0 | 45  | 48  |
| CA08COM-E16-**-P*-B     | 32,0 | 14,2            | 30,0 | 45  | 48  |
| CA08COM-E18-**-P*-B     | 36,5 | 15,8            | 33,0 | 53  | 58  |
| CA08COM-E20-**-P*-B     | 39,9 | 19,0            | 37,5 | 53  | 61  |
| CA08COM-E22-**-P*-B     | 43,1 | 19,0            | 37,5 | 53  | 61  |
| CA08COM-E24-**-P*-B     | 46,6 | 23,7            | 43,3 | 58  | 66  |
| CA08COM-E28-**-P*-B     | 53,4 | 23,7            | 43,3 | 58  | 66  |
| CA08COM-E32-**-P*-B     | 60,1 | 31,8            | 51,7 | 66  | 72  |
| CA08COM-E36-**-P*-B     | 66,3 | 34,6            | 58,0 | 69  | 75  |



### CA08COM-E with threaded coupling

CA08COM-E is a 90° plug with cable clamp. It mates with receptacles CA00COM, CA01COM and CA02COM-E.

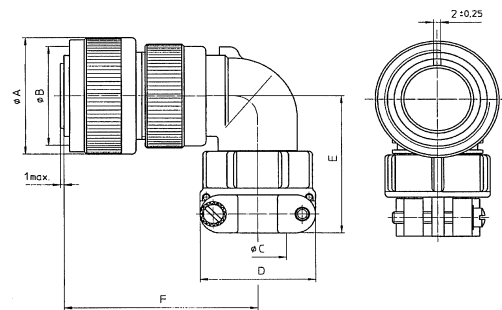

| Part No.<br>Pin Insert* | A    | B               | C <sup>1)</sup> | D    | E   | F   |
|-------------------------|------|-----------------|-----------------|------|-----|-----|
|                         | max  | Thread          |                 | max  | max | max |
| CA08COM-E10SL-**-P*     | 24,1 | 5/8-24UNEF-2B   | 7,9             | 22,7 | 42  | 45  |
| CA08COM-E12S-**-P*      | 25,8 | 3/4-20UNEF-2B   | 7,9             | 22,7 | 42  | 45  |
| CA08COM-E14S-**-P*      | 28,8 | 7/8-20UNEF-2B   | 11,1            | 27,5 | 42  | 47  |
| CA08COM-E16S-**-P*      | 31,8 | 1-20UNEF        | 14,2            | 30,0 | 45  | 48  |
| CA08COM-E16-**-P*       | 31,8 | 1-20UNEF        | 14,2            | 30,0 | 45  | 57  |
| CA08COM-E18-**-P*       | 34,1 | 1-1/8-18UNEF-2B | 15,8            | 32,2 | 53  | 58  |
| CA08COM-E20-**-P*       | 37,4 | 1-1/4-18UNEF-2B | 19,0            | 37,5 | 53  | 61  |
| CA08COM-E22-**-P*       | 40,5 | 1-3/8-18UNEF-2B | 19,0            | 37,5 | 53  | 61  |
| CA08COM-E24-**-P*       | 43,8 | 1-1/2-18UNEF-2B | 23,7            | 43,3 | 58  | 66  |
| CA08COM-E28-**-P*       | 50,2 | 1-3/4-18UNS-2B  | 23,7            | 43,3 | 58  | 66  |
| CA08COM-E32-**-P*       | 56,4 | 2-18UNS-2B      | 31,8            | 51,7 | 66  | 72  |
| CA08COM-E36-**-P*       | 62,8 | 2-1/4-16UN-2B   | 34,6            | 58,0 | 69  | 75  |

\* For socket inserts substitute "S" for "P"

\*\* Add contact arrangement number (see pages 6 – 8)


<sup>1)</sup> max cable dia

## 90° Plug, Class F



### CA08COM-F-B with bayonet coupling

CA08COM-F-B is a 90° plug for flex tubes. It mates with receptacles CA00COM-B, CA01COM-B and CA02COM-E-B.

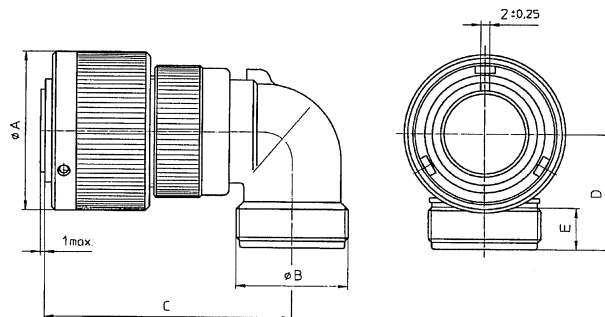


| Part No.<br>Pin Insert* | A    | B                | C   | D    | E    |
|-------------------------|------|------------------|-----|------|------|
|                         | max  | Thread           | max | max  | min  |
| CA08COM-F10SL-**-P*-B   | 22,8 | 5/8-24UNEF-2A    | 45  | 22,0 | 9,4  |
| CA08COM-F12S-**-P*-B    | 26,0 | 5/8-24UNEF-2A    | 45  | 22,0 | 9,4  |
| CA08COM-F14S-**-P*-B    | 29,2 | 3/4-20UNEF-2A    | 47  | 24,0 | 9,4  |
| CA08COM-F16S-**-P*-B    | 32,0 | 7/8-20UNEF-2A    | 48  | 25,0 | 9,4  |
| CA08COM-F16-**-P*-B     | 32,0 | 7/8-20UNEF-2A    | 57  | 25,0 | 9,4  |
| CA08COM-F18-**-P*-B     | 36,5 | 1-20UNEF-2A      | 58  | 27,0 | 9,4  |
| CA08COM-F20-**-P*-B     | 39,9 | 1-3/16-18UNEF-2A | 61  | 29,0 | 9,4  |
| CA08COM-F22-**-P*-B     | 43,1 | 1-3/16-18UNEF-2A | 61  | 30,0 | 9,4  |
| CA08COM-F24-**-P*-B     | 46,6 | 1-7/16-18UNEF-2A | 66  | 32,0 | 9,4  |
| CA08COM-F28-**-P*-B     | 53,4 | 1-7/16-18UNEF-2A | 66  | 34,0 | 9,4  |
| CA08COM-F32-**-P*-B     | 60,1 | 1-3/4-18UNS-2A   | 72  | 39,5 | 11,0 |
| CA08COM-F36-**-P*-B     | 66,3 | 2-18UNS-2A       | 75  | 45,0 | 12,6 |



### CA08COM-F with threaded coupling

CA08COM-F is a 90° plug for flex tubes. It mates with receptacles CA00COM, CA01COM and CA02COM-E.

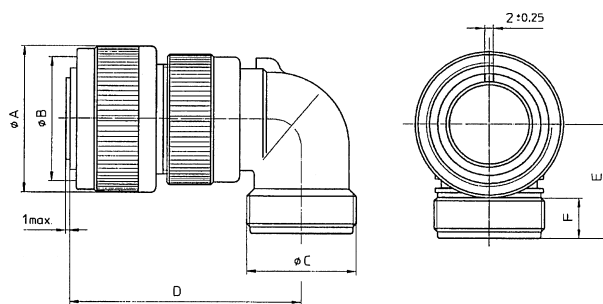

| Part No.<br>Pin Insert* | A    | B               | C                | D   | E    | F    |
|-------------------------|------|-----------------|------------------|-----|------|------|
|                         | max  | Thread          | Thread           | max | max  | min  |
| CA08COM-F10SL-**-P*     | 24,1 | 5/8-24UNEF-2B   | 5/8-24UNEF-2A    | 45  | 22,0 | 9,4  |
| CA08COM-F12SL-**-P*     | 25,8 | 3/4-20UNEF-2B   | 5/8-24UNEF-2A    | 45  | 22,0 | 9,4  |
| CA08COM-F14S-**-P*      | 28,8 | 7/8-20UNEF-2B   | 3/4-20UNEF-2A    | 47  | 24,0 | 9,4  |
| CA08COM-F16S-**-P*      | 31,8 | 1-20UNEF-2B     | 7/8-20UNEF-2A    | 48  | 25,0 | 9,4  |
| CA08COM-F16-**-P*       | 31,8 | 1-20UNEF-2B     | 7/8-20UNEF-2A    | 57  | 25,0 | 9,4  |
| CA08COM-F18-**-P*       | 34,1 | 1-1/8-18UNEF-2B | 1-20UNEF-2A      | 58  | 27,0 | 9,4  |
| CA08COM-F20-**-P*       | 37,4 | 1-1/4-18UNEF-2B | 1-3/16-18UNEF-2A | 61  | 29,0 | 9,4  |
| CA08COM-F22-**-P*       | 40,5 | 1-3/8-18UNEF-2B | 1-3/16-18UNEF-2A | 61  | 30,0 | 9,4  |
| CA08COM-F24-**-P*       | 43,8 | 1-1/2-18UNEF-2B | 1-7/16-18UNEF-2A | 66  | 32,0 | 9,4  |
| CA08COM-F28-**-P*       | 50,2 | 1-3/4-18UNS-2B  | 1-7/16-18UNEF-2A | 66  | 34,0 | 9,4  |
| CA08COM-F32-**-P*       | 56,4 | 2-18UNS-2B      | 1-3/4-18UNS-2A   | 72  | 39,5 | 11,0 |
| CA08COM-F36-**-P*       | 62,8 | 2-1/4-16UN-2B   | 2-18UNS-2A       | 75  | 45,0 | 12,6 |

\* For socket inserts substitute "S" for "P"

\*\* Add contact arrangement number (see pages 6 – 8)


# CA-COM

## 90° Plug, Class PG



### CA08COM-PG-B with bayonet coupling

CA08COM-PG-B designates a 90° plug for usage of PG terminations. It mates with receptacles CA01COM-B and CA02COM-B.

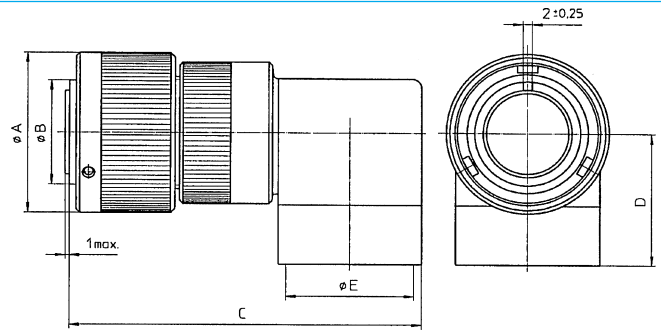


| Part No.<br>Pin insert* | A<br>max | B<br>-0,3 | C<br>max | D    | E      |
|-------------------------|----------|-----------|----------|------|--------|
| CA08COM-PG10SL-**P*-B   | 22,8     | 11,3      | 57       | 18,5 | PG9    |
| CA08COM-PG12S-**P*-B    | 26,0     | 14,0      | 57       | 18,5 | PG9    |
| CA08COM-PG14S-**P*-B    | 29,2     | 17,1      | 59       | 19,5 | PG11   |
| CA08COM-PG16S-**P*-B    | 32,0     | 20,4      | 63       | 22,0 | PG13,5 |
| CA08COM-PG16-**P*-B     | 32,0     | 20,4      | 72       | 22,0 | PG13,5 |
| CA08COM-PG18-**P*-B     | 36,5     | 23,6      | 77       | 26,3 | PG16   |
| CA08COM-PG20-**P*-B     | 39,9     | 26,7      | 82       | 29,0 | PG21   |
| CA08COM-PG22-**P*-B     | 43,1     | 29,8      | 82       | 29,5 | PG21   |



### CA08COM-PG with threaded coupling

CA08COM-PG designates a 90° plug for usage of PG terminations. It mates with receptacles CA01COM and CA02COM.

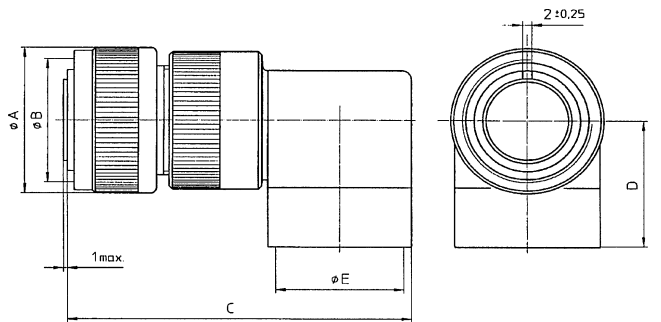

| Part No.<br>Pin insert* | A<br>max | B<br>Thread     | C<br>max | D    | E      |
|-------------------------|----------|-----------------|----------|------|--------|
| CA08COM-PG10SL-**P*     | 24,1     | 5/8-24UNEF-2B   | 57       | 18,5 | PG9    |
| CA08COM-PG12S-**P*      | 25,8     | 3/4-20UNEF-2B   | 57       | 18,5 | PG9    |
| CA08COM-PG14S-**P*      | 28,8     | 7/8-20UNEF-2B   | 59       | 19,5 | PG11   |
| CA08COM-PG16S-**P*      | 31,8     | 1-20UNEF-2B     | 63       | 22,0 | PG13,5 |
| CA08COM-PG16-**P*       | 31,8     | 1-20UNEF-2B     | 72       | 22,0 | PG13,5 |
| CA08COM-PG18-**P*       | 34,1     | 1-1/8-18UNEF-2B | 77       | 26,3 | PG16   |
| CA08COM-PG20-**P*       | 37,4     | 1-1/4-18UNEF-2B | 82       | 29,0 | PG21   |
| CA08COM-PG22-**P*       | 40,5     | 1-3/8-18UNEF-2B | 82       | 29,5 | PG21   |

\* For socket inserts substitute "S" for "P"

\*\* Add contact arrangement number (see pages 6 – 8)


CA-COM

90° Plug, Class IN



CA08COM-IN-B  
with bayonet coupling

CA08COM-IN-B is a 90° plug with universal endbell. It mates with receptacles CA00COM-B, CA01COM-B and CA02COM-E-B.

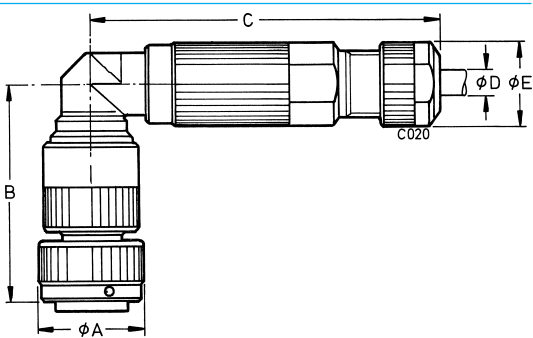


| Part No.<br>Pin Insert*       | A    | B<br>max | C<br>max | D<br>Cable sealing area | E<br>max |
|-------------------------------|------|----------|----------|-------------------------|----------|
| CA08COM-IN10SL-**P*-B-***-D07 | 24,1 | 52       | 78       | D07 = 4,5 – 7,2 mm      | 18       |
| CA08COM-IN20-**P*-B-***-D11   | 37,4 | 62       | 86       | D11 = 7,0 – 11,2        | 24       |



CA08COM-IN  
with threaded coupling


CA08COM-IN is a 90° plug with universal endbell. It mates with receptacles CA00COM, CA01COM and CA02COM-E.

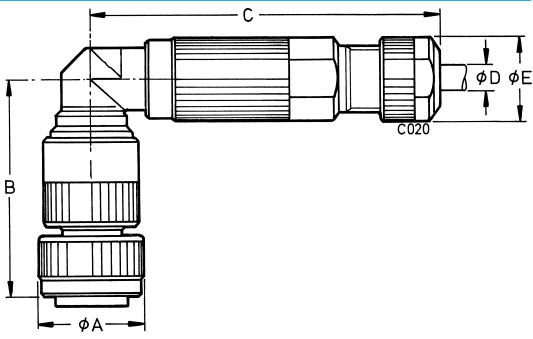

| Part No.<br>Pin Insert*     | A    | B<br>max | C<br>max | D<br>Cable sealing area | E<br>max |
|-----------------------------|------|----------|----------|-------------------------|----------|
| CA08COM-IN10SL-**P*-***-D07 | 24,1 | 52       | 78       | D07 = 4,5 – 7,2 mm      | 18       |
| CA08COM-IN20-**P*-***-D11   | 37,4 | 62       | 86       | D11 = 7,0 – 11,2        | 24       |


\* For socket inserts substitute "S" for "P"  
\*\* Add contact arrangement number (see pages 6 – 8)  
\*\*\* 01 Crimp contact

## Accessories




### Protective caps

for receptacles with bayonet coupling  
CA00COM-B, CA02COM-E-B and CA20COM-E-B

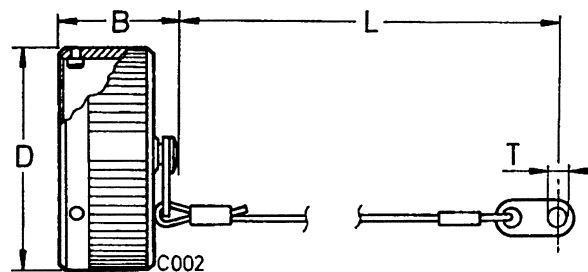


| Part No.      | Shell size | B<br>± 0,3 | D<br>max | L<br>± 0,25 | T<br>+0,25 |
|---------------|------------|------------|----------|-------------|------------|
| CA120003-1701 | 10 SL      | 19,5       | 22,4     | 107         | 4,3        |
| CA120003-1702 | 12S        | 19,5       | 25,6     | 107         | 4,3        |
| CA120003-1703 | 14S        | 19,5       | 28,8     | 107         | 4,3        |
| CA121003-1704 | 16S        | 19,5       | 31,6     | 107         | 4,3        |
| CA121003-1705 | 16         | 24,5       | 31,6     | 120         | 4,3        |
| CA121003-1706 | 18         | 24,5       | 35,7     | 120         | 4,3        |
| CA121003-1707 | 20         | 24,5       | 39,1     | 134         | 4,3        |
| CA121003-1708 | 22         | 24,5       | 42,3     | 134         | 4,3        |
| CA121003-1709 | 24         | 24,5       | 45,8     | 134         | 4,3        |
| CA121003-1710 | 28         | 24,5       | 51,6     | 176         | 5,5        |
| CA121003-1711 | 32         | 24,5       | 58,3     | 176         | 5,5        |
| CA121003-1712 | 36         | 24,5       | 64,5     | 176         | 5,5        |



### Protective caps

for receptacles with threaded coupling  
CA00COM, CA02COM-E and CA20COM

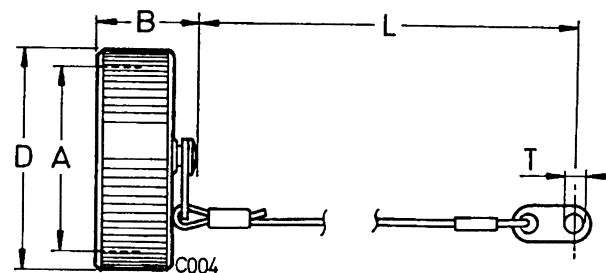


| Part No.      | Shell size | A<br>Thread     | B<br>max | D<br>max | L<br>max | T<br>+0,2 |
|---------------|------------|-----------------|----------|----------|----------|-----------|
| CA121003-1601 | 10SL       | 5/8-24UNEF-2B   | 16,0     | 20,2     | 114      | 3,6       |
| CA121003-1602 | 12S        | 3/4-20UNEF-2B   | 16,0     | 23,4     | 127      | 3,6       |
| CA121003-1603 | 14S        | 7/8-20UNEF-2B   | 16,0     | 26,6     | 127      | 3,6       |
| CA121003-1604 | 16S, 16    | 1-20UNEF-2B     | 16,0     | 29,8     | 127      | 3,6       |
| CA121003-1606 | 18         | 1-1/8-18UNEF-2B | 16,0     | 32,9     | 127      | 3,6       |
| CA121003-1607 | 20         | 1-1/4-18UNEF-2B | 16,0     | 36,1     | 141      | 3,6       |
| CA121003-1608 | 22         | 1-3/8-18UNEF-2B | 16,0     | 39,4     | 141      | 3,6       |
| CA121003-1609 | 24         | 1-1/2-18UNEF-2B | 16,0     | 42,6     | 154      | 4,4       |
| CA121003-1610 | 28         | 1-3/4-18UNEF-2B | 18,0     | 48,9     | 214      | 4,4       |
| CA121003-1611 | 32         | 2-18UNS-2B      | 18,0     | 55,3     | 214      | 4,8       |
| CA121003-1612 | 36         | 2-1/4-16UN-2B   | 18,0     | 61,6     | 214      | 4,8       |

## Accessories




### Protective caps

for plugs with bayonet coupling  
CA06COM-B and CA08COM-B

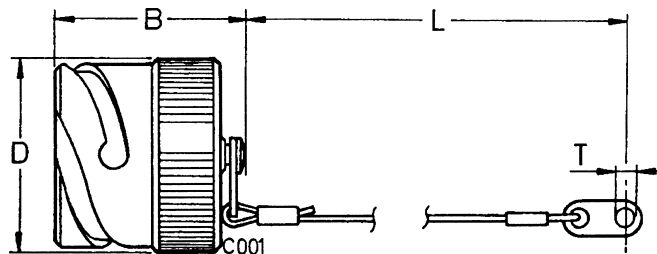


| Part No.      | Shell size | B<br>max | D<br>max | L<br>ca | T<br>+0,5 |
|---------------|------------|----------|----------|---------|-----------|
| CA121004-1701 | 10 SL      | 29,0     | 20,7     | 107     | 4,3       |
| CA121004-1702 | 12S        | 29,0     | 23,9     | 120     | 4,3       |
| CA121004-1703 | 14S        | 29,0     | 27,1     | 120     | 4,3       |
| CA121004-1704 | 16S        | 29,0     | 29,9     | 120     | 4,3       |
| CA121004-1705 | 16         | 37,0     | 29,9     | 134     | 4,3       |
| CA121004-1706 | 18         | 37,0     | 33,3     | 134     | 4,3       |
| CA121004-1707 | 20         | 37,0     | 36,7     | 147     | 4,7       |
| CA121004-1708 | 22         | 37,0     | 39,9     | 147     | 4,7       |
| CA121004-1709 | 24         | 37,0     | 43,4     | 147     | 4,7       |
| CA121004-1710 | 28         | 37,0     | 49,2     | 204     | 4,7       |
| CA121004-1711 | 32         | 37,0     | 55,9     | 204     | 5,5       |
| CA121004-1712 | 36         | 37,0     | 62,1     | 204     | 5,5       |



### Protective caps

for plugs with threaded coupling  
CA06COM and CA08COM

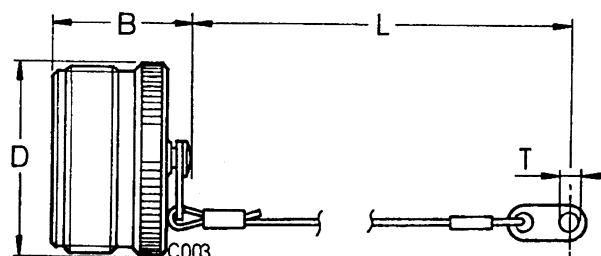


| Part No.      | Shell size | A<br>Thread     | B<br>max | D<br>max | L<br>max | T<br>+0,4 |
|---------------|------------|-----------------|----------|----------|----------|-----------|
| CA121004-1601 | 10SL       | 5/8-24UNEF-2A   | 20,5     | 16,7     | 114      | 4,0       |
| CA121004-1602 | 12S        | 3/4-20UNEF-2A   | 25,0     | 19,8     | 127      | 4,0       |
| CA121004-1603 | 14S        | 7/8-20UNEF-2A   | 25,0     | 23,0     | 127      | 4,0       |
| CA121004-1604 | 16S, 16    | 1-20UNEF-2A     | 25,0     | 26,2     | 127      | 4,0       |
| CA121004-1606 | 18         | 1-1/8-18UNEF-2A | 25,0     | 29,4     | 127      | 4,0       |
| CA121004-1607 | 20         | 1-1/4-18UNEF-2A | 25,0     | 32,5     | 141      | 4,8       |
| CA121004-1608 | 22         | 1-3/8-18UNEF-2A | 25,0     | 35,7     | 141      | 4,8       |
| CA121004-1609 | 24         | 1-1/2-18UNEF-2A | 25,0     | 38,9     | 154      | 4,8       |
| CA121004-1610 | 28         | 1-3/4-18UNEF-2A | 25,0     | 45,2     | 214      | 4,8       |
| CA121004-1611 | 32         | 2-18UNS-2A      | 25,0     | 51,6     | 214      | 5,6       |
| CA121004-1612 | 36         | 2-1/4-16UN-2A   | 25,0     | 57,9     | 214      | 5,6       |

## Accessories



Cable clamp  
without bushing

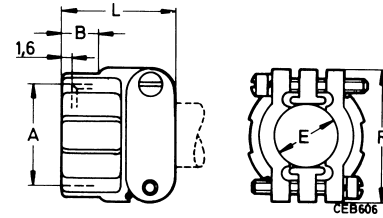


| Part No.     | Shell size | A<br>Thread      | B<br>max | E<br>max | L<br>max | R<br>max | Shell weight<br>g |
|--------------|------------|------------------|----------|----------|----------|----------|-------------------|
| CA121051-325 | 10SL, 12S  | 5/8-24UNEF-2B    | 10,5     | 7,9      | 20,8     | 22,6     | 13,2              |
| CA121051-326 | 14S        | 3/4-20UNEF-2B    | 10,6     | 11,1     | 22,4     | 27,4     | 18,0              |
| CA121051-327 | 16S, 16    | 7/8-20UNEF-2B    | 10,5     | 14,2     | 24,0     | 29,8     | 23,6              |
| CA121051-328 | 18         | 1-20UNEF-2B      | 10,5     | 15,8     | 24,0     | 32,2     | 27,3              |
| CA121051-329 | 20, 22     | 1-3/16-18UNEF-2B | 10,5     | 19,0     | 24,0     | 37,4     | 37,2              |
| CA121051-330 | 24, 28     | 1-7/16-18UNEF-2B | 10,5     | 23,7     | 26,4     | 43,5     | 56,3              |
| CA121051-331 | 32         | 1-3/4-18UNS-2B   | 12,0     | 31,8     | 28,0     | 51,7     | 83,9              |
| CA121051-332 | 36         | 2-18UNS-2B       | 13,7     | 34,6     | 29,6     | 57,8     | 109,8             |



Telescoping bushing

The telescoping bushing is used together with above cable clamps CA121051-.... It keeps oil, dirt or dust out of the endbell. Wrapping or insulating of the wires fed through the clamp is eliminated since they are protected by the bushing. Combinations of bushings may be used to reduce cable entry diameters for improved sealing.

Material: Polychloroprene

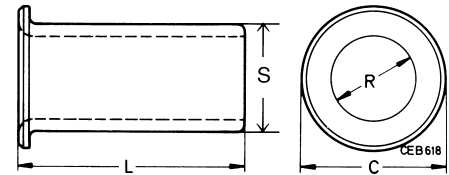


| Part No.     | Shell size | C<br>max | L<br>max | R<br>-0,3 | S<br>-0,3 |
|--------------|------------|----------|----------|-----------|-----------|
| 012-8552-000 | 10SL,12S   | 10,0     | 70,4     | 6,7       | 8,1       |
| 012-8554-000 | 14S        | 12,8     | 67,4     | 9,2       | 11,0      |
| 012-0218-000 | 16S, 16    | 18,9     | 63,9     | 11,2      | 14,2      |
| 012-0219-000 | 18         | 22,1     | 60,6     | 14,4      | 15,8      |
| 012-0220-000 | 20, 22     | 27,0     | 57,4     | 16,0      | 18,9      |
| 012-8555-000 | 24, 28     | 27,0     | 57,4     | 16,7      | 21,3      |
| 012-8556-000 | 24, 28     | 33,5     | 54,4     | 21,6      | 23,7      |
| 012-8557-000 | 32         | 33,5     | 54,4     | 21,6      | 26,6      |
| 012-8558-000 | 32         | 40,5     | 51,4     | 26,9      | 31,6      |
| 012-8558-000 | 36         | 40,5     | 51,4     | 26,9      | 31,6      |
| 012-0223-000 | 36         | 47,0     | 48,4     | 31,9      | 34,8      |


## Gaskets

These sealing gaskets made of neoprene are used with receptacles with flange for sealing between the shell and the flange of the receptacle.

for CA00COM-B



for CA02COM/CA02COM-B/CA00COM



### Rear panel mounting

| Part No.     | Shell size | A         | B      | C         | D      |
|--------------|------------|-----------|--------|-----------|--------|
|              |            | $\pm 0,1$ | $+0,2$ | $\pm 0,3$ | $+0,2$ |
| 075-8501-000 | 10SL       | 18,2      | 18,2   | 25,4      | 4,2    |
| 075-8502-000 | 12S        | 20,6      | 21,4   | 28,0      | 4,2    |
| 075-8503-000 | 14S        | 23,0      | 24,6   | 30,0      | 4,2    |
| 075-8504-000 | 16S, 16    | 24,6      | 27,4   | 32,5      | 4,2    |
| 075-8505-000 | 18         | 27,0      | 30,8   | 35,0      | 4,2    |
| 075-8506-000 | 20         | 29,4      | 34,2   | 38,0      | 4,2    |
| 075-8507-000 | 22         | 31,8      | 37,4   | 41,0      | 4,2    |
| 075-8508-000 | 24         | 34,9      | 40,8   | 44,5      | 4,2    |
| 075-8509-000 | 28         | 39,7      | 46,7   | 50,8      | 5,2    |
| 075-8510-000 | 32         | 44,5      | 53,4   | 57,0      | 5,2    |
| 075-8511-000 | 36         | 49,2      | 59,6   | 63,5      | 5,2    |

### Front panel mounting


| Part No.     | Shell size | A         | B      | C         | D      |
|--------------|------------|-----------|--------|-----------|--------|
|              |            | $\pm 0,1$ | $+0,2$ | $\pm 0,3$ | $+0,2$ |
| 075-8512-000 | 10SL       | 15,7      | 18,2   | 25,4      | 4,2    |
| 075-8513-000 | 12S        | 20,6      | 18,9   | 28,0      | 4,2    |
| 075-8514-000 | 14S        | 23,0      | 22,1   | 30,0      | 4,2    |
| 075-8515-000 | 16S, 16    | 24,6      | 25,3   | 32,5      | 4,2    |
| 075-8516-000 | 18         | 27,0      | 28,4   | 35,0      | 4,2    |
| 075-8517-000 | 20         | 29,4      | 31,6   | 38,0      | 4,2    |
| 075-8518-000 | 22         | 31,8      | 34,8   | 41,0      | 4,2    |
| 075-8519-000 | 24         | 34,9      | 38,0   | 44,5      | 4,2    |
| 075-8520-000 | 28         | 39,7      | 44,3   | 50,8      | 5,2    |
| 075-8521-000 | 32         | 44,5      | 50,7   | 57,0      | 5,2    |
| 075-8522-000 | 36         | 49,2      | 57,0   | 63,5      | 5,2    |

## Contacts

Standard contacts and contacts with reduced termination size


Finish:

**A36** - 5 µm silver plated (Standard)

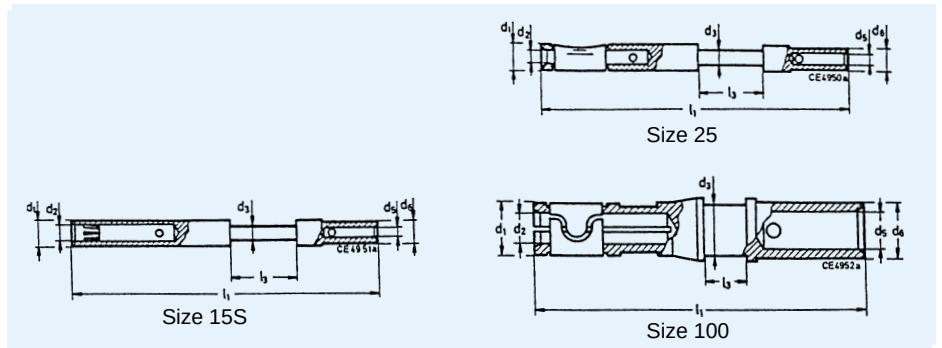

## Socket contacts

| Contact size | Termination size mm <sup>2</sup> | Part number with finish A36 | d1                   | d2 +0,05 | d3                   | d5                    | d6                    | l1 ± 0,2 | l2 ± 0,1 |
|--------------|----------------------------------|-----------------------------|----------------------|----------|----------------------|-----------------------|-----------------------|----------|----------|
| 15S          | 0,75 - 1,5                       | 031-8555-110                | 3,2 <sup>-0,15</sup> | 1,65     | 1,75 <sup>-0,1</sup> | 1,75 <sup>+0,08</sup> | 2,75 <sup>-0,05</sup> | 29,1     | 3,9      |
|              | 0,3 - 0,6                        | 031-8688-110                | 3,2 <sup>-0,15</sup> | 1,65     | 1,75 <sup>-0,1</sup> | 1,2 <sup>+0,1</sup>   | 2,75 <sup>-0,05</sup> | 29,1     | 3,9      |
|              | 0,14 - 0,38                      | 031-8555-130                | 3,2 <sup>-0,15</sup> | 1,65     | 1,75 <sup>-0,1</sup> | 0,9 <sup>+0,05</sup>  | 2,75 <sup>-0,05</sup> | 29,1     | 3,9      |
| 15           | 0,75 - 1,5                       | 031-8556-110                | 3,2 <sup>-0,15</sup> | 1,65     | 1,75 <sup>-0,1</sup> | 1,75 <sup>+0,08</sup> | 2,75 <sup>-0,05</sup> | 37,8     | 7,9      |
|              | 0,3 - 0,6                        | 031-8639-120                | 3,2 <sup>-0,15</sup> | 1,65     | 1,75 <sup>-0,1</sup> | 1,2 <sup>+0,1</sup>   | 2,75 <sup>-0,05</sup> | 37,8     | 7,9      |
|              | 0,14 - 0,38                      | 031-8556-130                | 3,2 <sup>-0,15</sup> | 1,65     | 1,75 <sup>-0,1</sup> | 0,9 <sup>+0,05</sup>  | 2,75 <sup>-0,05</sup> | 37,8     | 7,9      |
| 25           | 2,0 - 3,0                        | 031-8557-000                | 4,8 <sup>-0,1</sup>  | 2,45     | 3,3 <sup>-0,1</sup>  | 2,5 <sup>+0,1</sup>   | 3,8 <sup>-0,1</sup>   | 37,0     | 7,9      |
|              | 0,75 - 1,5                       | 031-8557-020                | 4,8 <sup>-0,1</sup>  | 2,45     | 3,3 <sup>-0,1</sup>  | 1,75 <sup>+0,08</sup> | 3,8 <sup>-0,1</sup>   | 37,0     | 7,9      |
|              | 4,0                              | 031-8557-010                | 4,8 <sup>-0,1</sup>  | 2,45     | 3,3 <sup>-0,1</sup>  | 2,8 <sup>+0,1</sup>   | 3,8 <sup>-0,1</sup>   | 37,0     | 7,9      |
|              | 0,3 - 0,6                        | 031-8557-040                | 4,8 <sup>-0,1</sup>  | 2,45     | 3,3 <sup>-0,1</sup>  | 1,2 <sup>+0,1</sup>   | 3,8 <sup>-0,1</sup>   | 37,0     | 7,9      |
| 100          | 6,0                              | 031-8558-000                | 6,5 <sup>-0,2</sup>  | 3,65     | 6,25 <sup>-0,2</sup> | 3,5 <sup>+0,1</sup>   | 6,8 <sup>-0,1</sup>   | 40,1     | 6,35     |
|              | 10,0                             | 031-8559-000                | 6,5 <sup>-0,2</sup>  | 3,65     | 6,25 <sup>-0,2</sup> | 4,8 <sup>+0,1</sup>   | 6,8 <sup>-0,1</sup>   | 40,1     | 6,35     |
|              | 2,0 - 3,0                        | 031-8519-010                | 6,5 <sup>-0,2</sup>  | 3,65     | 6,25 <sup>-0,2</sup> | 2,5 <sup>+0,05</sup>  | 6,8 <sup>-0,1</sup>   | 40,1     | 6,35     |
|              | 4,0                              | 031-8519-000                | 6,5 <sup>-0,2</sup>  | 3,65     | 6,25 <sup>-0,2</sup> | 4,55 <sup>+0,1</sup>  | 6,8 <sup>-0,1</sup>   | 40,1     | 6,35     |

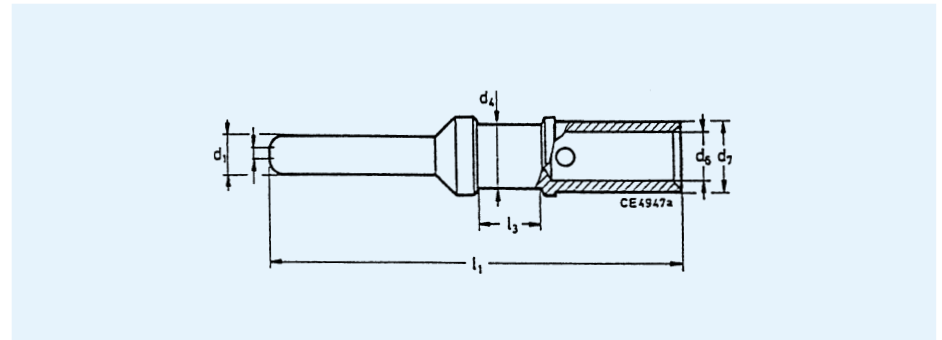

## Pin Contacts

| Contact size | Termination size mm <sup>2</sup> | Part number with finish A36 | d1 -0,05 | d4                    | d6                    | d7                    | l1 ± 0,15 | l3 ± 0,5 |
|--------------|----------------------------------|-----------------------------|----------|-----------------------|-----------------------|-----------------------|-----------|----------|
| 15S          | 0,75 - 1,5                       | 030-8586-000                | 1,6      | 1,75 <sup>-0,1</sup>  | 1,75 <sup>+0,08</sup> | 2,75 <sup>-0,05</sup> | 27,4      | 3,85     |
|              | 0,3 - 0,6                        | 330-8744-000                | 1,6      | 1,75 <sup>-0,1</sup>  | 1,2 <sup>+0,1</sup>   | 2,75 <sup>-0,05</sup> | 27,4      | 3,85     |
|              | 0,14 - 0,38                      | 030-8586-010                | 1,6      | 1,75 <sup>-0,1</sup>  | 0,9 <sup>+0,05</sup>  | 2,75 <sup>-0,05</sup> | 27,4      | 3,85     |
| 15           | 0,75 - 1,5                       | 030-8587-000                | 1,6      | 1,75 <sup>-0,1</sup>  | 1,75 <sup>+0,08</sup> | 2,75 <sup>-0,05</sup> | 31,4      | 7,9      |
|              | 0,3 - 0,6                        | 330-8659-000                | 1,6      | 1,75 <sup>-0,1</sup>  | 1,2 <sup>+0,1</sup>   | 2,75 <sup>-0,05</sup> | 31,4      | 7,9      |
|              | 0,14 - 0,38                      | 030-8587-030                | 1,6      | 1,75 <sup>-0,1</sup>  | 0,9 <sup>+0,05</sup>  | 2,75 <sup>-0,05</sup> | 31,4      | 7,9      |
| 25           | 2,0 - 3,0                        | 030-8588-000                | 2,4      | 3,3 <sup>-0,15</sup>  | 2,5 <sup>+0,1</sup>   | 3,8 <sup>-0,1</sup>   | 37,0      | 7,9      |
|              | 0,75 - 1,5                       | 030-8588-010                | 2,4      | 3,3 <sup>-0,15</sup>  | 1,75 <sup>+0,08</sup> | 3,8 <sup>-0,1</sup>   | 37,0      | 7,9      |
|              | 4,0                              | 030-8588-054                | 2,4      | 3,3 <sup>-0,15</sup>  | 2,8 <sup>+0,1</sup>   | 3,8 <sup>-0,1</sup>   | 37,0      | 7,9      |
| 100          | 6,0                              | 030-8589-000                | 3,6      | 6,25 <sup>-0,15</sup> | 3,5 <sup>+0,1</sup>   | 6,8 <sup>-0,1</sup>   | 39,6      | 6,35     |
|              | 10,0                             | 030-8590-000                | 3,6      | 6,25 <sup>-0,15</sup> | 4,8 <sup>+0,1</sup>   | 6,8 <sup>-0,1</sup>   | 39,6      | 6,35     |
|              | 2,0 - 3,0                        | 030-8612-010                | 3,6      | 6,25 <sup>-0,15</sup> | 2,5 <sup>+0,05</sup>  | 6,8 <sup>-0,1</sup>   | 39,6      | 6,35     |
|              | 4,0                              | 030-8612-020                | 3,6      | 6,25 <sup>-0,15</sup> | 2,8 <sup>+0,1</sup>   | 6,8 <sup>-0,1</sup>   | 39,6      | 6,35     |

## Tooling

### Hand crimp tool

for pin / socket contacts acc to VG95234 and Cannon contacts with reduced termination size

| Contact size | Wire size mm <sup>2</sup> | Hand crimp tools | Order reference | Crimp locator | Order reference |
|--------------|---------------------------|------------------|-----------------|---------------|-----------------|
| 15           | 0,3 – 1,5                 | M22520-1-01      | 995-0001-585    | TH 452        | 995-0002-052    |
| 15S          | 0,3 – 1,5                 |                  |                 |               |                 |
| 25           | 0,3 – 4,0                 |                  |                 |               |                 |

### Pneumatic crimp tool

for pin / socket contacts acc to VG95234 and Cannon contacts with reduced termination size

| Contact size | Wire size mm <sup>2</sup> | Pneumatic table crimp tool | Order reference | Bench mount | Order reference | Foot pedal | Order reference | Crimp locator | Order reference |
|--------------|---------------------------|----------------------------|-----------------|-------------|-----------------|------------|-----------------|---------------|-----------------|
| 15           | 0,3 – 1,5                 | WA27F-CE                   | 121586-5067     | BM-2        | 121586-5068     | WA10       | 121586-5069     | TH 452        | 995-0002-052    |
| 15S          | 0,3 – 1,5                 |                            |                 |             |                 |            |                 |               |                 |
| 25           | 0,3 – 4,0                 |                            |                 |             |                 |            |                 |               |                 |

### Hydraulic hand crimp tool

for pin / socket contacts acc to VG95234 and Cannon contacts with reduced termination size

| Contact size | Wire size mm <sup>2</sup> | Hand pump                          | Order reference | Foot pedal     | Order reference | High pressure hose 2 m                             | Order reference | Crimp head                                         | Order reference |
|--------------|---------------------------|------------------------------------|-----------------|----------------|-----------------|----------------------------------------------------|-----------------|----------------------------------------------------|-----------------|
| 100          | 2,0 – 10,0                | 4601.00000.330                     | 121586-0027     | 4601.51000.330 | 121586-0008     | 4604.00000.020                                     | 121586-0023     | 4632.00000.601                                     | 121586-0031     |
|              |                           | Safety device incl. Bench mounting | Order reference | Positioner     | Order reference | Crimp Turrets (upper crimp die)<br>Order reference |                 | Crimp Turrets (lower crimp die)<br>Order reference |                 |
|              |                           | CT121086-3079                      | 121086-3079     | 121086-3080    | 121086-3080     | 317-8531-000                                       |                 | 317-8531-001                                       |                 |

**Note:** Hydraulic electro pump (HK 12EL) upon request.

### Insertion tools / Extraction tools

| Contact size | Insertion tools |                 | Insertion pliers |                 | Extraction tools |                 |
|--------------|-----------------|-----------------|------------------|-----------------|------------------|-----------------|
|              | Part No.        | Order reference | Part No.         | Order reference | Part No.         | Order reference |
| 15           | CIT 16          | 121086-3008     | CIT-F80-16       | 121086-0097     | CET-F80-16       | 121086-0081     |
| 25           | CIT 12          | 121086-3007     | CIT-F80-12       | 121086-0096     | CET-F80-12       | 121086-0080     |
| 100          | CIT 8           | 121086-0095     |                  |                 | CET-8            | 121086-0079     |

### Crimp contacts

Connectors of series CA-COM and CA-COM-B are also available with crimp contacts for AWG wire sizes. In order to wire, insert and extract these contacts the tools mentioned on this page are needed. All tools have to be ordered separately.

Please ask for our detailed **Wiring and Assembly instructions**.

Hand crimp tool




Dimensions (closed, without locator)  
220 x 60 x 22 mm  
Weight (without turret) approx. 800 g

Pneumatic crimp tool

Pneumatic table crimp tool WA 27F-CE

Hydraulic hand crimp tool

- 1 Hand pump
- 2 Foot pedal
- 3 High pressure hose 2 m
- 4 Crimp head
- 5 Safety device incl. bench mounting
- 6 Positioner  
(to be used with 121086-3079 only)

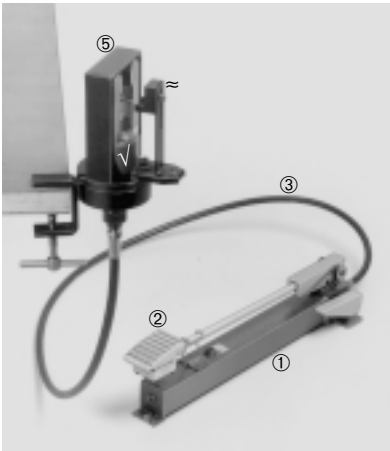

Technical Data  
**Hand pump:**  
Length 560 mm  
Width 140 mm  
Height 120 mm  
Oil contents 900 cm<sup>3</sup>  
Usable oil quality 730 cm<sup>3</sup>  
Output per lift 2,5 cm<sup>3</sup>  
**High pressure hose:**  
Length 2 m  
**Crimp head:**  
Crimp force 120 kN  
Lift (with positioners) 25 mm  
Weight (incl. oil) 13 kg approx.

Insertion tools / Extraction tools



Insertion tool



Insertion pliers



Extraction tool

## Product Safety Information

**THIS NOTE SHOULD BE READ IN CONJUNCTION WITH THE PRODUCT DATA SHEET/CATALOGUE. FAILURE TO OBSERVE THE ADVICE IN THIS INFORMATION SHEET AND THE OPERATING CONDITIONS SPECIFIED IN THE PRODUCT DATA SHEET/CATALOGUE COULD RESULT IN HAZARDOUS SITUATIONS.**

### 1. MATERIAL CONTENT AND PHYSICAL FORM

Electrical connectors do not usually contain hazardous materials. They contain conducting and non-conducting materials and can be divided into two groups.

a) Printed circuit types and low cost audio types which employ all plastic insulators and casings.

b) Rugged, Fire Barrier and High Reliability types with metal casings and either natural rubber, synthetic rubber, plastic or glass insulating materials.

Contact materials vary with type of connector and also application and are usually manufactured from either copper, copper alloys, nickel, alumel, chromel or steel. In special applications, other alloys may be specified.

### 2. FIRE CHARACTERISTICS AND ELECTRIC SHOCK HAZARD

**There is no fire hazard when the connector is correctly wired and used within the specified parameters. Incorrect wiring or assembly of the connector or careless use of metal tools or conductive fluids, or transit damage to any of the component parts may cause electric shock or burns. Live circuits must not be broken by separating mated connectors as this may cause arcing, ionisation and burning.**

Heat dissipation is greater at maximum resistance in a circuit. Hot spots may occur when resistance is raised locally by damage, e.g. cracked or deformed contacts, broken strands of wire. Local overheating may also result from the use of the incorrect application tools or from poor quality soldering or slack screw terminals. Overheating may occur if the ratings in the Product Data Sheet/Catalogue are exceeded and can cause breakdown of insulation and hence electric shock.

If heating is allowed to continue it intensifies by further increasing the local resistance through loss of temper of spring contacts, formation of oxide film on contacts and wires, and leakage currents through carbonisation of insulation and tracking paths. Fire can then result in the presence of combustible materials and this may release noxious fumes. Overheating may not be visually apparent. Burns may result from touching overheated components.

### 3. HANDLING

Care must be taken to avoid damage to any component parts of electrical connectors during installation and use. Although there are normally no sharp edges, care must be taken when handling certain components to avoid injury to fingers.

Electrical connectors may be damaged in transit to the customers, and damage may result in creation of hazards. Products should therefore be examined prior to installation/use and rejected if found to be damaged.

### 4. DISPOSAL

Incineration of certain materials may release noxious or even toxic fumes.

### 5. APPLICATION

Connectors with exposed contacts should not be selected for use on the current supply side of an electrical circuit, because an electric shock could result from touching exposed contacts on an unmated connector. Voltages in excess of 30 V ac or 42.5 V dc are potentially hazardous and care should be taken to ensure that such voltages can not be transmitted in any way to exposed metal parts of the connector body. The connector and wiring should be checked, before making live, to have no damage to metal parts or insulators, no solder blobs, loose strands, conducting lubricants, swarf, or any other undesired conducting particles. Insulation resistance should be checked to make certain that no low resistance joints or spurious conducting path are existing between contacts and exposed metal parts of the connector body. Further the contact resistance of the connectors should be measured within the electrical circuit in order to identify high resistances which result in excessive connector heating.

Always use the correct application tools as specified in the Data Sheet/Catalogue.

Do not permit untrained personnel to wire, assemble or tramper with connectors.

For operation voltage please see appropriate national regulations.

### IMPORTANT GENERAL INFORMATION.

#### 1. Air and creepage paths/Operating voltage

The admissible operating voltages depend on the individual applications and the valid national and other applicable safety regulations.

For this reason the air and creepage path data are only reference values. Observe reduction of air and creepage paths due to PC board and/or harnessing.

#### 2. Temperature

All information given are temperature limits. The operation temperature depends on the individual application.

#### 3. Other important information

Cannon continuously endeavours to improve their products. Therefore, Cannon products may deviate from the description, technical data and shape as shown in this catalogue and data sheets.

#### 4. Harnessing and Assembly Instructions

If applicable, our special harnessing and/or assembly instruction has to be adhered to. This is provided at request.

ITT Cannon, a division of ITT Industries, Inc. manufactures the highest quality products available in the marketplace; however these products are intended to be used in accordance with the specifications in this catalog. Any use or application that deviates from stated operating specifications is not recommended and may be unsafe. No information and data contained in this catalog shall be construed to create any liability on the part of Cannon. Any new issue of this catalog shall automatically invalidate and supersede any and all previous issues. **A limited warranty applies to Cannon products. Except for obligations assumed by Cannon under this warranty, Cannon shall not be liable for any loss, damage, cost of repairs, incidental or consequential damages of any kind, whether or not based on express or implied warranty, contract, negligence or strict liability arising in connection with the design, manufacture, sale, use or repair of the products.** Product availability, prices and delivery dates are exclusively subject to our respective order confirmation form; the same applies to orders based on development samples delivered. This catalog is not to be construed as an offer. It is intended merely as an invitation to make an offer. By this publication, Cannon does not assume responsibility or any liability for any patent infringements or other rights of third parties which may result from its use. Reprinting this catalog is generally permitted, indicating the source. However, Cannon's prior consent must be obtained in all cases.

Cannon is a trademark of ITT Industries, Inc



---

## Cannon Worldwide Facilities

---

**Austria**

Afrikanergasse 3  
1020 Vienna  
FAX: (1) 2160948 PH: (1) 2160947

---

**Benelux**

Residence Leopold  
Genèvestreet 10  
1140 Brussels, Belgium  
FAX: (02) 7269201 PH: (02) 726 75 94  
NL  
FAX: 31.35.691.8796 PH: 31.35.691.6855

---

**China**

No. 24, 2 Block  
Taohuawu New District  
Zhenjiang, Jiangsu  
P.R.C.  
FAX: 86 511 4428616 PH: 86 511 443 3399

---

**Denmark**

Park Allé 287 A  
2605 Brøndby  
FAX: 43 43 58 58 PH: 43 45 52 88

---

**Finland**

Virkatie 1  
1510 Vantaa  
FAX: +358 9 70039188 PH: +358 9 70039180

---

**France**

2, Ave Sablons Bouillants, B.P. 133  
77109 Meaux  
FAX: (1) 64 33 16 82 PH: (1) 60 24 51 51

---

**Germany**

Postfach 11 20, 71365 Weinstadt  
Cannonstrasse 1, 71384 Weinstadt  
FAX: (07151) 699217 PH: (07151) 699-0

---

**Hong Kong**

Unit 901 & 912, West Tower  
Shun Tak Center  
168-200 Connaught Road  
Central  
FAX: (852) 2732-2919 PH: (852) 2732-2720

---

**Italy**

Via Panzeri 10  
20123 Milano  
FAX: (02) 8372036 PH: (02) 581801

---

**Japan**

5362-1, 5-chome, Hibarigaoka  
Zama-shi, Kanagawa 228  
FAX: 0462-57-1680 PH: 0462-57-2010

---

**Korea**

620, Changkang Bldg.  
#22, Dohwa-dong, Mapo-ku  
Seoul  
FAX: (02) 717 7330 PH: (02) 702 7111

---

**Spain**

Parque Empresarial San Fernando  
Edificio Italia 1ª Planta  
28830 Madrid  
FAX: (34) 91 656 15 83 PH: (34) 91 656 03 11

---

**Sweden**

Norr Mälarstrand 64  
Jaktvarvet 1  
11235 Stockholm  
FAX: (46) 8 650 0072 PH: (46) 8 650 0071

---

**Switzerland**

Herzogenmühle 18  
8304 Wallisellen  
FAX: (01) 830-3104 PH: (01) 830-3888, 830-3613

---

**United Kingdom**

Jays Close, Viabes Estate  
Basingstoke Hampshire RG22 4BA  
FAX: (01256) 323356 PH: (01256) 311200

---

**United States**

666 E. Dyer Road  
Santa Ana, CA 92705-5612  
FAX: 714.628.2142 PH: 714.557.4700

---

**INTERNET**

<http://www.ittcannon.com>

---

# Cannon



**ITT Industries**  
*Engineered for life*