- **Direct Upgrades to TL07x and TL08x BiFET Operational Amplifiers**
- **Faster Slew Rate (20 V/μs Typ) Without Increased Power Consumption**
- **On-Chip Offset-Voltage Trimming for Improved DC Performance and Precision Grades Are Available (1.5 mV, TL051A)**

TL051
D OR P PACKAGE
(TOP VIEW)

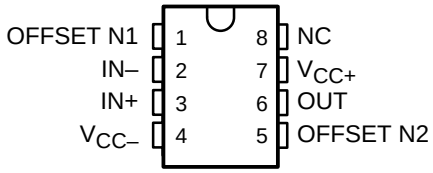

TL052
D, P, OR PS PACKAGE
(TOP VIEW)



TL054
D, DB, N, OR NS PACKAGE
(TOP VIEW)



description/ordering information

The TL05x series of JFET-input operational amplifiers offers improved dc and ac characteristics over the TL07x and TL08x families of BiFET operational amplifiers. On-chip Zener trimming of offset voltage yields precision grades as low as 1.5 mV (TL051A) for greater accuracy in dc-coupled applications. Texas Instruments improved BiFET process and optimized designs also yield improved bandwidth and slew rate without increased power consumption. The TL05x devices are pin-compatible with the TL07x and TL08x and can be used to upgrade existing circuits or for optimal performance in new designs.

BiFET operational amplifiers offer the inherently higher input impedance of the JFET-input transistors, without sacrificing the output drive associated with bipolar amplifiers. This makes them better suited for interfacing with high-impedance sensors or very low-level ac signals. They also feature inherently better ac response than bipolar or CMOS devices having comparable power consumption.

The TL05x family was designed to offer higher precision and better ac response than the TL08x, with the low noise floor of the TL07x. Designers requiring significantly faster ac response or ensured lower noise should consider the Excalibur TLE208x and TLE207x families of BiFET operational amplifiers.

Because BiFET operational amplifiers are designed for use with dual power supplies, care must be taken to observe common-mode input voltage limits and output swing when operating from a single supply. DC biasing of the input signal is required, and loads should be terminated to a virtual-ground node at mid-supply. Texas Instruments TLE2426 integrated virtual ground generator is useful when operating BiFET amplifiers from single supplies.

The TL05x are fully specified at ±15 V and ±5 V. For operation in low-voltage and/or single-supply systems, Texas Instruments LinCMOS families of operational amplifiers (TLC-prefix) are recommended. When moving from BiFET to CMOS amplifiers, particular attention should be paid to the slew rate and bandwidth requirements, and also the output loading.

Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

Copyright © 2003, Texas Instruments Incorporated

ORDERING INFORMATION

T_A	V_{IO}max AT 25°C	PACKAGE†		ORDERABLE PART NUMBER	TOP-SIDE MARKING
0°C to 70°C	800 μV	PDIP (P)	Tube of 50	TL051ACP	TL051ACP
				TL052ACP	TL052ACP
		SOIC (D)	Tube of 75	TL051ACD	051AC
			Tube of 75	TL052ACD	052AC
			Reel of 2500	TL052ACDR	
	1.5 mV	PDIP (P)	Tube of 50	TL051CP	TL051CP
				TL052CP	TL052CP
		PDIP (N)	Tube of 25	TL054ACN	TL054ACN
		SOIC (D)	Tube of 75	TL051CD	TL051C
			Reel of 2500	TL051CDR	
			Tube of 75	TL052CD	TL052C
			Reel of 2500	TL052CDR	
			Tube of 50	TL054ACD	TL054C
			Reel of 2500	TL054ACDR	
		SOP (PS)	Reel of 2000	TL052CPSR	TL052
		SSOP (DB)	Reel of 2000	TL054CDBR	TL054
	4 mV	PDIP (N)	Tube of 25	TL054CN	TL054CN
		SOIC (D)	Tube of 50	TL054CD	TL054C
			Reel of 2500	TL054CDR	
		SOP (NS)	Reel of 2000	TL054CNSR	TL054
–40°C to 85°C	800 μV	PDIP (P)	Tube of 50	TL052AIP	TL052AI
		SOIC (D)	Tube of 75	TL052AID	052AI
			Reel of 2500	TL052AIDR	
	1.5 mV	PDIP (N)	Tube of 25	TL054AIN	TL054AIN
		PDIP (P)	Tube of 50	TL051IP	TL051IP
				TL052IP	TL052IP
		SOIC (D)	Tube of 75	TL051ID	TL051I
			Tube of 75	TL052ID	TL052I
			Reel of 2500	TL052IDR	
			Tube of 50	TL054AID	TL054AI
			Reel of 2500	TL054AIDR	
	4 mV	PDIP (N)	Tube of 25	TL054IN	TL054IN
		SOIC (D)	Tube of 50	TL054ID	TL054I
			Reel of 2500	TL054IDR	

† Package drawings, standard packing quantities, thermal data, symbolization, and PCB design guidelines are available at www.ti.com/sc/package.

symbol (each amplifier)



equivalent schematic (each amplifier)

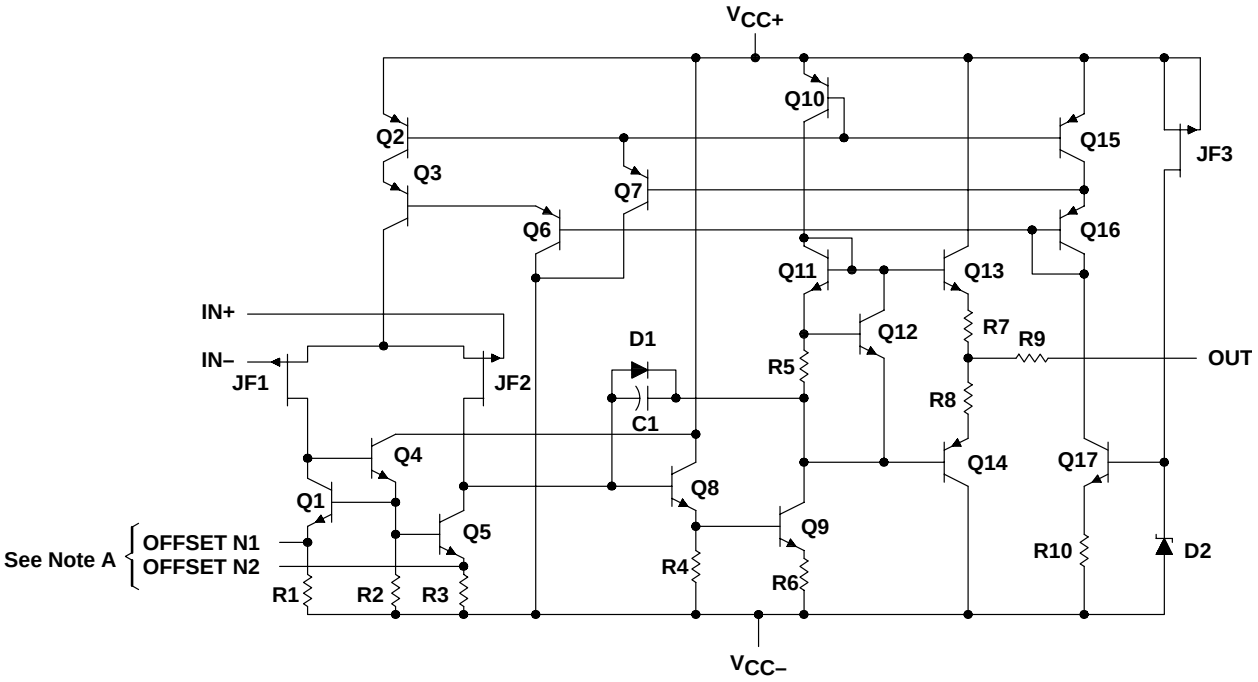

NOTE A: OFFSET N1 and OFFSET N2 are available only on the TL051x.

ACTUAL DEVICE COMPONENT COUNT†			
COMPONENT	**TL051**	**TL052**	**TL054**
Transistors	20	34	62
Resistors	10	19	37
Diodes	2	3	5
Capacitors	1	2	4

† These figures include all four amplifiers and all ESD, bias, and trim circuitry.

absolute maximum ratings over operating free-air temperature range (unless otherwise noted)†

Supply voltage, V_{CC+} (see Note 1) . . . . . 18 V
Supply voltage, V_{CC-} (see Note 1) . . . . . –18 V
Differential input voltage (see Note 2) . . . . . ±30 V
Input voltage range, V_I (any input, see Notes 1 and 3) . . . . . ±15 V
Input current, I_I (each input) . . . . . ±1 mA
Output current, I_O (each output) . . . . . ±80 mA
Total current into V_{CC+} . . . . . 160 mA
Total current out of V_{CC-} . . . . . 160 mA
Duration of short-circuit current at (or below) 25°C . . . . . Unlimited
Package thermal impedance, θ_{JA} (see Notes 4 and 5): D package (8 pin) . . . . . 97°C/W
D package (14 pin) . . . . . 86°C/W
DB package (14 pin) . . . . . 96°C/W
N package (14 pin) . . . . . 80°C/W
NS package (14 pin) . . . . . 76°C/W
P package (8 pin) . . . . . 85°C/W
PS package (8 pin) . . . . . 95°C/W
Operating virtual junction temperature, T_J . . . . . 150°C
Lead temperature 1,6 mm (1/16inch) from case for 10 seconds . . . . . 260°C
Storage temperature range . . . . . –65°C to 150°C

† Stresses beyond those listed under “absolute maximum ratings” may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under “recommended operating conditions” is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

NOTES: 1. All voltage values, except differential voltages, are with respect to the midpoint between V_{CC+} and V_{CC-}.
2. Differential voltages are at IN+ with respect to IN–.
3. The magnitude of the input voltage must never exceed the magnitude of the supply voltage or 15 V, whichever is less.
4. Maximum power dissipation is a function of $T_J(max)$, θ_{JA}, and T_A. The maximum allowable power dissipation at any allowable ambient temperature is $P_D = (T_J(max) – T_A)/\theta_{JA}$. Operating at the absolute maximum T_J of 150°C can impact reliability.
5. The package thermal impedance is calculated in accordance with JESD 51-7.

recommended operating conditions

			C SUFFIX		I SUFFIX		UNIT
			MIN	MAX	MIN	MAX	
$V_{CC\pm}$	Supply voltage		±5	±15	±5	±15	V
V_{IC}	Common-mode input voltage	$V_{CC\pm}$ = ±5 V	–1	4	–1	4	V
		$V_{CC\pm}$ = ±15 V	–11	11	–11	11	
T_A	Operating free-air temperature		0	70	–40	85	°C

TL051C and TL051AC electrical characteristics at specified free-air temperature

PARAMETER		TEST CONDITIONS		T_A†	TL051C, TL051AC						UNIT
					$V_{CC\pm}$ = ±5 V			$V_{CC\pm}$ = ±15 V			
					MIN	TYP	MAX	MIN	TYP	MAX	
V_{IO}	Input offset voltage	V_O = 0, V_{IC} = 0, R_S = 50 Ω	TL051C	25°C		0.75	3.5		0.59	1.5	mV
				Full range			4.5			2.5	
			TL051AC	25°C		0.55	2.8		0.35	0.8	
				Full range			3.8			1.8	
$\alpha_{V_{IO}}$	Temperature coefficient of input offset voltage‡		TL051C	25°C to 70°C		8			8		µV/°C
			TL051AC	25°C to 70°C		8			8	25	
	Input offset-voltage long-term drift§			25°C		0.04			0.04		µV/mo
I_{IO}	Input offset current	V_O = 0, V_{IC} = 0, See Figure 5		25°C		4	100		5	100	pA
				70°C		0.02	1		0.025	1	nA
I_{IB}	Input bias current	V_O = 0, V_{IC} = 0, See Figure 5		25°C		20	200		30	200	pA
				70°C		0.15	4		0.2	4	nA
V_{ICR}	Common-mode input voltage range			25°C	–1 to 4	–2.3 to 5.6		–11 to 11	–12.3 to 15.6		V
				Full range	–1 to 4			–11 to 11			
V_{OM+}	Maximum positive peak output voltage swing	R_L = 10 kΩ		25°C	3	4.2		13	13.9		V
				Full range	3			13			
		R_L = 2 kΩ		25°C	2.5	3.8		11.5	12.7		
				Full range	2.5			11.5			
$V_{OM–}$	Maximum negative peak output voltage swing	R_L = 10 kΩ		25°C	–2.5	–3.5		–12	–13.2		V
				Full range	–2.5			–12			
		R_L = 2 kΩ		25°C	–2.3	–3.2		–11	–12		
				Full range	–2.3			–11			
A_{VD}	Large-signal differential voltage amplification¶	R_L = 2 kΩ		25°C	25	59		50	105		V/mV
				0°C	30	65		60	129		
				70°C	20	46		30	85		
r_i	Input resistance			25°C		10^{12}			10^{12}		Ω
c_i	Input capacitance			25°C		10			12		pF
CMRR	Common-mode rejection ratio	V_{IC} = V_{ICR}min, V_O = 0, R_S = 50 Ω		25°C	65	85		75	93		dB
				0°C	65	84		75	92		
				70°C	65	84		75	91		
k_{SVR}	Supply-voltage rejection ratio ($\Delta V_{CC\pm}/\Delta V_{IO}$)	V_O = 0, R_S = 50 Ω		25°C	75	99		75	99		dB
				0°C	75	98		75	98		
				70°C	75	97		75	97		
I_{CC}	Supply current	V_O = 0, No load		25°C		2.6	3.2		2.7	3.2	mA
				0°C		2.7	3.2		2.8	3.2	
				70°C		2.6	3.2		2.7	3.2	

† Full range is 0°C to 70°C.
‡ This parameter is tested on a sample basis for the TL051A. For other test requirements, please contact the factory. This statement has no bearing on testing or nontesting of other parameters.
§ Typical values are based on the input offset-voltage shift observed through 168 hours of operating life test at T_A = 150°C, extrapolated to T_A = 25°C using the Arrhenius equation, and assuming an activation energy of 0.96 eV.
¶ For $V_{CC\pm}$ = ±5 V, V_O = ±2.3 V, or for $V_{CC\pm}$ = ±15 V, V_O = ±10 V.

TL051C and TL051AC operating characteristics at specified free-air temperature

PARAMETER		TEST CONDITIONS		T_A†	TL051C, TL051AC						UNIT
					$V_{CC\pm}$ = ±5 V			$V_{CC\pm}$ = ±15 V			
					MIN	TYP	MAX	MIN	TYP	MAX	
SR+	Positive slew rate at unity gain‡	R_L = 2 kΩ, See Figure 1	C_L = 100 pF,	25°C		16		13	20		V/μs
				Full range		16.4		11	22.6		
SR–	Negative slew rate at unity gain‡			25°C		15		13	18		
				Full range		16		11	19.3		
t_r	Rise time	$V_{I(PP)}$ = ±10 mV, R_L = 2 kΩ, C_L = 100 pF, See Figures 1 and 2		25°C		55			56		ns
				0°C		54			55		
				70°C		63			63		
t_f	Fall time			25°C		55			57		
				0°C		54			56		
				70°C		62			64		
	Overshoot factor			25°C		24			19		%
				0°C		24			19		
				70°C		24			19		
V_n	Equivalent input noise voltage§	R_S = 20 Ω, See Figure 3	f = 10 Hz	25°C		75			75		nV/√Hz
			f = 1 kHz	25°C		18			18	30	
$V_{N(PP)}$	Peak-to-peak equivalent input noise voltage		f = 10 Hz to 10 kHz	25°C		4			4		μV
I_n	Equivalent input noise current	f = 1 kHz		25°C		0.01			0.01		pA/√Hz
THD	Total harmonic distortion¶	R_S = 1 kΩ, f = 1 kHz	R_L = 2 kΩ,	25°C		0.003			0.003		%
B_1	Unity-gain bandwidth	V_I = 10 mV, C_L = 25 pF,	R_L = 2 kΩ, See Figure 4	25°C		3			3.1		MHz
				0°C		3.2			3.3		
				70°C		2.7			2.8		
ϕ_m	Phase margin at unity gain	V_I = 10 mV, C_L = 25 pF,	R_L = 2 kΩ, See Figure 4	25°C		59			62		deg
				0°C		58			62		
				70°C		59			62		

† Full range is 0°C to 70°C.
‡ For $V_{CC\pm}$ = ±5 V, $V_{I(PP)}$ = ±1 V; for $V_{CC\pm}$ = ±15 V, $V_{I(PP)}$ = ±5 V.
§ This parameter is tested on a sample basis for the TL051A. For other test requirements, please contact the factory. This statement has no bearing on testing or nontesting of other parameters.
¶ For $V_{CC\pm}$ = ±5 V, $V_{O(RMS)}$ = 1 V; for $V_{CC\pm}$ = ±15 V, $V_{O(RMS)}$ = 6 V.

TL051I and TL051AI electrical characteristics at specified free-air temperature

PARAMETER		TEST CONDITIONS		T_A†	TL051I, TL051AI						UNIT
					$V_{CC\pm}$ = ±5 V			$V_{CC\pm}$ = ±15 V			
					MIN	TYP	MAX	MIN	TYP	MAX	
V_{IO}	Input offset voltage	V_O = 0, V_{IC} = 0, R_S = 50 Ω	TL051I	25°C		0.75	3.5		0.59	1.5	mV
				Full range			5.3			3.3	
			TL051AI	25°C		0.55	2.8		0.35	0.8	
				Full range			4.6			2.6	
$\alpha_{V_{IO}}$	Temperature coefficient of input offset voltage‡		TL051I	25°C to 85°C		7			8		µV/°C
			TL051AI	25°C to 85°C		8			8	25	
	Input offset-voltage long-term drift§			25°C		0.04			0.04		µV/mo
I_{IO}	Input offset current	V_O = 0, V_{IC} = 0, See Figure 5		25°C		4	100		5	100	pA
				85°C		0.06	10		0.07	10	nA
I_{IB}	Input bias current	V_O = 0, V_{IC} = 0, See Figure 5		25°C		20	200		30	200	pA
				85°C		0.6	20		0.7	20	nA
V_{ICR}	Common-mode input voltage range			25°C	–1 to 4	–2.3 to 5.6		–11 to 11	–12.3 to 15.6		V
				Full range	–1 to 4			–11 to 11			
V_{OM+}	Maximum positive peak output voltage swing	R_L = 10 kΩ		25°C	3	4.2		13	13.9		V
				Full range	3			13			
		R_L = 2 kΩ		25°C	2.5	3.8		11.5	12.7		
				Full range	2.5			11.5			
V_{OM-}	Maximum negative peak output voltage swing	R_L = 10 kΩ		25°C	–2.5	–3.5		–12	–13.2		V
				Full range	–2.5			–12			
		R_L = 2 kΩ		25°C	–2.3	–3.2		–11	–12		
				Full range	–2.3			–11			
A_{VD}	Large-signal differential voltage amplification¶	R_L = 2 kΩ		25°C	25	59		50	105		V/mV
				–40°C	30	74		60	145		
				85°C	20	43		30	76		
r_i	Input resistance			25°C		10^{12}			10^{12}		Ω
c_i	Input capacitance			25°C		10			12		pF
CMRR	Common-mode rejection ratio	V_{IC} = V_{ICR}min, V_O = 0, R_S = 50 Ω		25°C	65	85		75	93		dB
				–40°C	65	83		75	90		
				85°C	65	84		75	93		
k_{SVR}	Supply-voltage rejection ratio ($\Delta V_{CC\pm}/\Delta V_{IO}$)	V_O = 0, R_S = 50 Ω		25°C	75	99		75	99		dB
				–40°C	75	98		75	98		
				85°C	75	99		75	99		
I_{CC}	Supply current	V_O = 0, No load		25°C		2.6	3.2		2.7	3.2	mA
				–40°C		2.4	3.2		2.6	3.2	
				85°C		2.5	3.2		2.6	3.2	

† Full range is –40°C to 85°C

‡ This parameter is tested on a sample basis for the TL051A. For other test requirements, please contact the factory. This statement has no bearing on testing or nontesting of other parameters.

§ Typical values are based on the input offset-voltage shift observed through 168 hours of operating life test at T_A = 150°C, extrapolated to T_A = 25°C using the Arrhenius equation, and assuming an activation energy of 0.96 eV.

¶ For $V_{CC\pm}$ = ±5 V, V_O = ±2.3 V, or for $V_{CC\pm}$ = ±15 V, V_O = ±10 V.

TL051I and TL051AI operating characteristics at specified free-air temperature

PARAMETER		TEST CONDITIONS		T_A†	TL051I, TL051AI						UNIT
					$V_{CC\pm}$ = ±5 V			$V_{CC\pm}$ = ±15 V			
					MIN	TYP	MAX	MIN	TYP	MAX	
SR+	Positive slew rate at unity gain‡	R_L = 2 kΩ, See Figure 1	C_L = 100 pF,	25°C		16		13	20		V/μs
				Full range				11			
SR–	Negative slew rate at unity gain‡			25°C		15		13	18		
				Full range				11			
t_r	Rise time	$V_{I(PP)}$ = ±10 mV, R_L = 2 kΩ, C_L = 100 pF, See Figures 1 and 2		25°C		55			56		ns
				–40°C		52			53		
				85°C		64			65		
t_f	Fall time			25°C		55			57		
				–40°C		51			53		
				85°C		64			65		
	Overshoot factor			25°C		24			19		%
				–40°C		24			19		
				85°C		24			19		
V_n	Equivalent input noise voltage§	R_S = 20 Ω, See Figure 3	f = 10 Hz	25°C		75			75		nV/√Hz
			f = 1 kHz	25°C		18			18	30	
$V_{N(PP)}$	Peak-to-peak equivalent input noise voltage		f = 10 Hz to 10 kHz	25°C		4			4		μV
I_n	Equivalent input noise current	f = 1 kHz		25°C		0.01			0.01		pA/√Hz
THD	Total harmonic distortion¶	R_S = 1 kΩ, f = 1 kHz	R_L = 2 kΩ,	25°C		0.003			0.003		%
B_1	Unity-gain bandwidth	V_I = 10 mV, C_L = 25 pF,	R_L = 2 kΩ, See Figure 4	25°C		3			3.1		MHz
				–40°C		3.5			3.6		
				85°C		2.6			2.7		
ϕ_m	Phase margin at unity gain	V_I = 10 mV, C_L = 25 pF,	R_L = 2 kΩ, See Figure 4	25°C		59			62		deg
				–40°C		58			61		
				85°C		59			62		

† Full range is –40°C to 85°C.
‡ For $V_{CC\pm}$ = ±5 V, $V_{I(PP)}$ = ±1 V; for $V_{CC\pm}$ = ±15 V, $V_{I(PP)}$ = ±5 V.
§ This parameter is tested on a sample basis for the TL051A. For other test requirements, please contact the factory. This statement has no bearing on testing or nontesting of other parameters.
¶ For $V_{CC\pm}$ = ±5 V, $V_{O(RMS)}$ = 1 V; for $V_{CC\pm}$ = ±15 V, $V_{O(RMS)}$ = 6 V.

TL052C and TL052AC electrical characteristics at specified free-air temperature

PARAMETER		TEST CONDITIONS		T_A†	TL052C, TL052AC						UNIT
					$V_{CC\pm}$ = ±5 V			$V_{CC\pm}$ = ±15 V			
					MIN	TYP	MAX	MIN	TYP	MAX	
V_{IO}	Input offset voltage	V_O = 0, V_{IC} = 0, R_S = 50 Ω	TL052C	25°C		0.73	3.5		0.65	1.5	mV
				Full range			4.5			2.5	
			TL052AC	25°C		0.51	2.8		0.4	0.8	
				Full range			3.8			1.8	
$\alpha_{V_{IO}}$	Temperature coefficient of input offset voltage‡		TL052C	25°C to 70°C		8			8		µV/°C
			TL052AC	25°C to 70°C		8			6	25	
	Input offset-voltage long-term drift§	V_O = 0, R_S = 50 Ω	V_{IC} = 0,	25°C		0.04			0.04		µV/mo
I_{IO}	Input offset current	V_O = 0, See Figure 5	V_{IC} = 0,	25°C		4	100		5	100	pA
				70°C		0.02	1		0.025	1	nA
I_{IB}	Input bias current	V_O = 0, See Figure 5	V_{IC} = 0,	25°C		20	200		30	200	pA
				70°C		0.15	4		0.2	4	nA
V_{ICR}	Common-mode input voltage range			25°C	–1 to 4	–2.3 to 5.6		–11 to 11	–12.3 to 15.6		V
				Full range	–1 to 4			–11 to 11			
V_{OM+}	Maximum positive peak output voltage swing	R_L = 10 kΩ		25°C	3	4.2		13	13.9		V
				Full range	3			13			
		R_L = 2 kΩ		25°C	2.5	3.8		11.5	12.7		
				Full range	2.5			11.5			
$V_{OM–}$	Maximum negative peak output voltage swing	R_L = 10 kΩ		25°C	–2.5	–3.5		–12	–13.2		V
				Full range	–2.5			–12			
		R_L = 2 kΩ		25°C	–2.3	–3.2		–11	–12		
				Full range	–2.3			–11			
A_{VD}	Large-signal differential voltage amplification¶	R_L = 2 kΩ		25°C	25	59		50	105		V/mV
				0°C	30	65		60	129		
				70°C	20	46		30	85		
r_i	Input resistance			25°C		10^{12}			10^{12}		Ω
c_i	Input capacitance			25°C		10			12		pF
CMRR	Common-mode rejection ratio	V_{IC} = V_{ICR}min, V_O = 0,	R_S = 50 Ω	25°C	65	85		75	93		dB
				0°C	65	84		75	92		
				70°C	65	84		75	91		

† Full range is 0°C to 70°C.

‡ This parameter is tested on a sample basis. For other test requirements, please contact the factory. This statement has no bearing on testing or nontesting of other parameters.

§ Typical values are based on the input offset-voltage shift observed through 168 hours of operating life test at T_A = 150°C, extrapolated to T_A = 25°C using the Arrhenius equation, and assuming an activation energy of 0.96 eV.

¶ For $V_{CC\pm}$ = ±5 V, V_O = ±2.3 V; at $V_{CC\pm}$ = ±15 V, V_O = ±10 V.

TL052C and TL052AC electrical characteristics at specified free-air temperature (continued)

PARAMETER		TEST CONDITIONS		T_A	TL052C, TL052AC						UNIT
					$V_{CC\pm}$ = ±5 V			$V_{CC\pm}$ = ±15 V			
					MIN	TYP	MAX	MIN	TYP	MAX	
k_{SVR}	Supply-voltage rejection ratio ($\Delta V_{CC\pm}/\Delta V_{IO}$)	V_O = 0,	R_S = 50 Ω	25°C	75	99		75	99		dB
				0°C	75	98		75	98		
				70°C	75	97		75	97		
I_{CC}	Supply current (two amplifiers)	V_O = 0,	No load	25°C		4.6	5.6		4.8	5.6	mA
				0°C		4.7	6.4		4.8	6.4	
				70°C		4.4	6.4		4.6	6.4	
V_{O1}/V_{O2}	Crosstalk attenuation	A_{VD} = 100		25°C		120			120		dB

TL052C and TL052AC operating characteristics at specified free-air temperature

PARAMETER		TEST CONDITIONS		T_A†	TL052C, TL052AC						UNIT
					$V_{CC\pm}$ = ±5 V			$V_{CC\pm}$ = ±15 V			
					MIN	TYP	MAX	MIN	TYP	MAX	
SR+	Slew rate at unity gain	R_L = 2 kΩ, C_L = 100 pF, See Figure 1		25°C		17.8		9	20.7		V/μs
				Full range				8			
SR–	Negative slew rate at unity gain‡			25°C		15.4		9	17.8		
				Full range				8			
t_r	Rise time	$V_{I(PP)}$ = ±10 mV, R_L = 2 kΩ, C_L = 100 pF, See Figures 1 and 2		25°C		55			56		ns
				0°C		54			55		
				70°C		63			63		
t_f	Fall time			25°C		55			57		
				0°C		54			56		
				70°C		62			64		
	Overshoot factor			25°C		24			19		%
				0°C		24			19		
				70°C		24			19		
V_n	Equivalent input noise voltage§	R_S = 20 Ω, See Figure 3	f = 10 Hz	25°C		71			71		nV/√Hz
			f = 1 kHz	25°C		19			19	30	
$V_{N(PP)}$	Peak-to-peak equivalent input noise current		f = 10 Hz to 10 kHz	25°C		4			4		μV
I_n	Equivalent input noise current	f = 1 kHz		25°C		0.01			0.01		pA/√Hz
THD	Total harmonic distortion¶	R_S = 1 kΩ, f = 1 kHz	R_L = 2 kΩ,	25°C		0.003			0.003		%
B_1	Unity-gain bandwidth	V_I = 10 mV, C_L = 25 pF,	R_L = 2 kΩ, See Figure 4	25°C		3			3		MHz
				0°C		3.2			3.2		
				70°C		2.6			2.7		
ϕ_m	Phase margin at unity gain	V_I = 10 mV, C_L = 25 pF,	R_L = 2 kΩ, See Figure 4	25°C		60			63		deg
				0°C		59			63		
				70°C		60			63		

† Full range is 0°C to 70°C.
‡ For $V_{CC\pm}$ = ±5 V, $V_{I(PP)}$ = ±1 V; for $V_{CC\pm}$ = ±15 V, $V_{I(PP)}$ = ±5 V.
§ This parameter is tested on a sample basis. For other test requirements, please contact the factory. This statement has no bearing on testing or nontesting of other parameters.
¶ For $V_{CC\pm}$ = ±5 V, $V_{O(RMS)}$ = 1 V; for $V_{CC\pm}$ = ±15 V, $V_{O(RMS)}$ = 6 V.

TL052I and TL052AI electrical characteristics at specified free-air temperature

PARAMETER		TEST CONDITIONS		T_A†	TL052I, TL052AI						UNIT
					$V_{CC\pm}$ = ±5 V			$V_{CC\pm}$ = ±15 V			
					MIN	TYP	MAX	MIN	TYP	MAX	
V_{IO}	Input offset voltage	V_O = 0, V_{IC} = 0, R_S = 50 Ω	TL052I	25°C		0.73	3.5		0.65	1.5	mV
				Full range			5.3			3.3	
			TL052AI	25°C		0.51	2.8		0.4	0.8	
				Full range			4.6			2.6	
$\alpha_{V_{IO}}$	Temperature coefficient‡		TL052I	25°C to 85°C		7			6		µV/°C
			TL052AI	25°C to 85°C		6			6	25	
	Input offset-voltage long-term drift§	V_O = 0, R_S = 50 Ω	V_{IC} = 0,	25°C		0.04			0.04		µV/mo
I_{IO}	Input offset current	V_O = 0, See Figure 5	V_{IC} = 0,	25°C		4	100		5	100	pA
				85°C		0.06	10		0.07	10	nA
I_{IB}	Input bias current	V_O = 0, See Figure 5	V_{IC} = 0,	25°C		20	200		30	200	pA
				85°C		0.6	20		0.7	20	nA
V_{ICR}	Common-mode input voltage range			25°C	–1 to 4	–2.3 to 5.6		–11 to 11	–12.3 to 15.6		V
				Full range	–1 to 4			–11 to 11			
V_{OM+}	Maximum positive peak output voltage swing	R_L = 10 kΩ		25°C	3	4.2		13	13.9		V
				Full range	3			13			
		R_L = 2 kΩ		25°C	2.5	3.8		11.5	12.7		
				Full range	2.5			11.5			
$V_{OM–}$	Maximum negative peak output voltage swing	R_L = 10 kΩ		25°C	–2.5	–3.5		–12	–13.2		V
				Full range	–2.5			–12			
		R_L = 2 kΩ		25°C	–2.3	–3.2		–11	–12		
				Full range	–2.3			–11			
A_{VD}	Large-signal differential voltage amplification¶	R_L = 2 kΩ		25°C	25	59		50	105		V/mV
				–40°C	30	74		60	145		
				85°C	20	43		30	76		
r_i	Input resistance			25°C		10^{12}			10^{12}		Ω
c_i	Input capacitance			25°C		10			12		pF
CMRR	Common-mode rejection ratio	V_{IC} = V_{ICR}min, V_O = 0,	R_S = 50 Ω	25°C	65	85		75	93		dB
				–40°C	65	83		75	90		
				85°C	65	84		75	93		

† Full range is –40°C to 85°C.

‡ This parameter is tested on a sample basis. For other test requirements, please contact the factory. This statement has no bearing on testing or nontesting of other parameters

§ Typical values are based on the input offset-voltage shift observed through 168 hours of operating life test at T_A = 150°C, extrapolated to T_A = 25°C using the Arrhenius equation, and assuming an activation energy of 0.96 eV.

¶ At $V_{CC\pm}$ = ±5 V, V_O = ±2.3 V; at $V_{CC\pm}$ = ±15 V, V_O = ±10 V.

TL052I and TL052AI electrical characteristics at specified free-air temperature (continued)

PARAMETER		TEST CONDITIONS	T_A	TL052I, TL052AI						UNIT
				$V_{CC\pm}$ = ±5 V			$V_{CC\pm}$ = ±15 V			
				MIN	TYP	MAX	MIN	TYP	MAX	
k_{SVR}	Supply-voltage rejection ratio ($\Delta V_{CC\pm}/\Delta V_{IO}$)	V_O = 0, R_S = 50 Ω	25°C	75	99		75	99		dB
			–40°C	75	98		75	98		
			85°C	75	99		75	99		
I_{CC}	Supply current (two amplifiers)	V_O = 0, No load	25°C		4.6	5.6		4.8	5.6	mA
			–40°C		4.5	6.4		4.7	6.4	
			85°C		4.4	6.4		4.6	6.4	
V_{O1}/V_{O2}	Crosstalk attenuation	A_{VD} = 100	25°C		120			120		dB

TL052I and TL052AI operating characteristics at specified free-air temperature

PARAMETER		TEST CONDITIONS		T_A†	TL052I, TL052AI						UNIT
					$V_{CC\pm}$ = ±5 V			$V_{CC\pm}$ = ±15 V			
					MIN	TYP	MAX	MIN	TYP	MAX	
SR+	Slew rate at unity gain‡	R_L = 2 kΩ, C_L = 100 pF, See Figure 1		25°C		17.8		9	20.7		V/μs
				Full range				8			
SR–	Negative slew rate at unity gain‡			25°C		15.4		9	17.8		
				Full range				8			
t_r	Rise time	$V_{I(PP)}$ = ±10 mV, R_L = 2 kΩ, C_L = 100 pF, See Figures 1 and 2		25°C		55			56		ns
				–40°C		52			53		
				85°C		64			65		
t_f	Fall time			25°C		55			57		
				–40°C		51			53		
				85°C		64			65		
	Overshoot factor			25°C		24%			19%		%
				–40°C		24%			19%		
				85°C		24%			19		
V_n	Equivalent input noise voltage§	R_S = 20 Ω, See Figure 3	f = 10 Hz	25°C		71			71		nV/√Hz
			f = 1 kHz	25°C		19			19	30	
$V_{N(PP)}$	Peak-to-peak equivalent input noise current		f = 10 Hz to 10 kHz	25°C		4			4		μV
I_n	Equivalent input noise current	f = 1 kHz		25°C		0.01			0.01		pA/√Hz
THD	Total harmonic distortion¶	R_S = 1 kΩ, R_L = 2 kΩ, f = 1 kHz		25°C		0.003			0.003		%
B_1	Unity-gain bandwidth	V_I = 10 mV, C_L = 25 pF, R_L = 2 kΩ, See Figure 4		25°C		3			3		MHz
				–40°C		3.5			3.6		
				85°C		2.5			2.6		
ϕ_m	Phase margin at unity gain	V_I = 10 mV, C_L = 25 pF, R_L = 2 kΩ, See Figure 4		25°C		60			63		deg
				–40°C		58			61		
				85°C		60			63		

† Full range is –40°C to 85°C.
‡ For $V_{CC\pm}$ = ±5 V, $V_{I(PP)}$ = ±1 V; for $V_{CC\pm}$ = ±15 V, $V_{I(PP)}$ = ±5 V.
§ This parameter is tested on a sample basis. For other test requirements, please contact the factory. This statement has no bearing on testing or nontesting of other parameters.
¶ For $V_{CC\pm}$ = ±5 V, $V_{O(RMS)}$ = 1 V; for $V_{CC\pm}$ = ±15 V, $V_{O(RMS)}$ = 6 V.

TL054C and TL054AC electrical characteristics at specified free-air temperature

PARAMETER		TEST CONDITIONS		T_A†	TL054C, TL054AC						UNIT
					$V_{CC\pm}$ = ±5 V			$V_{CC\pm}$ = ±15 V			
					MIN	TYP	MAX	MIN	TYP	MAX	
V_{IO}	Input offset voltage	V_O = 0, V_{IC} = 0, R_S = 50 Ω	TL054C	25°C		0.64	5.5		0.56	4	mV
				Full range			7.7			6.2	
			TL054AC	25°C		0.57	3.5		0.5	1.5	
				Full range			5.7			3.7	
$\alpha_{V_{IO}}$	Temperature coefficient of input offset voltage		TL054C	25°C to 70°C		25			23		µV/°C
			TL054AC	25°C to 70°C		24			23		
	Input offset-voltage long-term drift‡			25°C		0.04			0.04		µV/mo
I_{IO}	Input offset current	V_O = 0, V_{IC} = 0, See Figure 5		25°C		4	100		5	100	pA
				70°C		0.02	1		0.025	1	nA
I_{IB}	Input bias current	V_O = 0, V_{IC} = 0, See Figure 5		25°C		20	200		30	200	pA
				70°C		0.15	4		0.2	4	nA
V_{ICR}	Common-mode input voltage range			25°C	–1 to 4	–2.3 to 5.6		–11 to 11	–12.3 to 15.6		V
				Full range	–1 to 4			–11 to 11			
V_{OM+}	Maximum positive peak output voltage swing	R_L = 10 kΩ		25°C	3	4.2		13	13.9		V
				Full range	3			13			
		R_L = 2 kΩ		25°C	2.5	3.8		11.5	12.7		
				Full range	2.5			11.5			
$V_{OM–}$	Maximum negative peak output voltage swing	R_L = 10 kΩ		25°C	–2.5	–3.5		–12	–13.2		V
				Full range	–2.5			–12			
		R_L = 2 kΩ		25°C	–2.3	–3.2		–11	–12		
				Full range	–2.3			–11			
A_{VD}	Large-signal differential voltage amplification§	R_L = 2 kΩ		25°C	25	72		50	133		V/mV
				0°C	30	88		60	173		
				70°C	20	57		30	85		
r_i	Input resistance			25°C		10^{12}			10^{12}		Ω
c_i	Input capacitance			25°C		10			12		pF
CMRR	Common-mode rejection ratio	V_{IC} = V_{ICR}min, V_O = 0, R_S = 50 Ω		25°C	65	84		75	92		dB
				0°C	65	84		75	92		
				70°C	65	84		75	93		
k_{SVR}	Supply-voltage rejection ratio ($\Delta V_{CC\pm}/\Delta V_{IO}$)	$V_{CC\pm}$ = ±5 V to ±15 V, V_O = 0, R_S = 50 Ω		25°C	75	99		75	99		dB
				0°C	75	99		75	99		
				70°C	75	99		75	99		
I_{CC}	Supply current (four amplifiers)	V_O = 0, No load		25°C		8.1	11.2		8.4	11.2	mA
				0°C		8.2	12.8		8.5	12.8	
				70°C		7.9	11.2		8.2	11.2	
V_{O1}/V_{O2}	Crosstalk attenuation	A_{VD} = 100		25°C		120			120		dB

† Full range is 0°C to 70°C.

‡ Typical values are based on the input offset-voltage shift observed through 168 hours of operating life test at T_A = 150°C, extrapolated to T_A = 25°C using the Arrhenius equation, and assuming an activation energy of 0.96 eV.

§ For $V_{CC\pm}$ = ±5 V, V_O = ±2.3 V, at $V_{CC\pm}$ = ±15 V, V_O = ±10 V.B

TL054C and TL054AC operating characteristics at specified free-air temperature

PARAMETER		TEST CONDITIONS		T_A†	TL054C, TL054C						UNIT
					$V_{CC\pm}$ = ±5 V			$V_{CC\pm}$ = ±15 V			
					MIN	TYP	MAX	MIN	TYP	MAX	
SR+	Positive slew rate at unity gain	R_L = 2 kΩ, C_L = 100 pF, See Figure 1 and Note 7		25°C		15.4		10	17.8		V/μs
				0°C		15.7		8	17.9		
SR–	Negative slew rate at unity gain‡			70°C		14.4		8	17.5		
				25°C		13.9		10	15.9		
				0°C		14.3		8	16.1		
				70°C		13.3		8	15.5		
t_r	Rise time	$V_{I(PP)}$ = ±10 mV, R_L = 2 kΩ, C_L = 100 pF, See Figures 1 and 2		25°C		55			56		ns
				0°C		54			55		
				70°C		63			63		
t_f	Fall time			25°C		55			57		
				0°C		54			56		
				70°C		62			64		
	Overshoot factor			25°C		24%			19%		%
				0°C		24%			19%		
				70°C		24%			19		
V_n	Equivalent input noise voltage§	R_S = 20 Ω, See Figure 3	f = 10 Hz	25°C		75			75		nV/√Hz
			f = 1 kHz	25°C		21			21	45	
$V_{N(PP)}$	Peak-to-peak equivalent input noise voltage		f = 10 Hz to 10 kHz	25°C		4			4		μV
I_n	Equivalent input noise current	f = 1 kHz		25°C		0.01			0.01		pA/√Hz
THD	Total harmonic distortion¶	R_S = 1 kΩ, R_L = 2 kΩ, f = 1 kHz		25°C		0.003			0.003		%
B_1	Unity-gain bandwidth	V_I = 10 mV, C_L = 25 pF, R_L = 2 kΩ, See Figure 4		25°C		2.7			2.7		MHz
				0°C		3			3		
				70°C		2.4			2.4		
ϕ_m	Phase margin at unity gain	V_I = 10 mV, C_L = 25 pF, R_L = 2 kΩ, See Figure 4		25°C		61			64		deg
				0°C		60			64		
				70°C		61			63		

† Full range is 0°C to 70°C.
‡ For $V_{CC\pm}$ = ±5 V, $V_{I(PP)}$ = ±1 V; for $V_{CC\pm}$ = ±15 V, $V_{I(PP)}$ = ±5 V.
§ This parameter is tested on a sample basis. For other test requirements, please contact the factory. This statement has no bearing on testing or nontesting of other parameters.
¶ For $V_{CC\pm}$ = ±5 V, $V_{O(RMS)}$ = 1 V; for $V_{CC\pm}$ = ±15 V, $V_{O(RMS)}$ = 6 V.

TL054I and TL054AI electrical characteristics at specified free-air temperature

PARAMETER		TEST CONDITIONS		T_A†	TL054I, TL054AI						UNIT
					$V_{CC\pm}$ = ±5 V			$V_{CC\pm}$ = ±15 V			
					MIN	TYP	MAX	MIN	TYP	MAX	
V_{IO}	Input offset voltage	V_O = 0, V_{IC} = 0, R_S = 50 Ω	TL054I	25°C		0.64	5.5		0.56	4	mV
				Full range			8.8			7.3	
			TL054AI	25°C		0.57	3.5		0.5	1.5	
				Full range			6.8			4.8	
$\alpha_{V_{IO}}$	Temperature coefficient of input offset voltage		TL054I	25°C to 85°C		25			24		µV/°C
			TL054AI	25°C to 85°C		25			23		
	Input offset voltage long-term drift‡			25°C		0.04			0.04		µV/mo
I_{IO}	Input offset current	V_O = 0, V_{IC} = 0, See Figure 5		25°C		4	100		5	100	pA
				85°C		0.06	10		0.07	10	nA
I_{IB}	Input bias current	V_O = 0, V_{IC} = 0, See Figure 5		25°C		20	200		30	200	pA
				85°C		0.6	20		0.7	20	nA
V_{ICR}	Common-mode input voltage range			25°C	–1 to 4	–2.3 to 5.6		–11 to 11	–12.3 to 15.6		V
				Full range	–1 to 4			–11 to 11			
V_{OM+}	Maximum positive peak output voltage swing	R_L = 10 kΩ		25°C	3	4.2		13	13.9		V
				Full range	3			13			
		R_L = 2 kΩ		25°C	2.5	3.8		11.5	12.7		
				Full range	2.5			11.5			
$V_{OM–}$	Maximum negative peak output voltage swing	R_L = 10 kΩ		25°C	–2.5	–3.5		–12	–13.2		V
				Full range	–2.5			–12			
		R_L = 2 kΩ		25°C	–2.3	–3.2		–11	–12		
				Full range	–2.3			–11			
A_{VD}	Large-signal differential voltage amplification§	R_L = 2 kΩ		25°C	25	72		50	133		V/mV
				–40°C	30	101		60	212		
				85°C	20	50		30	70		
r_i	Input resistance			25°C		10^{12}			10^{12}		Ω
c_i	Input capacitance			25°C		10			12		pF
CMRR	Common-mode rejection ratio	V_{IC} = V_{ICR}min, V_O = 0, R_S = 50 Ω		25°C	65	84		75	92		dB
				–40°C	65	83		75	92		
				85°C	65	84		75	93		
k_{SVR}	Supply-voltage rejection ratio ($\Delta V_{CC\pm}/\Delta V_{IO}$)	$V_{CC\pm}$ = ±5 V to ±15 V, V_O = 0, R_S = 50 Ω		25°C	75	99		75	99		dB
				–40°C	75	98		75	99		
				85°C	75	99		75	99		
I_{CC}	Supply current (four amplifiers)	V_O = 0, No load		25°C		8.1	11.2		8.4	11.2	mA
				–40°C		7.9	12.8		8.2	12.8	
				85°C		7.6	11.2		7.9	11.2	
V_{O1}/V_{O2}	Crosstalk attenuation	A_{VD} = 100		25°C		120			120		dB

† Full range is –40°C to 85°C.
‡ Typical values are based on the input offset voltage shift observed through 168 hours of operating life test at T_A = 150°C, extrapolated to T_A = 25°C using the Arrhenius equation, and assuming an activation energy of 0.96 eV.
§ For $V_{CC\pm}$ = ±5 V, V_O = ±2.3 V, at $V_{CC\pm}$ = ±15 V, V_O = ±10 V.

TL054I and TL054AI operating characteristics at specified free-air temperature

PARAMETER		TEST CONDITIONS		T_A†	TL054I, TL054AI						UNIT
					$V_{CC\pm}$ = ±5 V			$V_{CC\pm}$ = ±15 V			
					MIN	TYP	MAX	MIN	TYP	MAX	
SR+	Positive slew rate at unity gain	R_L = 2 kΩ, See Figure 1	C_L = 100 pF,	25°C		15.4		10	17.8		V/μs
				–40°C		16.4		8	18		
SR–	Negative slew rate at unity gain‡			85°C		14		8	17.3		
				25°C		13.9		10	15.9		
				–40°C		14.7		8	16.1		
				85°C		13		8	15.3		
t_r	Rise time	$V_{I(PP)}$ = ±10 mV, R_L = 2 kΩ, C_L = 100 pF, See Figures 1 and 2		25°C		55			56		ns
				–40°C		52			53		
				85°C		64			65		
t_f	Fall time			25°C		55			57		
				–40°C		51			53		
				85°C		64			65		
	Overshoot factor			25°C		24			19		%
				–40°C		24			19		
				85°C		24			19		
V_n	Equivalent input noise voltage§	R_S = 20 Ω, See Figure 3	f = 10 Hz	25°C		75			75		nV/√Hz
			f = 1 kHz	25°C		21			21	45	
$V_{N(PP)}$	Peak-to-peak equivalent input noise voltage		f = 10 Hz to 10 kHz	25°C		4			4		μV
I_n	Equivalent input noise current	f = 1 kHz		25°C		0.01			0.01		pA/√Hz
THD	Total harmonic distortion¶	R_S = 1 kΩ, f = 1 kHz	R_L = 2 kΩ,	25°C		0.003%			0.003%		%
B_1	Unity-gain bandwidth	V_I = 10 mV, C_L = 25 pF,	R_L = 2 kΩ, See Figure 4	25°C		2.7			2.7		MHz
				–40°C		3.3			3.3		
				85°C		2.3			2.4		
ϕ_m	Phase margin at unity gain	V_I = 10 mV, C_L = 25 pF,	R_L = 2 kΩ, See Figure 4	25°C		61			64		deg
				–40°C		59			62		
				85°C		61			64		

† Full range is –40°C to 85°C.
‡ For $V_{CC\pm}$ = ±5 V, $V_{I(PP)}$ = ±1 V; for $V_{CC\pm}$ = ±15 V, $V_{I(PP)}$ = ±5 V.
§ This parameter is tested on a sample basis. For other test requirements, please contact the factory. This statement has no bearing on testing or nontesting of other parameters.
¶ For $V_{CC\pm}$ = ±5 V, $V_{O(RMS)}$ = 1 V; for $V_{CC\pm}$ = ±15 V, $V_{O(RMS)}$ = 6 V.

PARAMETER MEASUREMENT INFORMATION



NOTE A: C_L includes fixture capacitance.

Figure 1. Slew Rate, Rise/Fall Time, and Overshoot Test Circuit

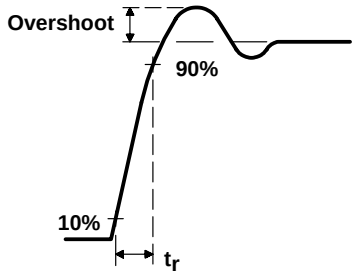

Figure 2. Rise-Time and Overshoot Waveform



Figure 3. Noise-Voltage Test Circuit

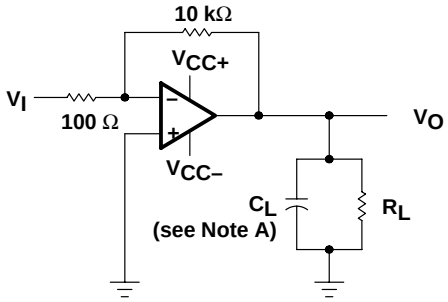

NOTE A: C_L includes fixture capacitance.

Figure 4. Unity-Gain Bandwidth and Phase-Margin Test Circuit

typical values

Typical values, as presented in this data sheet represent the median (50% point) of device parametric performance.

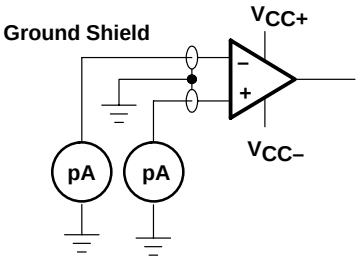

Figure 5. Input-Bias and Offset-Current Test Circuit

input bias and offset current

At the picoamp-bias-current level typical of the TL05x and TL05xA, accurate measurement of the bias current becomes difficult. Not only does this measurement require a picoammeter, but test-socket leakages easily can exceed the actual device bias currents. To accurately measure these small currents, Texas Instruments uses a two-step process. The socket leakage is measured using picoammeters with bias voltages applied, but with no device in the socket. The device then is inserted in the socket, and a second test that measures both the socket leakage and the device input bias current is performed. The two measurements then are subtracted algebraically to determine the bias current of the device.

noise

Because of the increasing emphasis on low noise levels in many of today's applications, the input noise voltage density is sample tested at f = 1 kHz. Texas Instruments also has additional noise-testing capability to meet specific application requirements. Please contact the factory for details.

TYPICAL CHARACTERISTICS

Table of Graphs

			FIGURE
V_{IO}	Input offset voltage	Distribution	6–11
$\alpha_{V_{IO}}$	Temperature coefficient of input offset voltage	Distribution	12, 13, 14
I_{IB}	Input bias current	vs Common-mode input voltage vs Free-air temperature	15 16
I_{IO}	Input offset current	vs Free-air temperature	16
V_{IC}	Common-mode input voltage range limits	vs Supply voltage vs Free-air temperature	17 18
V_O	Output voltage	vs Differential input voltage	19, 20
V_{OM}	Maximum peak output voltage	vs Supply voltage vs Output current vs Free-air temperature	21 25, 26 27, 28
$V_{O(PP)}$	Maximum peak-to-peak output voltage	vs Frequency	22, 23, 24
A_{VD}	Large-signal differential voltage amplification	vs Load resistance vs Frequency vs Free-air temperature	29 30 31, 32, 33
CMRR	Common-mode rejection ratio	vs Frequency vs Free-air temperature	34, 35 36
z_o	Output impedance	vs Frequency	37
k_{SVR}	Supply-voltage rejection ratio	vs Free-air temperature	38
I_{OS}	Short-circuit output current	vs Supply voltage vs Time vs Free-air temperature	39 40 41
I_{CC}	Supply current	vs Supply voltage vs Free-air temperature	42, 43, 44 45, 46, 47
SR	Slew rate	vs Load resistance vs Free-air temperature	48–53 54–59
	Overshoot factor	vs Load capacitance	60
V_n	Equivalent input noise voltage	vs Frequency	61, 62
THD	Total harmonic distortion	vs Frequency	63
B_1	Unity-gain bandwidth	vs Supply voltage vs Free-air temperature	64, 65, 66 67, 68, 69
ϕ_m	Phase margin	vs Supply voltage vs Load capacitance vs Free-air temperature	70, 71, 72 73, 74, 75 76, 77, 78
	Phase shift	vs Frequency	30
	Voltage-follower small-signal pulse response	vs Time	79
	Voltage-follower large-signal pulse response	vs Time	80

TYPICAL CHARACTERISTICS

**DISTRIBUTION OF TL051
INPUT OFFSET VOLTAGE**

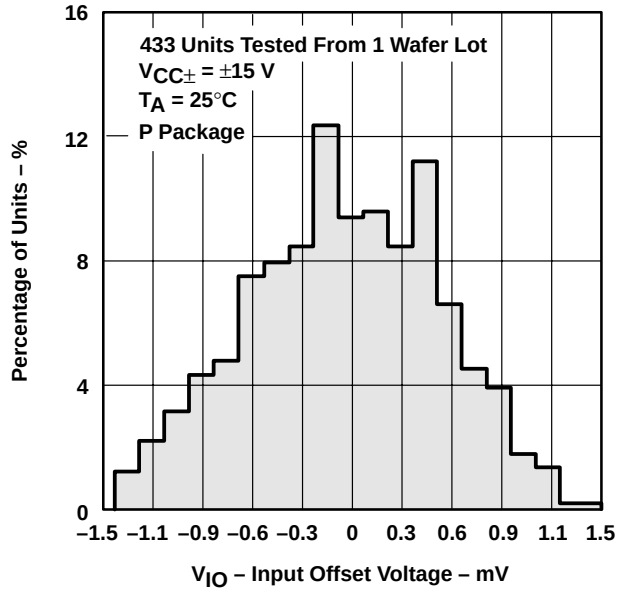

Figure 6

**DISTRIBUTION OF TL051A
INPUT OFFSET VOLTAGE**

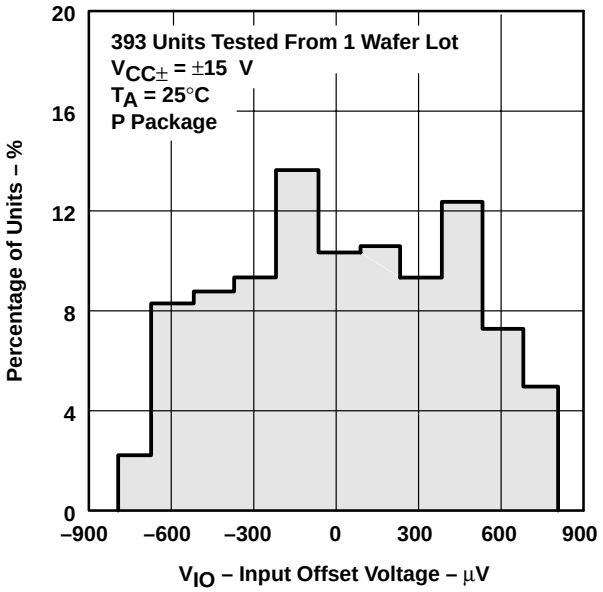

Figure 7

**DISTRIBUTION OF TL052
INPUT OFFSET VOLTAGE**

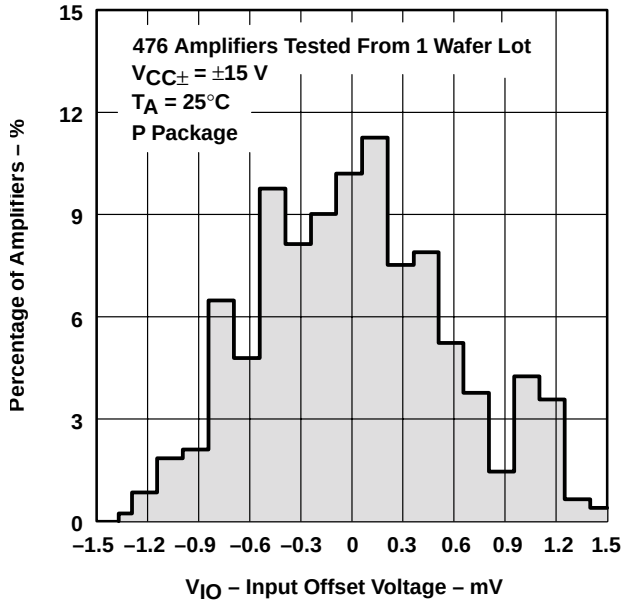

Figure 8

**DISTRIBUTION OF TL052A
INPUT OFFSET VOLTAGE**

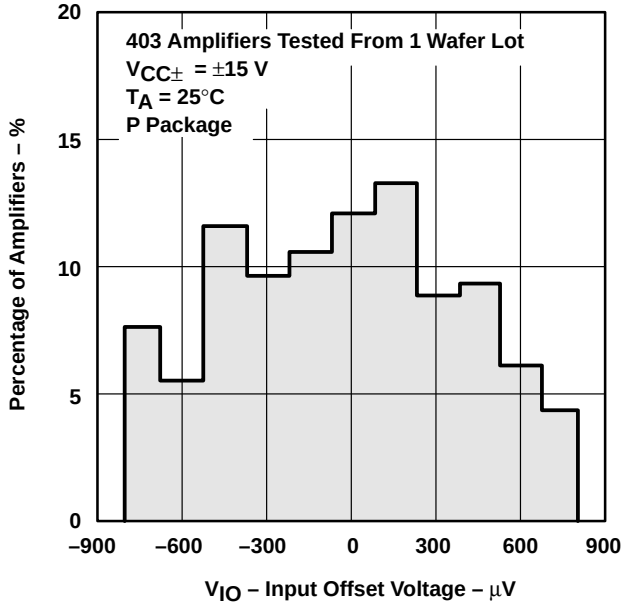

Figure 9

TYPICAL CHARACTERISTICS

**DISTRIBUTION OF TL054
INPUT OFFSET VOLTAGE**

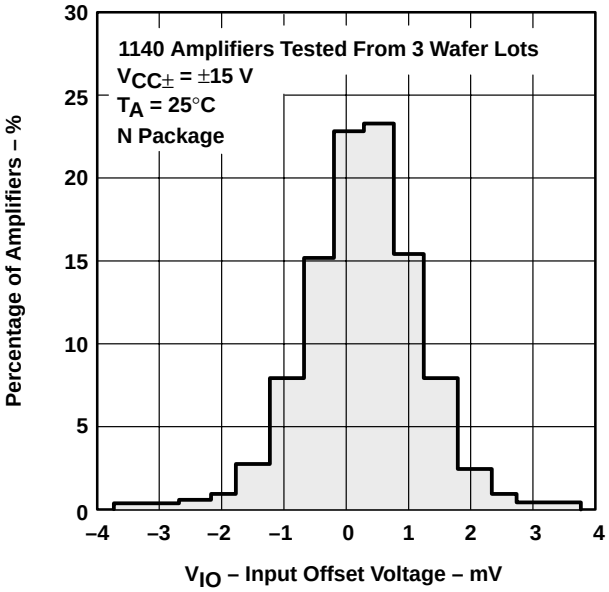

Figure 10

**DISTRIBUTION OF TL054A
INPUT OFFSET VOLTAGE**

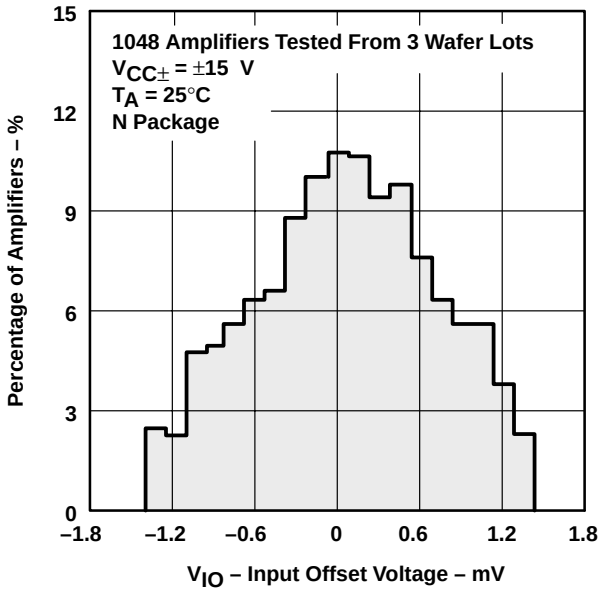

Figure 11

**DISTRIBUTION OF TL051
INPUT OFFSET VOLTAGE
TEMPERATURE COEFFICIENT**

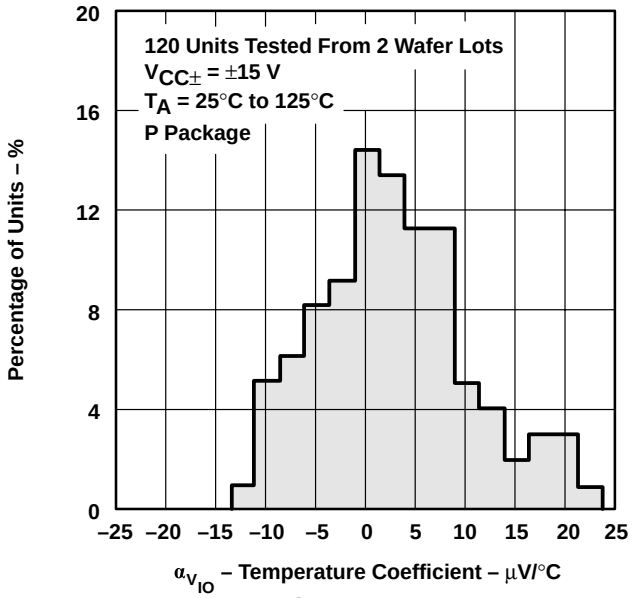

Figure 12

**DISTRIBUTION OF TL052
INPUT OFFSET VOLTAGE
TEMPERATURE COEFFICIENT**

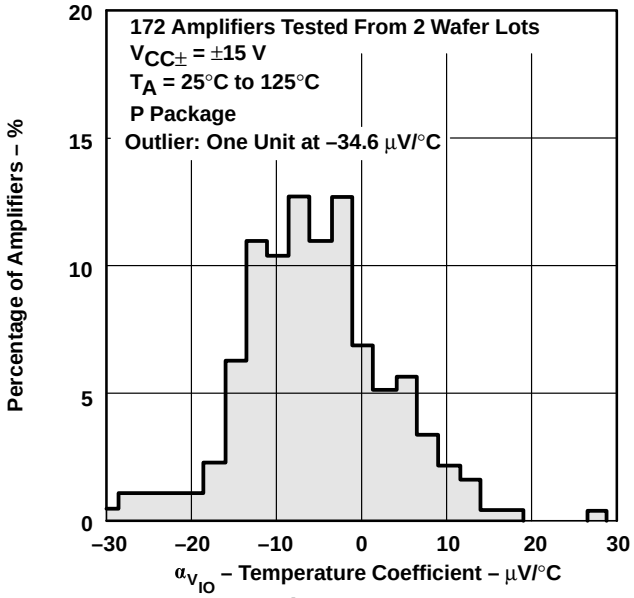

Figure 13

TYPICAL CHARACTERISTICS

DISTRIBUTION OF TL054 INPUT OFFSET VOLTAGE TEMPERATURE COEFFICIENT

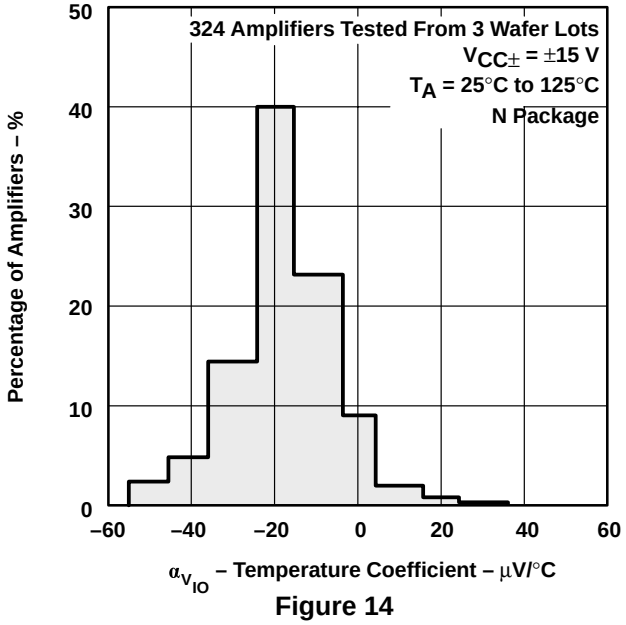

Figure 14

INPUT BIAS CURRENT vs COMMON-MODE INPUT VOLTAGE

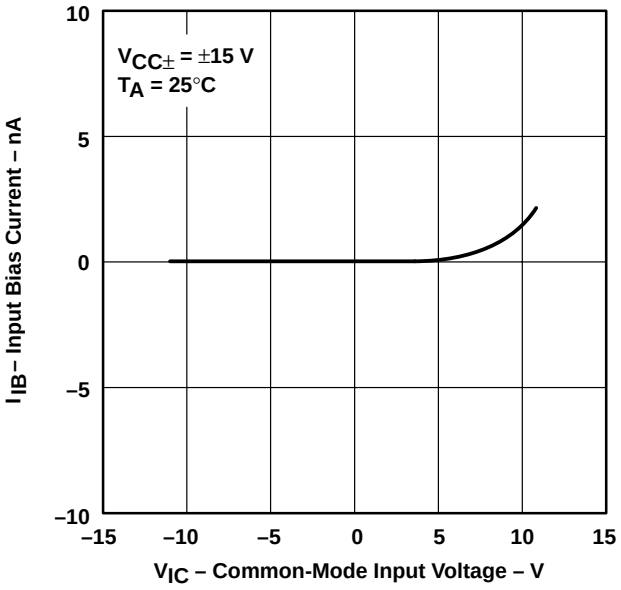

Figure 15

INPUT BIAS CURRENT AND INPUT OFFSET CURRENT† vs FREE-AIR TEMPERATURE

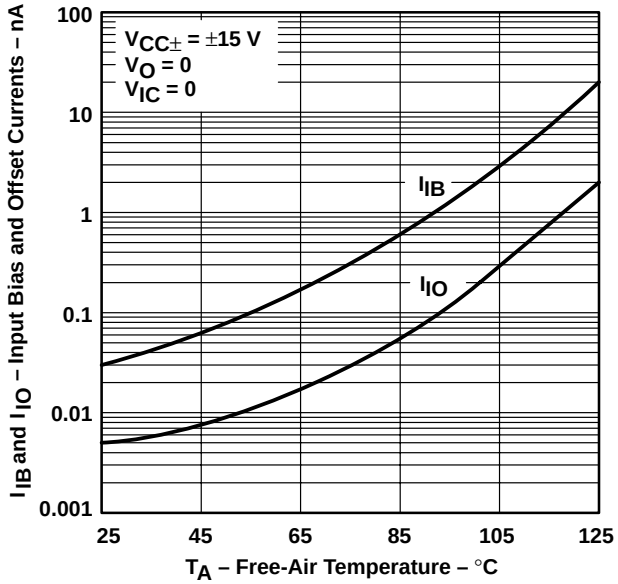

Figure 16

COMMON-MODE INPUT VOLTAGE RANGE LIMITS vs SUPPLY VOLTAGE

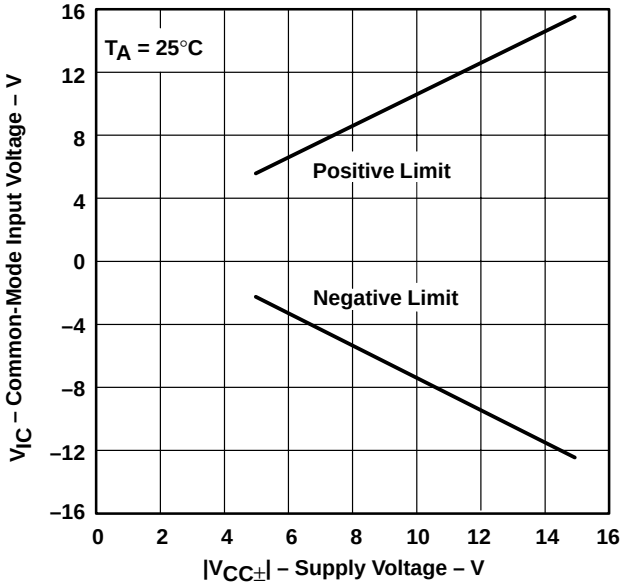

Figure 17

† Data at high and low temperatures are applicable only within the rated operating free-air temperature ranges of the various devices.

TYPICAL CHARACTERISTICS

COMMON-MODE INPUT VOLTAGE RANGE LIMITS† vs FREE-AIR TEMPERATURE

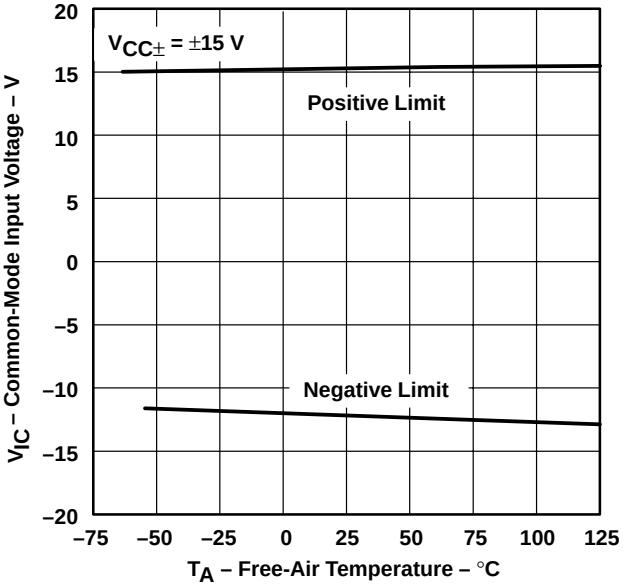

Figure 18

OUTPUT VOLTAGE vs DIFFERENTIAL INPUT VOLTAGE

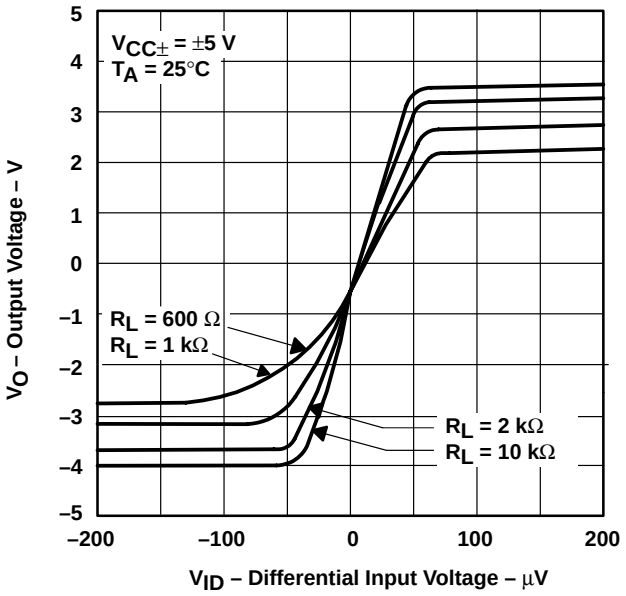

Figure 19

OUTPUT VOLTAGE vs DIFFERENTIAL INPUT VOLTAGE

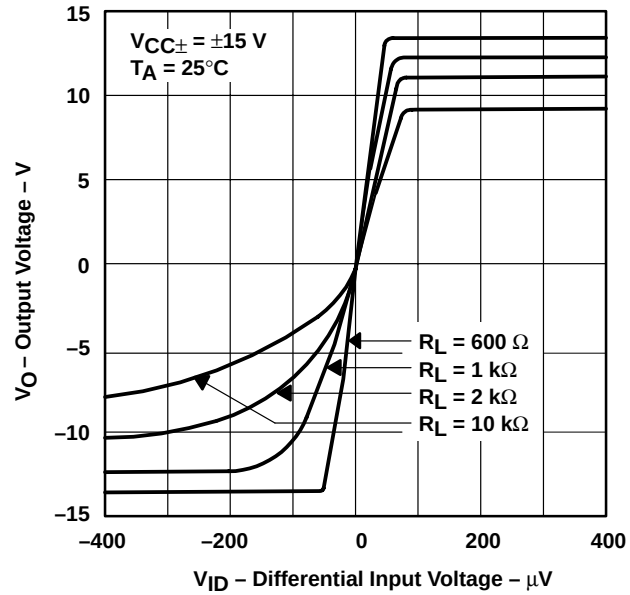

Figure 20

MAXIMUM PEAK OUTPUT VOLTAGE vs SUPPLY VOLTAGE

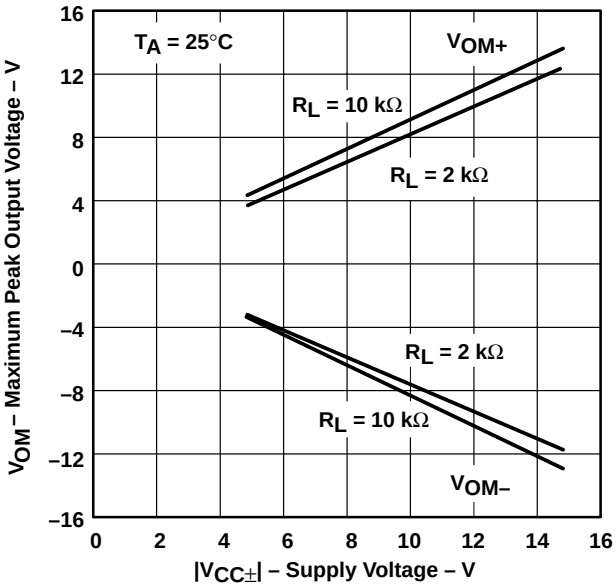

Figure 21

† Data at high and low temperatures are applicable only within the rated operating free-air temperature ranges of the various devices.

TYPICAL CHARACTERISTICS

MAXIMUM PEAK-TO-PEAK OUTPUT VOLTAGE† vs FREQUENCY

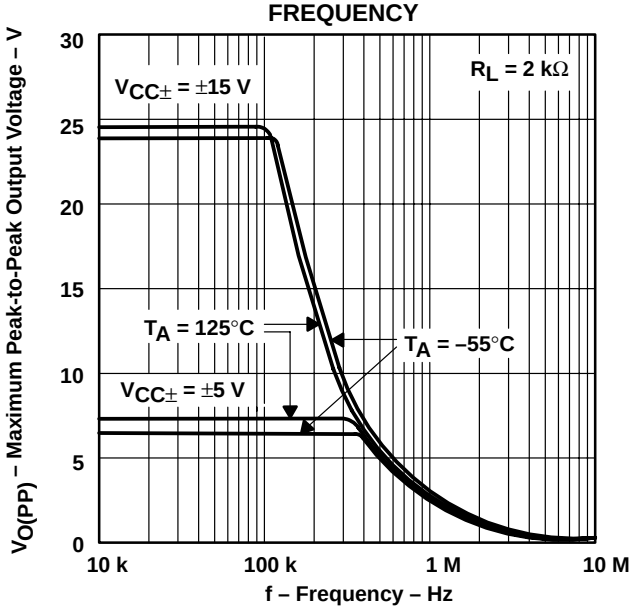

Figure 22

MAXIMUM PEAK-TO-PEAK OUTPUT VOLTAGE vs FREQUENCY

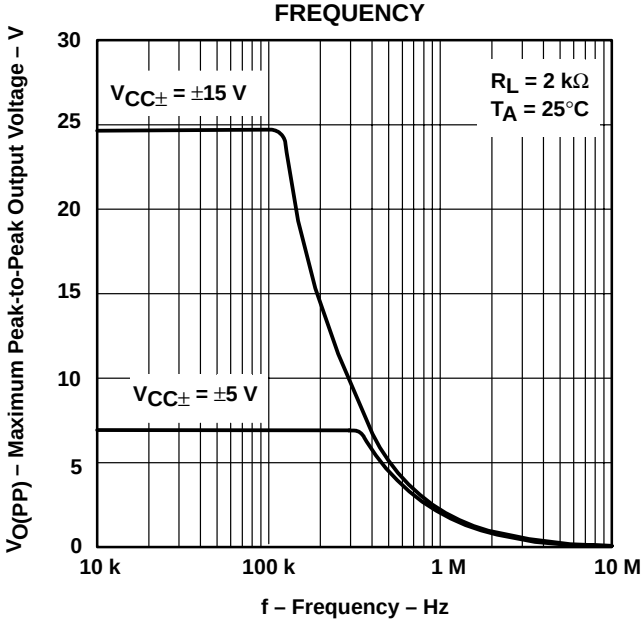

Figure 23

MAXIMUM PEAK-TO-PEAK OUTPUT VOLTAGE vs FREQUENCY

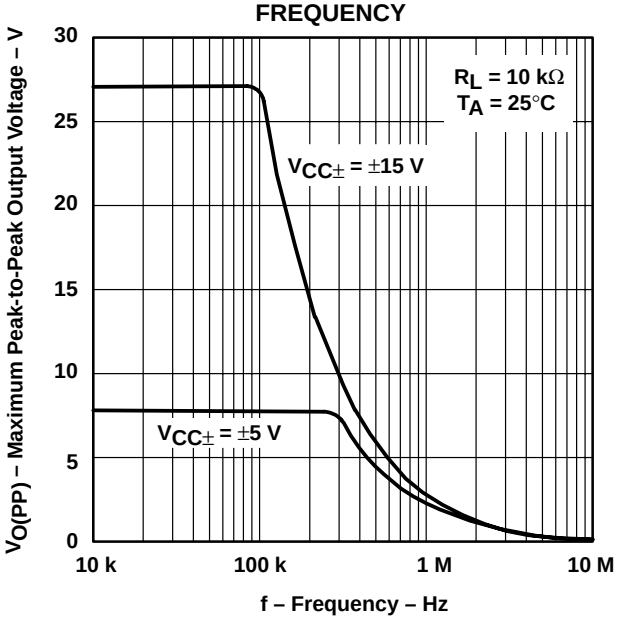

Figure 24

MAXIMUM PEAK OUTPUT VOLTAGE vs OUTPUT CURRENT

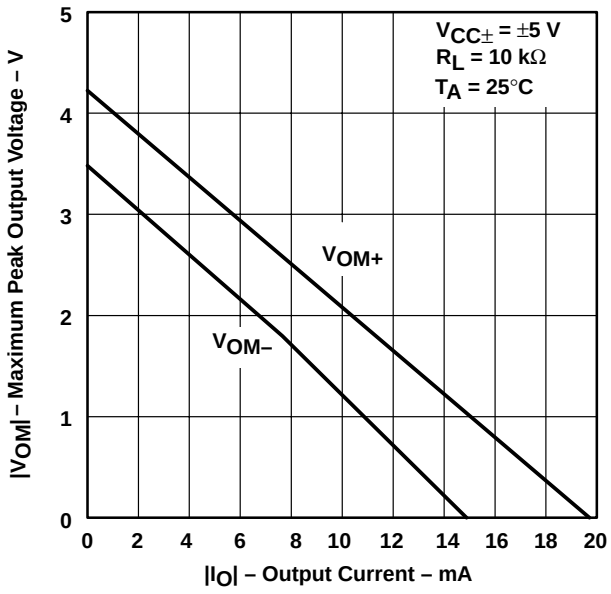

Figure 25

† Data at high and low temperatures are applicable only within the rated operating free-air temperature ranges of the various devices.

TYPICAL CHARACTERISTICS

MAXIMUM PEAK OUTPUT VOLTAGE vs OUTPUT CURRENT

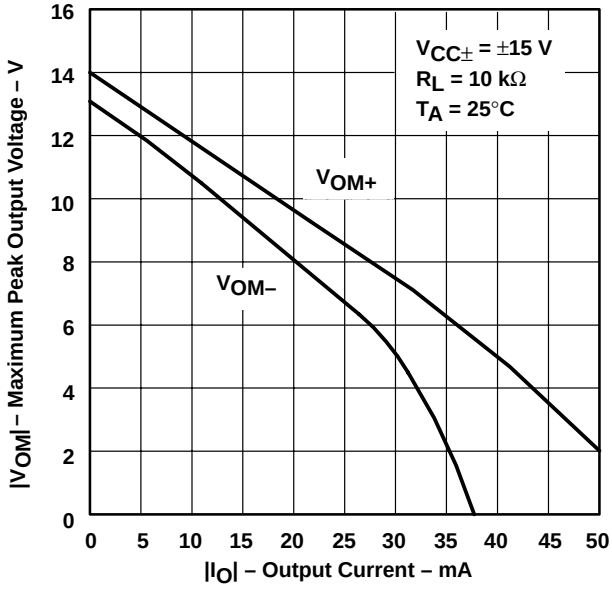

Figure 26

MAXIMUM PEAK OUTPUT VOLTAGE† vs FREE-AIR TEMPERATURE

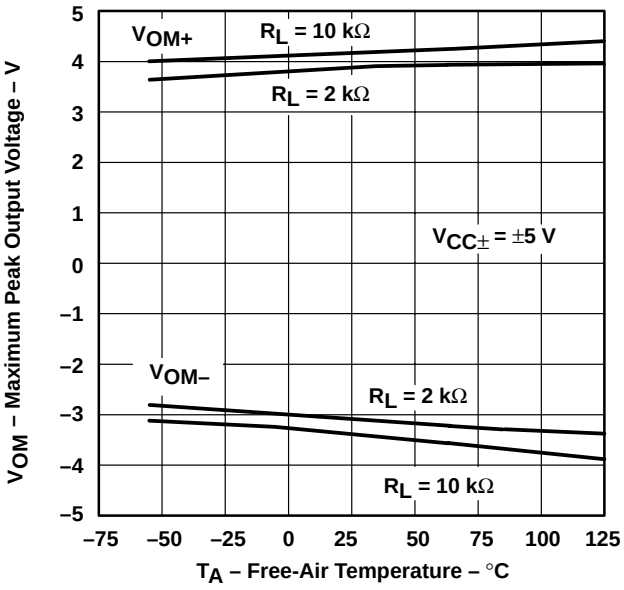

Figure 27

MAXIMUM PEAK OUTPUT VOLTAGE† vs FREE-AIR TEMPERATURE

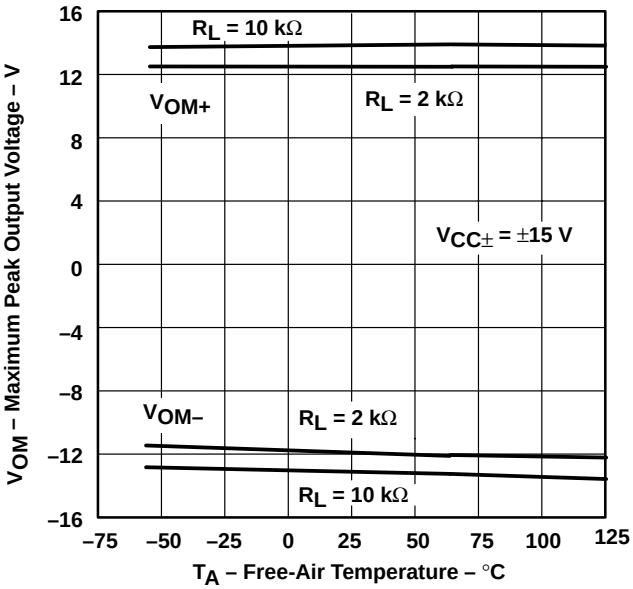

Figure 28

LARGE-SIGNAL DIFFERENTIAL VOLTAGE AMPLIFICATION vs LOAD RESISTANCE

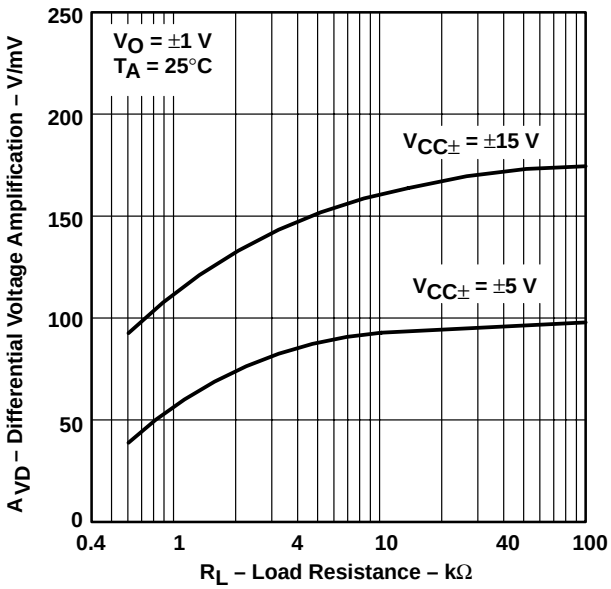

Figure 29

† Data at high and low temperatures are applicable only within the rated operating free-air temperature ranges of the various devices.

TYPICAL CHARACTERISTICS

LARGE-SIGNAL DIFFERENTIAL VOLTAGE AMPLIFICATION AND PHASE SHIFT vs FREQUENCY

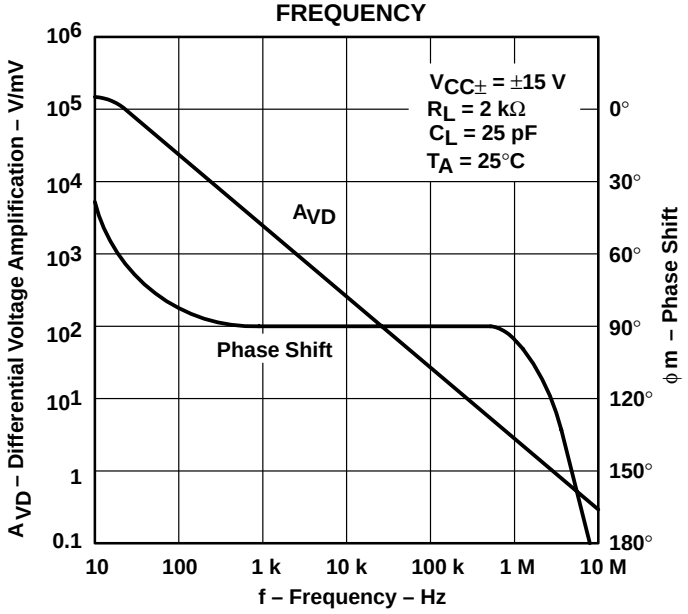

Figure 30

TL051 AND TL052 LARGE-SIGNAL DIFFERENTIAL VOLTAGE AMPLIFICATION† vs FREE-AIR TEMPERATURE

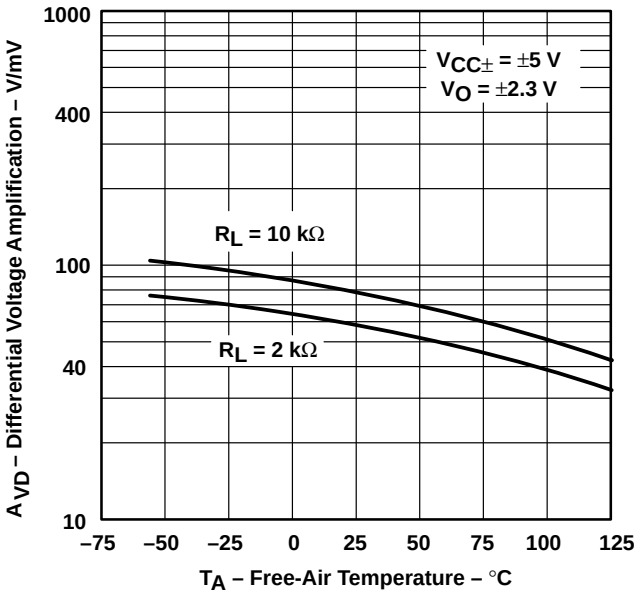

Figure 31

TL054 LARGE-SIGNAL DIFFERENTIAL VOLTAGE AMPLIFICATION† vs FREE-AIR TEMPERATURE

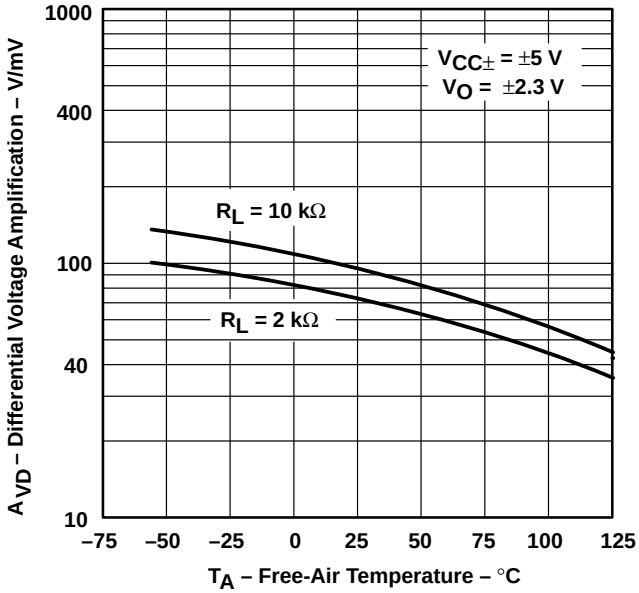

Figure 32

† Data at high and low temperatures are applicable only within the rated operating free-air temperature ranges of the various devices.

TYPICAL CHARACTERISTICS

LARGE-SIGNAL DIFFERENTIAL VOLTAGE AMPLIFICATION† vs FREE-AIR TEMPERATURE

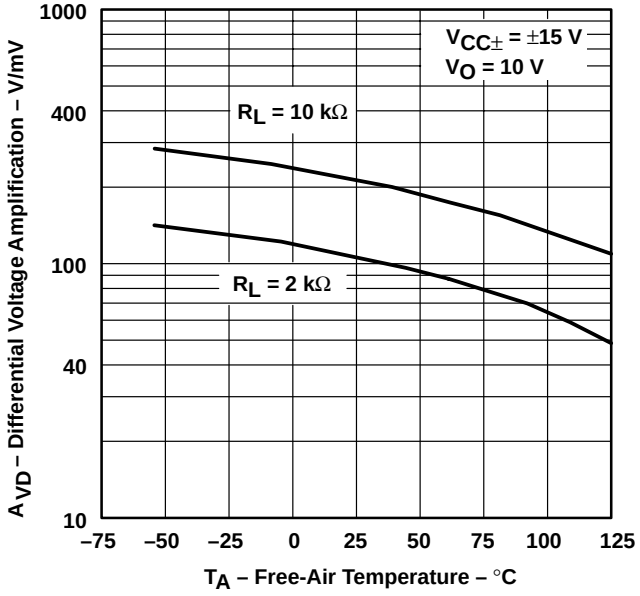

Figure 33

COMMON-MODE REJECTION RATIO vs FREQUENCY

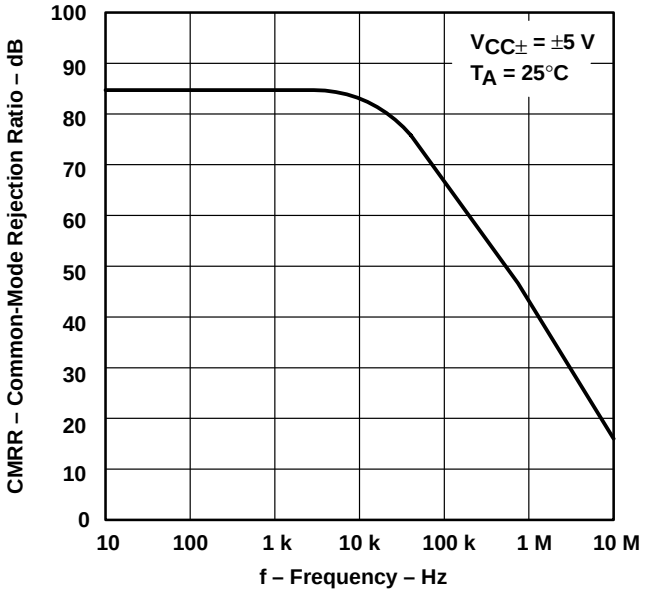

Figure 34

COMMON-MODE REJECTION RATIO vs FREQUENCY

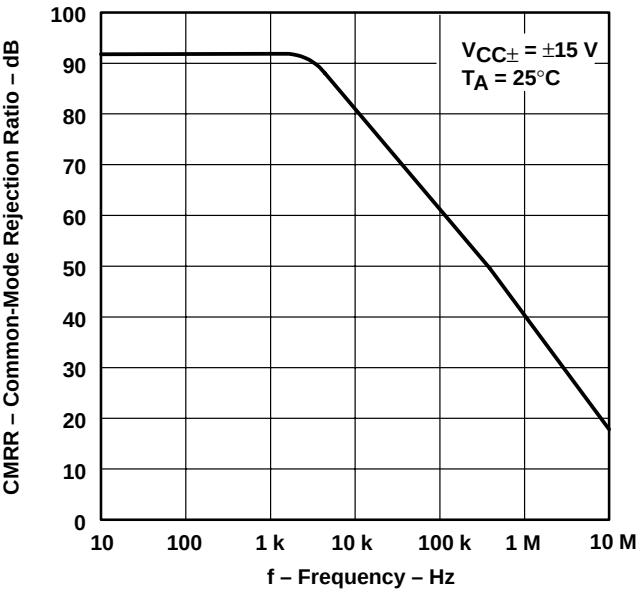

Figure 35

COMMON-MODE REJECTION RATIO† vs FREE-AIR TEMPERATURE

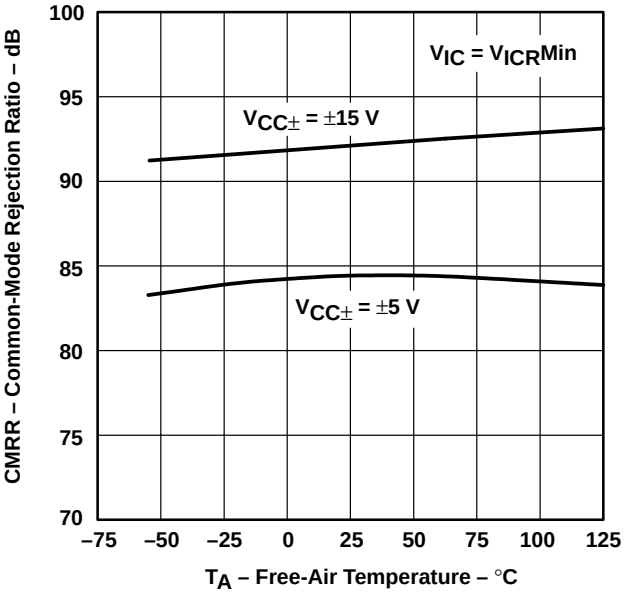

Figure 36

† Data at high and low temperatures are applicable only within the rated operating free-air temperature ranges of the various devices.

TYPICAL CHARACTERISTICS

OUTPUT IMPEDANCE vs FREQUENCY

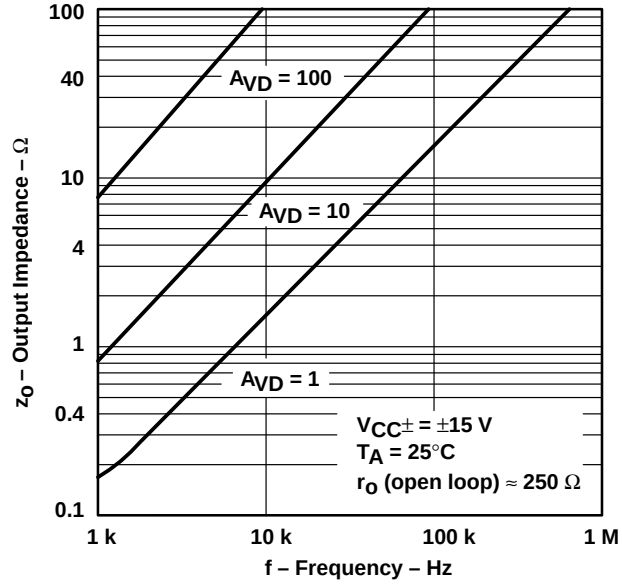

Figure 37

SUPPLY-VOLTAGE REJECTION RATIO† vs FREE-AIR TEMPERATURE

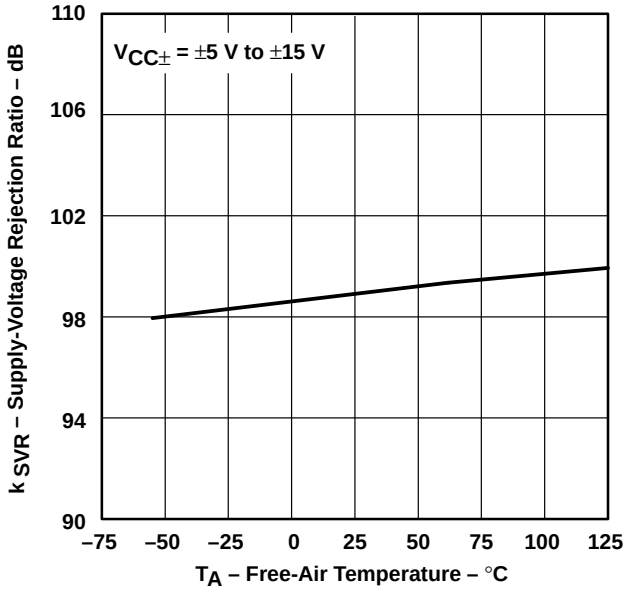

Figure 38

SHORT-CIRCUIT OUTPUT CURRENT vs SUPPLY VOLTAGE

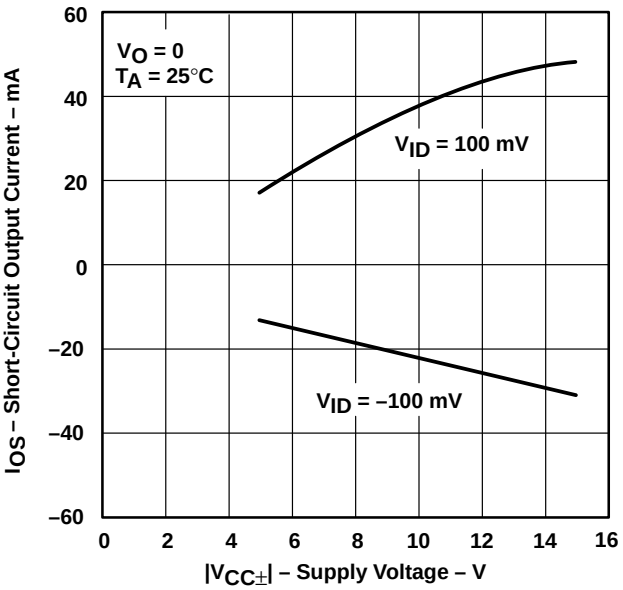

Figure 39

SHORT-CIRCUIT OUTPUT CURRENT vs TIME

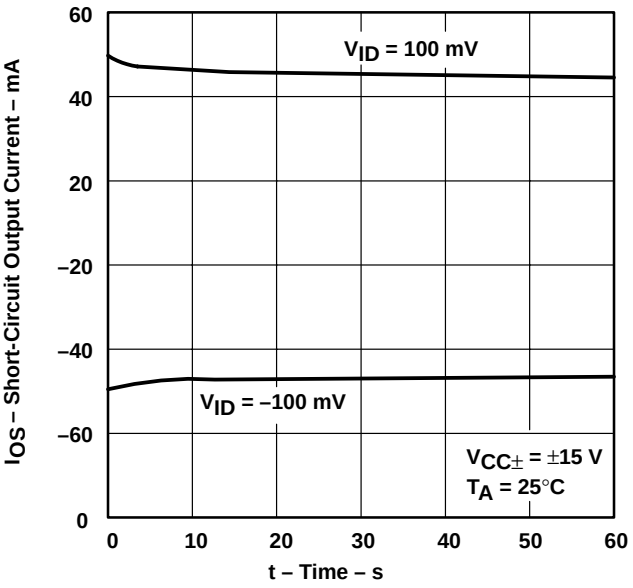

Figure 40

† Data at high and low temperatures are applicable only within the rated operating free-air temperature ranges of the various devices.

TYPICAL CHARACTERISTICS

SHORT-CIRCUIT OUTPUT CURRENT† vs FREE-AIR TEMPERATURE

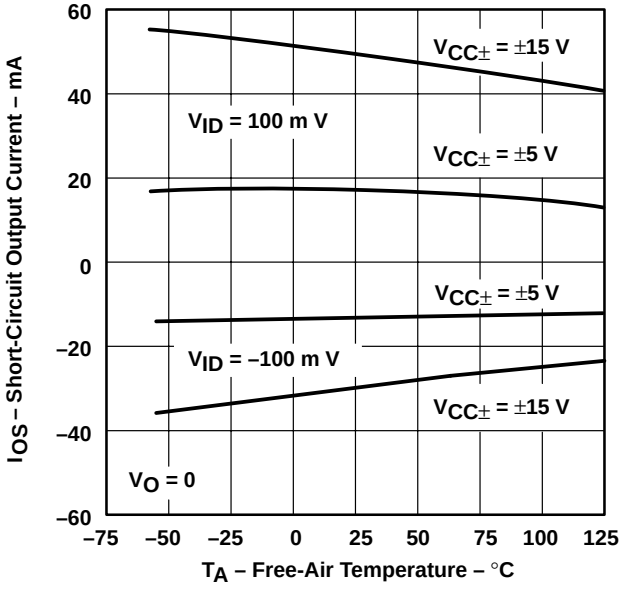

Figure 41

TL051 SUPPLY CURRENT† vs SUPPLY VOLTAGE

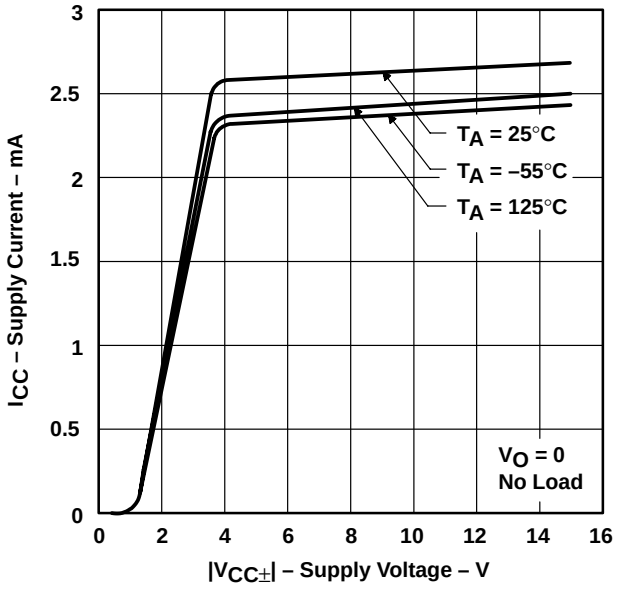

Figure 42

TL052 SUPPLY CURRENT† vs SUPPLY VOLTAGE

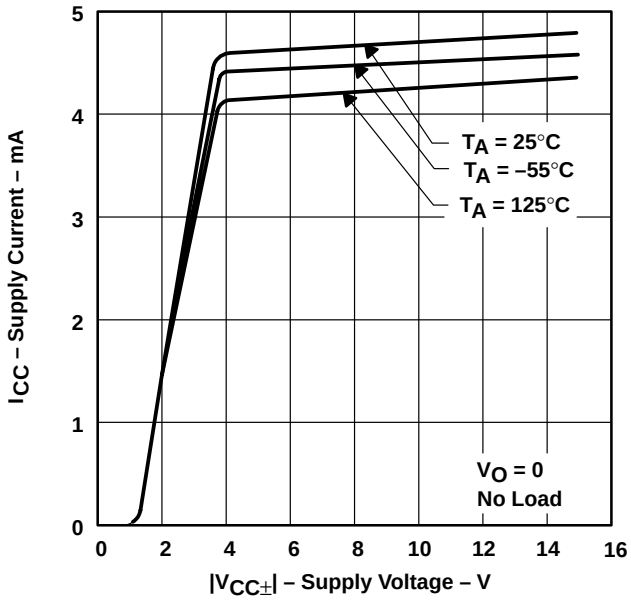

Figure 43

TL054 SUPPLY CURRENT† vs SUPPLY VOLTAGE

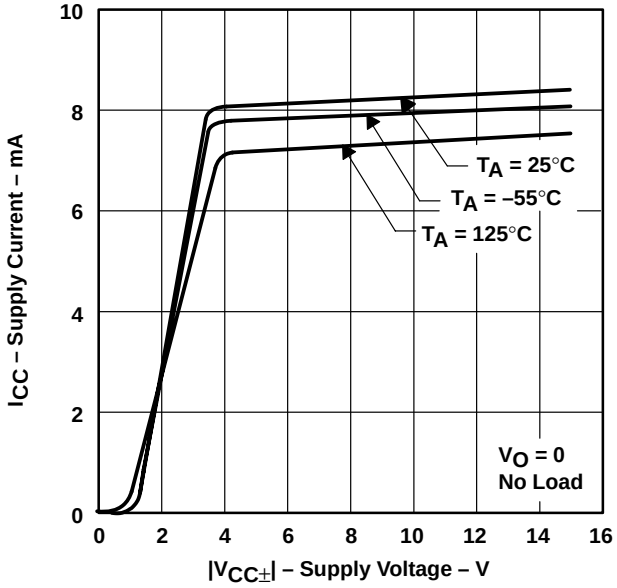

Figure 44

† Data at high and low temperatures are applicable only within the rated operating free-air temperature ranges of the various devices.

TYPICAL CHARACTERISTICS

TL051
SUPPLY CURRENT†
vs
FREE-AIR TEMPERATURE

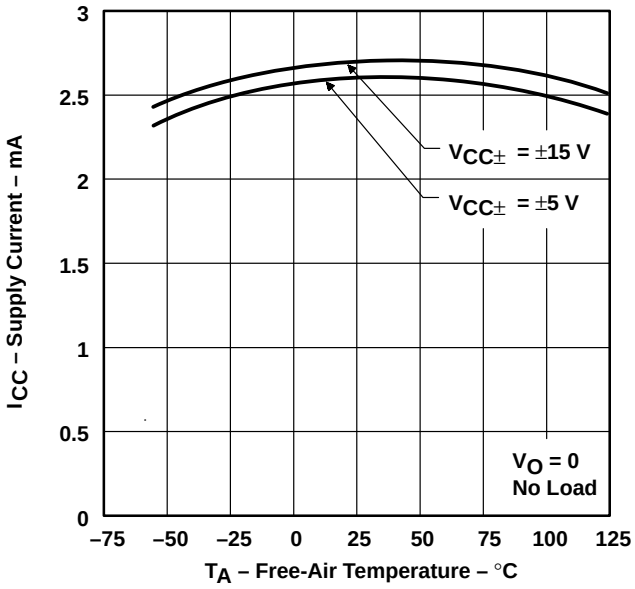

Figure 45

TL052
SUPPLY CURRENT†
vs
FREE-AIR TEMPERATURE

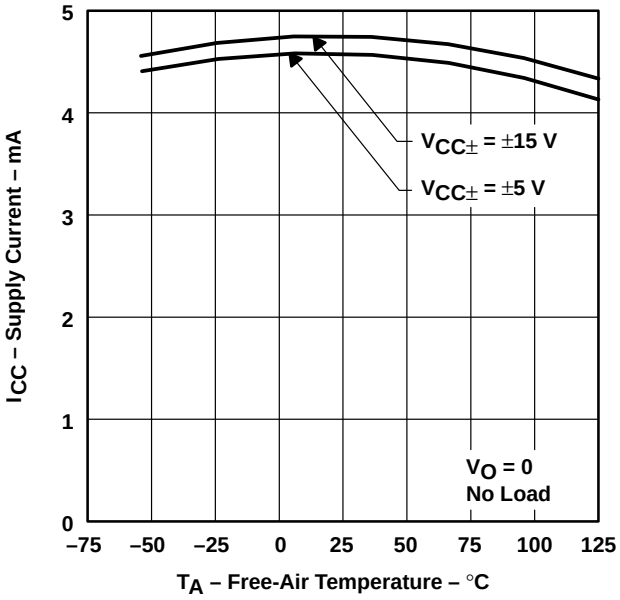

Figure 46

TL054
SUPPLY CURRENT†
vs
FREE-AIR TEMPERATURE

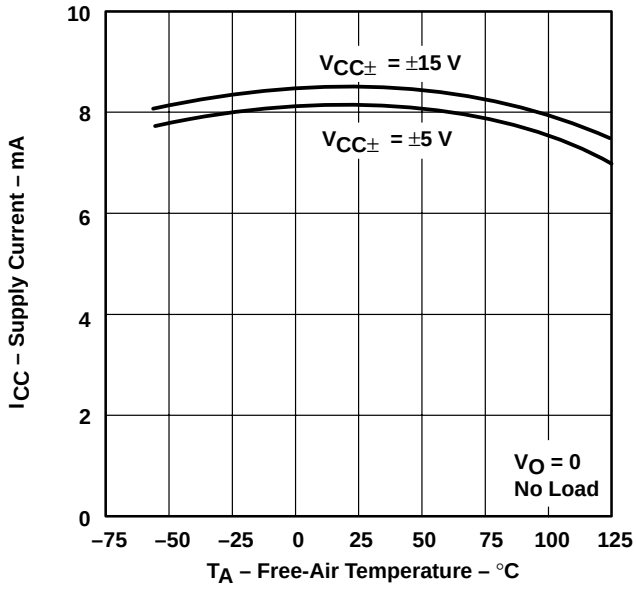

Figure 47

TL051
SLEW RATE
vs
LOAD RESISTANCE

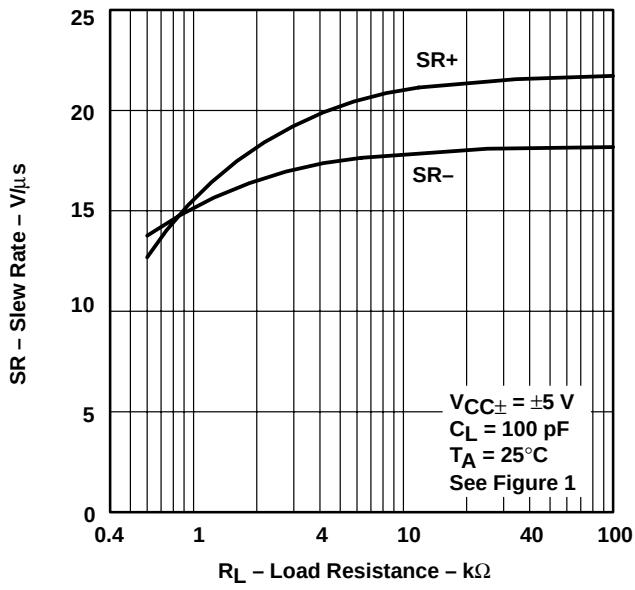

Figure 48

† Data at high and low temperatures are applicable only within the rated operating free-air temperature ranges of the various devices.

TYPICAL CHARACTERISTICS

**TL052
SLEW RATE
vs
LOAD RESISTANCE**

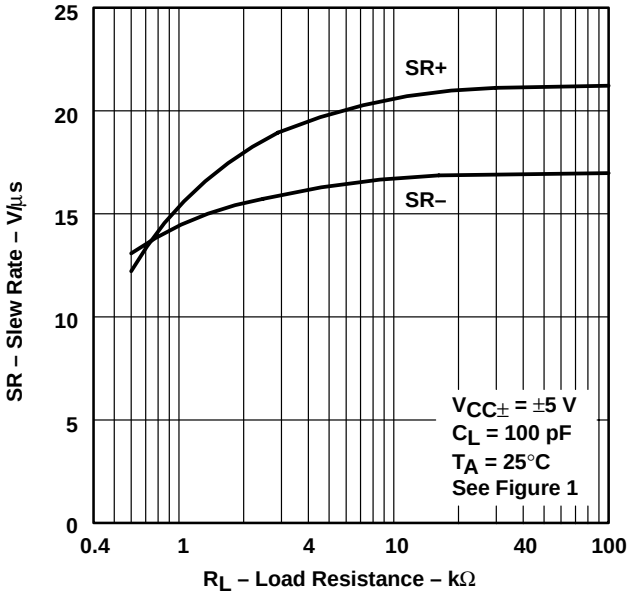

Figure 49

**TL054
SLEW RATE
vs
LOAD RESISTANCE**

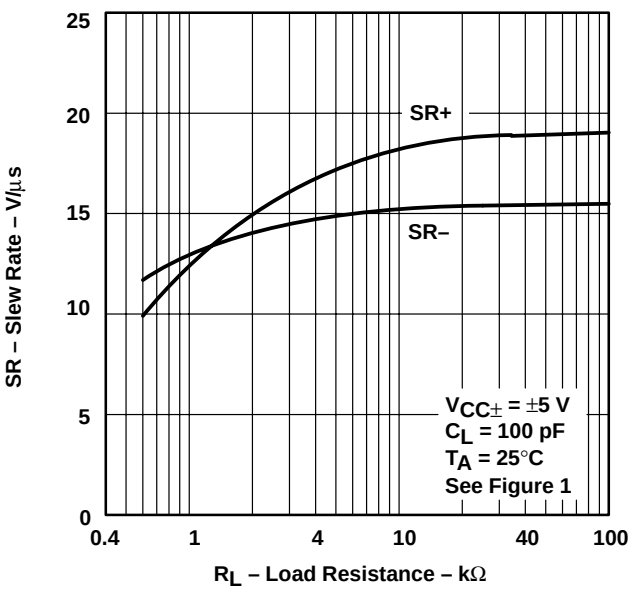

Figure 50

**TL051
SLEW RATE
vs
LOAD RESISTANCE**

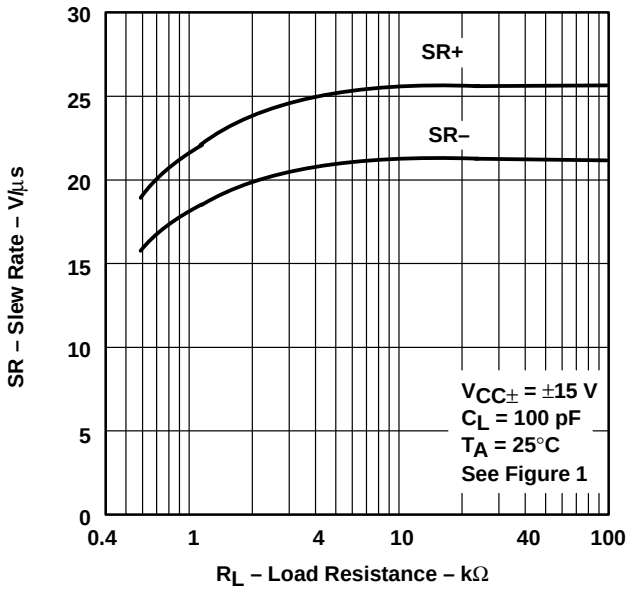

Figure 51

**TL052
SLEW RATE
vs
LOAD RESISTANCE**

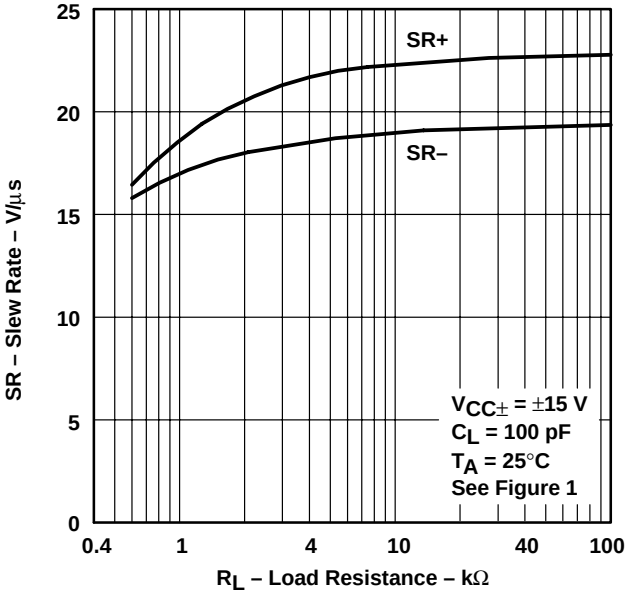

Figure 52

TYPICAL CHARACTERISTICS

TL054
SLEW RATE
vs
LOAD RESISTANCE

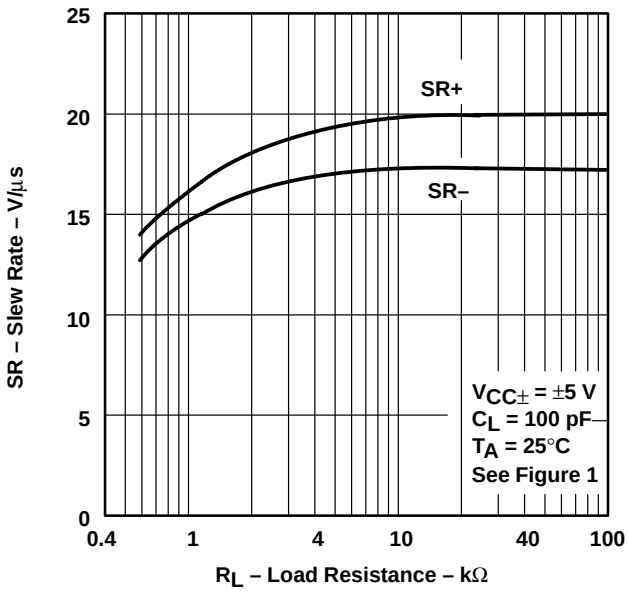

Figure 53

TL051
SLEW RATE†
vs
FREE-AIR TEMPERATURE

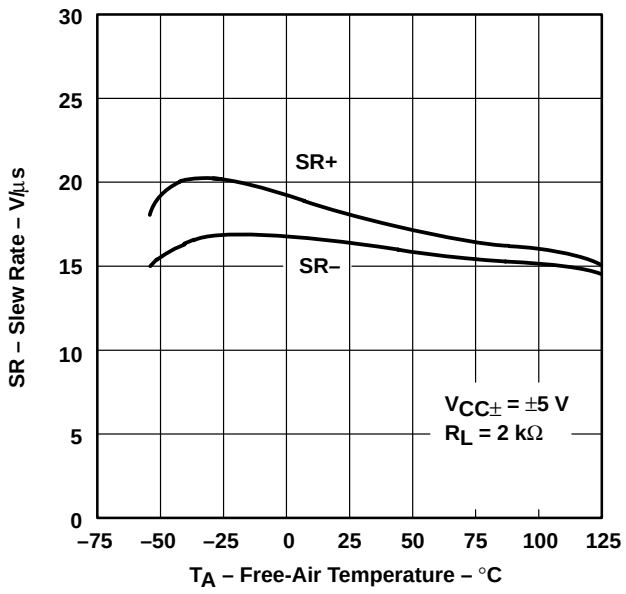

Figure 54

TL052
SLEW RATE†
vs
FREE-AIR TEMPERATURE

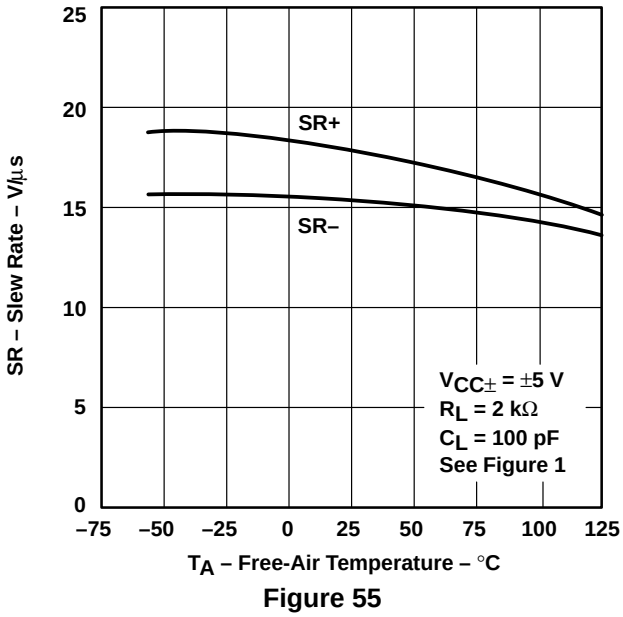

Figure 55

TL054
SLEW RATE†
vs
FREE-AIR TEMPERATURE

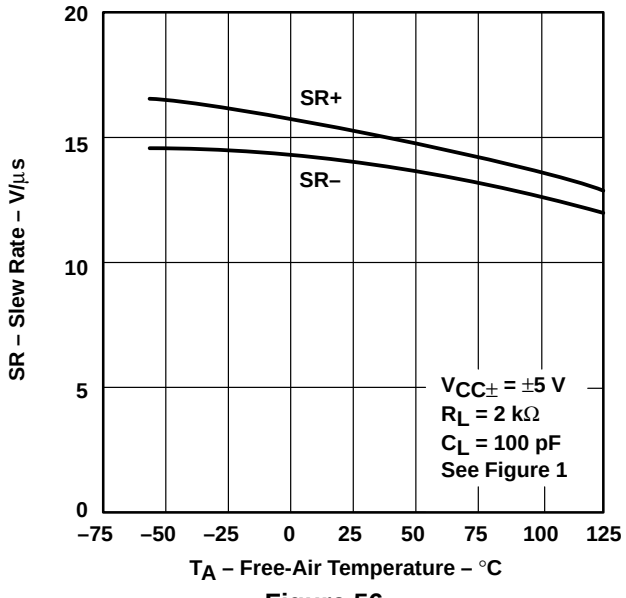

Figure 56

† Data at high and low temperatures are applicable only within the rated operating free-air temperature ranges of the various devices.

TYPICAL CHARACTERISTICS

TL051
SLEW RATE† vs FREE-AIR TEMPERATURE

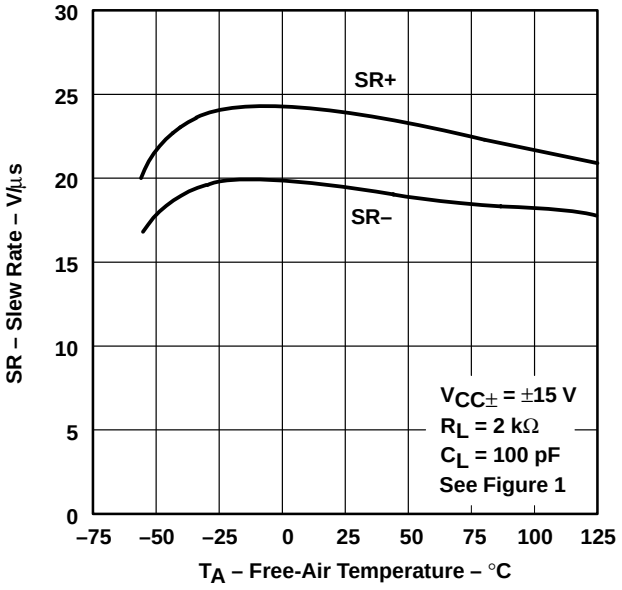

Figure 57

TL052
SLEW RATE† vs FREE-AIR TEMPERATURE

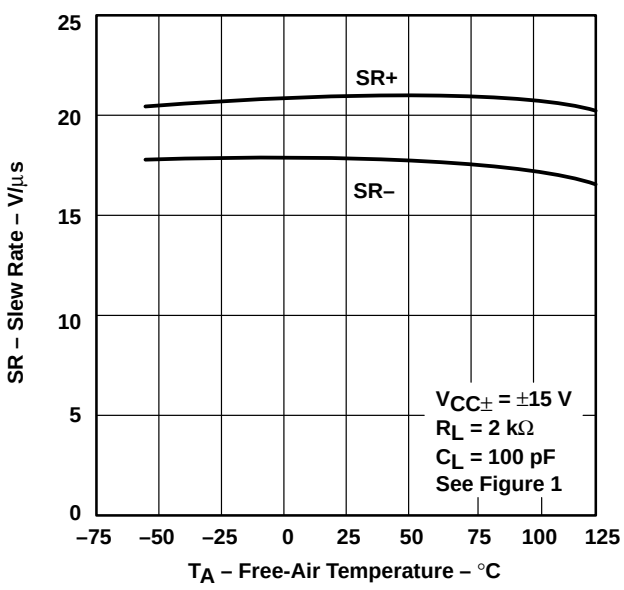

Figure 58

TL054
SLEW RATE† vs FREE-AIR TEMPERATURE

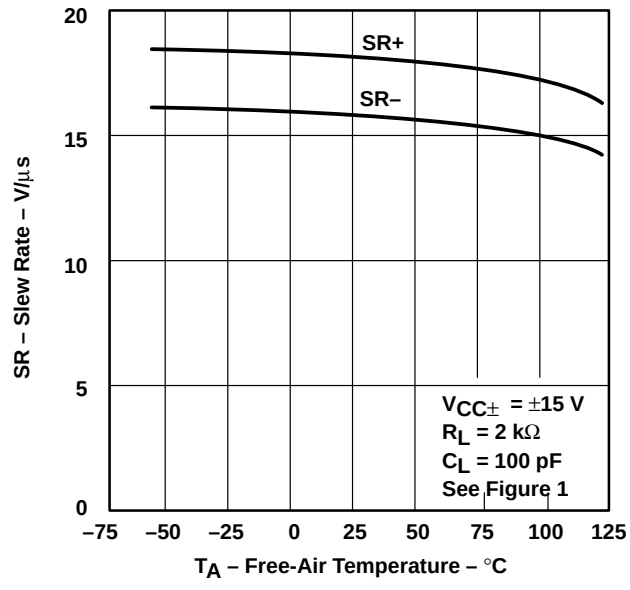

Figure 59

OVERSHOOT FACTOR vs LOAD CAPACITANCE

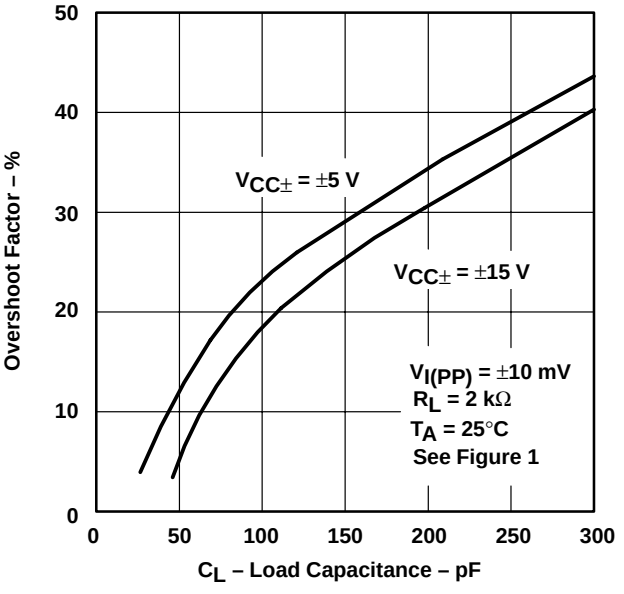

Figure 60

† Data at high and low temperatures are applicable only within the rated operating free-air temperature ranges of the various devices.

TYPICAL CHARACTERISTICS

**TL051
EQUIVALENT INPUT NOISE VOLTAGE
vs
FREQUENCY**

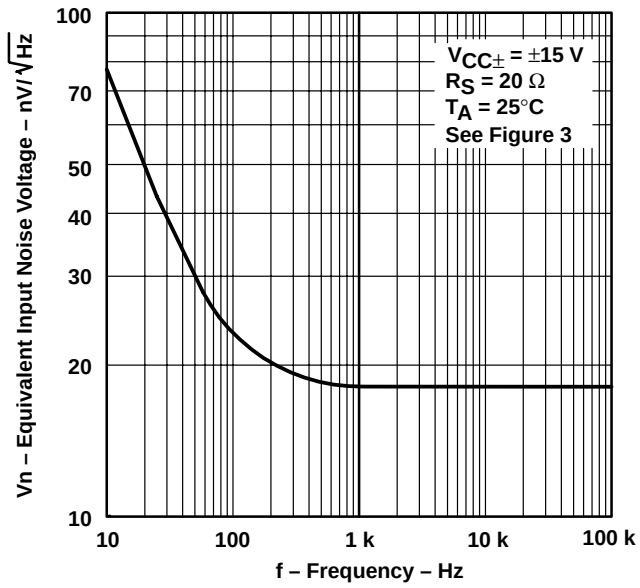

Figure 61

**TL052 AND TL054
EQUIVALENT INPUT NOISE VOLTAGE
vs
FREQUENCY**

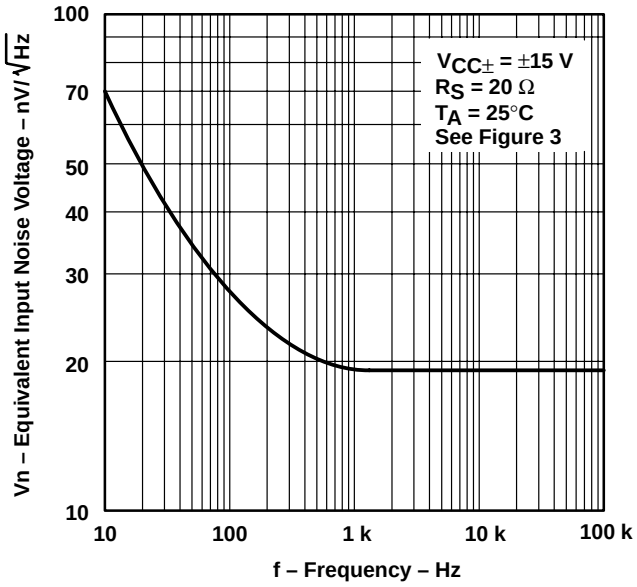

Figure 62

**TOTAL HARMONIC DISTORTION
vs
FREQUENCY**

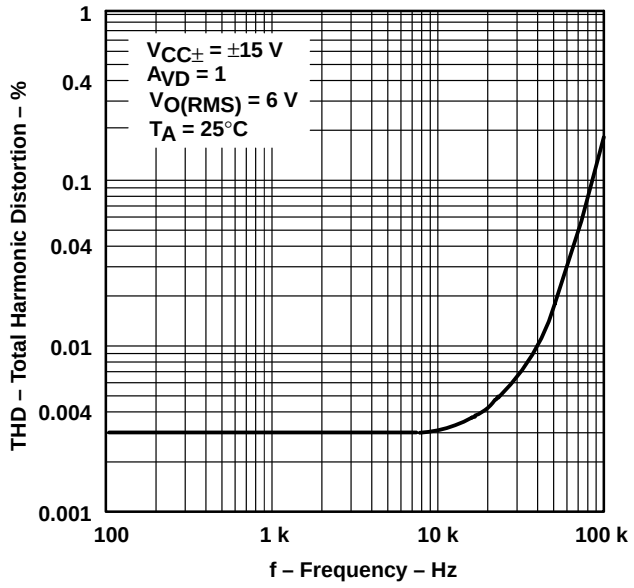

Figure 63

**TL051
UNITY-GAIN BANDWIDTH
vs
SUPPLY VOLTAGE**

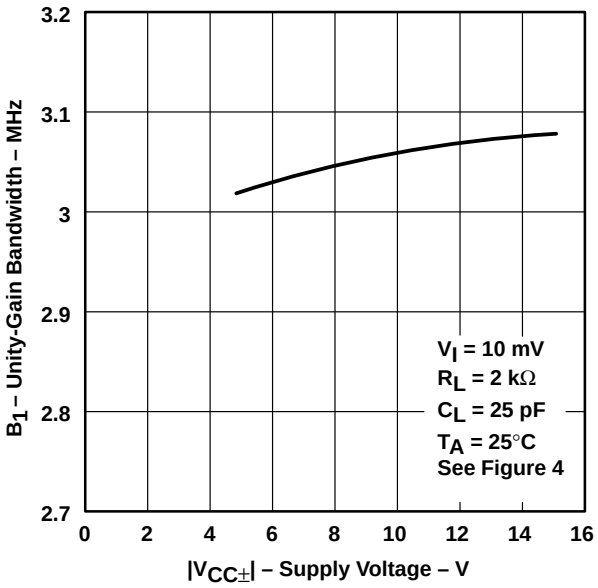

Figure 64

TYPICAL CHARACTERISTICS

TL052
UNITY-GAIN BANDWIDTH
vs
SUPPLY VOLTAGE

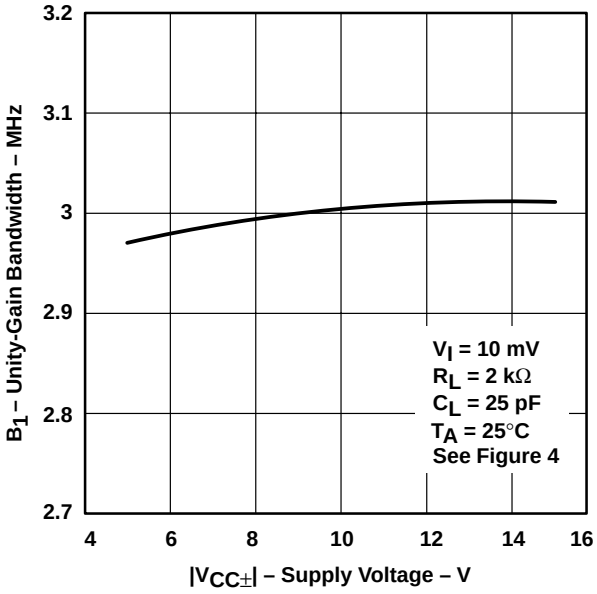

Figure 65

TL054
UNITY-GAIN BANDWIDTH
vs
SUPPLY VOLTAGE

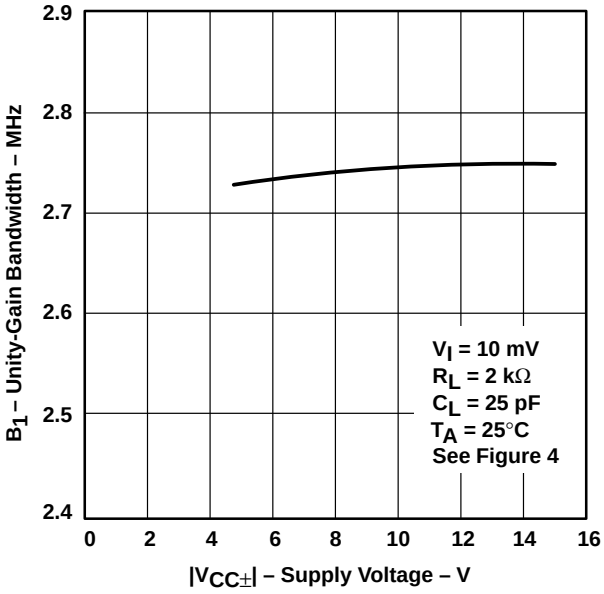

Figure 66

TL051
UNITY-GAIN BANDWIDTH†
vs
FREE-AIR TEMPERATURE

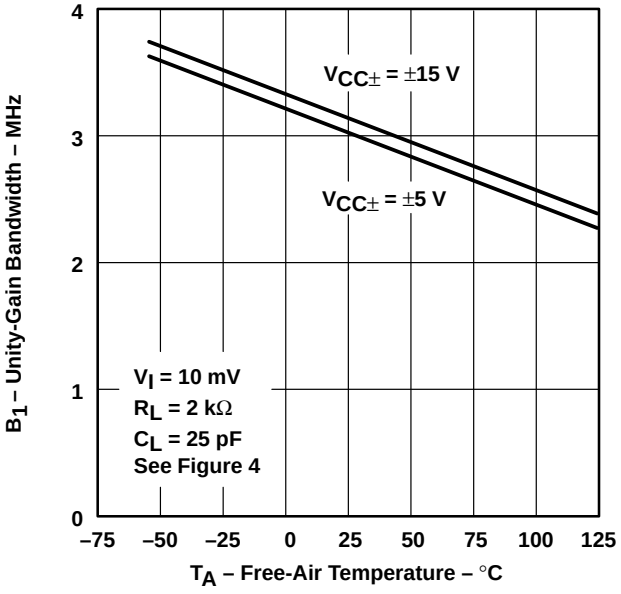

Figure 67

TL052
UNITY-GAIN BANDWIDTH†
vs
FREE-AIR TEMPERATURE

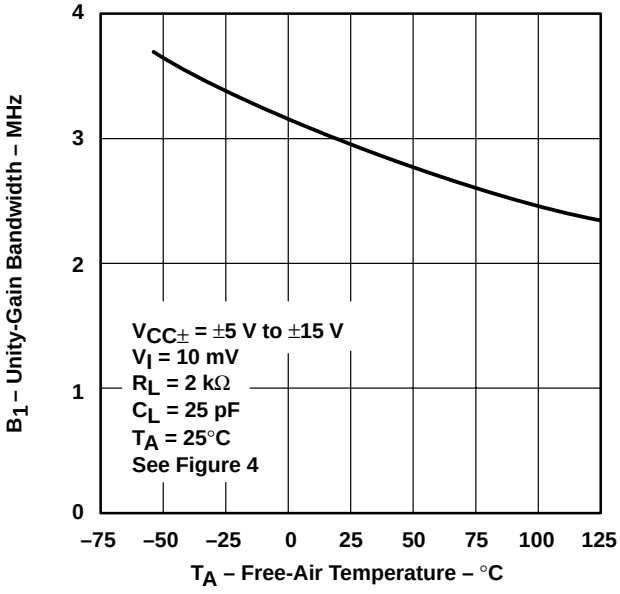

Figure 68

† Data at high and low temperatures are applicable only within the rated operating free-air temperature ranges of the various devices.

TYPICAL CHARACTERISTICS

TL054
UNITY-GAIN BANDWIDTH†
vs
FREE-AIR TEMPERATURE

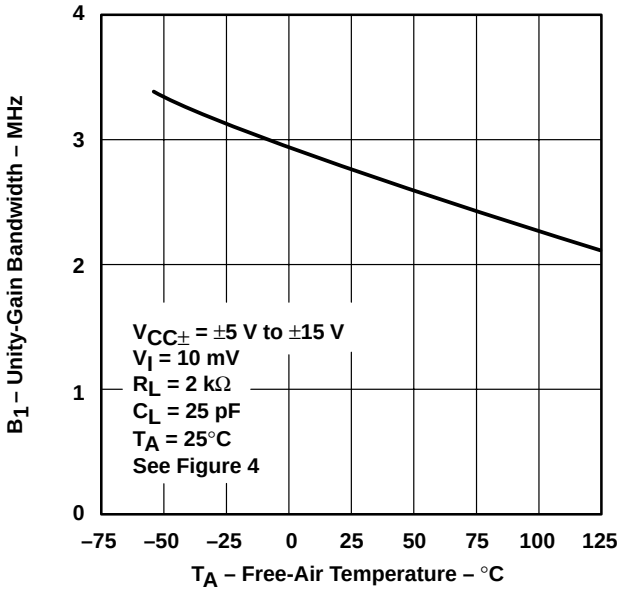

Figure 69

TL051
PHASE MARGIN
vs
SUPPLY VOLTAGE

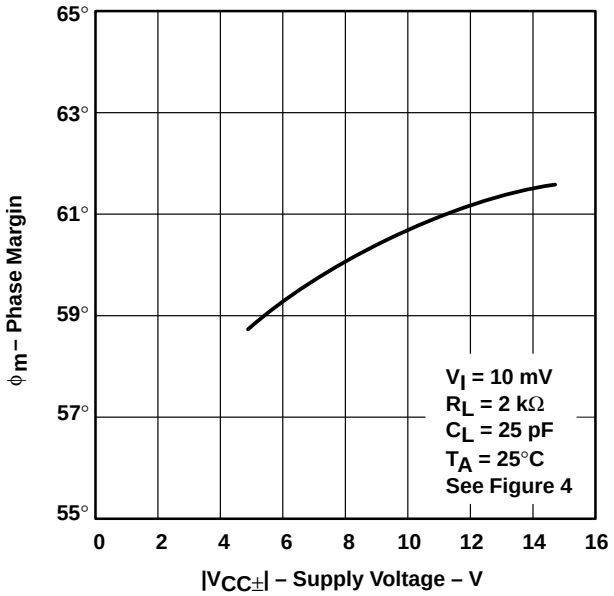

Figure 70

TL052
PHASE MARGIN
vs
SUPPLY VOLTAGE

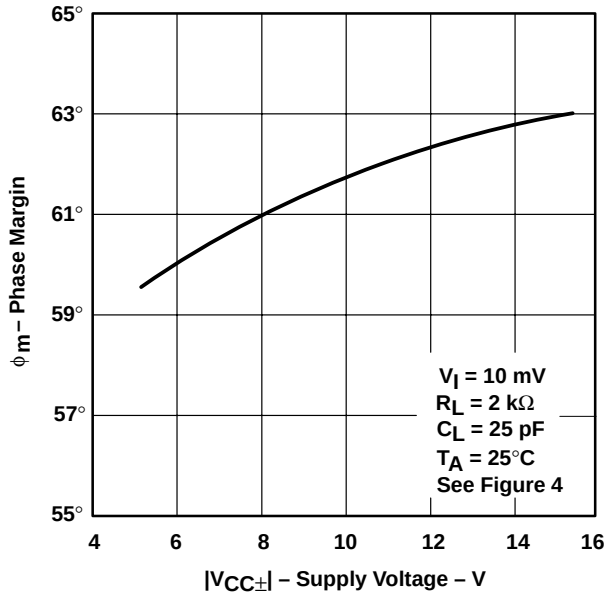

Figure 71

TL054
PHASE MARGIN
vs
SUPPLY VOLTAGE

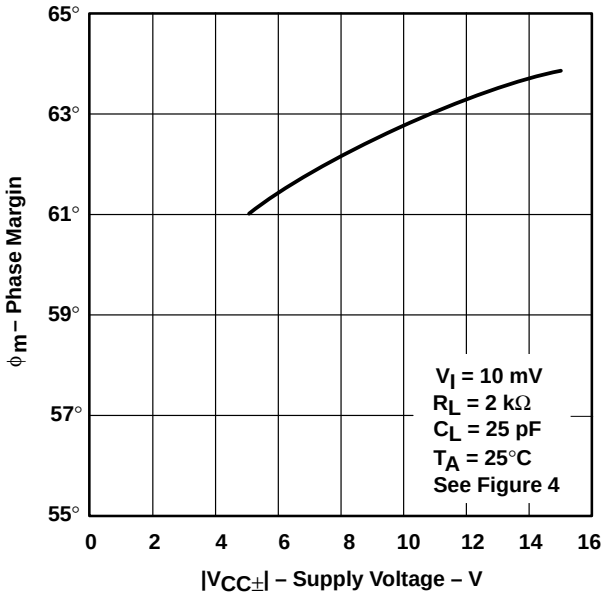

Figure 72

† Data at high and low temperatures are applicable only within the rated operating free-air temperature ranges of the various devices.

TYPICAL CHARACTERISTICS

TL051
PHASE MARGIN†
vs
LOAD CAPACITANCE

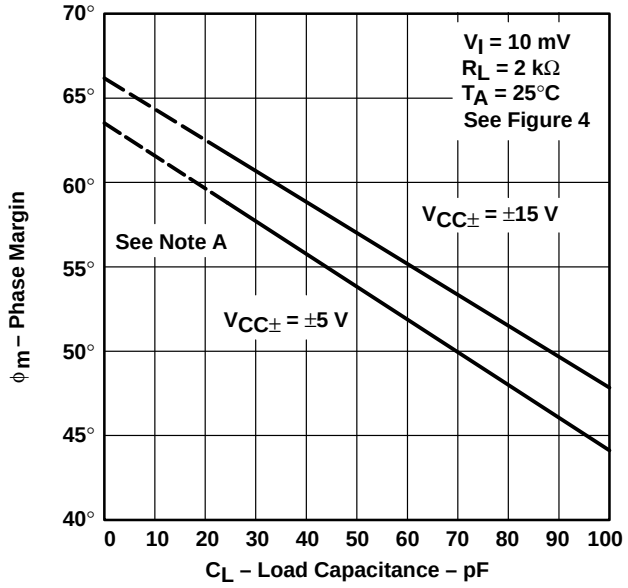

Figure 73

TL052
PHASE MARGIN†
vs
LOAD CAPACITANCE

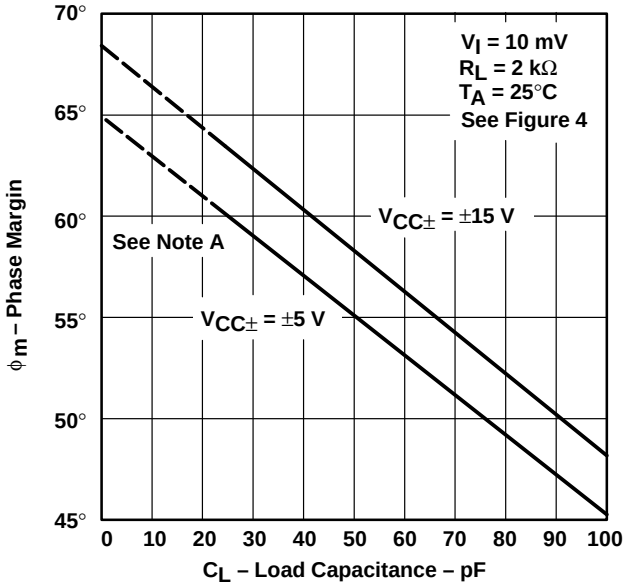

Figure 74

TL054
PHASE MARGIN†
vs
LOAD CAPACITANCE

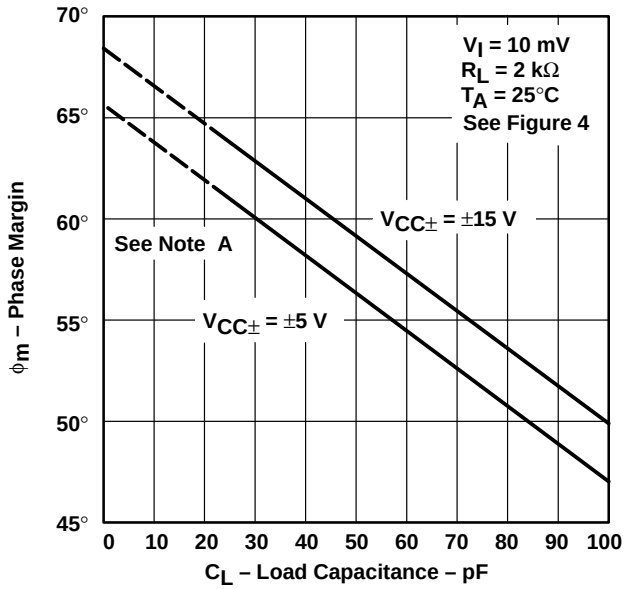

Figure 75

† Values of phase margin below a load capacitance of 25 pF were estimated.

TYPICAL CHARACTERISTICS

TL051
PHASE MARGIN†
vs
FREE-AIR TEMPERATURE

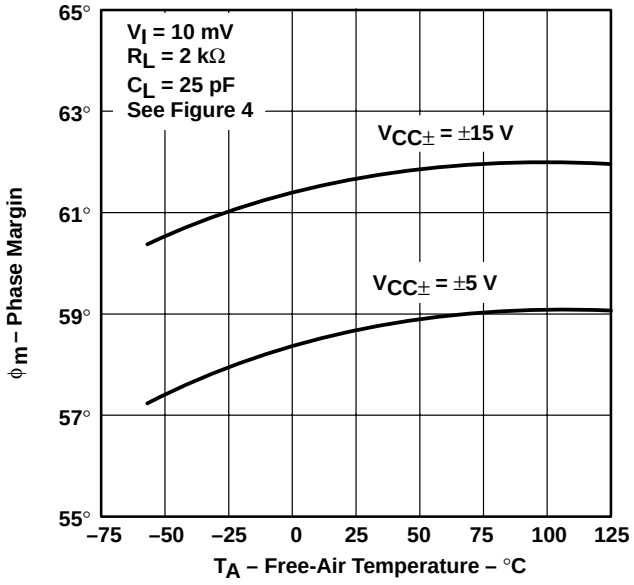

Figure 76

TL052
PHASE MARGIN†
vs
FREE-AIR TEMPERATURE

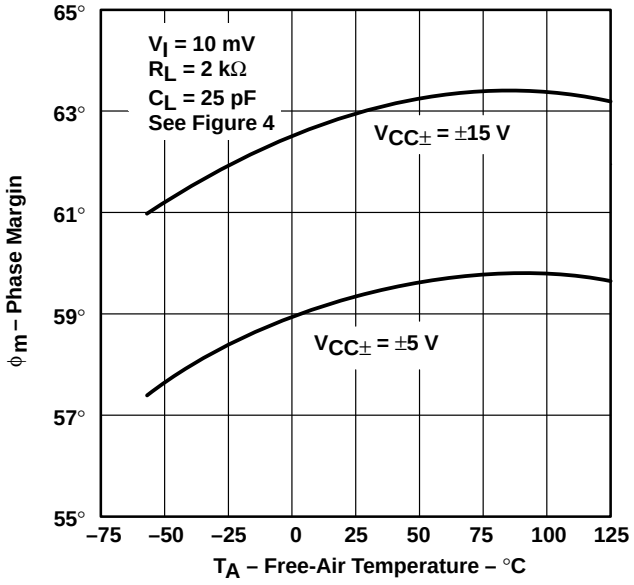

Figure 77

TL054
PHASE MARGIN†
vs
FREE-AIR TEMPERATURE

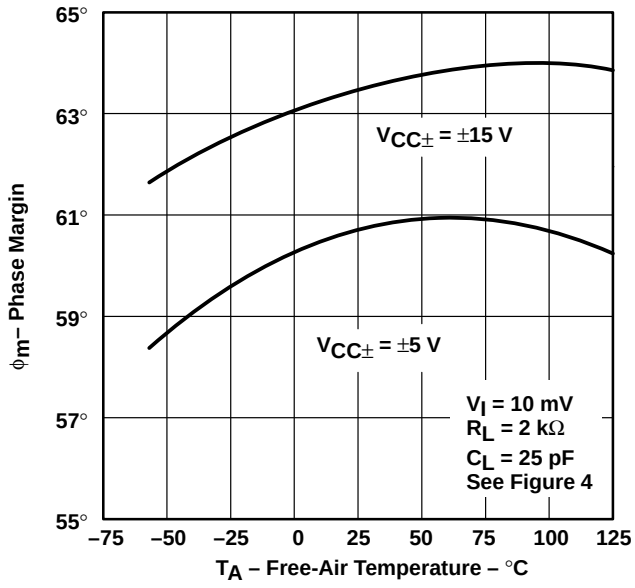

Figure 78

† Data at high and low temperatures are applicable only within the rated operating free-air temperature ranges of the various devices.

TYPICAL CHARACTERISTICS

VOLTAGE-FOLLOWER SMALL-SIGNAL PULSE RESPONSE

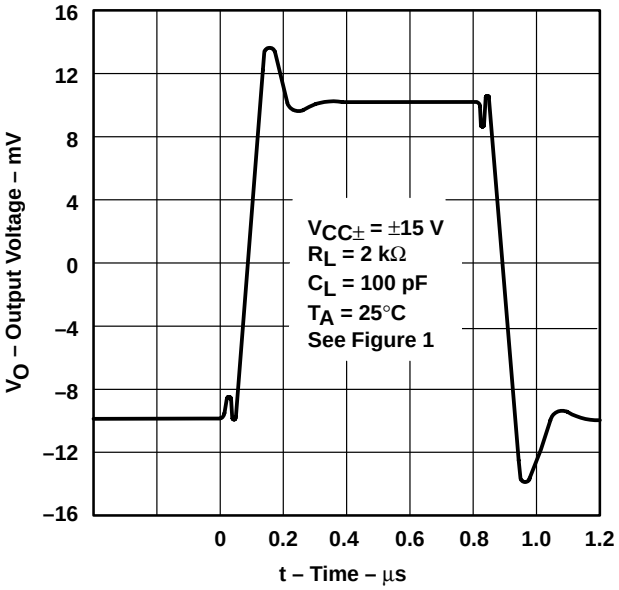

Figure 79

VOLTAGE-FOLLOWER LARGE-SIGNAL PULSE RESPONSE

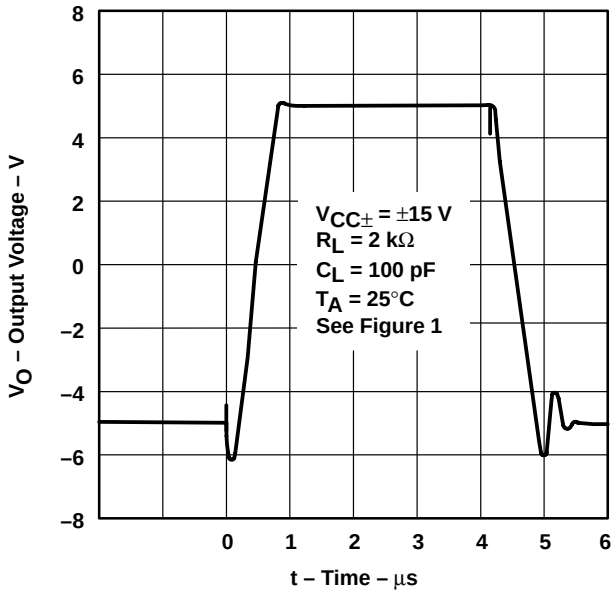

Figure 80

APPLICATION INFORMATION

output characteristics

All operating characteristics (except bandwidth and phase margin) are specified with 100-pF load capacitance. The TL05x and TL05xA drive higher capacitive loads; however, as the load capacitance increases, the resulting response pole occurs at lower frequencies, causing ringing, peaking, or even oscillation. The value of the load capacitance at which oscillation occurs varies with production lots. If an application appears to be sensitive to oscillation due to load capacitance, adding a small resistance in series with the load should alleviate the problem. Capacitive loads of 1000 pF, and larger, may be driven if enough resistance is added in series with the output (see Figure 81 and Figure 82).

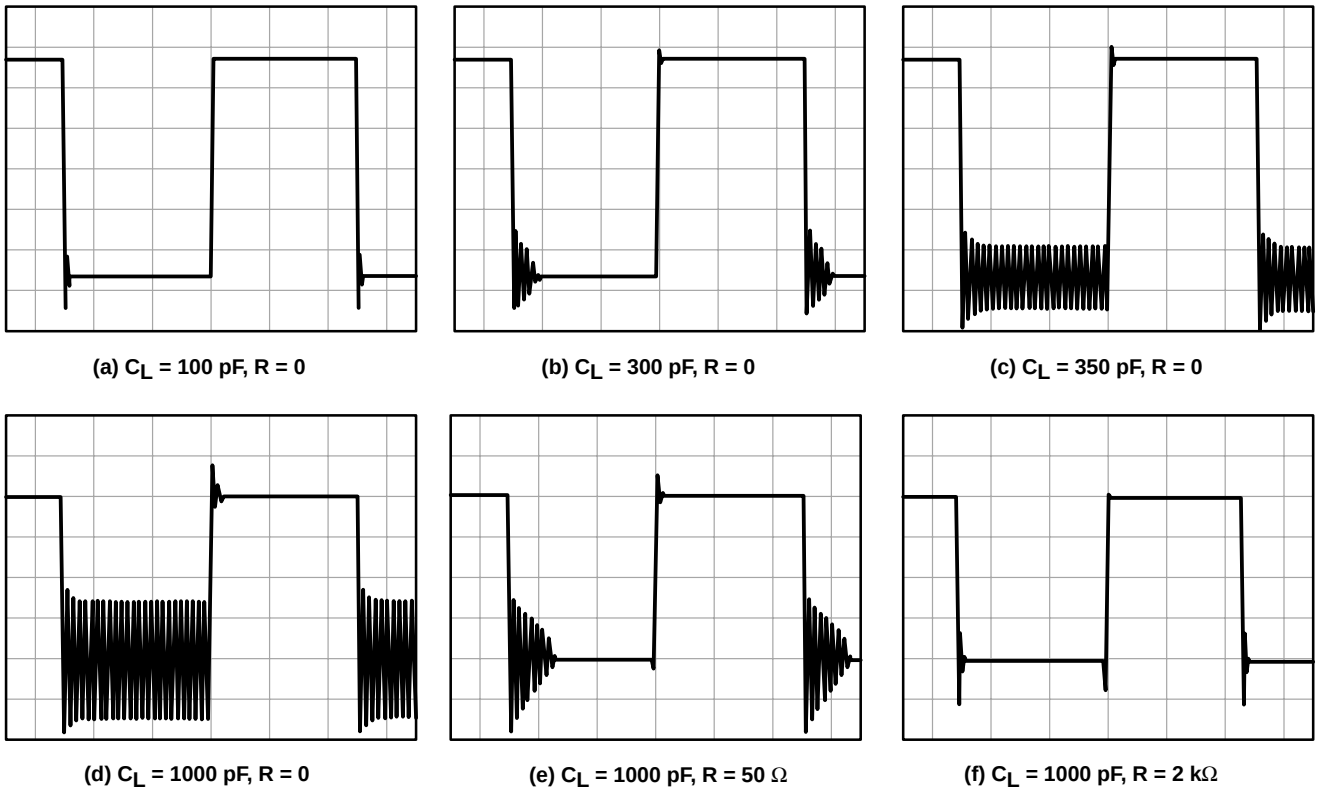

(a) C_L = 100 pF, R = 0 (b) C_L = 300 pF, R = 0 (c) C_L = 350 pF, R = 0

(d) C_L = 1000 pF, R = 0 (e) C_L = 1000 pF, R = 50 Ω (f) C_L = 1000 pF, R = 2 kΩ

Figure 81. Effect of Capacitive Loads

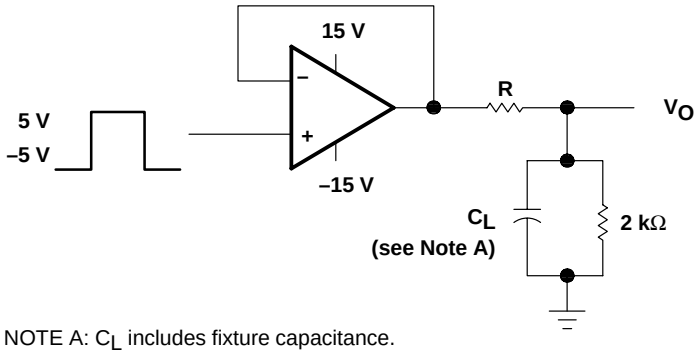

NOTE A: C_L includes fixture capacitance.

Figure 82. Test Circuit for Output Characteristics

APPLICATION INFORMATION

input characteristics

The TL05x and TL05xA are specified with a minimum and a maximum input voltage that, if exceeded at either input, could cause the device to malfunction.

Because of the extremely high input impedance and resulting low-bias current requirements, the TL05x and TL05xA are well suited for low-level signal processing; however, leakage currents on printed-circuit boards and sockets easily can exceed bias current requirements and cause degradation in system performance. It is good practice to include guard rings around inputs (see Figure 83). These guards should be driven from a low-impedance source at the same voltage level as the common-mode input.

Unused amplifiers should be connected as grounded unity-gain followers to avoid possible oscillation.

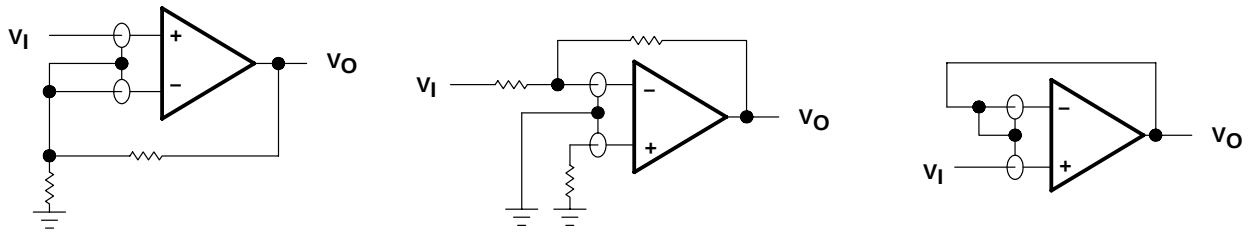

(a) NONINVERTING AMPLIFIER **(b) INVERTING AMPLIFIER** **(c) UNITY-GAIN AMPLIFIER**

Figure 83. Use of Guard Rings

noise performance

The noise specifications in operational amplifier circuits are greatly dependent on the current in the first-stage differential amplifier. The low input-bias current requirements of the TL05x and TL05xA result in a very low current noise. This feature makes the devices especially favorable over bipolar devices when using values of circuit impedance greater than 50 kΩ.

APPLICATION INFORMATION

phase meter

The phase meter in Figure 84 produces an output voltage of 10 mV per degree of phase delay between the two input signals V_A and V_B. The reference signal V_A must be the same frequency as V_B. The TLC3702 comparators (U1) convert these two input sine waves into ±5-V square waves. Then, R1 and R4 provide level shifting prior to the SN74HC109 dual J-K flip flops.

Flip-flop U2B is connected as a toggle flip-flop and generates a square wave at one-half the frequency of V_B. Flip-flop U2A also produces a square wave at one-half the input frequency. The pulse duration of U2A varies from zero to one-half the period, where zero corresponds to zero phase delay between V_A and V_B and one-half the period corresponds to V_B lagging V_A by 360 degrees.

The output pulse from U2A causes the TLC4066 (U3) switch to charge the TL05x (U4) integrator capacitors C1 and C2. As the phase delay approaches 360 degrees, the output of U4A approximates a square wave, and U2A has an output of almost 2.5 V. U4B acts as a noninverting amplifier with a gain of 1.44 in order to scale the 0- to 2.5-V integrator output to a 0- to 3.6-V output range.

R8 and R10 provide output gain and zero-level calibration. This circuit operates over a 100-Hz to 10-kHz frequency range.

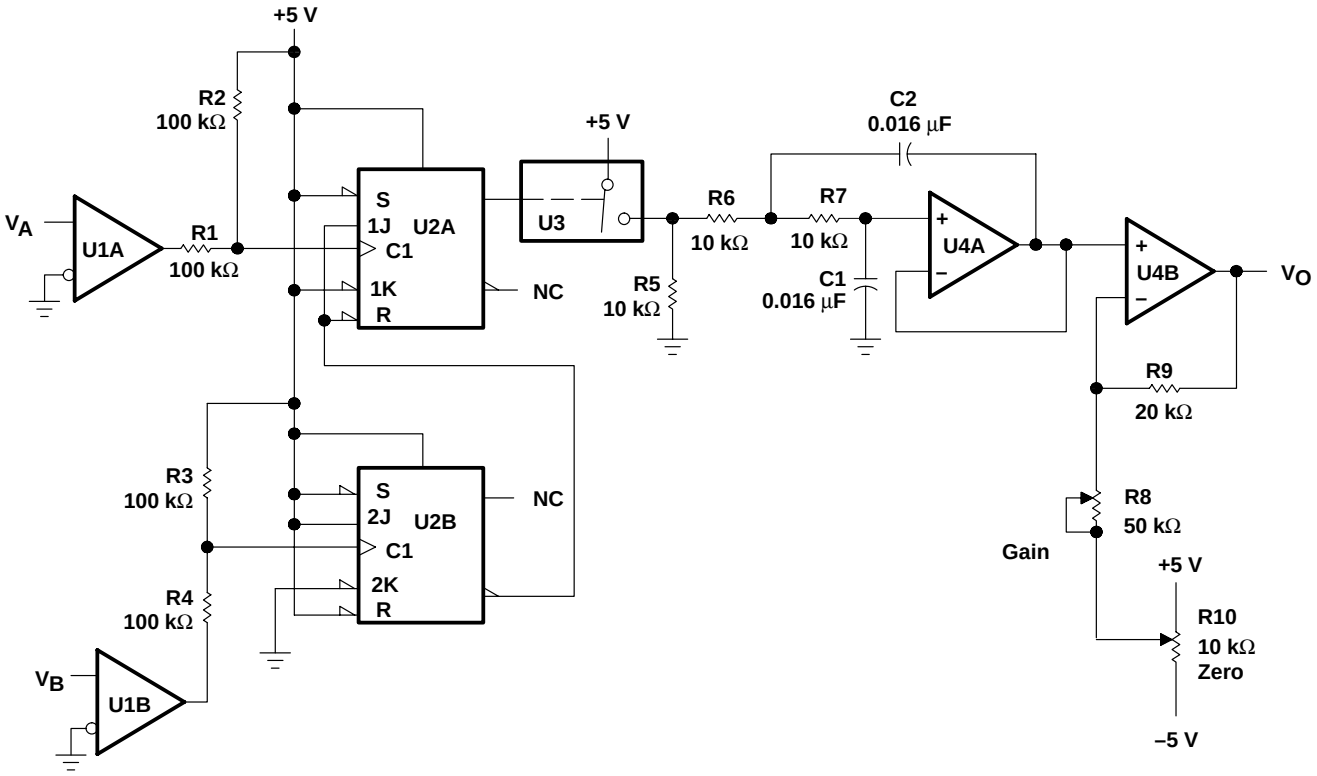

NOTE A: U1 = TLC3702; $V_{CC\pm}$ = ±5 V
U2 = SN74HC109
U3 = TLC4066
U4, U5 = TL05x; $V_{CC\pm}$ = ±5 V

Figure 84. Phase Meter

APPLICATION INFORMATION

precision constant-current source over temperature

A precision current source (see Figure 85) benefits from the high input impedance and stability of Texas Instruments enhanced-JFET process. A low-current shunt regulator maintains 2.5 V between the inverting input and the output of the TL05x. The negative feedback then forces 2.5 V across the current-setting resistor R; therefore, the current to the load simply is 2.5 V divided by R.

Possible choices for the shunt regulator include the LT1004, LT1009, and LM385. If the regulator's cathode connects to the operational amplifier output, this circuit sources load current. Similarly, if the cathode connects to the inverting input, the circuit sinks current from the load. To minimize output current change with temperature, R should be a metal film resistor with a low temperature coefficient. Also, this circuit must be operated with split-voltage supplies.

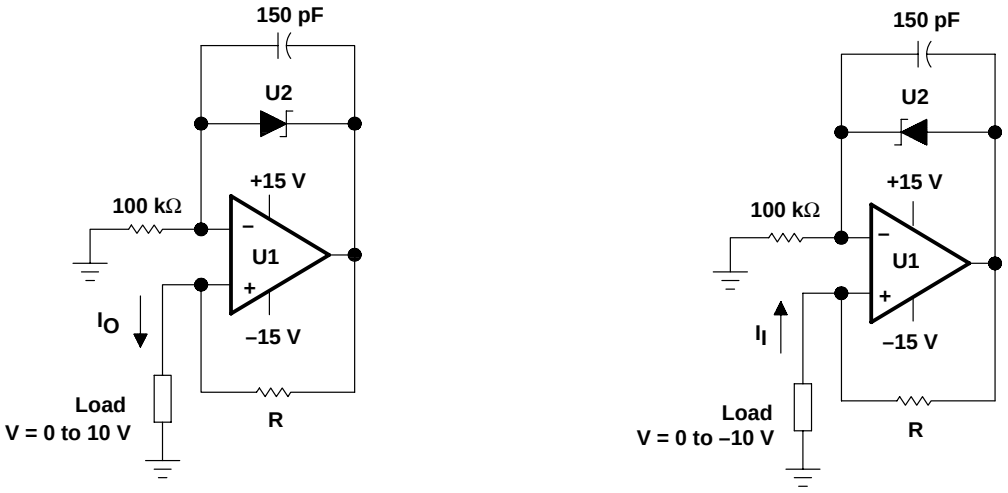

NOTE A: U1 = 1/2 TL05x
U2 = LM385, LT1004, or LT1009 voltage reference

$I = \frac{2.5\ V}{R}$, R = Low-temperature-coefficient metal-film resistor

Figure 85. Precision Constant-Current Source

APPLICATION INFORMATION

instrumentation amplifier with adjustable gain/null

The instrumentation amplifier in Figure 86 benefits greatly from the high input impedance and stable input offset voltage of the TL05xA. Amplifiers U1A, U1B, and U2A form the actual instrumentation amplifier, while U2B provides offset null. Potentiometer R1 provides gain adjustment. With R1 = 2 kΩ, the circuit gain equals 100, while with R1 = 200 kΩ, the circuit gain equals two. The following equation shows the instrumentation amplifier gain as a function of R1:

$$A_V = 1 + \left(\frac{R2 + R3}{R1}\right)$$

Readjusting the offset null is necessary when the circuit gain is changed. If U2B is needed for another application, R7 can be terminated at ground. The low input offset voltage of the TL05xA minimizes the dc error of the circuit. For best matching, all resistors should be one-percent tolerance. The matching between R4, R5, R6, and R7 controls the CMRR of this application.

The following equation shows the output voltages when the input voltage equals zero. This dc error can be nulled by adjusting the offset null potentiometer; however, any change in offset voltage over time or temperature also creates an error. To calculate the error from changes in offset, consider the three offset components in the equation as delta offsets, rather than initial offsets. The improved stability of Texas Instruments enhanced JFETs minimizes the error resulting from change in input offset voltage with time. Assuming V_I equals zero, V_O can be shown as a function of the offset voltage:

$$V_O = V_{IO2}\left[\left(1 + \frac{R3}{R1}\right)\left(\frac{R7}{R5 + R7}\right)\left(1 + \frac{R6}{R4}\right) + \frac{R2}{R1}\left(\frac{R6}{R4}\right)\right]$$

$$-V_{IO1}\left[\frac{R3}{R1}\left(\frac{R7}{R5 + R7}\right)\left(1 + \frac{R6}{R4}\right) + \frac{R6}{R4}\left(1 + \frac{R2}{R1}\right)\right] + V_{IO3}\left(1 + \frac{R6}{R4}\right)$$

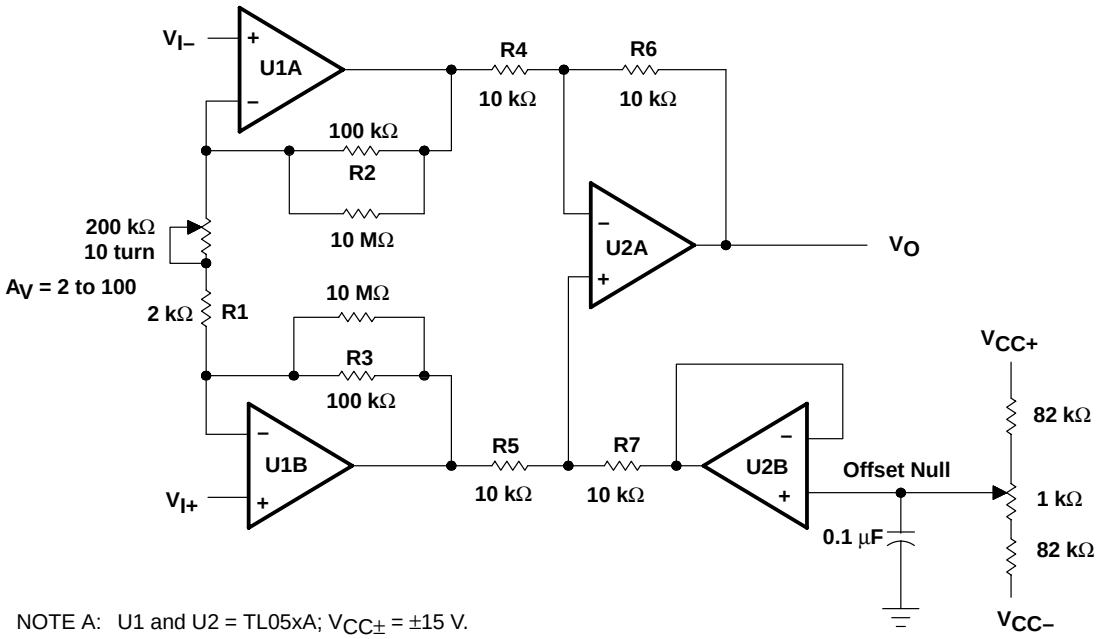

NOTE A: U1 and U2 = TL05xA; $V_{CC\pm}$ = ±15 V.

Figure 86. Instrumentation Amplifier

APPLICATION INFORMATION

high input impedance log amplifier

The low input offset voltage and high input impedance of the TL05xA creates a precision log amplifier (see Figure 87). IC1 is a 2.5-V, low-current precision, shunt regulator. Transistors Q1 and Q2 must be a closely matched npn pair. For best performance over temperature, R4 should be a metal-film resistor with a low temperature coefficient.

In this circuit, U1A serves as a high-impedance unity-gain buffer. Amplifier U1B converts the input voltage to a current through R1 and Q1. Amplifier U1C, IC1, and R4 form a 1-μA temperature-stable current source that sets the base-emitter voltage of Q2. U1D amplifies the difference between the base-emitter voltage of Q1 and Q2 (see Figure 88). The output voltage is given by the following equation:

$$V_O = -\left[1 + \frac{R6}{R5}\right] \frac{kT}{q} \left[\ln \frac{V_I}{\left(R1 \times 1 \times 10^{-6}\right)}\right]$$ where $k = 1.38 \times 10^{-23}$, $q = 1.602 \times 10^{-19}$, and T is Kelvin temperature

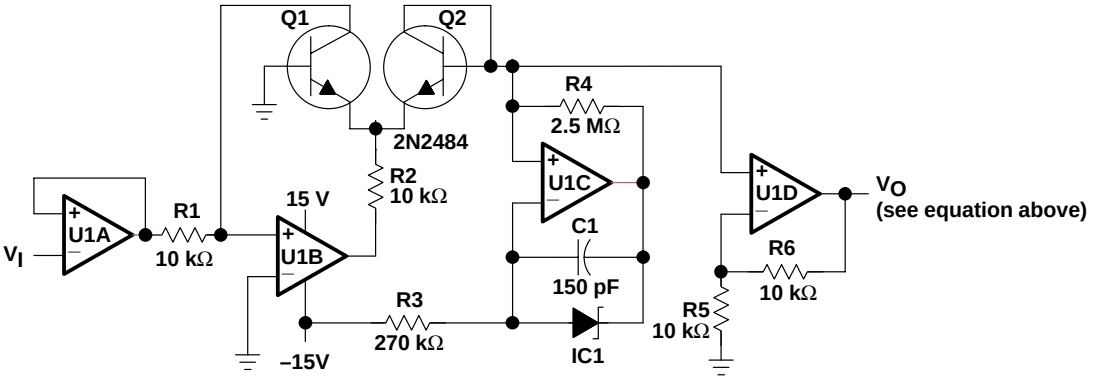

NOTE A: U1A through U1D = TL05xA. IC1 = LM385, LT1004, or LT1009 voltage reference

Figure 87. Log Amplifier

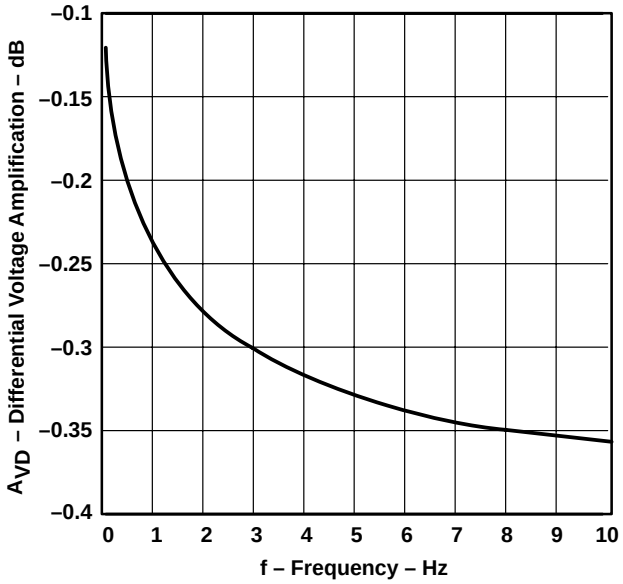

Figure 88. Output Voltage vs Input Voltage for Log Amplifier

APPLICATION INFORMATION

analog thermometer

By combining a current source that does not vary over temperature with an instrumentation amplifier, a precise analog thermometer can be built (see Figure 89). Amplifier U1A and IC1 establish a constant current through the temperature-sensing diode D1. For this section of the circuit to operate correctly, the TL05x must use split supplies, and R3 must be a metal-film resistor with a low temperature coefficient.

The temperature-sensitive voltage from the diode is compared to a temperature-stable voltage reference set by IC2. R4 should be adjusted to provide the correct output voltage when the diode is at a known temperature. Although this potentiometer resistance varies with temperature, the divider ratio of the potentiometer remains constant.

Amplifiers U1B, U2A, and U2B form the instrumentation amplifier that converts the difference between the diode and reference voltage to a voltage proportional to the temperature. With switch S1 closed, the amplifier gain equals 5 and the output voltage is proportional to temperature in degrees Celsius. With S1 open, the amplifier gain is 9 and the output is proportional to temperature in degrees Fahrenheit. Every time S1 is changed, R4 must be recalibrated. By setting S1 correctly, the output voltage equals 10 mV per degree (C or F).

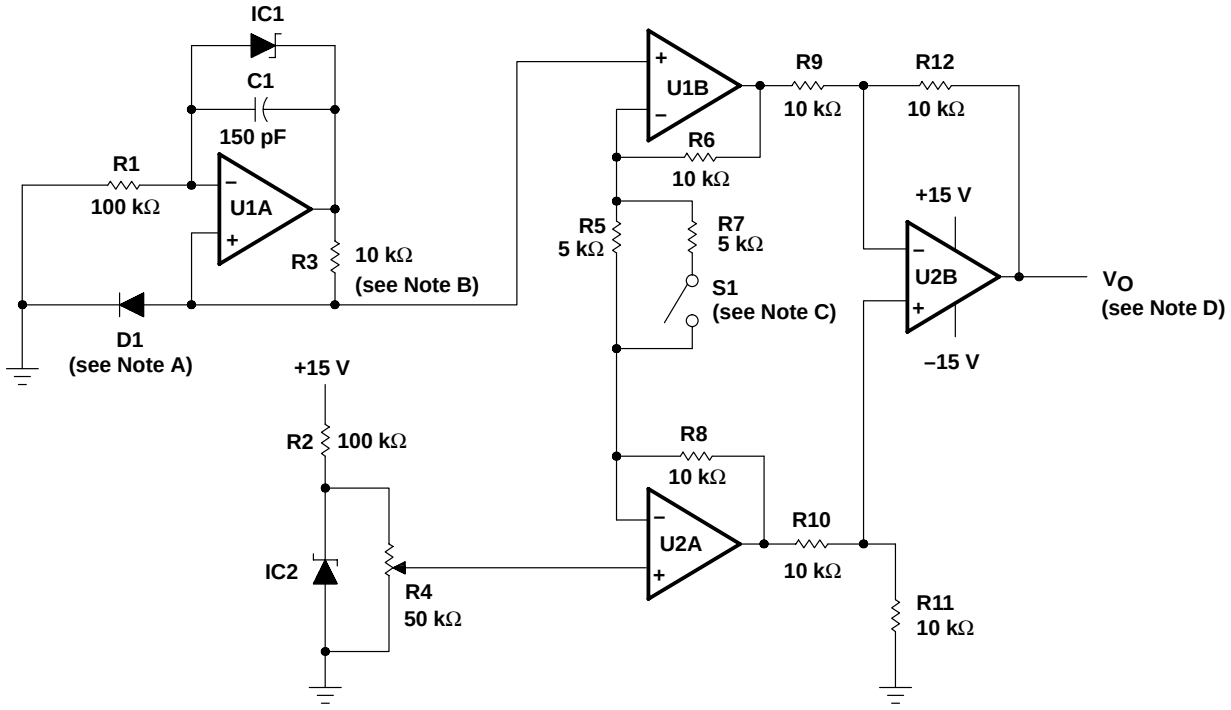

NOTES: A. Temperature-sensing diode ≈ (–2 mV/°C)
B. Metal-film resistor (low temperature coefficient)
C. Switch open for °F and closed for °C
D. V_O α temperature; 10 mV/°C or 10 mV/°F
E. U1, U2 = TL05x. IC1, IC2 = LM385, LT1004, or LT1009 voltage reference

Figure 89. Analog Thermometer

APPLICATION INFORMATION

voltage-ratio-to-dB converter

The application in Figure 90 measures the amplitude ratio of two signals, then converts the ratio to decibels (see Figure 91). The output voltage provides a resolution of 100 mV/dB. The two inputs can be either dc or sinusoidal ac signals. When using ac signals, both signals should be the same frequency or output glitches will occur. For measuring two input signals of different frequencies, extra filtering should be added after the rectifiers.

The circuit contains three low-offset TL05xA devices. Two of these devices provide the rectification and logarithmic conversion of the inputs. The third TL05xA forms an instrumentation amplifier. The stage performing the logarithmic conversion also requires two well-matched npn transistors.

The input signal first passes through a high-impedance unity-gain buffer U1A (U2A). Then U1B (U2B) rectifies the input signal at a gain of 0.5, and U1C (U2C) provides a noninverting gain of 2, so that the system gain is still one. U1D (U2D), R6 (R13), and Q1 (Q2) perform the logarithmic conversion of the rectified input signal. The instrumentation amplifier formed by U3A, U3B, U3D scales the difference of the two logarithmic voltages by a gain of 33.6. As a result, the output voltage equals 100 mV/dB. The 1-kΩ potentiometer on the input of U3C calibrates the zero-dB reference level. The following equations are used to derive the relationship between the input voltage ratio, expressed in decibels, and the output voltage.

$$X\ dB = 20\ \log\left[\frac{V_A}{V_B}\right] = 20\left[\frac{\ln\left(V_A\right) - \left(V_B\right)}{\ln\ (10)}\right]$$

$$X\ dB = 8.686\left[\ln\left(V_A\right) - \ln\left(V_B\right)\right]$$

$$V_{BE(Q1)} = \frac{kT}{q}\ \ln\left[\frac{V_A}{R \times I_S}\right] \qquad V_{BE(Q2)} = \frac{kT}{q}\ \ln\left[\frac{V_B}{R \times I_S}\right]$$

$$\Delta V_{BE} = V_{BE(Q1)} - V_{BE(Q2)} = \frac{kT}{q}\left[\ln\left(V_A\right) - \ln\left(V_B\right)\right]$$

$$X\ dB = \frac{8.686}{kT/q}\left[V_{BE(Q1)} - V_{BE(Q2)}\right] = 336\left[V_{BE(Q1)} - V_{BE(Q2)}\right] \text{ at } 25°C$$

where

$k = 1.38 \times 10^{-23}$, $q = 1.602 \times 10^{-19}$, and T is Kelvin temperature

This gives a resolution of 1 V/dB. Therefore, the gain of the instrumentation amplifier is set at 33.6 to obtain 100 mV/dB.

APPLICATION INFORMATION

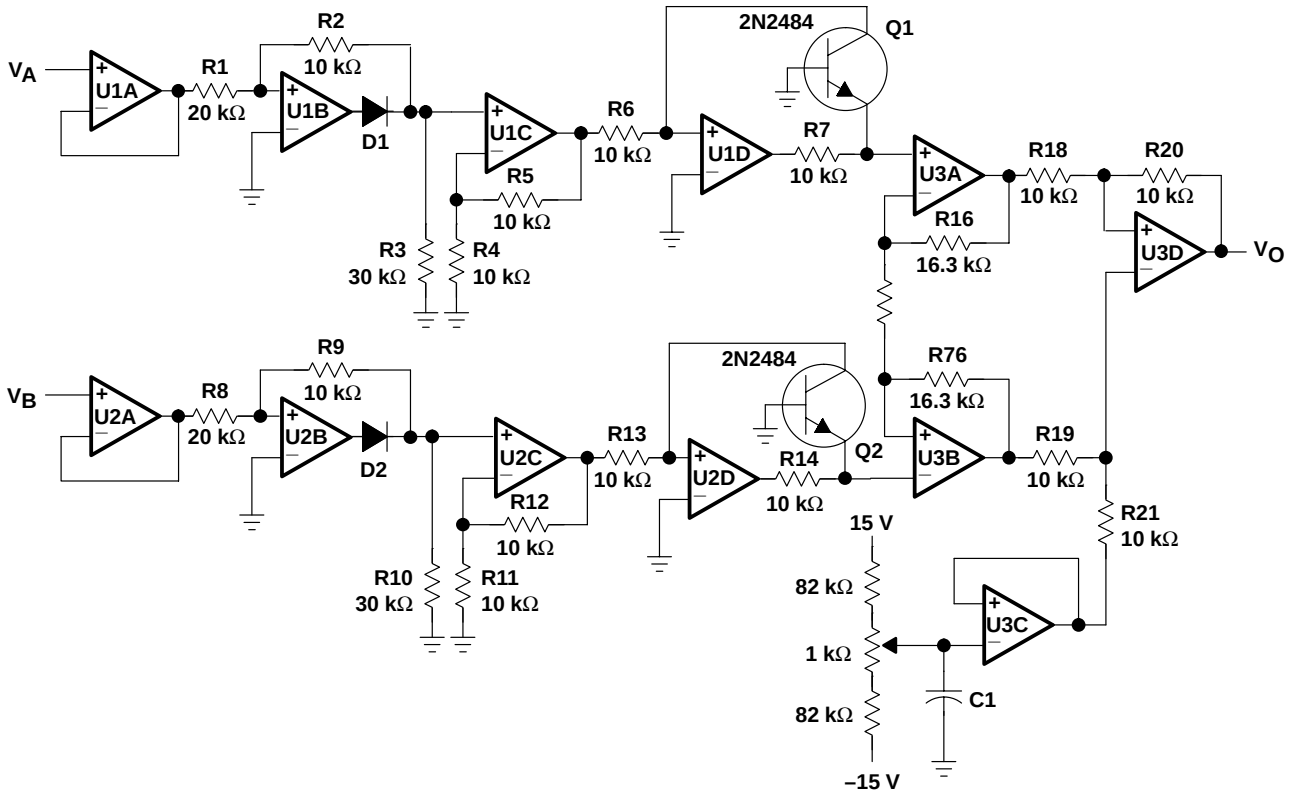

NOTE A: U1A through U3D = TL05xA, $V_{CC\pm}$ = ±15 V. D1 and D2 = 1N914.

Figure 90. Voltage Ratio-to-dB Converter

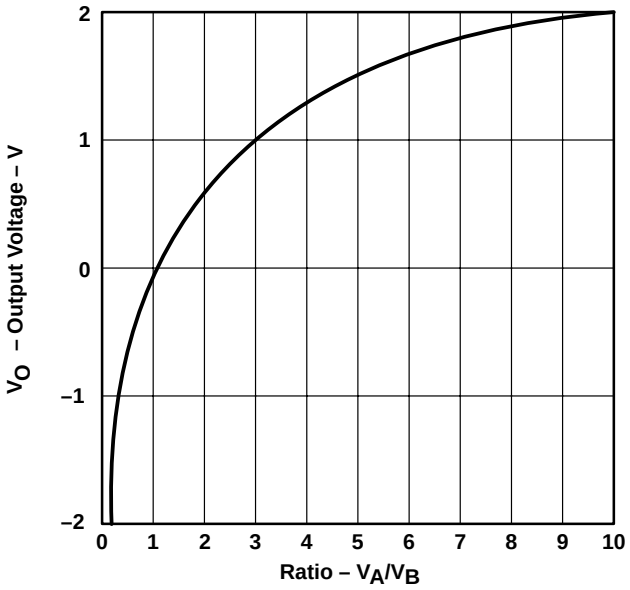

Figure 91. Output Voltage vs the Ratio of the Input Voltages for Voltage-to-dB Converter

APPLICATION INFORMATION

macromodel information

Macromodel information provided was derived using Microsim *Parts*™, the model-generation software used with Microsim *PSpice*™. The Boyle macromodel (see Note 6 and subcircuit Figure 92) are generated using the TL05x typical electrical and operating characteristics at T_A = 25°C. Using this information, output simulations of the following key parameters can be generated to a tolerance of 20% (in most cases):

- Maximum positive output voltage swing
- Maximum negative output voltage swing
- Slew rate
- Quiescent power dissipation
- Input bias current
- Open-loop voltage amplification
- Unity-gain frequency
- Common-mode rejection ratio
- Phase margin
- DC output resistance
- AC output resistance
- Short-circuit output current limit

NOTE 6: G. R. Boyle, B. M. Cohn, D. O. Pederson, and J. E. Solomon, "Macromodeling of Integrated Circuit Operational Amplifiers", *IEEE Journal of Solid-State Circuits,* SC-9, 353 (1974).

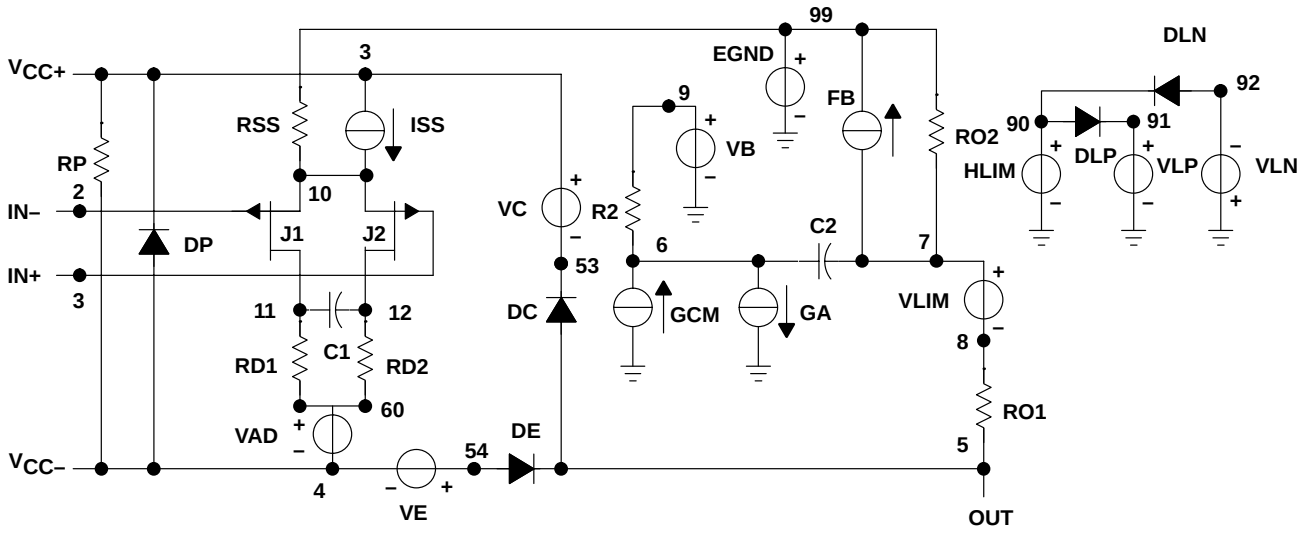


```
.SUBCKT TL05x 1 2 3 4 5
C1    11    12    3.988E–12
C2    6     7     15.00E–12
DC    5     53    DX
DE    54    5     DX
DLP   90    91    DX
DLN   92    90    DX
DP    4     3     DX
EGND  99    0     POLY (2) (3,0) (4,0) 0 .5 .5
FB    7     99    POLY (5) VB VC VE VLP
+ VLN 0 2.875E6 –3E6 3E6 3E6 –3E6
GA    6     0     11    12 292.2E–6
GCM   0     6     10    99 6.542E–9
ISS   3     10    DC 300.0E–6
HLIM  90    0     VLIM 1K
J1    11    2     10 JX
J2    12    1     10 JX
R2    6     9     100.0E3
RD1   4     11    3.422E3
RD2   4     12    3.422E3
R01   8     5     125
R02   7     99    125
RP    3     4     11.11E3
RSS   10    99    666.7E6
VB    9     0     DC 0
VC    3     53    DC 3
VE    54    4     DC 3.7
VLIM  7     8     DC 0
VLP   91    0     DC 28
VLN   0     92    DC 28
.MODEL DX D (IS=800.0E–18)
.MODEL JX PJF (IS=15.00E–12 BETA=185.2E–6
+ VTO=–.1)
.ENDS
```

Figure 92. Boyle Macromodel and Subcircuit

PSpice and *Parts* are trademarks of MicroSim Corporation.

Macromodels, simulation models, or other models provided by TI, directly or indirectly, are not warranted by TI as fully representing all of the specification and operating characteristics of the semiconductor product to which the model relates.

PACKAGING INFORMATION

Orderable Device	Status (1)	Package Type	Package Drawing	Pins	Package Qty	Eco Plan (2)	Lead/Ball Finish (6)	MSL Peak Temp (3)	Op Temp (°C)	Device Marking (4/5)	Samples
TL051ACD	ACTIVE	SOIC	D	8	75	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	0 to 70	051AC	Samples
TL051ACDG4	ACTIVE	SOIC	D	8	75	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	0 to 70	051AC	Samples
TL051ACP	ACTIVE	PDIP	P	8	50	Pb-Free (RoHS)	CU NIPDAU	N / A for Pkg Type	0 to 70	TL051ACP	Samples
TL051AID	OBSOLETE	SOIC	D	8		TBD	Call TI	Call TI	-40 to 85		
TL051AIP	OBSOLETE	PDIP	P	8		TBD	Call TI	Call TI	-40 to 85		
TL051CD	ACTIVE	SOIC	D	8	75	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	0 to 70	TL051C	Samples
TL051CDR	ACTIVE	SOIC	D	8	2500	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	0 to 70	TL051C	Samples
TL051CDRG4	ACTIVE	SOIC	D	8	2500	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	0 to 70	TL051C	Samples
TL051CP	ACTIVE	PDIP	P	8	50	Pb-Free (RoHS)	CU NIPDAU	N / A for Pkg Type	0 to 70	TL051CP	Samples
TL051CPE4	ACTIVE	PDIP	P	8	50	Pb-Free (RoHS)	CU NIPDAU	N / A for Pkg Type	0 to 70	TL051CP	Samples
TL051ID	OBSOLETE	SOIC	D	8		TBD	Call TI	Call TI			
TL051IDR	OBSOLETE	SOIC	D	8		TBD	Call TI	Call TI			
TL051IP	OBSOLETE	PDIP	P	8		TBD	Call TI	Call TI			
TL052-W	ACTIVE	WAFERSALE	YS	0		TBD	Call TI	Call TI			Samples
TL052ACD	ACTIVE	SOIC	D	8	75	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	0 to 70	052AC	Samples
TL052ACDG4	ACTIVE	SOIC	D	8	75	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	0 to 70	052AC	Samples
TL052ACDR	ACTIVE	SOIC	D	8	2500	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	0 to 70	052AC	Samples
TL052ACDRG4	ACTIVE	SOIC	D	8	2500	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	0 to 70	052AC	Samples
TL052ACP	ACTIVE	PDIP	P	8	50	Pb-Free (RoHS)	CU NIPDAU	N / A for Pkg Type	0 to 70	TL052ACP	Samples

Orderable Device	Status (1)	Package Type	Package Drawing	Pins	Package Qty	Eco Plan (2)	Lead/Ball Finish (6)	MSL Peak Temp (3)	Op Temp (°C)	Device Marking (4/5)	Samples
TL052ACPE4	ACTIVE	PDIP	P	8	50	Pb-Free (RoHS)	CU NIPDAU	N / A for Pkg Type	0 to 70	TL052ACP	Samples
TL052AID	ACTIVE	SOIC	D	8	75	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	-40 to 85	052AI	Samples
TL052AIDE4	ACTIVE	SOIC	D	8	75	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	-40 to 85	052AI	Samples
TL052AIDG4	ACTIVE	SOIC	D	8	75	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	-40 to 85	052AI	Samples
TL052AIDR	ACTIVE	SOIC	D	8	2500	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	-40 to 85	052AI	Samples
TL052AIDRG4	ACTIVE	SOIC	D	8	2500	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	-40 to 85	052AI	Samples
TL052AIP	ACTIVE	PDIP	P	8	50	Pb-Free (RoHS)	CU NIPDAU	N / A for Pkg Type	-40 to 85	TL052AIP	Samples
TL052AMFKB	OBSOLETE	LCCC	FK	20		TBD	Call TI	Call TI	-55 to 125		
TL052AMJGB	OBSOLETE	CDIP	JG	8		TBD	Call TI	Call TI	-55 to 125		
TL052CD	ACTIVE	SOIC	D	8	75	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	0 to 70	TL052C	Samples
TL052CDG4	ACTIVE	SOIC	D	8	75	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	0 to 70	TL052C	Samples
TL052CDR	ACTIVE	SOIC	D	8	2500	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	0 to 70	TL052C	Samples
TL052CDRE4	ACTIVE	SOIC	D	8	2500	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	0 to 70	TL052C	Samples
TL052CDRG4	ACTIVE	SOIC	D	8	2500	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	0 to 70	TL052C	Samples
TL052CP	ACTIVE	PDIP	P	8	50	Pb-Free (RoHS)	CU NIPDAU	N / A for Pkg Type	0 to 70	TL052CP	Samples
TL052CPSR	ACTIVE	SO	PS	8	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	0 to 70	T052	Samples
TL052ID	ACTIVE	SOIC	D	8	75	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	-40 to 85	TL052I	Samples
TL052IDG4	ACTIVE	SOIC	D	8	75	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	-40 to 85	TL052I	Samples
TL052IDR	ACTIVE	SOIC	D	8	2500	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	-40 to 85	TL052I	Samples

Orderable Device	Status (1)	Package Type	Package Drawing	Pins	Package Qty	Eco Plan (2)	Lead/Ball Finish (6)	MSL Peak Temp (3)	Op Temp (°C)	Device Marking (4/5)	Samples
TL052IDRE4	ACTIVE	SOIC	D	8	2500	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	-40 to 85	TL052I	Samples
TL052IP	ACTIVE	PDIP	P	8	50	Pb-Free (RoHS)	CU NIPDAU	N / A for Pkg Type	-40 to 85	TL052IP	Samples
TL052IPE4	ACTIVE	PDIP	P	8	50	Pb-Free (RoHS)	CU NIPDAU	N / A for Pkg Type	-40 to 85	TL052IP	Samples
TL052MFKB	OBSOLETE	LCCC	FK	20		TBD	Call TI	Call TI	-55 to 125		
TL052MJG	OBSOLETE	CDIP	JG	8		TBD	Call TI	Call TI	-55 to 125		
TL052MJGB	OBSOLETE	CDIP	JG	8		TBD	Call TI	Call TI	-55 to 125		
TL054ACD	ACTIVE	SOIC	D	14	50	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	0 to 70	TL054AC	Samples
TL054ACDE4	ACTIVE	SOIC	D	14	50	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	0 to 70	TL054AC	Samples
TL054ACDG4	ACTIVE	SOIC	D	14	50	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	0 to 70	TL054AC	Samples
TL054ACDR	ACTIVE	SOIC	D	14	2500	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	0 to 70	TL054AC	Samples
TL054ACN	ACTIVE	PDIP	N	14	25	Pb-Free (RoHS)	CU NIPDAU	N / A for Pkg Type	0 to 70	TL054ACN	Samples
TL054AID	ACTIVE	SOIC	D	14	50	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	-40 to 85	TL054AI	Samples
TL054AIDG4	ACTIVE	SOIC	D	14	50	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	-40 to 85	TL054AI	Samples
TL054AIDR	ACTIVE	SOIC	D	14	2500	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	-40 to 85	TL054AI	Samples
TL054AIDRE4	ACTIVE	SOIC	D	14	2500	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	-40 to 85	TL054AI	Samples
TL054AMFKB	OBSOLETE	LCCC	FK	20		TBD	Call TI	Call TI	-55 to 125		
TL054AMJB	OBSOLETE	CDIP	J	14		TBD	Call TI	Call TI	-55 to 125		
TL054CD	ACTIVE	SOIC	D	14	50	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	0 to 70	TL054C	Samples
TL054CDE4	ACTIVE	SOIC	D	14	50	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	0 to 70	TL054C	Samples
TL054CDR	ACTIVE	SOIC	D	14	2500	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	0 to 70	TL054C	Samples

Orderable Device	Status (1)	Package Type	Package Drawing	Pins	Package Qty	Eco Plan (2)	Lead/Ball Finish (6)	MSL Peak Temp (3)	Op Temp (°C)	Device Marking (4/5)	Samples
TL054CDRG4	ACTIVE	SOIC	D	14	2500	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	0 to 70	TL054C	Samples
TL054CN	ACTIVE	PDIP	N	14	25	Pb-Free (RoHS)	CU NIPDAU	N / A for Pkg Type	0 to 70	TL054CN	Samples
TL054CNE4	ACTIVE	PDIP	N	14	25	Pb-Free (RoHS)	CU NIPDAU	N / A for Pkg Type	0 to 70	TL054CN	Samples
TL054CNSR	ACTIVE	SO	NS	14	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	0 to 70	TL054	Samples
TL054ID	ACTIVE	SOIC	D	14	50	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	-40 to 85	TL054I	Samples
TL054IDE4	ACTIVE	SOIC	D	14	50	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	-40 to 85	TL054I	Samples
TL054IDG4	ACTIVE	SOIC	D	14	50	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	-40 to 85	TL054I	Samples
TL054IDR	ACTIVE	SOIC	D	14	2500	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	-40 to 85	TL054I	Samples
TL054IDRG4	ACTIVE	SOIC	D	14	2500	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	-40 to 85	TL054I	Samples
TL054IN	ACTIVE	PDIP	N	14	25	Pb-Free (RoHS)	CU NIPDAU	N / A for Pkg Type	-40 to 85	TL054IN	Samples
TL054MFKB	OBSOLETE	LCCC	FK	20		TBD	Call TI	Call TI	-55 to 125		
TL054MJ	OBSOLETE	CDIP	J	14		TBD	Call TI	Call TI	-55 to 125		
TL054MJB	OBSOLETE	CDIP	J	14		TBD	Call TI	Call TI	-55 to 125		

(1) The marketing status values are defined as follows:
ACTIVE: Product device recommended for new designs.
LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.
NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.
PREVIEW: Device has been announced but is not in production. Samples may or may not be available.
OBSOLETE: TI has discontinued the production of the device.

(2) Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS), Pb-Free (RoHS Exempt), or Green (RoHS & no Sb/Br) - please check http://www.ti.com/productcontent for the latest availability information and additional product content details.
TBD: The Pb-Free/Green conversion plan has not been defined.
Pb-Free (RoHS): TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.
Pb-Free (RoHS Exempt): This component has a RoHS exemption for either 1) lead-based flip-chip solder bumps used between the die and package, or 2) lead-based die adhesive used between the die and leadframe. The component is otherwise considered Pb-Free (RoHS compatible) as defined above.

Green (RoHS & no Sb/Br): TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)

(3) MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

(4) There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.

(5) Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.

(6) Lead/Ball Finish - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead/Ball Finish values may wrap to two lines if the finish value exceeds the maximum column width.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

TAPE AND REEL INFORMATION

REEL DIMENSIONS

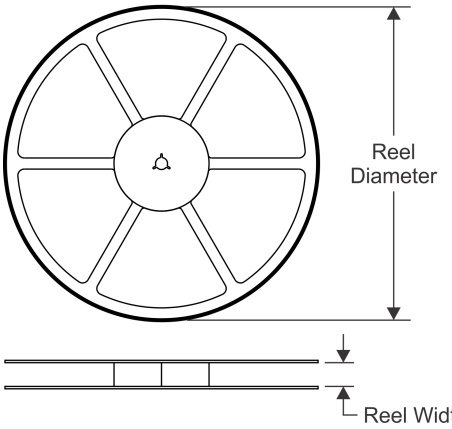

TAPE DIMENSIONS

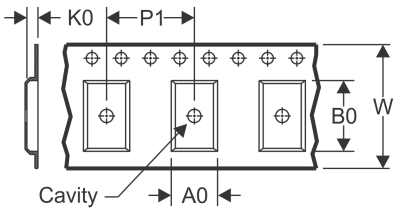

A0	Dimension designed to accommodate the component width
B0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers

QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE

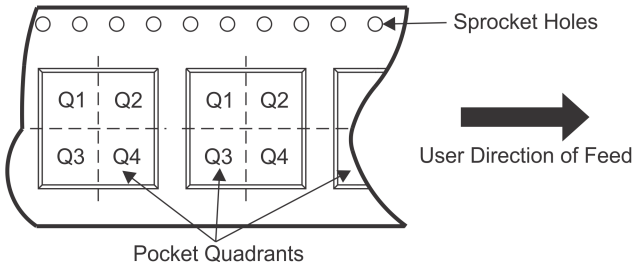

*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
TL051CDR	SOIC	D	8	2500	330.0	12.4	6.4	5.2	2.1	8.0	12.0	Q1
TL052ACDR	SOIC	D	8	2500	330.0	12.4	6.4	5.2	2.1	8.0	12.0	Q1
TL052AIDR	SOIC	D	8	2500	330.0	12.4	6.4	5.2	2.1	8.0	12.0	Q1
TL052CDR	SOIC	D	8	2500	330.0	12.4	6.4	5.2	2.1	8.0	12.0	Q1
TL052CPSR	SO	PS	8	2000	330.0	16.4	8.2	6.6	2.5	12.0	16.0	Q1
TL052IDR	SOIC	D	8	2500	330.0	12.4	6.4	5.2	2.1	8.0	12.0	Q1
TL054ACDR	SOIC	D	14	2500	330.0	16.4	6.5	9.0	2.1	8.0	16.0	Q1
TL054AIDR	SOIC	D	14	2500	330.0	16.4	6.5	9.0	2.1	8.0	16.0	Q1
TL054CDR	SOIC	D	14	2500	330.0	16.4	6.5	9.0	2.1	8.0	16.0	Q1
TL054IDR	SOIC	D	14	2500	330.0	16.4	6.5	9.0	2.1	8.0	16.0	Q1

TAPE AND REEL BOX DIMENSIONS

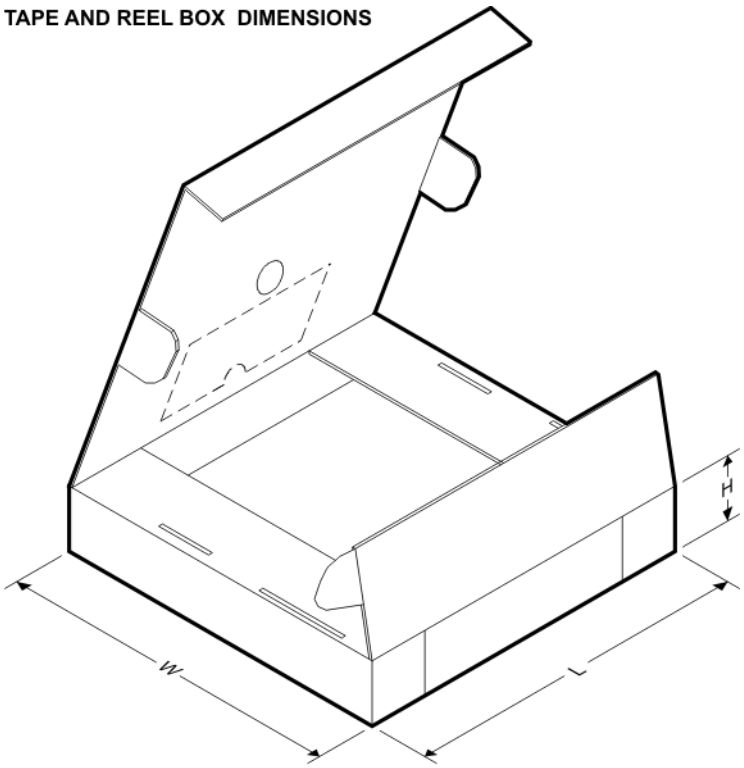

*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
TL051CDR	SOIC	D	8	2500	340.5	338.1	20.6
TL052ACDR	SOIC	D	8	2500	340.5	338.1	20.6
TL052AIDR	SOIC	D	8	2500	340.5	338.1	20.6
TL052CDR	SOIC	D	8	2500	340.5	338.1	20.6
TL052CPSR	SO	PS	8	2000	367.0	367.0	38.0
TL052IDR	SOIC	D	8	2500	340.5	338.1	20.6
TL054ACDR	SOIC	D	14	2500	333.2	345.9	28.6
TL054AIDR	SOIC	D	14	2500	333.2	345.9	28.6
TL054CDR	SOIC	D	14	2500	333.2	345.9	28.6
TL054IDR	SOIC	D	14	2500	333.2	345.9	28.6

MCER001A – JANUARY 1995 – REVISED JANUARY 1997

JG (R-GDIP-T8) **CERAMIC DUAL-IN-LINE**

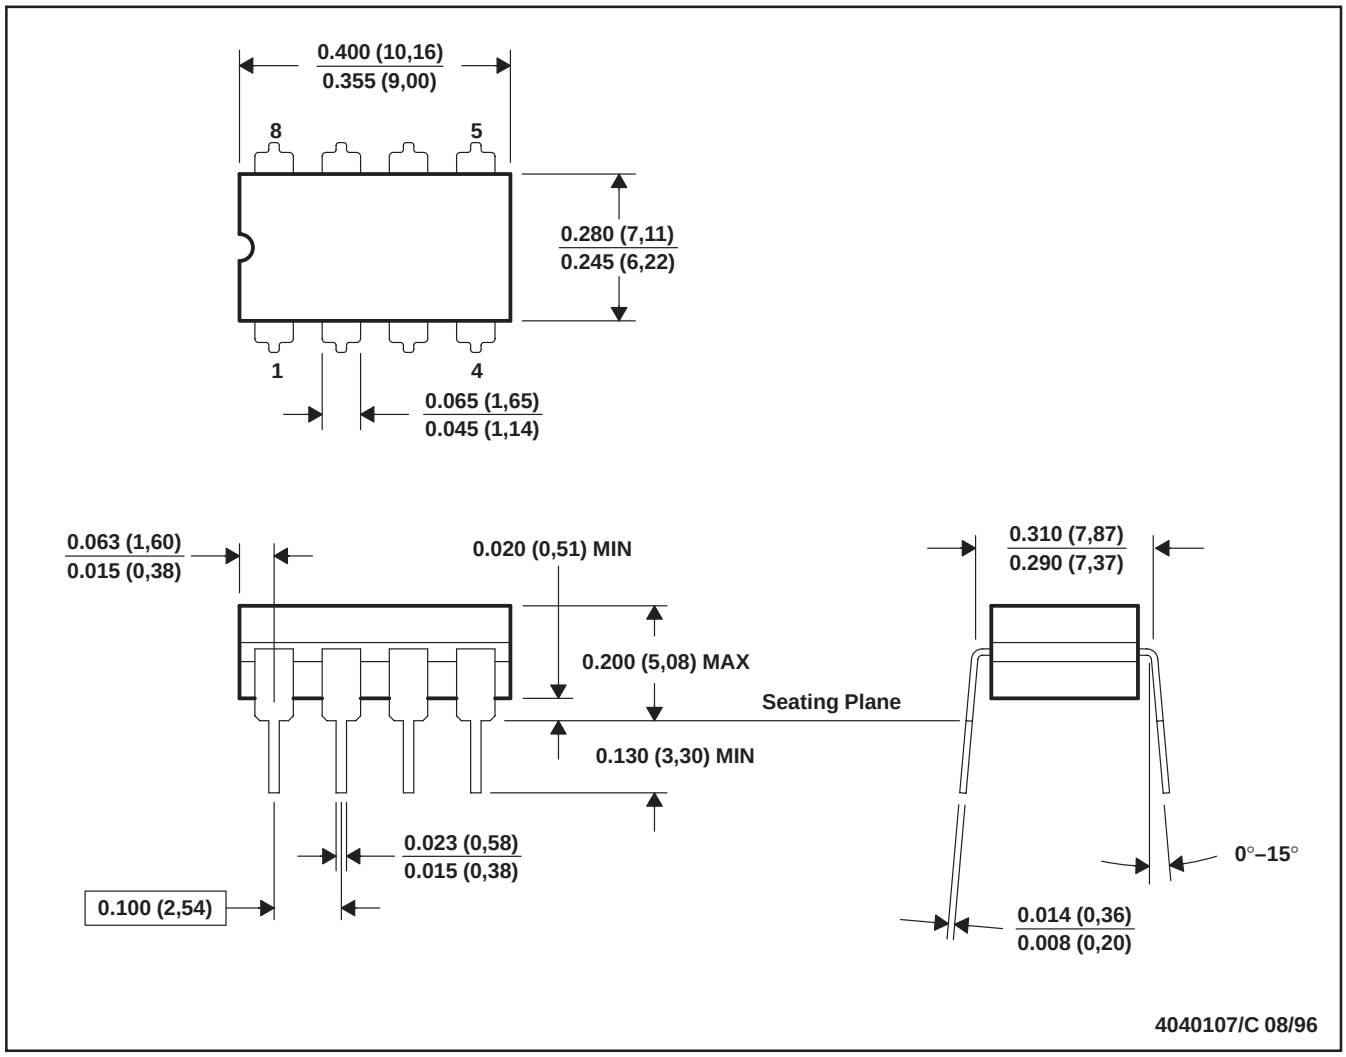

NOTES: A. All linear dimensions are in inches (millimeters).
B. This drawing is subject to change without notice.
C. This package can be hermetically sealed with a ceramic lid using glass frit.
D. Index point is provided on cap for terminal identification.
E. Falls within MIL STD 1835 GDIP1-T8

J (R–GDIP–T**)

14 LEADS SHOWN

CERAMIC DUAL IN–LINE PACKAGE

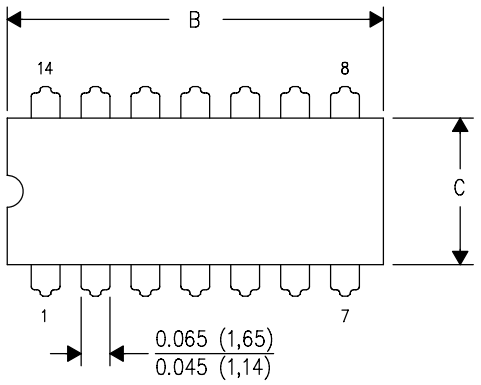

DIM \ PINS **	14	16	18	20
A	0.300 (7,62) BSC	0.300 (7,62) BSC	0.300 (7,62) BSC	0.300 (7,62) BSC
B MAX	0.785 (19,94)	.840 (21,34)	0.960 (24,38)	1.060 (26,92)
B MIN	—	—	—	—
C MAX	0.300 (7,62)	0.300 (7,62)	0.310 (7,87)	0.300 (7,62)
C MIN	0.245 (6,22)	0.245 (6,22)	0.220 (5,59)	0.245 (6,22)

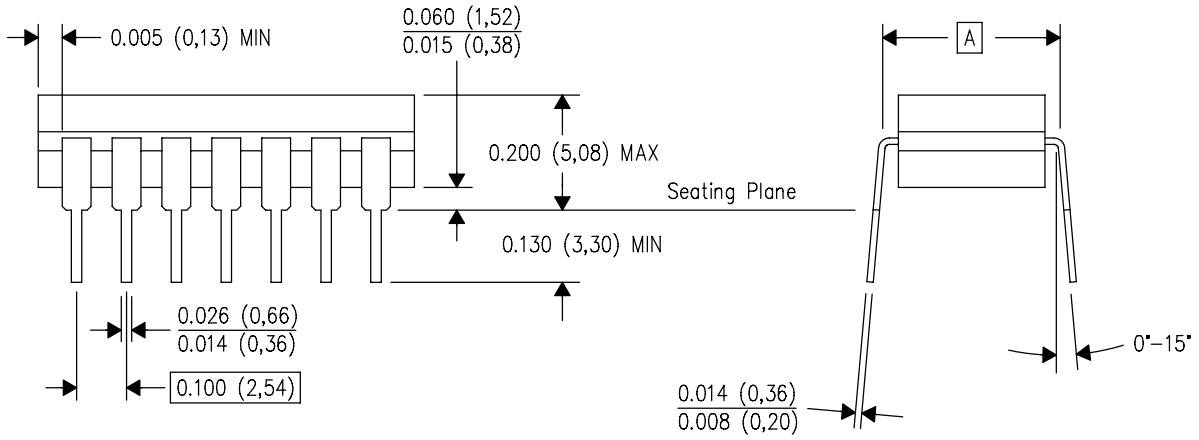

4040083/F 03/03

NOTES:
A. All linear dimensions are in inches (millimeters).
B. This drawing is subject to change without notice.
C. This package is hermetically sealed with a ceramic lid using glass frit.
D. Index point is provided on cap for terminal identification only on press ceramic glass frit seal only.
E. Falls within MIL STD 1835 GDIP1–T14, GDIP1–T16, GDIP1–T18 and GDIP1–T20.

FK (S–CQCC–N**) LEADLESS CERAMIC CHIP CARRIER

28 TERMINAL SHOWN

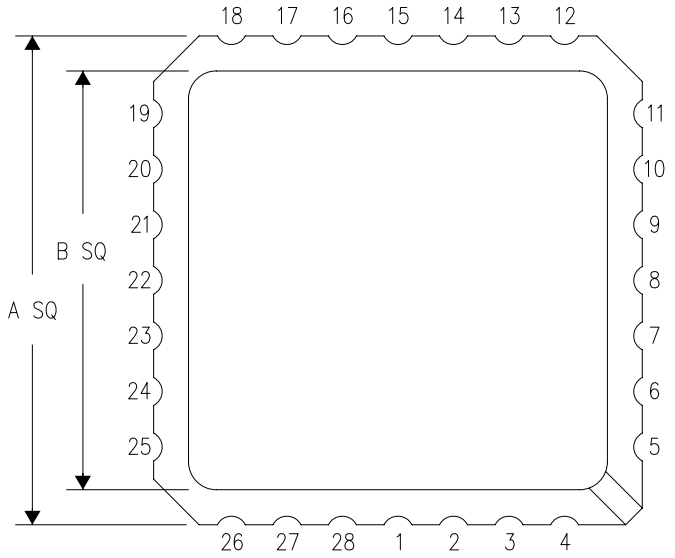

NO. OF TERMINALS **	A		B	
	MIN	MAX	MIN	MAX
20	0.342 (8,69)	0.358 (9,09)	0.307 (7,80)	0.358 (9,09)
28	0.442 (11,23)	0.458 (11,63)	0.406 (10,31)	0.458 (11,63)
44	0.640 (16,26)	0.660 (16,76)	0.495 (12,58)	0.560 (14,22)
52	0.740 (18,78)	0.761 (19,32)	0.495 (12,58)	0.560 (14,22)
68	0.938 (23,83)	0.962 (24,43)	0.850 (21,6)	0.858 (21,8)
84	1.141 (28,99)	1.165 (29,59)	1.047 (26,6)	1.063 (27,0)

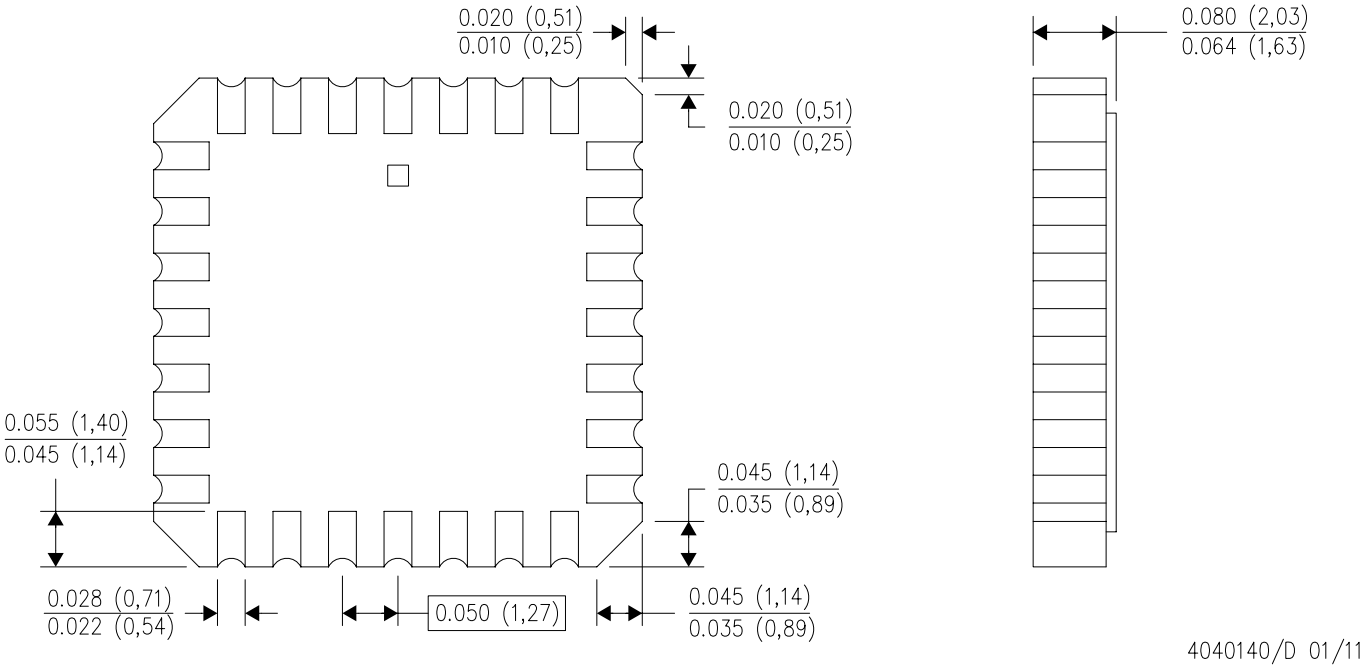

4040140/D 01/11

NOTES:
A. All linear dimensions are in inches (millimeters).
B. This drawing is subject to change without notice.
C. This package can be hermetically sealed with a metal lid.
D. Falls within JEDEC MS–004

P (R–PDIP–T8) PLASTIC DUAL–IN–LINE PACKAGE

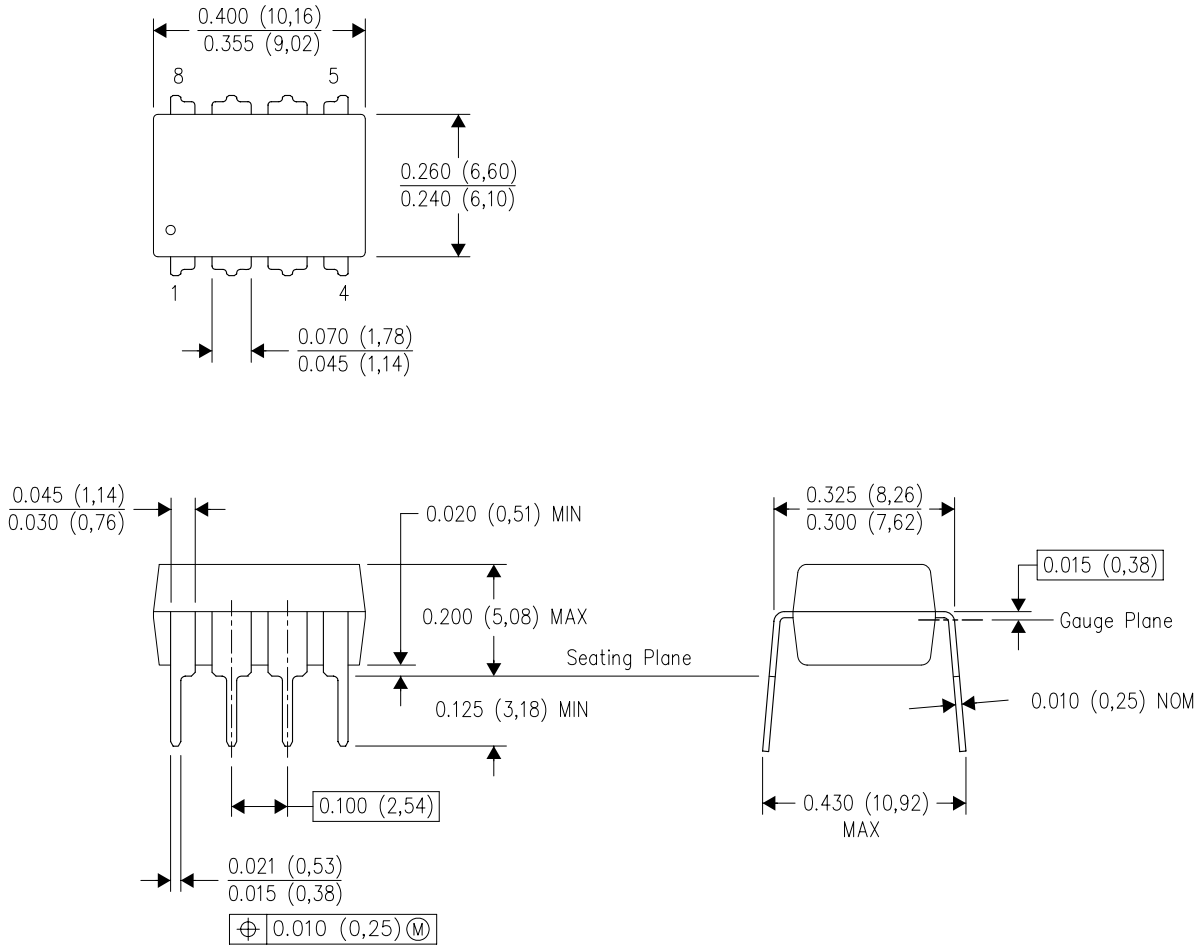

NOTES:
A. All linear dimensions are in inches (millimeters).
B. This drawing is subject to change without notice.
C. Falls within JEDEC MS–001 variation BA.

N (R–PDIP–T**)

PLASTIC DUAL–IN–LINE PACKAGE

16 PINS SHOWN

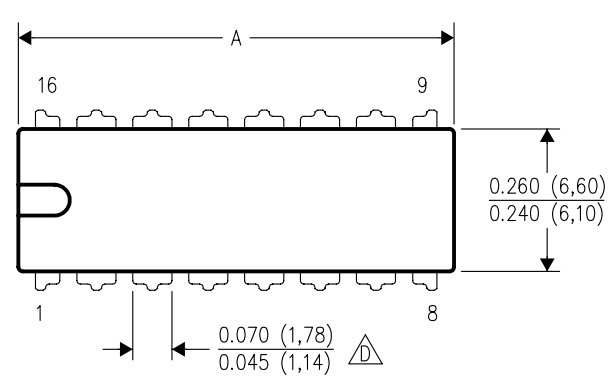

DIM \ PINS **	14	16	18	20
A MAX	0.775 (19,69)	0.775 (19,69)	0.920 (23,37)	1.060 (26,92)
A MIN	0.745 (18,92)	0.745 (18,92)	0.850 (21,59)	0.940 (23,88)
MS–001 VARIATION (C)	AA	BB	AC	AD

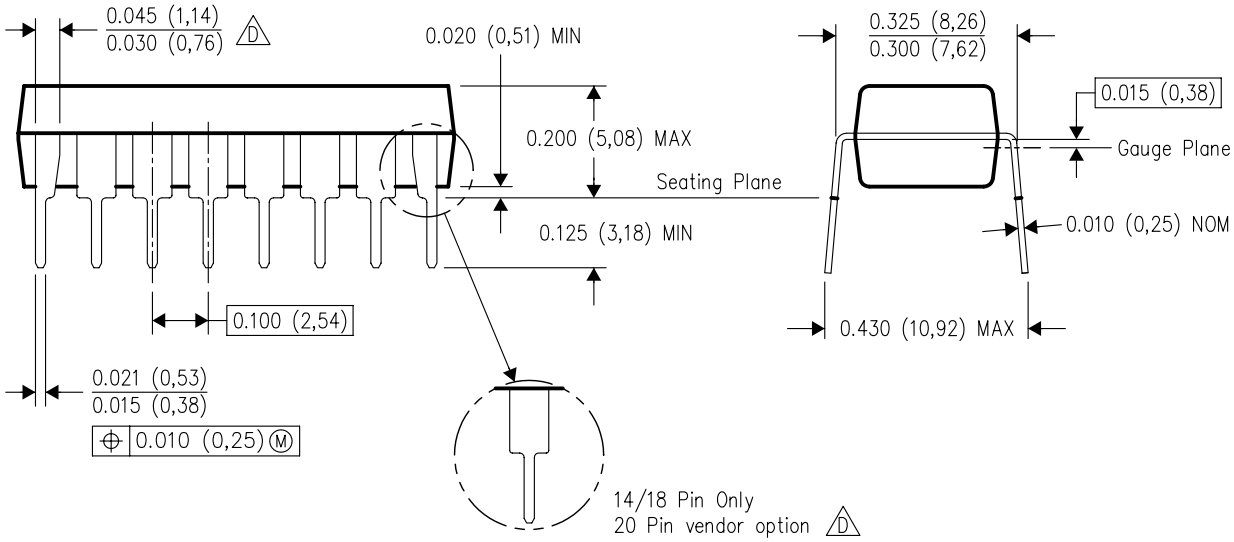

4040049/E 12/2002

NOTES:
A. All linear dimensions are in inches (millimeters).
B. This drawing is subject to change without notice.
C. Falls within JEDEC MS–001, except 18 and 20 pin minimum body length (Dim A).
D. The 20 pin end lead shoulder width is a vendor option, either half or full width.

D (R–PDSO–G14) PLASTIC SMALL OUTLINE

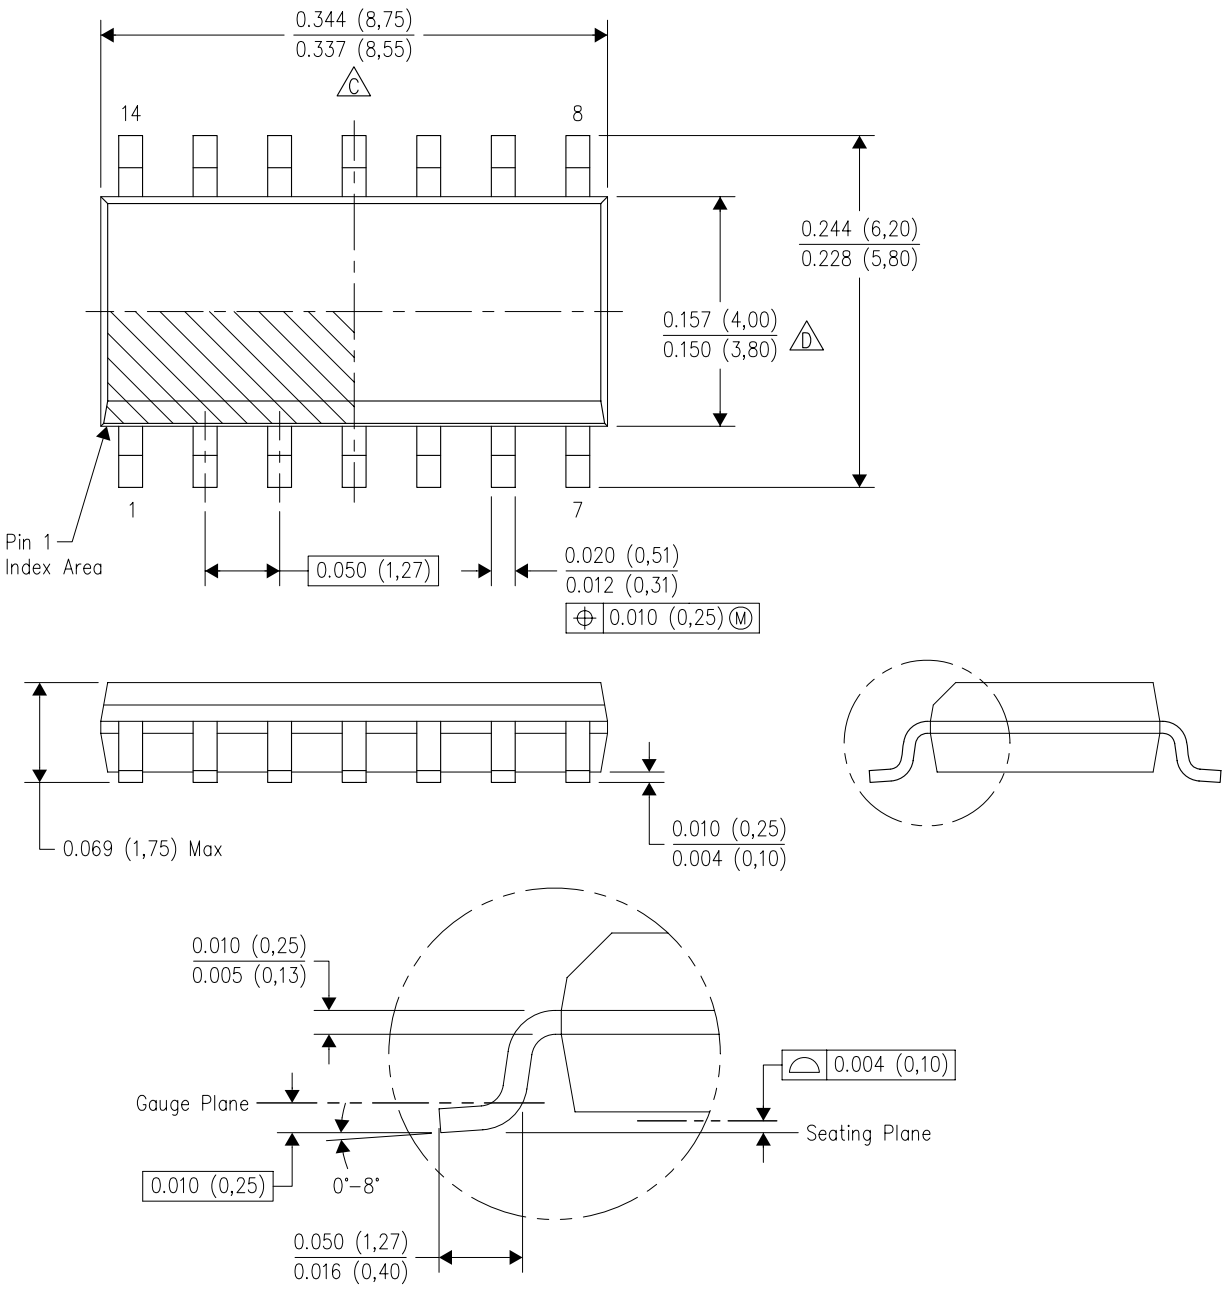

NOTES:
A. All linear dimensions are in inches (millimeters).
B. This drawing is subject to change without notice.
C. Body length does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.006 (0,15) each side.
D. Body width does not include interlead flash. Interlead flash shall not exceed 0.017 (0,43) each side.
E. Reference JEDEC MS–012 variation AB.

D (R–PDSO–G14) PLASTIC SMALL OUTLINE

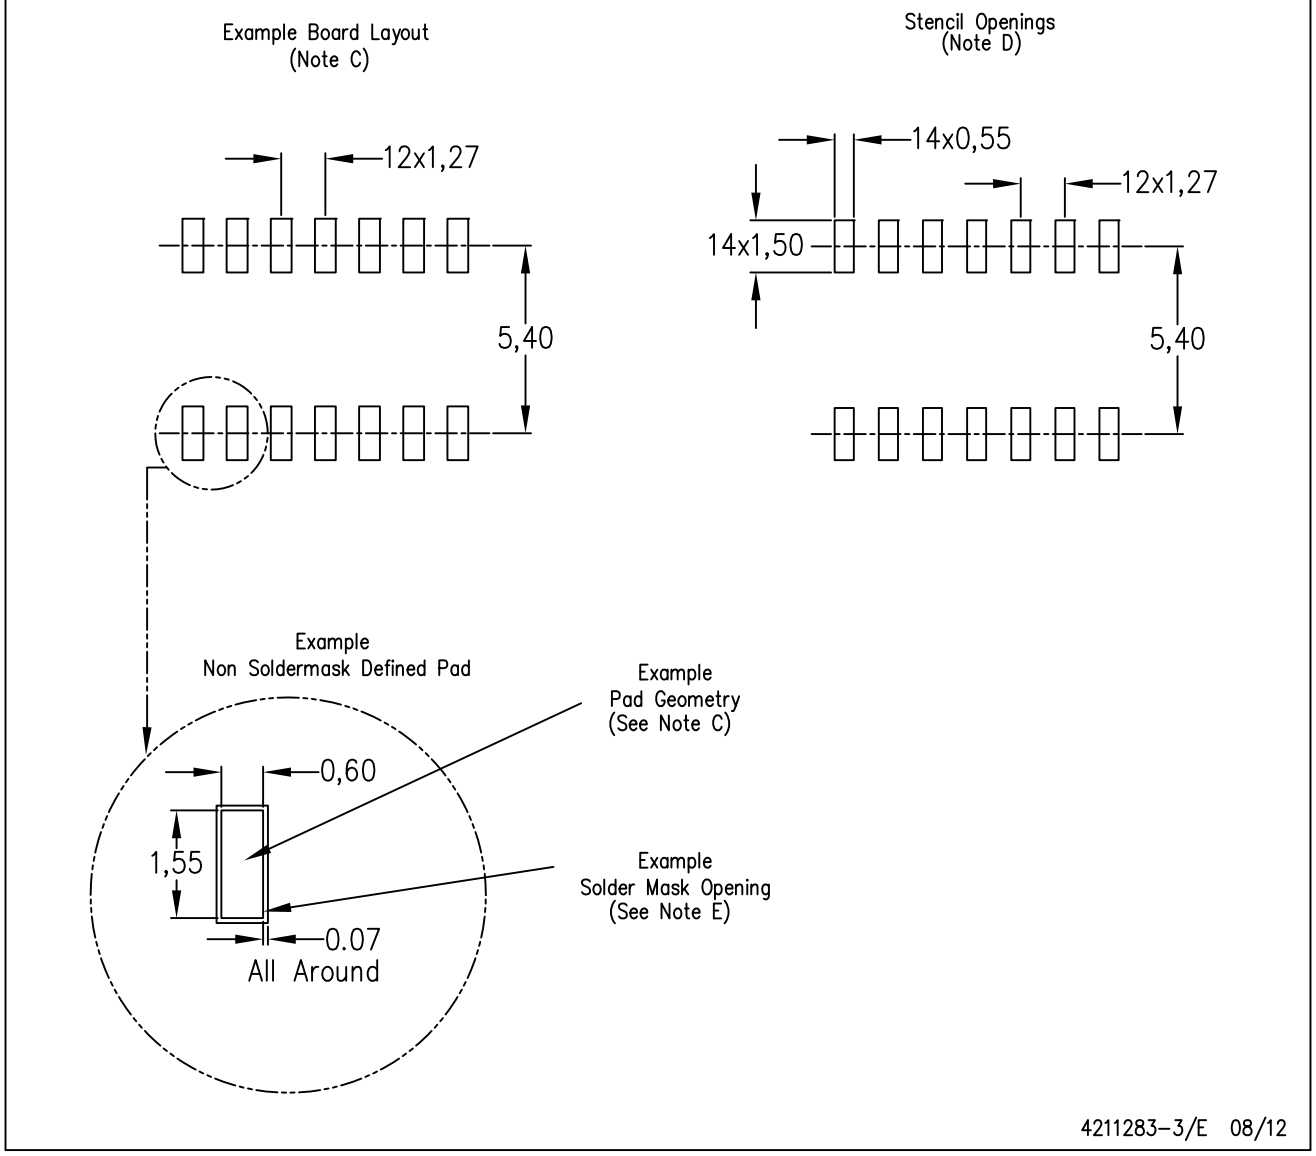

NOTES:
A. All linear dimensions are in millimeters.
B. This drawing is subject to change without notice.
C. Publication IPC–7351 is recommended for alternate designs.
D. Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Refer to IPC–7525 for other stencil recommendations.
E. Customers should contact their board fabrication site for solder mask tolerances between and around signal pads.

D (R–PDSO–G8) PLASTIC SMALL OUTLINE

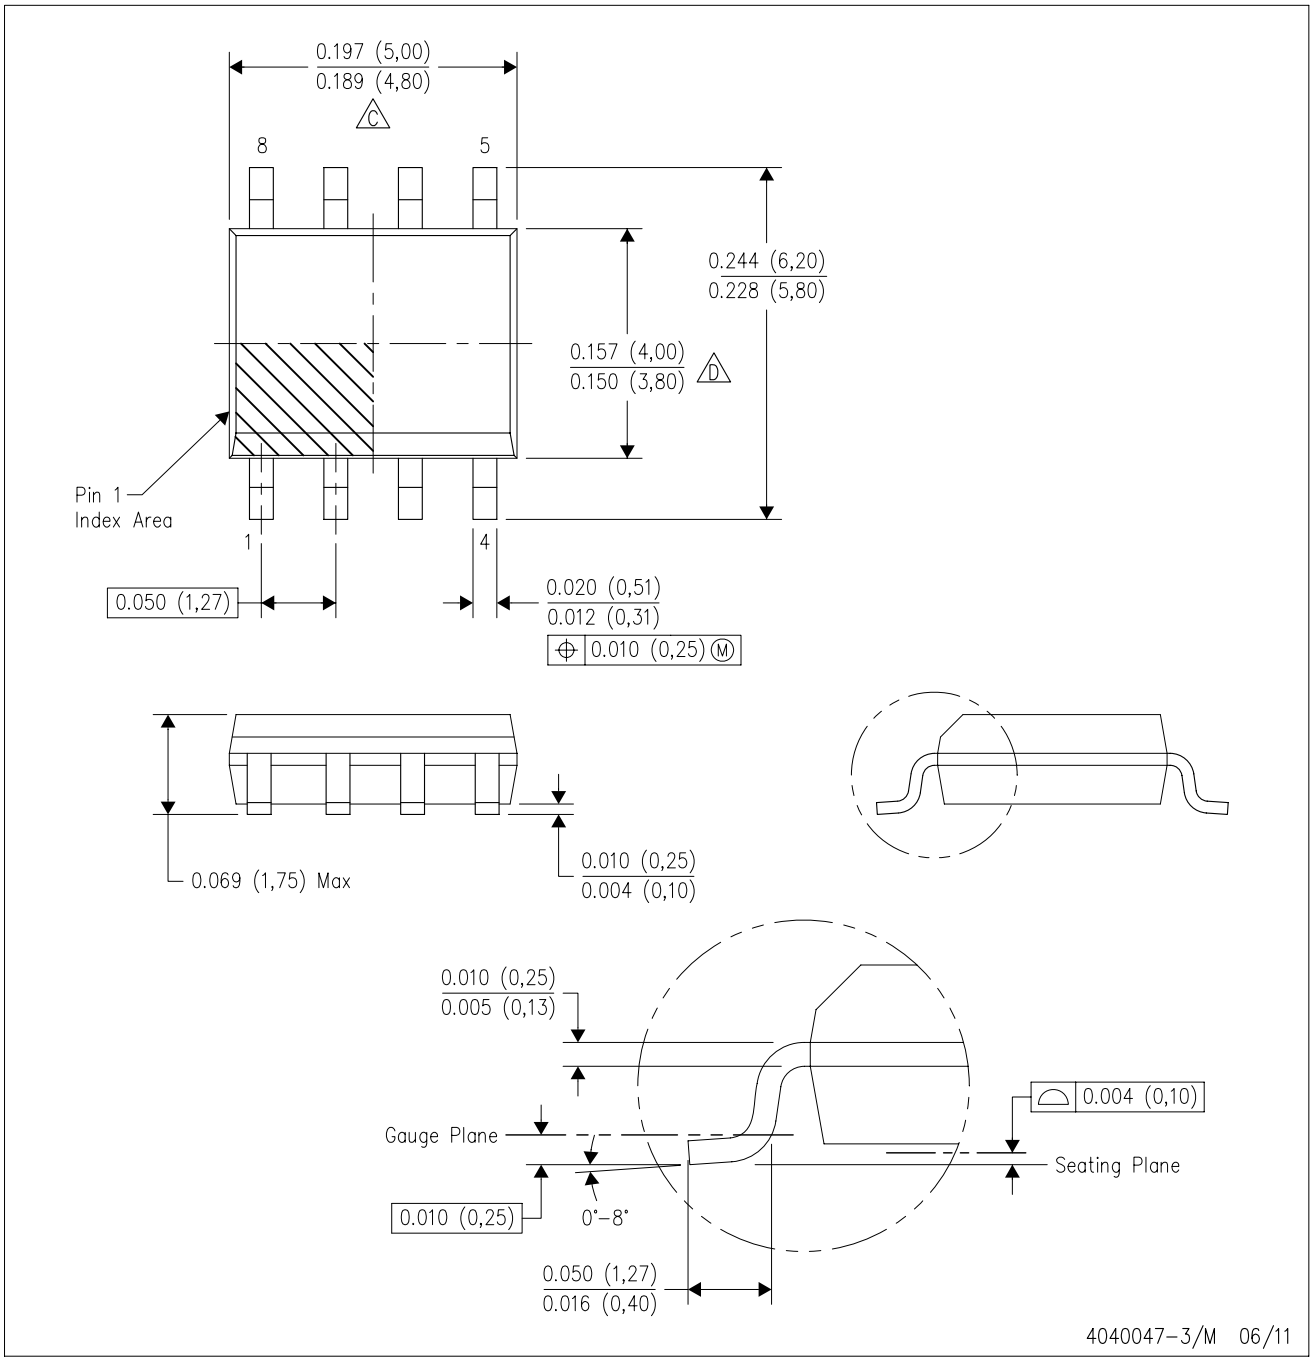

NOTES:
A. All linear dimensions are in inches (millimeters).
B. This drawing is subject to change without notice.
C. Body length does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.006 (0,15) each side.
D. Body width does not include interlead flash. Interlead flash shall not exceed 0.017 (0,43) each side.
E. Reference JEDEC MS–012 variation AA.

D (R–PDSO–G8) PLASTIC SMALL OUTLINE

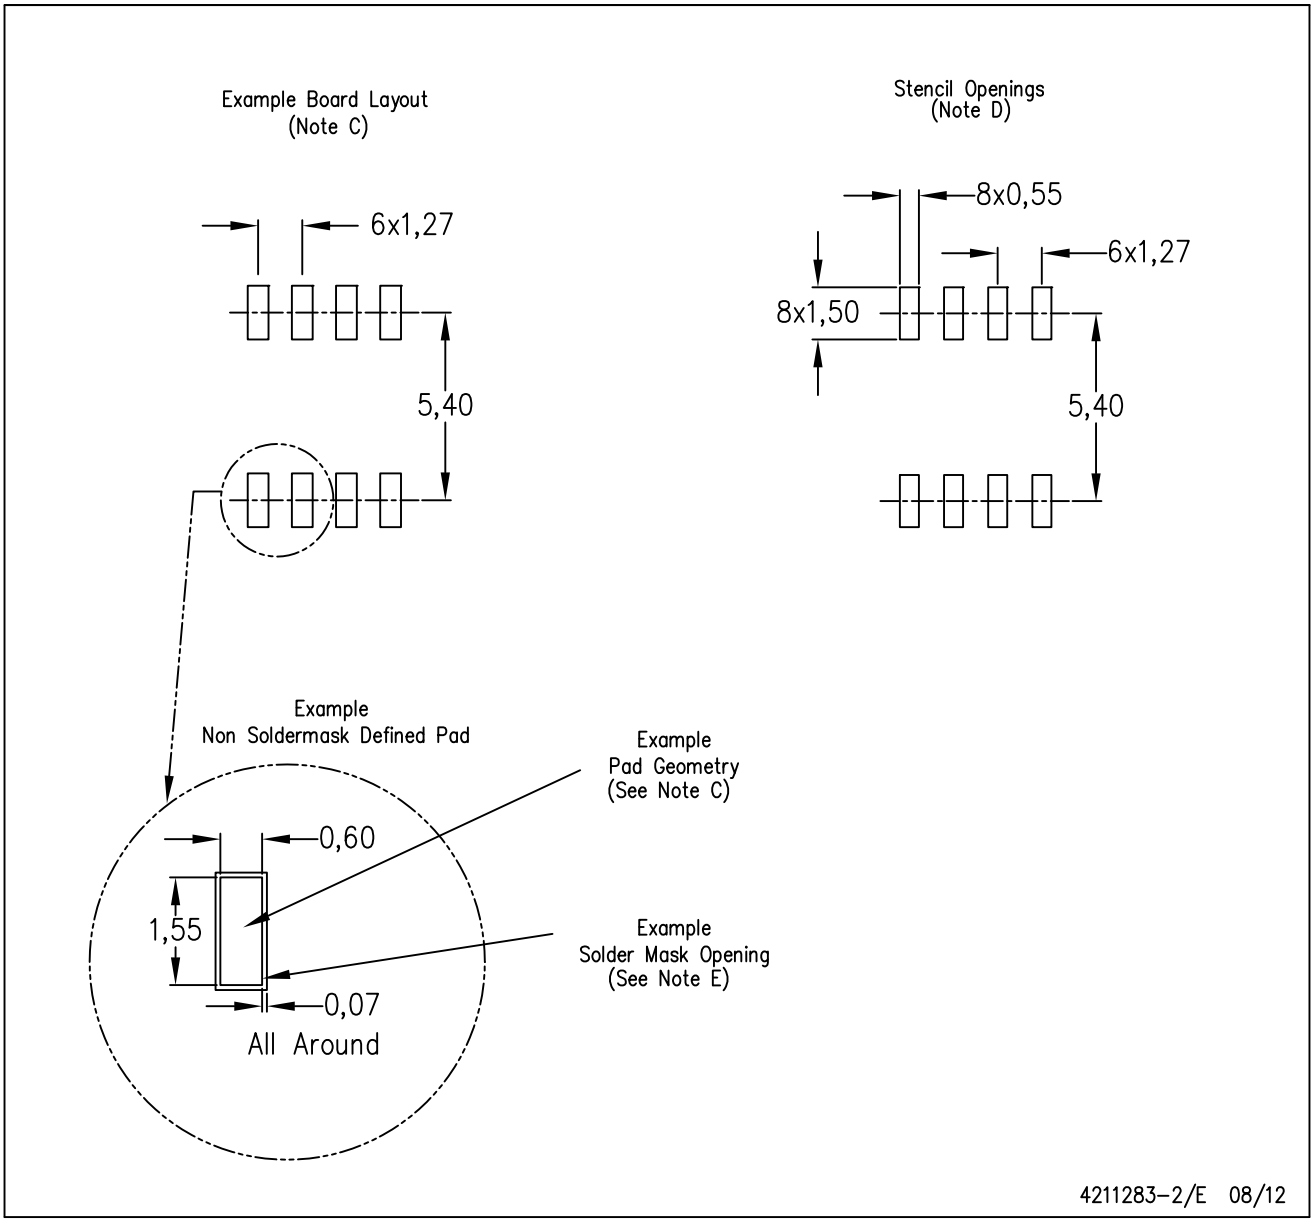

NOTES:
A. All linear dimensions are in millimeters.
B. This drawing is subject to change without notice.
C. Publication IPC–7351 is recommended for alternate designs.
D. Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Refer to IPC–7525 for other stencil recommendations.
E. Customers should contact their board fabrication site for solder mask tolerances between and around signal pads.

MECHANICAL DATA

PS (R-PDSO-G8) **PLASTIC SMALL-OUTLINE PACKAGE**

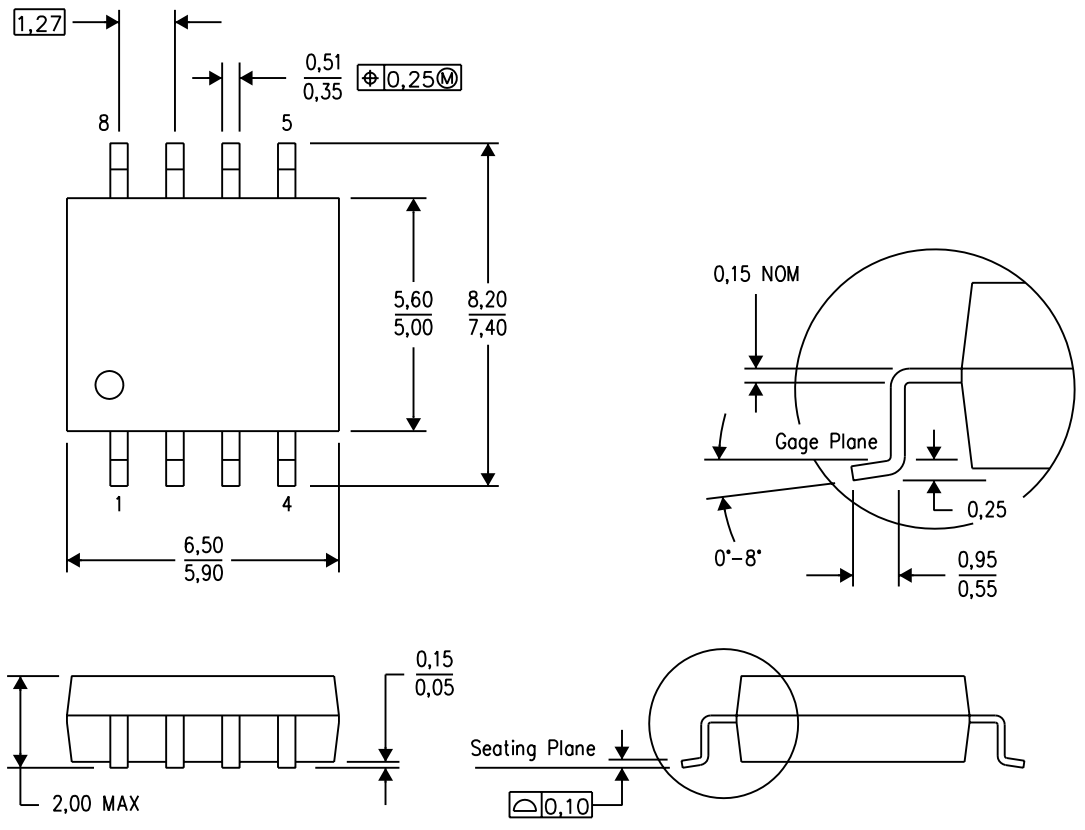

4040063/C 03/03

NOTES:
A. All linear dimensions are in millimeters.
B. This drawing is subject to change without notice.
C. Body dimensions do not include mold flash or protrusion, not to exceed 0,15.

MECHANICAL DATA

NS (R-PDSO-G)** **PLASTIC SMALL-OUTLINE PACKAGE**

14-PINS SHOWN

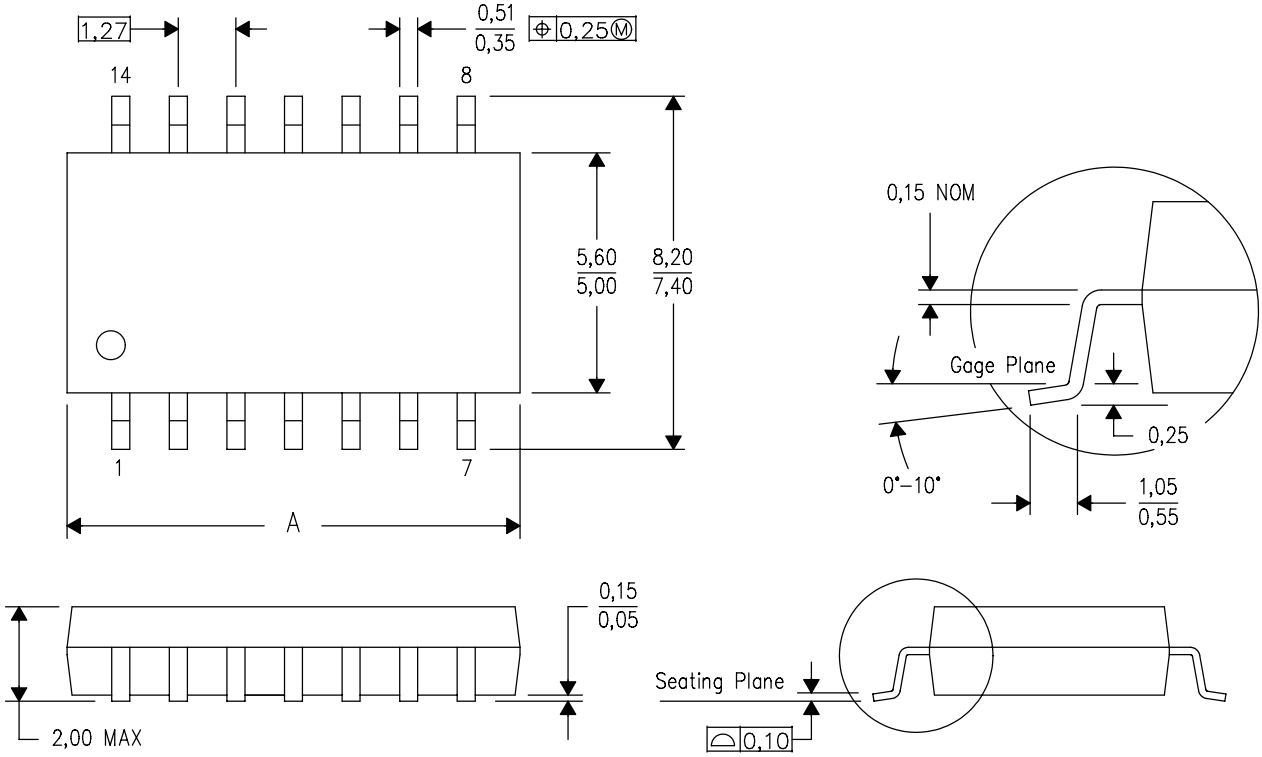

DIM \ PINS **	14	16	20	24
A MAX	10,50	10,50	12,90	15,30
A MIN	9,90	9,90	12,30	14,70

4040062/C 03/03

NOTES:
A. All linear dimensions are in millimeters.
B. This drawing is subject to change without notice.
C. Body dimensions do not include mold flash or protrusion, not to exceed 0,15.

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, enhancements, improvements and other changes to its semiconductor products and services per JESD46, latest issue, and to discontinue any product or service per JESD48, latest issue. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All semiconductor products (also referred to herein as “components”) are sold subject to TI’s terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its components to the specifications applicable at the time of sale, in accordance with the warranty in TI’s terms and conditions of sale of semiconductor products. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by applicable law, testing of all parameters of each component is not necessarily performed.

TI assumes no liability for applications assistance or the design of Buyers’ products. Buyers are responsible for their products and applications using TI components. To minimize the risks associated with Buyers’ products and applications, Buyers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, machine, or process in which TI components or services are used. Information published by TI regarding third-party products or services does not constitute a license to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of significant portions of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI components or services with statements different from or beyond the parameters stated by TI for that component or service voids all express and any implied warranties for the associated TI component or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Buyer acknowledges and agrees that it is solely responsible for compliance with all legal, regulatory and safety-related requirements concerning its products, and any use of TI components in its applications, notwithstanding any applications-related information or support that may be provided by TI. Buyer represents and agrees that it has all the necessary expertise to create and implement safeguards which anticipate dangerous consequences of failures, monitor failures and their consequences, lessen the likelihood of failures that might cause harm and take appropriate remedial actions. Buyer will fully indemnify TI and its representatives against any damages arising out of the use of any TI components in safety-critical applications.

In some cases, TI components may be promoted specifically to facilitate safety-related applications. With such components, TI’s goal is to help enable customers to design and create their own end-product solutions that meet applicable functional safety standards and requirements. Nonetheless, such components are subject to these terms.

No TI components are authorized for use in FDA Class III (or similar life-critical medical equipment) unless authorized officers of the parties have executed a special agreement specifically governing such use.

Only those TI components which TI has specifically designated as military grade or “enhanced plastic” are designed and intended for use in military/aerospace applications or environments. Buyer acknowledges and agrees that any military or aerospace use of TI components which have ***not*** been so designated is solely at the Buyer's risk, and that Buyer is solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI has specifically designated certain components as meeting ISO/TS16949 requirements, mainly for automotive use. In any case of use of non-designated products, TI will not be responsible for any failure to meet ISO/TS16949.

Products		**Applications**	
Audio	www.ti.com/audio	Automotive and Transportation	www.ti.com/automotive
Amplifiers	amplifier.ti.com	Communications and Telecom	www.ti.com/communications
Data Converters	dataconverter.ti.com	Computers and Peripherals	www.ti.com/computers
DLP® Products	www.dlp.com	Consumer Electronics	www.ti.com/consumer-apps
DSP	dsp.ti.com	Energy and Lighting	www.ti.com/energy
Clocks and Timers	www.ti.com/clocks	Industrial	www.ti.com/industrial
Interface	interface.ti.com	Medical	www.ti.com/medical
Logic	logic.ti.com	Security	www.ti.com/security
Power Mgmt	power.ti.com	Space, Avionics and Defense	www.ti.com/space-avionics-defense
Microcontrollers	microcontroller.ti.com	Video and Imaging	www.ti.com/video
RFID	www.ti-rfid.com		
OMAP Applications Processors	www.ti.com/omap	**TI E2E Community**	e2e.ti.com
Wireless Connectivity	www.ti.com/wirelessconnectivity		

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2014, Texas Instruments Incorporated