

2SC3122


TV VHF RF AMPLIFIER APPLICATIONS

- High Gain : $G_{pe}=24\text{dB}$ (Typ.) ($f=200\text{MHz}$)
- Low Noise : $NF=2.0\text{dB}$ (Typ.) ($f=200\text{MHz}$)
- Excellent Forward AGC Characteristics


MAXIMUM RATINGS ($T_a = 25^\circ\text{C}$)

CHARACTERISTIC	SYMBOL	RATING	UNIT
Collector-Base Voltage	V_{CBO}	30	V
Collector-Emitter Voltage	V_{CEO}	30	V
Emitter-Base Voltage	V_{EBO}	3	V
Collector Current	I_C	20	mA
Base Current	I_B	10	mA
Collector Power Dissipation	P_C	150	mW
Junction Temperature	T_j	125	$^\circ\text{C}$
Storage Temperature Range	T_{stg}	$-55\sim 125$	$^\circ\text{C}$

Marking



Unit in mm

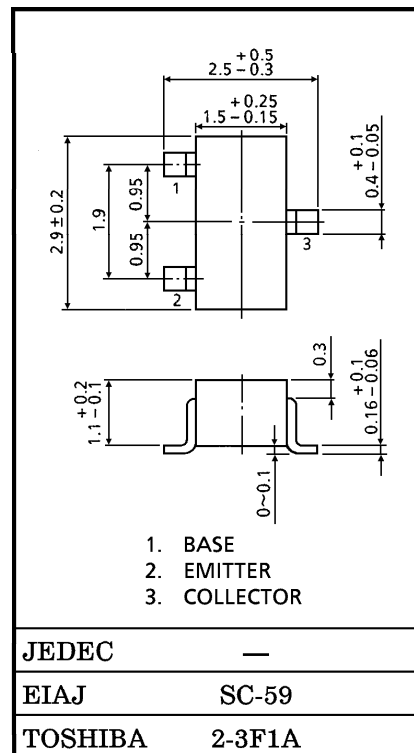

JEDEC —

EIAJ

SC-59

TOSHIBA


2-3F1A

Weight : 0.012g

ELECTRICAL CHARACTERISTICS ($T_a = 25^\circ\text{C}$)





CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Collector Cut-off Current	I_{CBO}	$V_{CB}=25\text{V}, I_E=0$	—	—	100	nA
Emitter Cut-off Current	I_{EBO}	$V_{EB}=2\text{V}, I_C=0$	—	—	100	nA
Collector-Emitter Breakdown Voltage	$V_{(BR)CEO}$	$I_C=1\text{mA}, I_B=0$	30	—	—	V
DC Current Gain	h_{FE}	$V_{CE}=10\text{V}, I_C=2\text{mA}$	60	150	300	—
Reverse Transfer Capacitance	C_{re}	$V_{CB}=10\text{V}, I_E=0, f=1\text{MHz}$	—	0.3	0.45	pF
Transition Frequency	f_T	$V_{CE}=10\text{V}, I_C=2\text{mA}$	400	650	—	MHz
Power Gain	G_{pe}	$V_{CE}=12\text{V}, V_{AGC}=1.4\text{V},$	20	24	28	dB
Noise Figure	NF	$f=200\text{MHz}$	—	2.0	3.2	dB
AGC Voltage	V_{AGC}	$V_{CC}=12\text{V}, GR=30\text{dB},$ $f=200\text{MHz}$ (Note)	3.6	4.4	5.1	V






(Note) V_{AGC} measured by test circuit shown in Fig.1 when power gain is reduced to 30dB compared that of V_{AGC} at 1.4V.

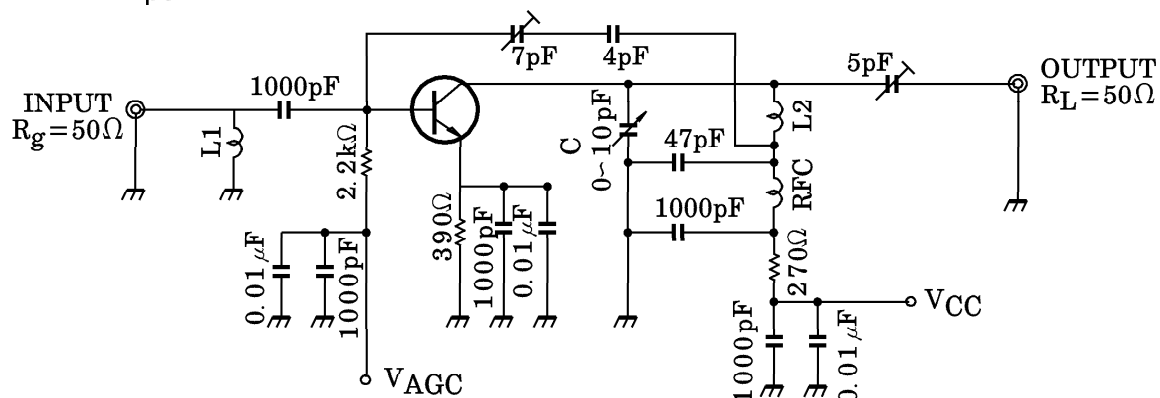Fig.1 200MHz G_{pe} , NF TEST CIRCUIT

L1 : RF Coil M-15T (TOKO Inc.) or EQUIVALENT

L2 : RF Coil M-25T (TOKO Inc.) or EQUIVALENT

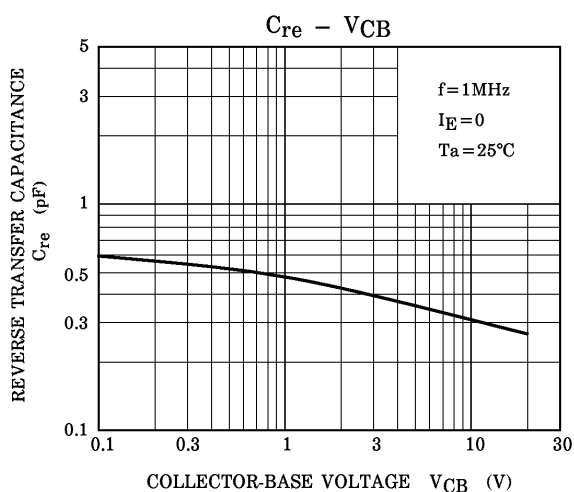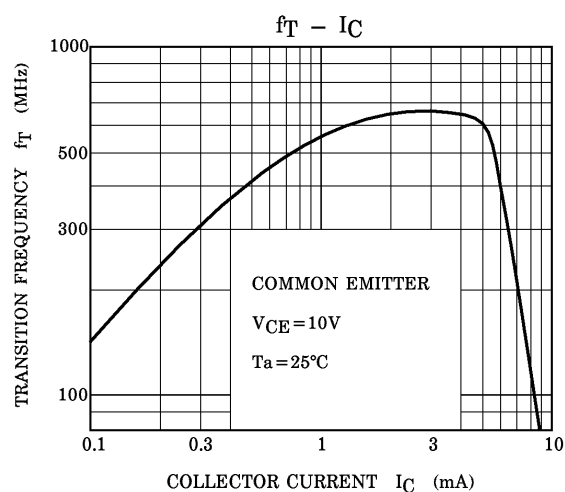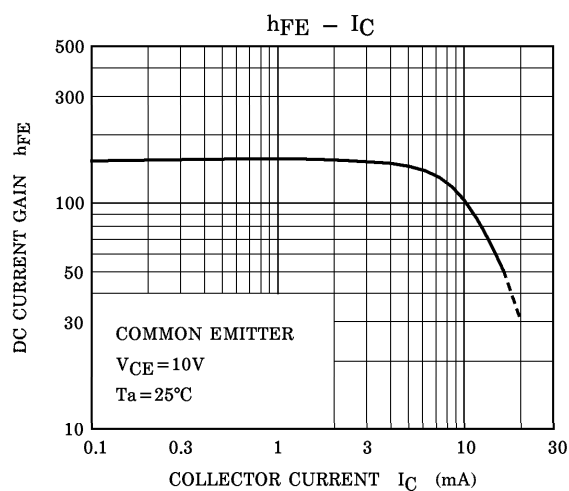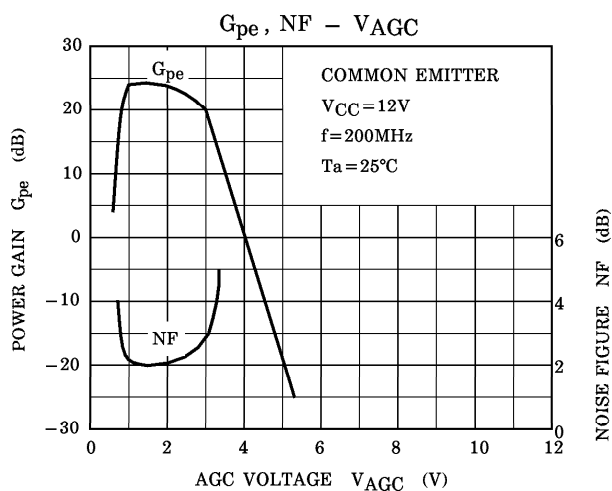

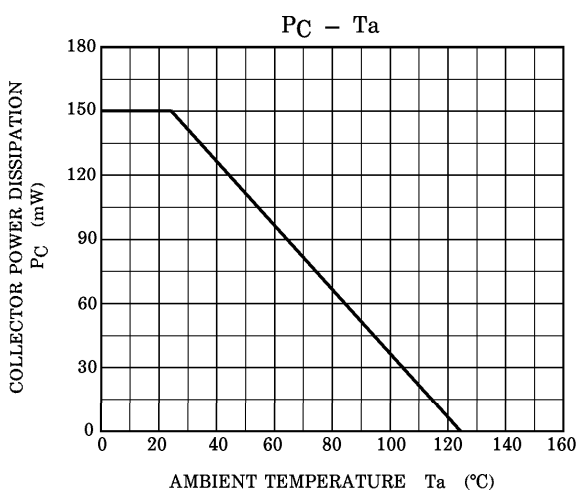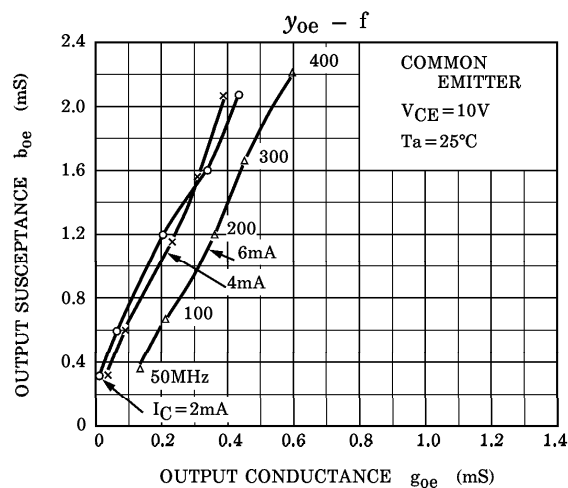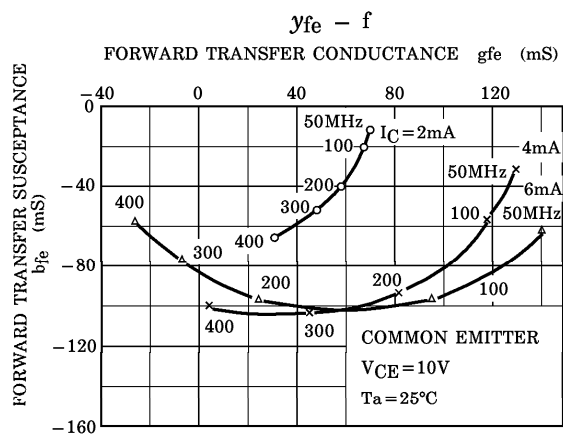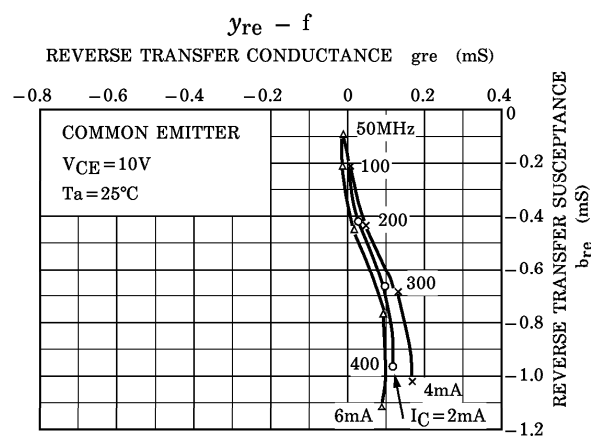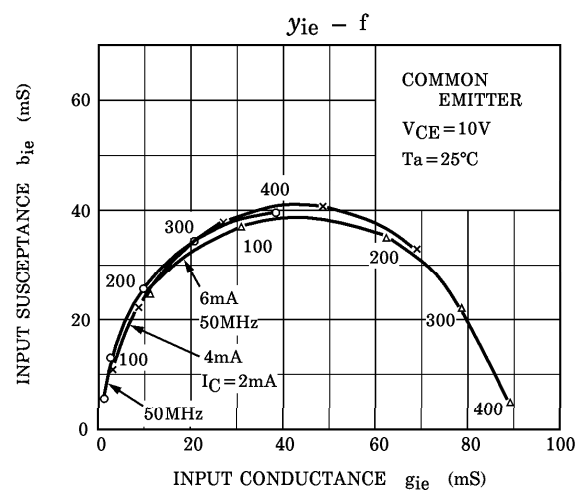

RESTRICTIONS ON PRODUCT USE

000707EAA

- TOSHIBA is continually working to improve the quality and reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to comply with the standards of safety in making a safe design for the entire system, and to avoid situations in which a malfunction or failure of such TOSHIBA products could cause loss of human life, bodily injury or damage to property. In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent TOSHIBA products specifications. Also, please keep in mind the precautions and conditions set forth in the "Handling Guide for Semiconductor Devices," or "TOSHIBA Semiconductor Reliability Handbook" etc..
- The TOSHIBA products listed in this document are intended for usage in general electronics applications (computer, personal equipment, office equipment, measuring equipment, industrial robotics, domestic appliances, etc.). These TOSHIBA products are neither intended nor warranted for usage in equipment that requires extraordinarily high quality and/or reliability or a malfunction or failure of which may cause loss of human life or bodily injury ("Unintended Usage"). Unintended Usage include atomic energy control instruments, airplane or spaceship instruments, transportation instruments, traffic signal instruments, combustion control instruments, medical instruments, all types of safety devices, etc.. Unintended Usage of TOSHIBA products listed in this document shall be made at the customer's own risk.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.
- The information contained herein is subject to change without notice.