

November 1998 Revised December 1999

## FST16210 20-Bit Bus Switch

### **General Description**

The Fairchild Switch FST16210 provides 20-Bits of highspeed CMOS TTL-compatible bus switching. The low on resistance of the switch allows inputs to be connected to outputs without adding propagation delay or generating additional ground bounce noise.

The device is organized as a 10-bit or 20-Bit bus switch. When  $\overline{OE}_1$  is LOW, the switch is ON and Port 1A is connected to Port 1B. When  $\overline{OE}_2$  is LOW, Port 2A is connected to Port 2B

### **Features**

- $\blacksquare$  4 $\Omega$  switch connection between two ports.
- Minimal propagation delay through the switch.
- Low I<sub>CC</sub>.
- Zero bounce in flow-through mode.
- Control inputs compatible with TTL level.

### **Ordering Code:**

Order Number	Package Number	Package Description
FST16210MTD	MTD48	48-Lead Thin Shrink Small Outline Package (TSSOP), JEDEC MO-153, 6.1mm Wide

Devices also available in Tape and Reel. Specify by appending the suffix letter "X" to the ordering code.


### **Connection Diagram**




### **Pin Descriptions**

Pin Name	Description				
$\overline{OE}_1, \overline{OE}_2$	Bus Switch Enables				
1A, 2A	Bus A				
1B, 2B	Bus B				

### **Logic Diagram**





### **Truth Table**

Inp	uts	Inputs/Outputs					
OE <sub>1</sub>	OE <sub>2</sub>	1A, 1B	2A, 2B				
L	L	1A = 1B	2A = 2B				
L	Н	1A = 1B	Z				
Н	L	Z	2A = 2B				
Н	Н	Z	Z				

### Absolute Maximum Ratings(Note 1)

#### 

# Recommended Operating Conditions (Note 3)

 $\begin{array}{lll} \mbox{Power Supply Operating ($V_{CC}$)} & 4.0 \mbox{V to } 5.5 \mbox{V} \\ \mbox{Input Voltage ($V_{IN}$)} & 0 \mbox{V to } 5.5 \mbox{V} \\ \mbox{Output Voltage ($V_{OUT}$)} & 0 \mbox{V to } 5.5 \mbox{V} \\ \end{array}$ 

Input Rise and Fall Time (t<sub>r</sub>, t<sub>f</sub>)

Note 1: The "Absolute Maximum Ratings" are those values beyond which the safety of the device cannot be guaranteed. The device should not be operated at these limits. The parametric values defined in the Electrical Characteristics tables are not guaranteed at the absolute maximum rating. The "Recommended Operating Conditions" table will define the conditions for actual device operation.

Note 2: The input and output negative voltage ratings may be exceeded if the input and output diode current ratings are observed.

Note 3: Unused control inputs must be held high or low. They may not float.

### **DC Electrical Characteristics**

		V <sub>CC</sub> (V)	$T_A = -40  ^{\circ}\text{C} \text{ to } +85  ^{\circ}\text{C}$				
Symbol	Parameter		Min	Typ (Note 4)	Max	Units	Conditions
V <sub>IK</sub>	Clamp Diode Voltage	4.5			-1.2	V	$I_{IN} = -18mA$
V <sub>IH</sub>	HIGH Level Input Voltage	4.0-5.5	2.0			V	
V <sub>IL</sub>	LOW Level Input Voltage	4.0-5.5			0.8	V	
I <sub>I</sub>	Input Leakage Current	5.5			±1.0	μΑ	0≤ V <sub>IN</sub> ≤5.5V
		0			10	μΑ	V <sub>IN</sub> = 5.5V
I <sub>OZ</sub>	OFF-STATE Leakage Current	5.5			±1.0	μΑ	0 ≤A, B ≤V <sub>CC</sub>
R <sub>ON</sub>	Switch On Resistance	4.5		4	7	Ω	V <sub>IN</sub> = 0V, I <sub>IN</sub> = 64mA
	(Note 5)	4.5		4	7	Ω	V <sub>IN</sub> = 0V, I <sub>IN</sub> = 30mA
		4.5		8	12	Ω	V <sub>IN</sub> = 2.4V, I <sub>IN</sub> = 15mA
		4.0		11	20	Ω	V <sub>IN</sub> = 2.4V, I <sub>IN</sub> = 15mA
I <sub>CC</sub>	Quiescent Supply Current	5.5			3	μΑ	V <sub>IN</sub> = V <sub>CC</sub> or GND, I <sub>OUT</sub> = 0
ΔI <sub>CC</sub>	Increase in I <sub>CC</sub> per Input	5.5			2.5	mA	One input at 3.4V
							Other inputs at V <sub>CC</sub> or GND

Note 4: Typical values are at  $V_{CC} = 5.0V$  and  $T_A = +25^{\circ}C$ 

Note 5: Measured by the voltage drop between A and B pins at the indicated current through the switch. On resistance is determined by the lower of the voltages on the two (A or B) pins.

### **AC Electrical Characteristics**

Symbol	Parameter	$T_A = -40$ °C to $+85$ °C, $C_L = 50$ pF, RU $= RD = 500\Omega$				Units	Conditions	Figure No.
Oymbor		V <sub>CC</sub> = 4.5 - 5.5V		V <sub>CC</sub> = 4.0V		Onits	Conditions	rigare No.
		Min	Max	Min	Max			
t <sub>PHL</sub> ,t <sub>PLH</sub>	Prop Delay Bus to Bus (Note 6)		0.25		0.25	ns	V <sub>I</sub> = OPEN	Figure 1, Figure 2
t <sub>PZH</sub> , t <sub>PZL</sub>	Output Enable Time	1.5	6.0		6.5	ns	$V_I = 7V$ for $t_{PZL}$ $V_I = OPEN$ for $t_{PZH}$	Figure 1, Figure 2
t <sub>PHZ</sub> , t <sub>PLZ</sub>	Output Disable Time	1.5	7.0		7.2		$V_I = 7V$ for $t_{PLZ}$ $V_I = OPEN$ for $t_{PHZ}$	Figure 1, Figure 2


Note 6: This parameter is guaranteed by design but is not tested. The bus switch contributes no propagation delay other than the RC delay of the typical On resistance of the switch and the 50pF load capacitance, when driven by an ideal voltage source (zero output impedance).

### Capacitance (Note 7)

Symbol	Parameter	Тур	Max	Units	Conditions
C <sub>IN</sub>	Control pin Input Capacitance	3		pF	V <sub>CC</sub> = 5.0V
C <sub>I/O</sub>	Input/Output Capacitance	6		pF	$V_{CC}$ , $\overline{OE} = 5.0V$

Note 7: T<sub>A</sub> = +25°C, f = 1 MHz, Capacitance is characterized but not tested.

### **AC Loading and Waveforms**



Note: Input driven by 50  $\Omega$  source terminated in 50  $\Omega$ 

Note:  $\mathbf{C}_{\mathbf{L}}$  includes load and stray capacitance

Note: Input PRR = 1.0 MHz,  $t_W$  = 500 ns

### FIGURE 1. AC Test Circuit


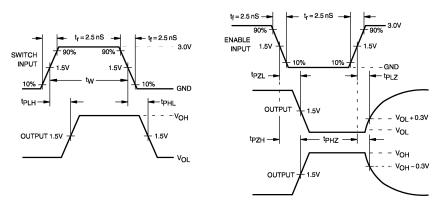


FIGURE 2. AC Waveforms

### Physical Dimensions inches (millimeters) unless otherwise noted

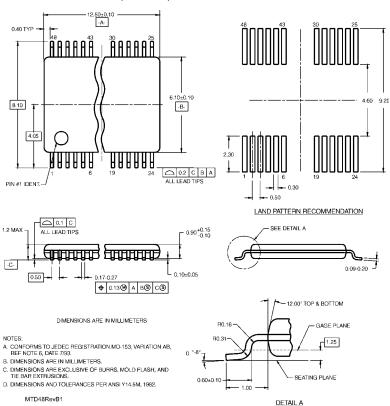

48-Lead Thin Shrink Small Outline Package (TSSOP), JEDEC MO-153, 6.1mm Wide Package Number MTD48

### **Technology Description**

The Fairchild Switch family derives from and embodies Fairchild's proven switch technology used for several years in its 74LVX3L384(FST3384) bus switch product.

Fairchild does not assume any responsibility for use of any circuitry described, no circuit patent licenses are implied and Fairchild reserves the right at any time without notice to change said circuitry and specifications.

### LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

- Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
- A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

www.fairchildsemi.com