


TA4015FT

TA4015FT Use for Crystal Oscillators

Features

- Bias resistors, a transistor for oscillation and a transistor for buffer are packed in one package; hence, TA4015FT can easily compose a crystal oscillator.
- TA4015FT comes with a 6-pin thin ultra-compact package and is suitable for super-high density mounting.



SSOP6-P-0.65

Maximum Ratings (Ta = 25°C)

Weight: 0.0045 g (typ.)


Characteristics	Symbol	Rating	Unit
Power supply voltage	V_{CC}	6	V
Circuit current	I_{CC}	9	mA
Total power dissipation	P_D	200	mW
Junction temperature	T_j	125	°C
Storage temperature	T_{stg}	-55~125	°C

Electrical Characteristics (Ta = 25°C)

Characteristics	Symbol	Test Circuit	Test Condition	Min	Typ.	Max	Unit
Circuit current	I_{CC}	—	$V_{CC} = 3.0\text{ V}$	1.10	1.32	1.52	mA
Oscillator base voltage	V_{OSCB}	—	$V_{CC} = 3.0\text{ V}$	1.65	1.71	1.79	V
Oscillator emitter voltage	V_{OSCE}	—	$V_{CC} = 3.0\text{ V}$	0.92	0.99	1.06	V
Buffer base voltage	V_{BuffB}	—	$V_{CC} = 3.0\text{ V}$	2.20	2.28	2.36	V
Fout voltage	V_{Fout}	—	$V_{CC} = 3.0\text{ V}$	1.95	2.02	2.10	V

Characteristics	Symbol	Typ.	Unit
R1 resistance	R_1	7.5	$k\Omega$
R2 resistance	R_2	6.8	$k\Omega$
R3 resistance	R_3	24	$k\Omega$
R4 resistance	R_4	820	Ω
R5 resistance	R_5	820	Ω


Marking



Caution

Because of this product structure, when handling this product, please be sure to protect work desk, human body and soldering irons from electrostatics.


Equivalent Circuit Diagram

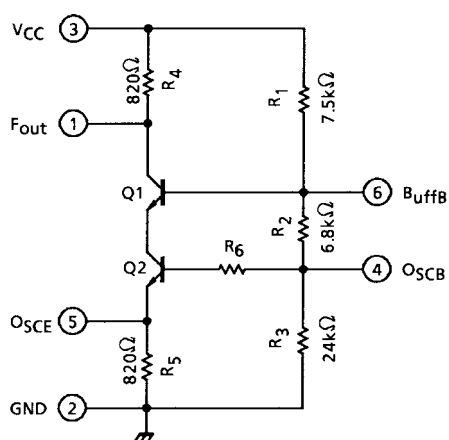

Package Dimensions

SSOP6-P-0.65

Unit: mm

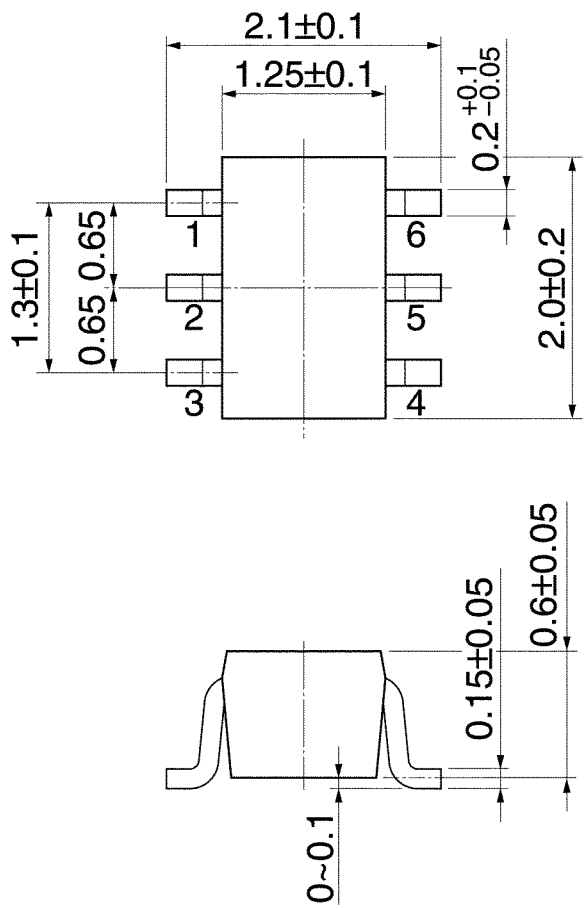

Weight: 0.0045 g (typ.)

RESTRICTIONS ON PRODUCT USE

030619EBA

- The information contained herein is subject to change without notice.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA for any infringements of patents or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of TOSHIBA or others.
- TOSHIBA is continually working to improve the quality and reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to comply with the standards of safety in making a safe design for the entire system, and to avoid situations in which a malfunction or failure of such TOSHIBA products could cause loss of human life, bodily injury or damage to property.
In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent TOSHIBA products specifications. Also, please keep in mind the precautions and conditions set forth in the "Handling Guide for Semiconductor Devices," or "TOSHIBA Semiconductor Reliability Handbook" etc..
- The TOSHIBA products listed in this document are intended for usage in general electronics applications (computer, personal equipment, office equipment, measuring equipment, industrial robotics, domestic appliances, etc.). These TOSHIBA products are neither intended nor warranted for usage in equipment that requires extraordinarily high quality and/or reliability or a malfunction or failure of which may cause loss of human life or bodily injury ("Unintended Usage"). Unintended Usage include atomic energy control instruments, airplane or spaceship instruments, transportation instruments, traffic signal instruments, combustion control instruments, medical instruments, all types of safety devices, etc.. Unintended Usage of TOSHIBA products listed in this document shall be made at the customer's own risk.
- The products described in this document are subject to the foreign exchange and foreign trade laws.
- TOSHIBA products should not be embedded to the downstream products which are prohibited to be produced and sold, under any law and regulations.