


TWIN POWER SILENT AUTOMOTIVE RELAY

CR RELAYS

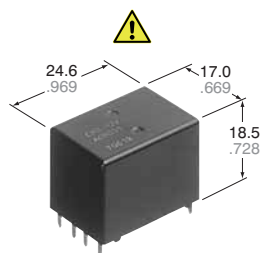

mm inch

FEATURES

• Silent


Noise has been reduced by approximately 20 dB, using our own silencing design.


• Twin (1 Form C × 2)

Forward/reverse motor control is possible with a single relay.

• Sealed construction

Simple footprint enable ease of PC board layout

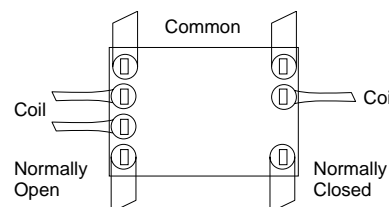

 Product is discontinued.

SPECIFICATIONS

Contact

Arrangement	1 Form C × 2		
Contact material	Ag alloy (Cadmium free)		
Initial contact resistance (Initial) (By voltage drop 6 V DC 1A)	Typ. 6 mΩ (N.O.) Typ. 9 mΩ (N.C.)		
Contact voltage drop	Max. 0.2V (at 10 A)		
Rating	Nominal switching capacity	N.O.: 20 A 14 V DC N.C.: 10 A 14 V DC	
	Max. carrying current	35 A for 2 minutes, 25 A for 1 hour (12 V, at 20°C/68°F) 30 A for 2 minutes, 20 A for 1 hour (12 V, at 85°C/185°F)	
	Min. switching capacity ^{#1}	1 A 12 V DC	
Expected life (min. operations)	Mechanical (at 120 cpm)		Min. 10 ⁷
	Elec- trical	Resistive load	Min. 10 ^{5*1}
		Motor load	Min. 2×10 ^{5*2} Min. 10 ^{5*3}

Coil

Nominal operating power	640 mW	
Conditions for operation, transport and storage ^{*11} (Not freezing and condensing at low temperature)	Ambient temperature	−40°C to +85°C −40°F to +185°F
	Humidity	5% R.H. to 85% R.H.
Mass	Approx. 12.5g/44 oz	

Remarks

TYPICAL APPLICATIONS

- Power windows
- Auto door lock
- Electrically powered sunroof
- Electrically powered mirror, etc.

#1 This value can change due to the switching frequency, environmental conditions, and desired reliability level, therefore it is recommended to check this with the actual load.

Characteristics

Max. operating speed (at nominal switching capacity)	6 cpm	
Initial insulation resistance ^{*4}	Min. 100 MΩ (at 500 V DC)	
Initial breakdown voltage ^{*5}	Between open contacts	500 Vrms for 1 min.
	Between contacts and coil	500 Vrms for 1 min.
Operate time ^{*6} (at nominal voltage)(at 20°C/68°F)	Max. 10 ms (initial)	
Release time ^{*6} (at nominal voltage)(at 20°C/68°F)	Max. 10 ms (initial)	
Shock resistance	Functional ^{*7}	Min. 100 m/s ² {10G}
	Destructive ^{*8}	Min. 1,000 m/s ² {100G}
Vibration resistance	Functional ^{*9}	10 Hz to 100 Hz, Min. 44.1 m/s ² {4.5G}
	Destructive ^{*10}	10 Hz to 500 Hz, Min. 44.1 m/s ² {4.5G}

ORDERING INFORMATION


Ex. CR 2 - 12 V

Contact arrangement	Coil voltage(DC)
1 Form C × 2	12 V

Standard packing: Carton(tube package) 32pcs. Case: 800pcs.

Part No.	Nominal voltage, V DC	Pick-up voltage, V DC (Initial)*	Drop-out voltage, V DC (Initial)	Coil resistance, Ω	Nominal operating current, mA	Nominal operating power, mW	Usable voltage range, V DC
CR2-12V	12	Max. 7.2	Min. 1.0	225±10%	53.3±10%	640	10 to 16

DIMENSIONS

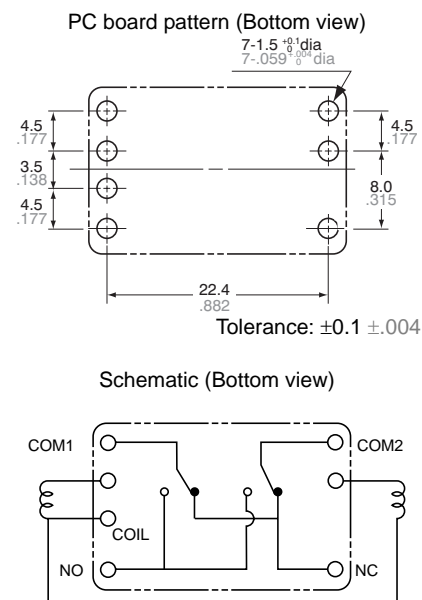


EXAMPLE OF CIRCUIT


Tr1	Tr2	Motor
OFF	OFF	Stop
ON	OFF	Forward
OFF	ON	Reverse

REFERENCE DATA


1-(1). Coil temperature rise (at room temperature)
Sample: CR2-12V, 5pcs
Contact carrying current: 10A, 15A, 20A
Ambient temperature: Room temperature

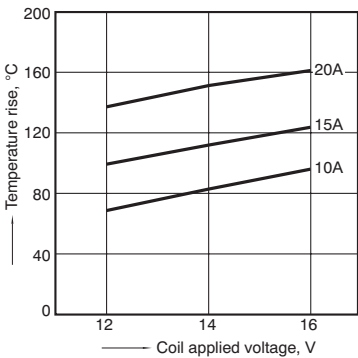


1-(2). Coil temperature rise (at 85°C 185°F)
Sample: CR2-12V, 5pcs
Contact carrying current: 10A, 15A
Ambient temperature: 85°C 185°F

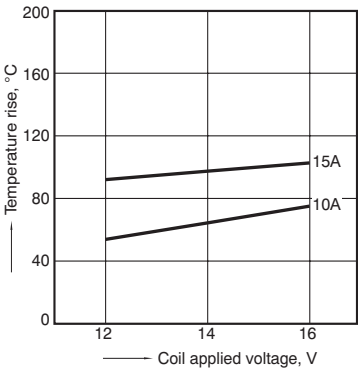


2. Max. switching capability (Resistive load, initial)

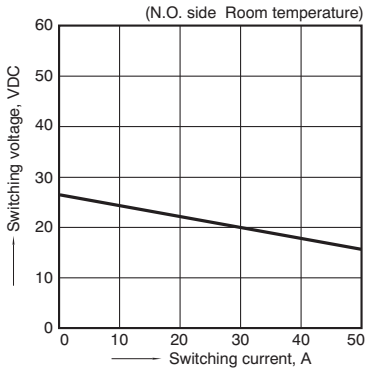


3. Ambient temperature and operating temperature range

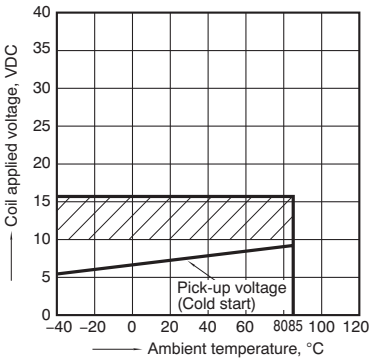


4. Ambient temperature characteristics

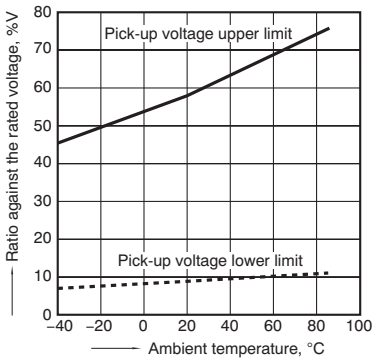


5. Distribution of pick-up and drop-out voltage
Sample: CR2-12V, 100pcs

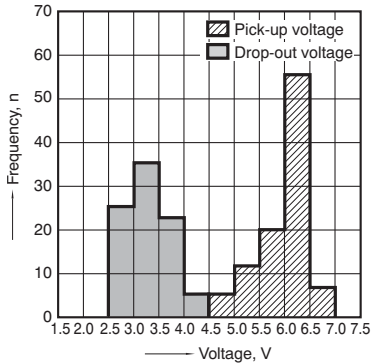


6. Distribution of operate time
Sample: CR2-12V, 100pcs

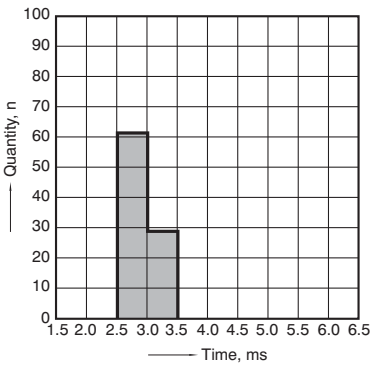


7. Distribution of release time
Sample: CR2-12V, 100pcs
* With diode

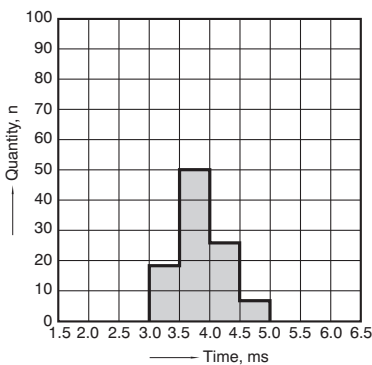


8-(1). Operation noise distribution
When operated

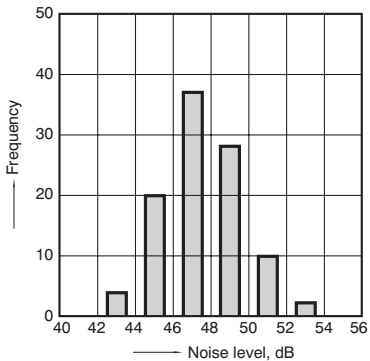

8-(2). Operation noise distribution
When released

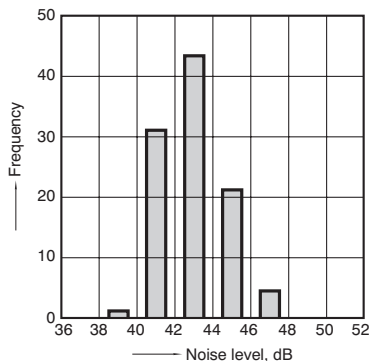


Measuring conditions
Sample: CR2-12 V, 50 pcs.
Equipment setting: "A" weighted, Fast, Max. hold
Coil voltage: 12V DC
Coil connection device: Diode
Background noise: Approx. 20dB

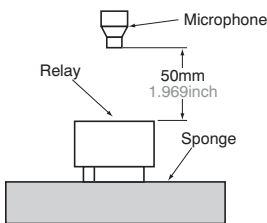

9-(1). Electrical life test (Motor free)


Sample: CR2-12V, 3pcs
 Load: Inrush current: 25A, Steady current: 6A,
 Brake current: 15A,
 power window motor actual load (free condition)
 Tested voltage: 14V DC
 Ambient temperature: Room temperature

Circuit

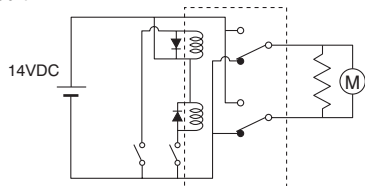


Load current waveform


Inrush current: 25A, Steady current: 6A,
 Brake current: 15A
 Tested voltage: 14V DC

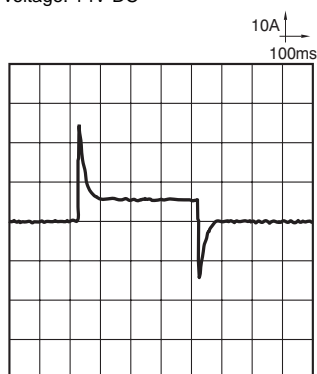

Change of pick-up and drop-out voltage

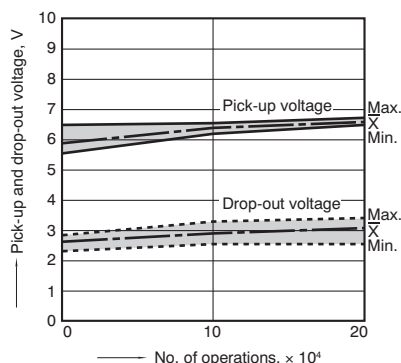


Change of contact resistance

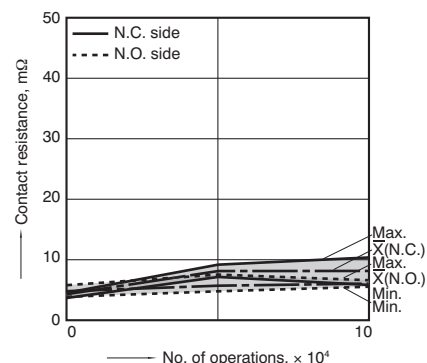

9-(2). Electrical life test (Motor lock)


Sample: CR2-12V, 3pcs
 Brake current: 22A,
 power window motor actual load (lock condition)
 Tested voltage: 14V DC
 Switching frequency: (ON:OFF = 0.5s:9.5s)
 Ambient temperature: Room temperature

Circuit

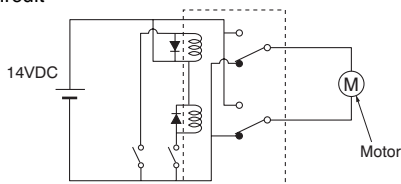


Load current waveform


Brake current: 22A
 Tested voltage: 14V DC

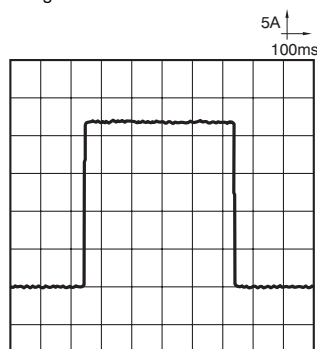

Change of pick-up and drop-out voltage

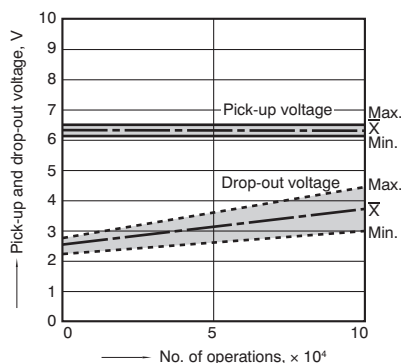

Change of contact resistance

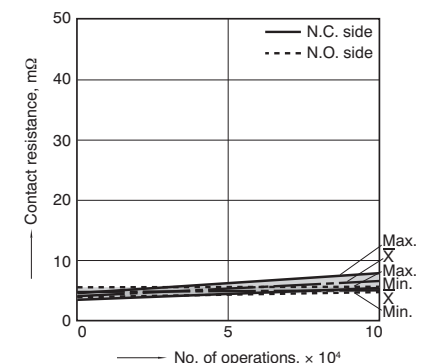

For Cautions for Use, see [Relay Technical Information](#).