
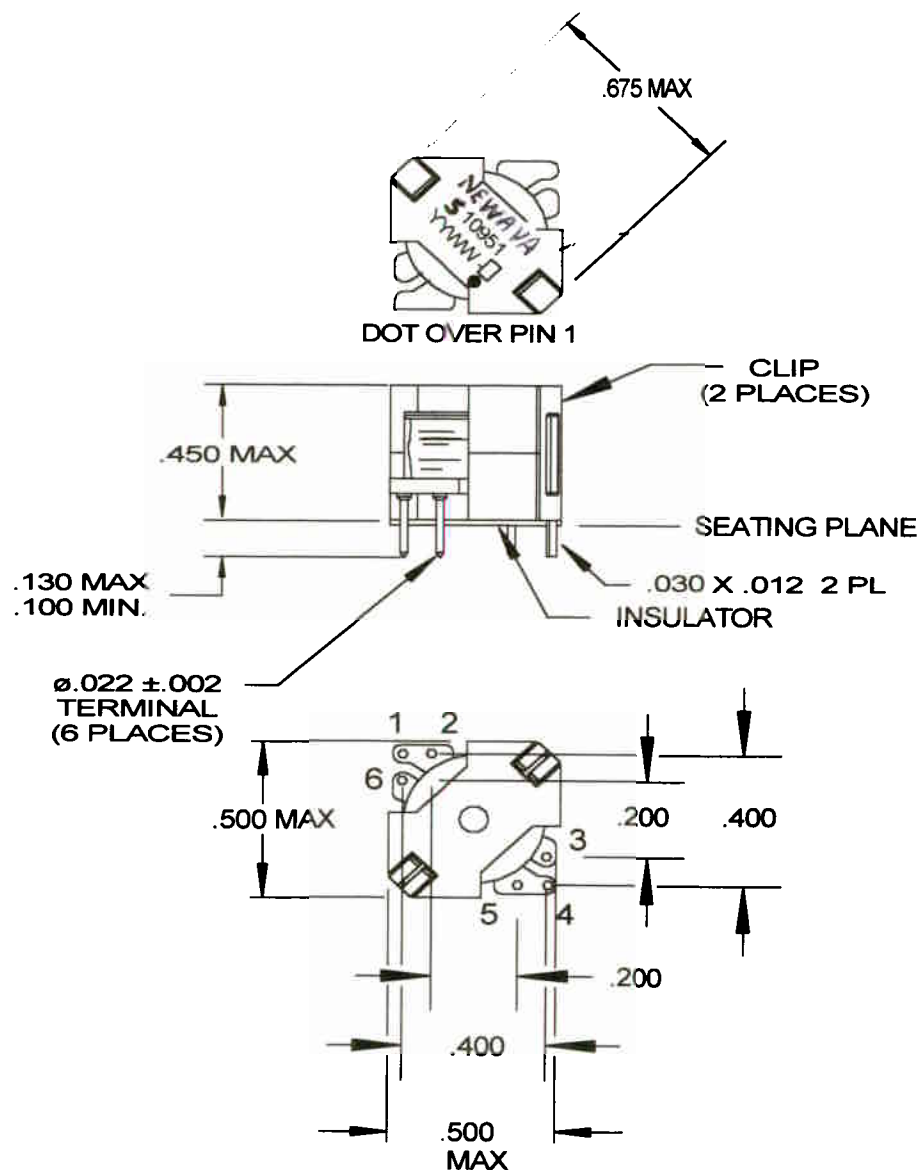


SPECIFICATIONS:

1. LONGITUDINAL BALANCE: 40 db MIN @ 4 kHz
(2-6) OR (3-5)
WITH 1 AND 4 GROUNDED
100 OHMS - 100 OHMS
2. INDUCTANCE: 6-2 = 3.78 - 8.44 mHy
@ 0.1 Vrms, 10.0 kHz
3. HI-POT: 1000 Vdc MIN WINDING TO WINDING
WINDING TO CORE
4. TURNS RATIO: (6-2) : (3-5) = 1 CT : 1 CT $\pm 1\%$



NOTE: PIN 1 DOT MUST BE A DOT, NOT AN ASTERICK!

TOLERANCES UNLESS
OTHERWISE SPECIFIED

INCHES / DECIMAL
MILLIMETERS (mm)

.XX = $\pm .01$
.XX = ± 0.20

.XXX = $\pm .005$

ANGLES $\pm 1^\circ$