

Ceramic RF Transformer

50Ω 1300 to 2300 MHz

TCN1-23+
TCN1-23




Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
Input RF Power**	5W
**From 85°C derate linearly to 2.5 W at 100°C	

Pin Connections

PRIMARY DOT	4
PRIMARY (GND)	2,5
SECONDARY DOT	1
SECONDARY	6
NOT USED	3

Outline Drawing

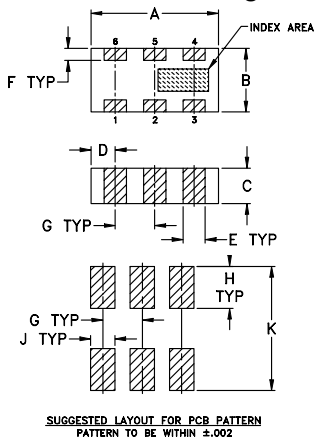


TOLERANCE UNLESS OTHERWISE STATED

- 2 PLACE DECIMALS: ±.01
3 PLACE DECIMALS: ±.005

Outline Dimensions (inch)

A	B	C	D	E	F
.126	.063	.037	.024	.022	.012
3.20	1.60	0.94	0.61	0.56	0.30
G	H	J	K		wt
.039	.042	.024	.123		grams
0.99	1.07	0.61	3.12		.020

Demo Board MCL P/N: TB-287 Suggested PCB Layout (PL-163)



- NOTE:**
- TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .020" ± .0015". COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
 - BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER).
- DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Features

- wideband, 1300 to 2300 MHz
- miniature size, 0.12"x.06"x.037"
- LTCC construction
- low cost

Applications

- DECT
- PCS
- PHS
- PDS
- PDC

CASE STYLE: FV1206-1
PRICE: \$ 1.99 ea. QTY (10-49)
\$ 1.69 ea. QTY (100)

+ RoHS compliant in accordance
with EU Directive (2002/95/EC)

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.

Electrical Specifications (T_{AMB} = 25°C)


Ω RATIO	FREQUENCY (MHz)	INSERTION* LOSS (dB)	PHASE UNBALANCE (Deg.) Typ.	AMPLITUDE UNBALANCE (dB) Typ.
1	1300-2300	0.7	5.0	0.7
	1800-2000	0.6	4.0	0.5

* Insertion Loss is referenced to mid-band loss, 0.8dB


Typical Performance Data

FREQUENCY (MHz)	INSERTION LOSS (dB)	INPUT R. LOSS (dB)	AMPLITUDE UNBALANCE (dB)	PHASE UNBALANCE (Deg.)
1300.00	0.91	15.33	0.89	1.52
1500.00	0.91	16.32	0.60	1.46
1600.00	0.91	17.14	0.50	1.81
1700.00	0.91	18.31	0.44	2.34
1800.00	0.92	19.68	0.41	3.09
1900.00	0.93	21.20	0.43	3.82
2000.00	0.95	22.85	0.50	4.57
2100.00	0.97	24.40	0.60	5.34
2200.00	1.00	25.70	0.75	6.05
2300.00	1.04	26.43	0.95	6.61


TCN1-23
INSERTION LOSS

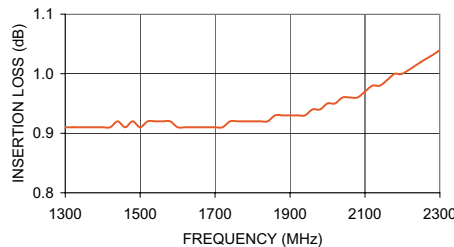


TCN1-23
AMPLITUDE UNBALANCE

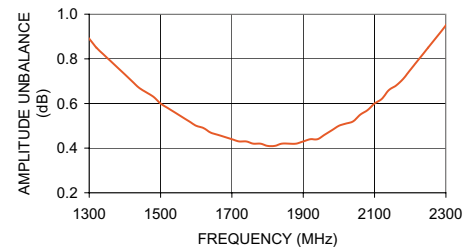

TCN1-23
PHASE UNBALANCE

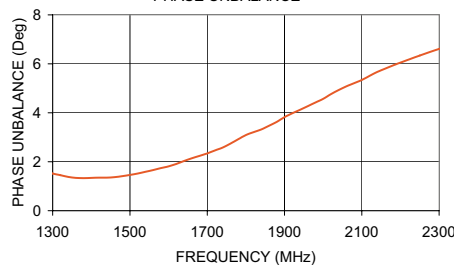

configuration G



Mini-Circuits®

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified

INTERNET <http://www.minicircuits.com>



REV. A
M101913
TCN1-23
ED-11687/2
DJ/RS/CP
060428