
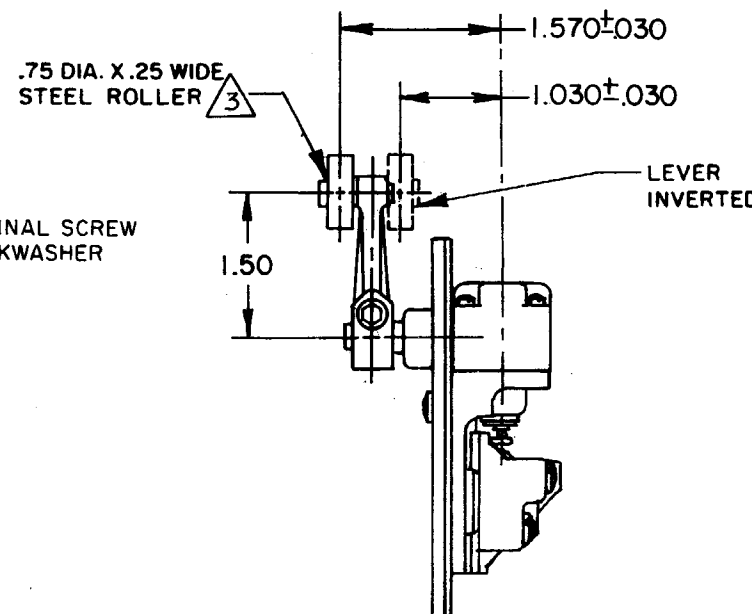
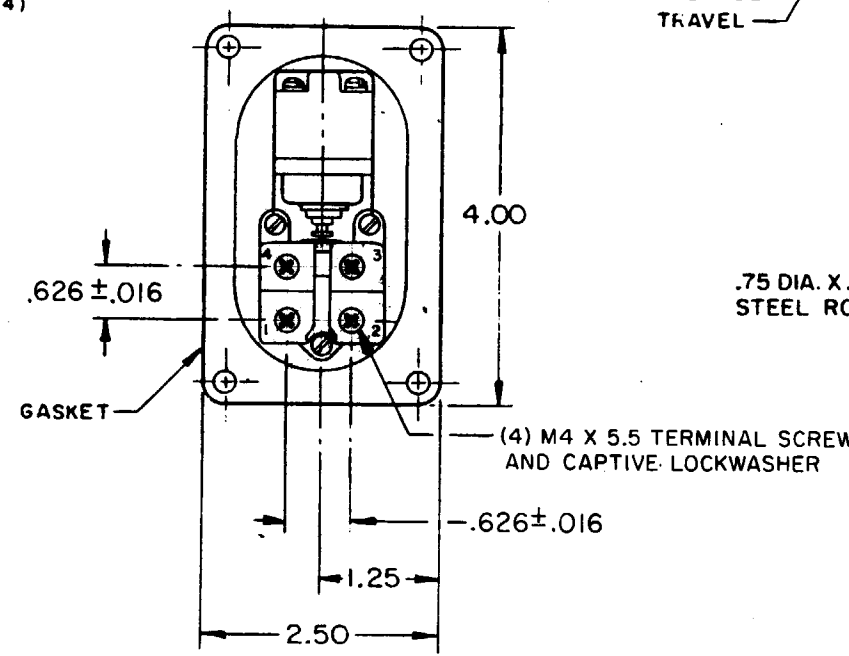
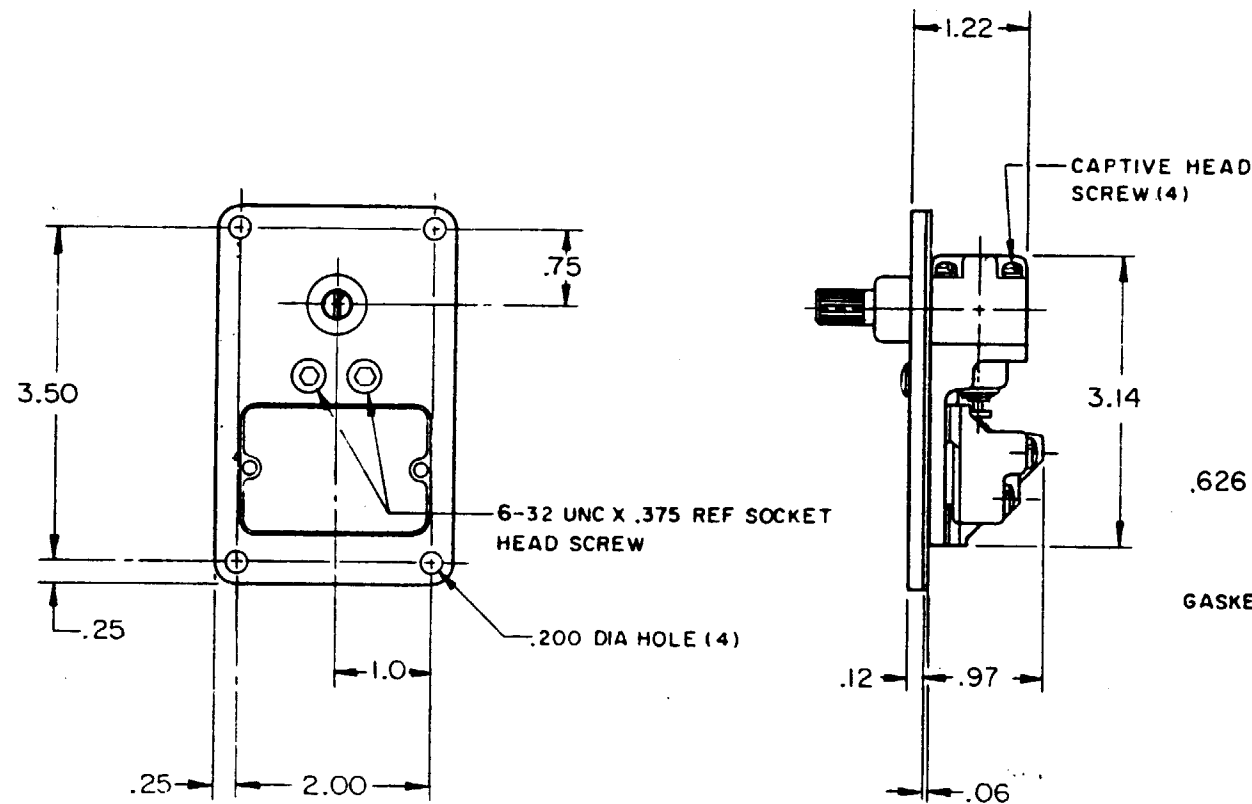
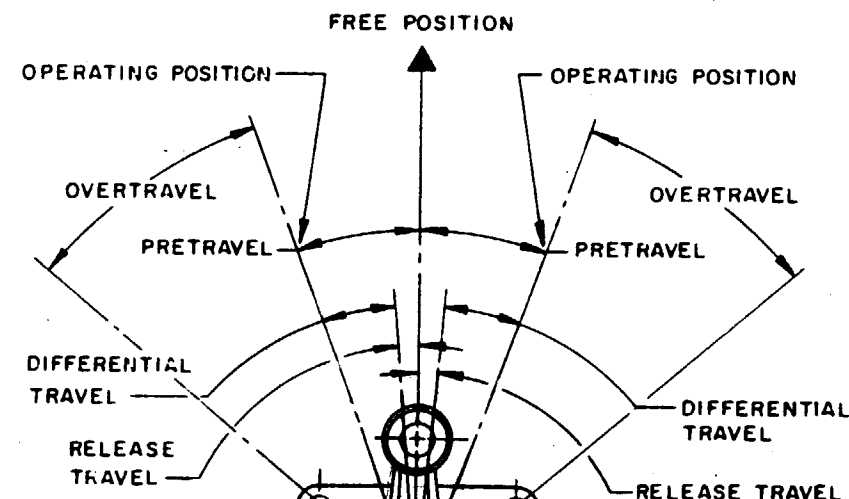




CAM TRACKING VIEW

NOTE-

- 1-SWITCH IS ASSEMBLED FOR ACTUATION IN BOTH DIRECTIONS BUT MAY BE ADJUSTED TO ACTUATE IN EITHER THE CLOCKWISE DIRECTION ONLY OR THE COUNTERCLOCKWISE DIRECTION ONLY
- 2-TO CONVERT SWITCH FOR ACTUATION IN EITHER THE CLOCKWISE OR COUNTERCLOCKWISE DIRECTION ONLY, REMOVE ACTUATOR HEAD AND ROTATE THE NOTCHED PLUNGER 90° TO THE RIGHT FOR CLOCKWISE ACTUATION OR 90° TO THE LEFT FOR COUNTERCLOCKWISE ACTUATION

- 3-ROLLER LEVER MAY BE LOCKED IN ANY POSITION THRU 360°
- 4-LEVER FURNISHED UNASSEMBLED IN UNIT PACKING BOX

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS	ELECTRICAL DATA	SCALE 1/2 TO 1
OPERATING TORQUE - - - - - 4.5 IN-LB	CONTACT ARRANGEMENT (SEE CIRCUIT DIAGRAM)	DO NOT SCALE PRINT
FULL OVERTRAVEL TORQUE - - - 6 IN-LB		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
RELEASE TORQUE - - - - - .75 IN-LB	0.1A-125 VAC 0.1A-30 VDC	ONE PLACE (.0) ± .030
PRETRAVEL - - - - - 20° MAX		TWO PLACE (.00) ± .015
DIFFERENTIAL TRAVEL - - - - 12° MAX		THREE PLACE (.000) ± .005
OVERTRAVEL - - - - - 30° MIN		ANGLES ±
RELEASE TRAVEL - - - - - 5° MIN		WEIGHT
SWITCH-BASIC REPLACEMENT - - 2MN-J26		

7LS51

M

DRAWING
NUMBER

ISSUE
X5

REVISIONS

A	PR18435	TSM	30 AUG 90
B	CO 70394-B	DAW	3 SEP 91
C	CO71539	LJF	27 NOV 91
D	CO 77031	JDB	22 DEC 93

RELEASE NO. PR-18435
CHECK
MAM
5 SEP 90
TSM
30 AUG 90
DRAWN

FO-80378-003