

IGBT MODULE (N series)


n Features

- Square RBSOA
- Low Saturation Voltage
- Less Total Power Dissipation
- Improved FWD Characteristic
- Minimized Internal Stray Inductance
- Overcurrent Limiting Function (4~5 Times Rated Current)

n Applications

- High Power Switching
- A.C. Motor Controls
- D.C. Motor Controls
- Uninterruptible Power Supply

n Outline Drawing

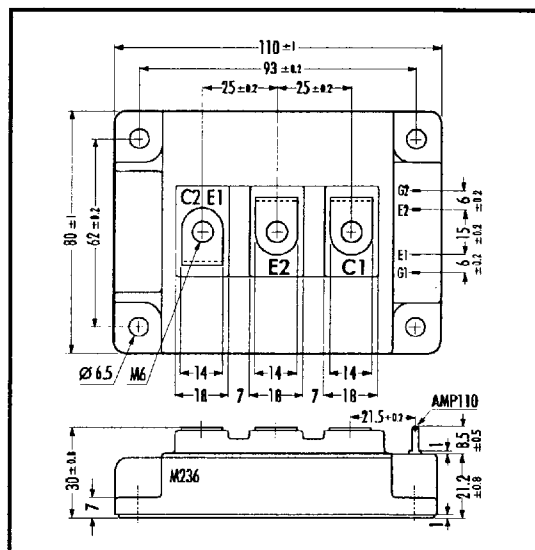

n Maximum Ratings and Characteristics

•Absolute Maximum Ratings (T_c=25°C)

Items	Symbols	Ratings	Units
Collector-Emitter Voltage	V _{CEs}	1200	V
Gate -Emitter Voltage	V _{GES}	± 20	V
Collector Current	Continuous	I _C	300
	1ms	I _{C PULSE}	600
	Continuous	-I _C	300
	1ms	-I _{C PULSE}	600
Max. Power Dissipation	P _C	2100	W
Operating Temperature	T _J	+150	°C
Storage Temperature	T _{stg}	-40 ~ +125	°C
Isolation Voltage	A.C. 1min.	V _{is}	2500
Screw Torque	Mounting *1	3.5	Nm
	Terminals *2	4.5	Nm

Note: *1 Recommendable Value; 2.5 ~ 3.5 Nm (M5) or (M6)
 *2 Recommendable Value; 3.5 ~ 4.5 Nm (M6)


•Electrical Characteristics (at T_J=25°C)

Items	Symbols	Test Conditions	Min.	Typ.	Max.	Units
Zero Gate Voltage Collector Current	I _{CEs}	V _{GE} =0V V _{CE} =1200V			3.0	mA
Gate-Emitter Leakage Current	I _{GES}	V _{CE} =0V V _{GE} =± 20V			45	μA
Gate-Emitter Threshold Voltage	V _{GE(th)}	V _{GE} =20V I _C =300mA	4.5		7.5	V
Collector-Emitter Saturation Voltage	V _{CE(sat)}	V _{GE} =15V I _C =300A			3.3	V
Input capacitance	C _{ies}	V _{CE} =0V		48000		pF
Output capacitance	C _{oes}	V _{CE} =10V		17400		
Reverse Transfer capacitance	C _{res}	f=1MHz		15480		
Turn-on Time	t _{ON}	V _{CC} =600V			1.2	μs
	t _r	I _C =300A		0.25	0.6	
Turn-off Time	t _{OFF}	V _{GE} =± 15V			1.5	
	t _r	R _G =2.7Ω		0.35	0.5	
Diode Forward On-Voltage	V _F	I _F =300A V _{GE} =0V			3.0	V
Reverse Recovery Time	t _{rr}	I _F =300A			350	ns

•Thermal Characteristics


Items	Symbols	Test Conditions	Min.	Typ.	Max.	Units
Thermal Resistance	R _{th(j-c)}	IGBT			0.06	°C/W
	R _{th(j-e)}	Diode			0.15	
	R _{th(c-h)}	With Thermal Compound		0.0167		

n Equivalent Circuit

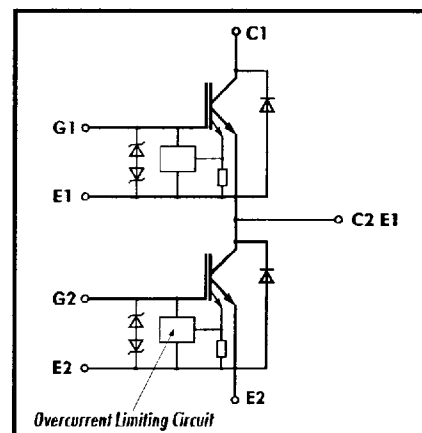


Collector current vs. Collector-Emitter voltage

$T_J = 25^\circ\text{C}$

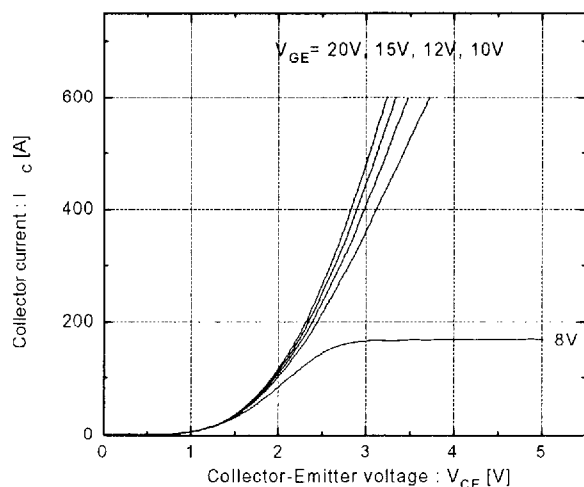


Collector current vs. Collector-Emitter voltage

$T_J = 125^\circ\text{C}$

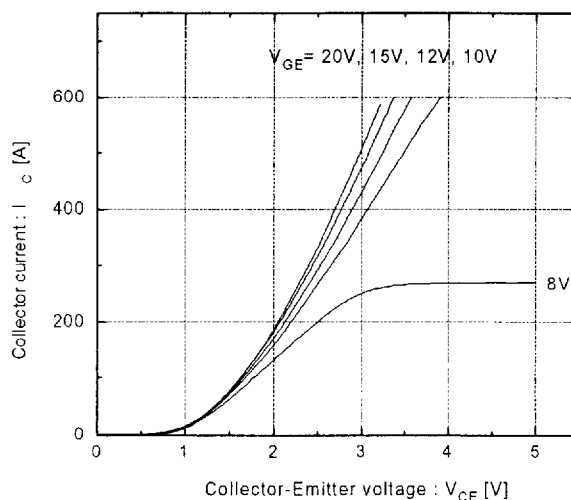


Collector-Emitter vs. Gate-Emitter voltage

$T_J = 25^\circ\text{C}$

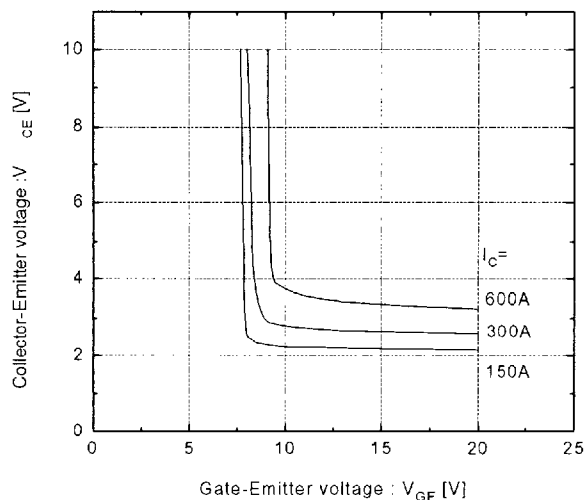


Collector-Emitter vs. Gate-Emitter voltage

$T_J = 125^\circ\text{C}$

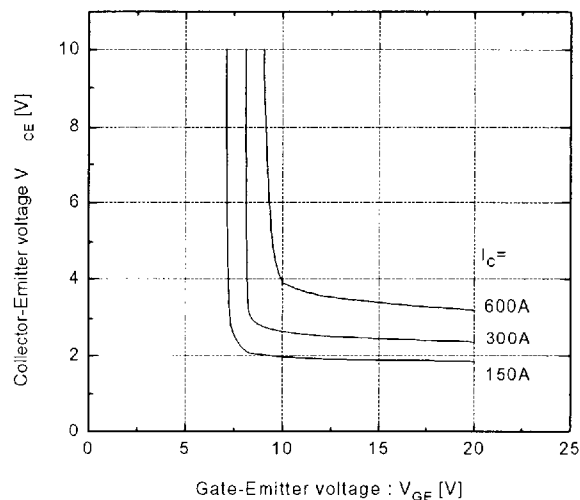


Switching time vs. Collector current







$V_{CC} = 600V, R_G = 2.7\Omega, V_{GE} = \pm 15V, T_J = 25^\circ\text{C}$

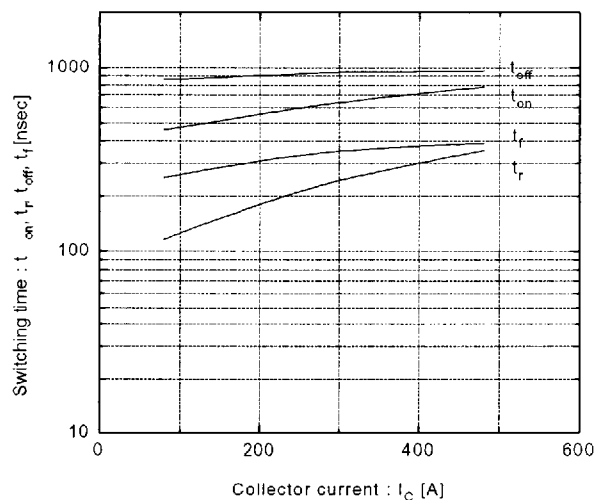


Switching time vs. Collector current

$V_{CC} = 600V, R_G = 2.7\Omega, V_{GE} = \pm 15V, T_J = 125^\circ\text{C}$

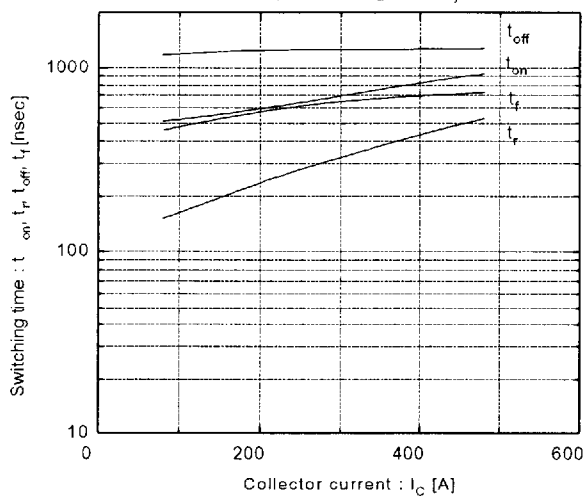


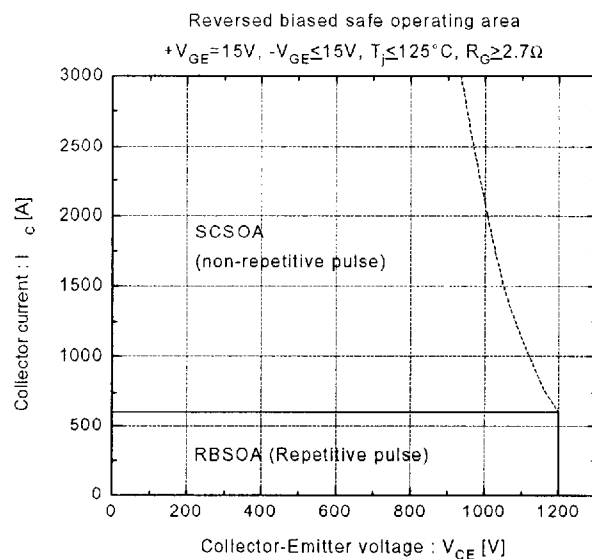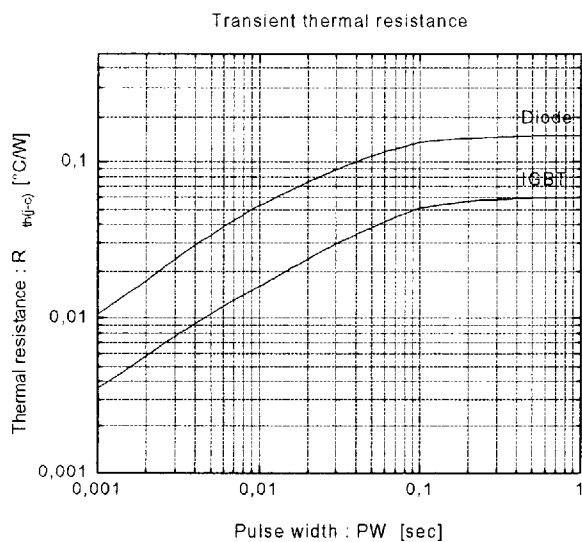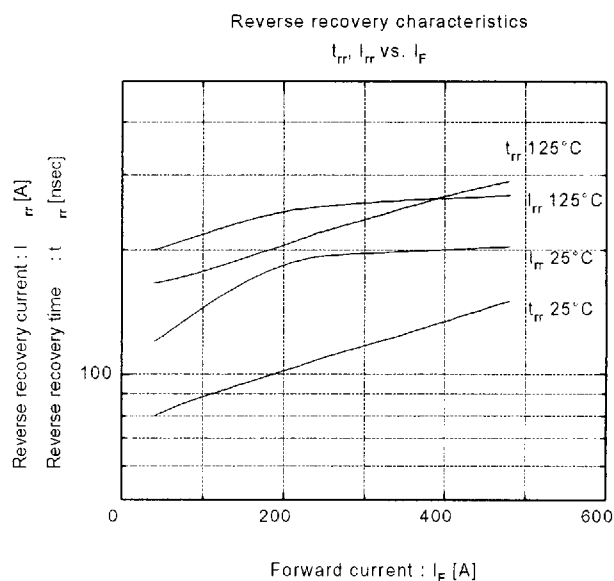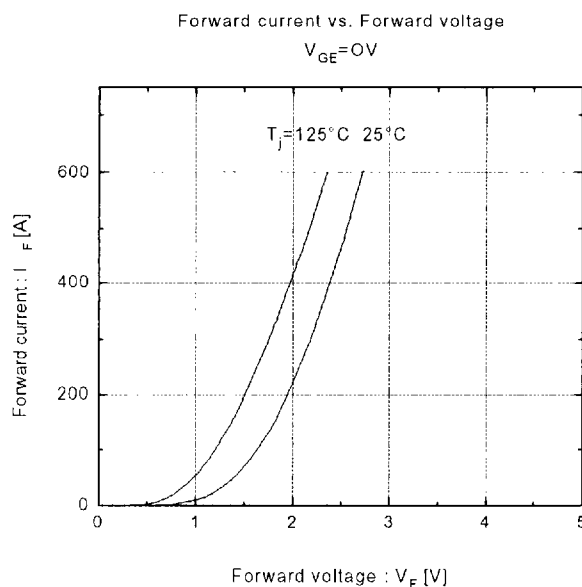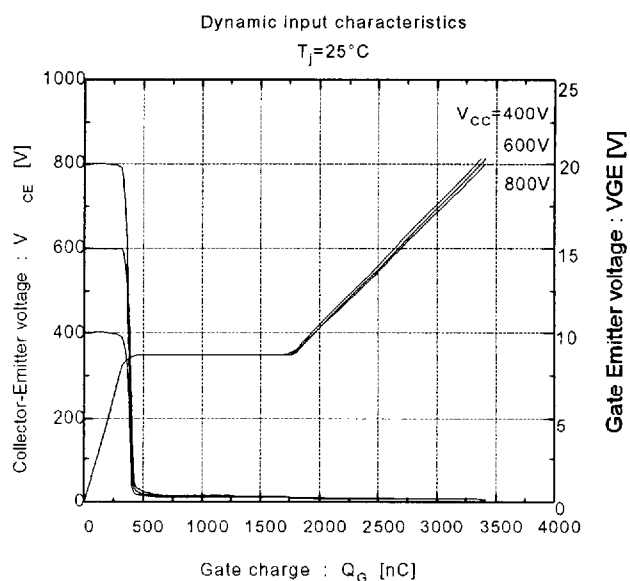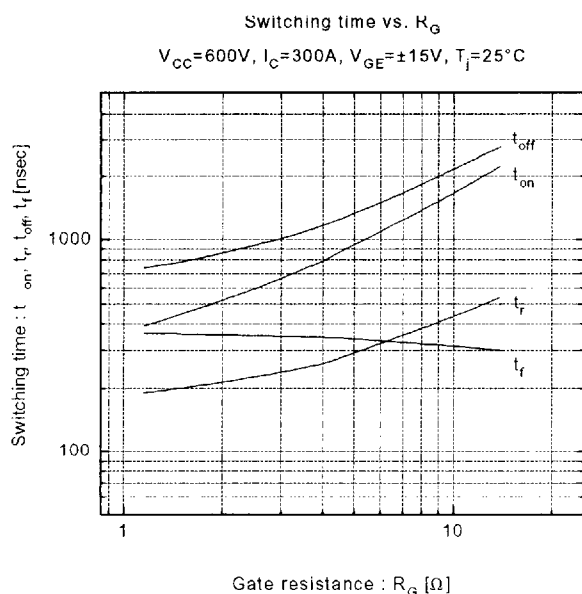

Switching loss vs. Collector current

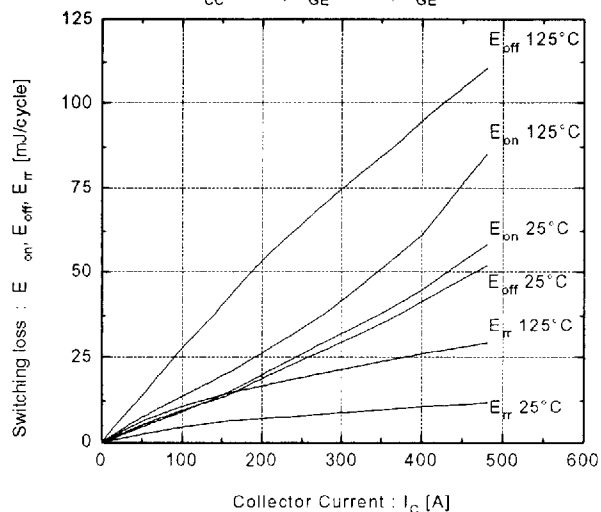 $V_{CC}=600V, R_{GE}=2.7\Omega, V_{GE}=\pm 15V$


Capacitance vs. Collector-Emitter voltage

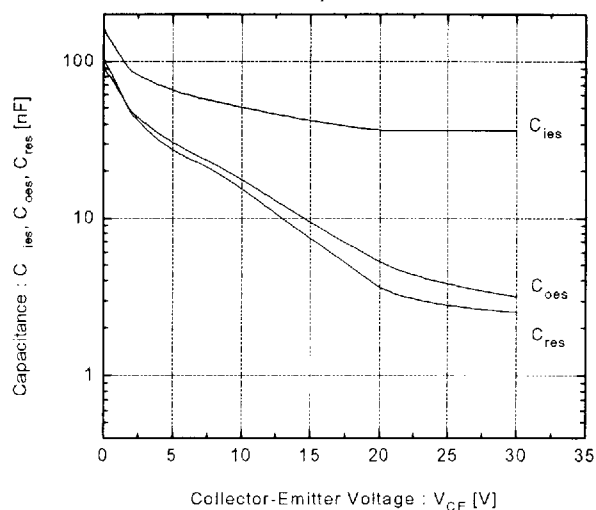 $T_J=25^\circ C$

Fuji Electric GmbH

Lyoner Straße 26

D-60528 Frankfurt/M

Tel.: 069 - 66 90 29 - 0

Fax.: 069 - 66 90 29 - 56

Fuji Electric (UK) Ltd.

 Commonwealth House
 2 Chalkhill Road Hammersmith

London W6 8DW, UK

Tel.: 0181 - 233 11 30

Fax.: 0181 - 233 11 60

P.O. Box 702708 - Dallas, TX - (972) 733-1700 - (972) 381-9991 (fax)