

NSR15SDW1T1

NSR15SDW1T2

Dual RF Schottky Diode

These diodes are designed for analog and digital applications, including DC based signal detection and mixing applications.

Features:

- Low Capacitance (<1 pF)
- Low V_F (390 mV typical @ 1 mA)
- Low $V_{F\Delta}$ (1 mV typical @ 1 mA)
- Pins 2 and 5 Shorted

Benefits:

- Reduced Parasitic Losses
- Accurate Signal Measurement
- Reduced Cross Talk

MAXIMUM RATINGS

Rating	Symbol	Max	Unit
Peak Reverse Voltage	V_R	15	V
Forward Current	I_F	30	mA
Operating and Storage Temperature Range	T_J, T_{stg}	-65 to +150	°C
ESD Rating: Class 1 per Human Body Model Class A per Machine Model			

THERMAL CHARACTERISTICS



Characteristic	Symbol	Value	Unit
Maximum Thermal Resistance - Junction-to-Ambient	$R_{\theta JA}$	500	°C/W



ON Semiconductor®


<http://onsemi.com>

RF SCHOTTKY BARRIER DIODES 15 VOLTS, 30 mA



SC-88
CASE 419B
STYLE 21

MARKING DIAGRAM



R6 = Specific Device Code
M = Date Code

ORDERING INFORMATION

Device	Package	Shipping
NSR15SDW1T1	SC-88	3000/Tape & Reel
NSR15SDW1T2	SC-88	3000/Tape & Reel

ELECTRICAL CHARACTERISTICS

Characteristic	Symbol	Min	Typ	Max	Unit
Breakdown Voltage ($I_R = 10 \mu A$)	V_{BR}	15	20	-	V
Reverse Leakage ($V_R = 1 V$)	I_R	-	2	50	nA
Forward Voltage ($I_F = 1 mA$)	V_{F1}	-	390	415	mV
Forward Voltage ($I_F = 10 mA$)	V_{F2}	-	530	680	mV
Delta V_F ($I_F = 1 mA$, All Diodes)	ΔV_F	-	1	15	mV
Capacitance ($V_F = 0 V$, $f = 1 MHz$)	C_T	-	0.8	1	pF

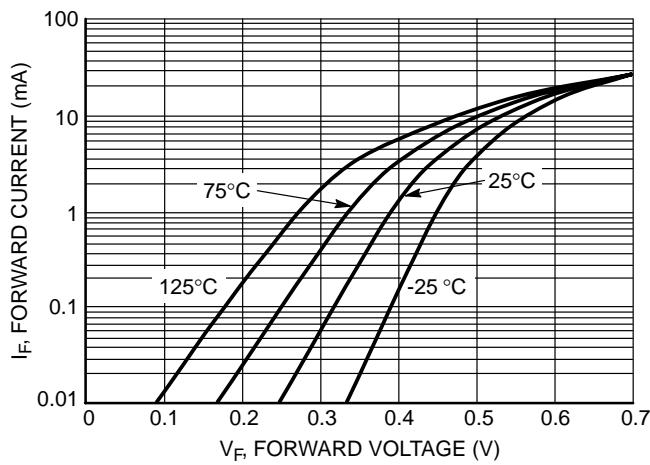


Figure 1. Forward Current versus Forward Voltage at Temperatures

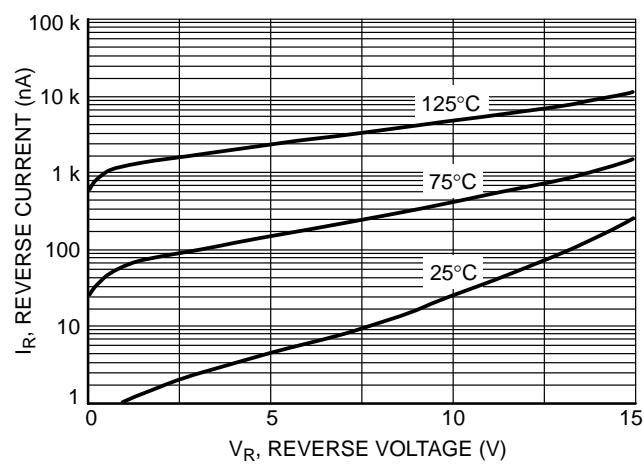


Figure 2. Reverse Current versus Reverse Voltage

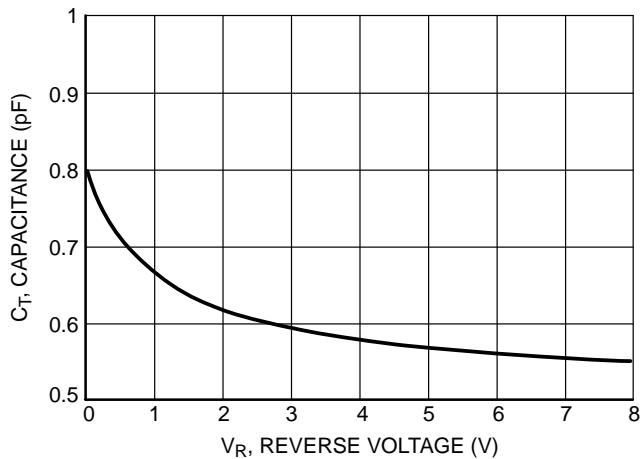


Figure 3. Total Capacitance versus Reverse Voltage

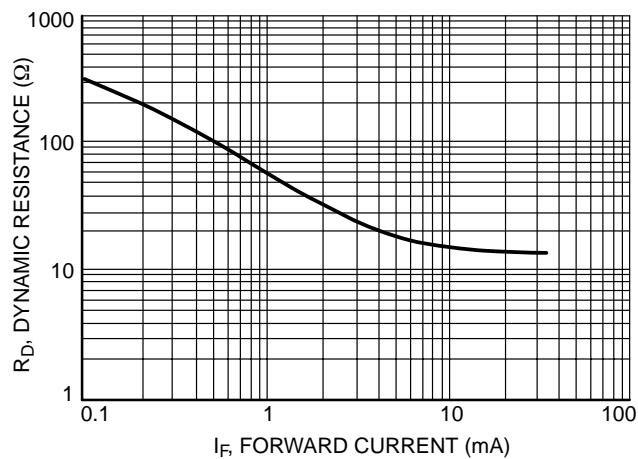


Figure 4. Dynamic Resistance versus Forward Current

NSR15SDW1T1 NSR15SDW1T2

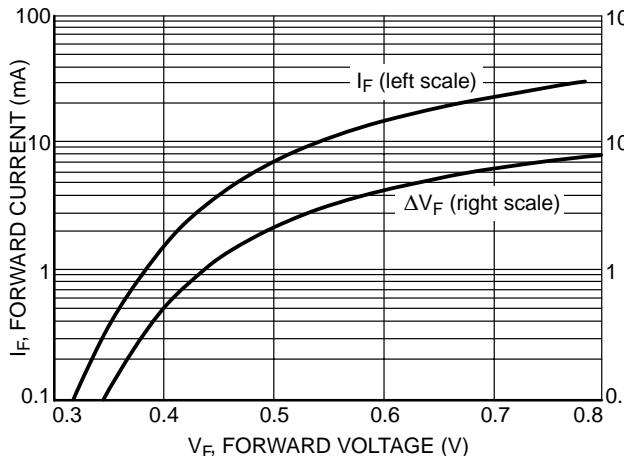


Figure 5. Typical V_F Match at Mixer Bias Levels

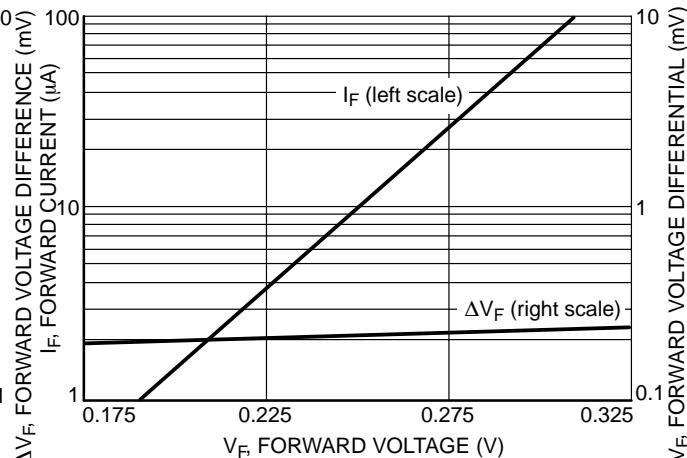


Figure 6. Typical V_F Match at Detector Bias Levels

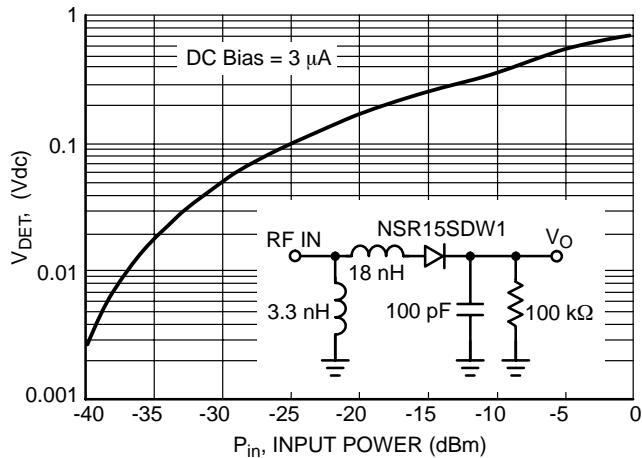


Figure 7. Typical Output Voltage versus Input Power, Small Signal Detector Operating at 850 MHz

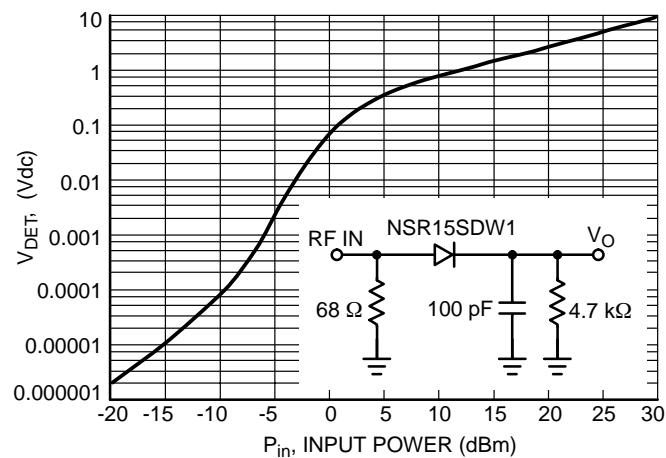


Figure 8. Typical Output Voltage versus Input Power, Large Signal Detector Operating at 915 MHz


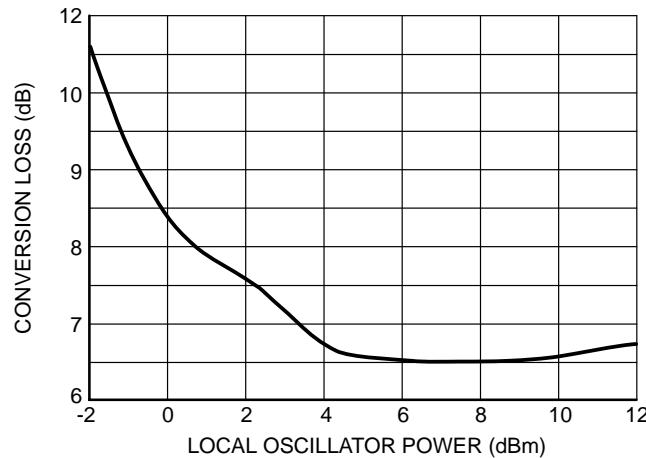


Figure 9. Typical Conversion Loss versus L.O. Drive, 2.0 GHz

NSR15SDW1T1 NSR15SDW1T2

PACKAGE DIMENSIONS


SC-88 (SOT-363)
CASE 419B-02
ISSUE N

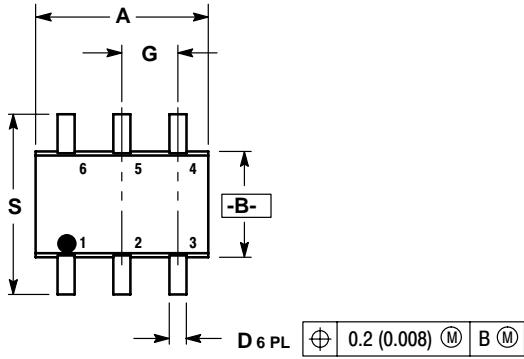

NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. 419B-01 OBSOLETE, NEW STANDARD 419B-02.

DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.071	0.087	1.80	2.20
B	0.045	0.053	1.15	1.35
C	0.031	0.043	0.80	1.10
D	0.004	0.012	0.10	0.30
G	0.026	BSC	0.65	BSC
H	---	0.004	---	0.10
J	0.004	0.010	0.10	0.25
K	0.004	0.012	0.10	0.30
N	0.008	REF	0.20	REF
S	0.079	0.087	2.00	2.20

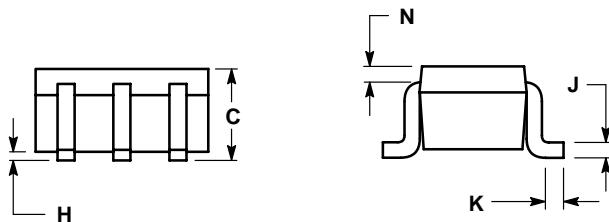

STYLE 21:
PIN 1. ANODE 1
2. N/C
3. ANODE 2
4. CATHODE 2
5. N/C
6. CATHODE 1

ON Semiconductor and  are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer.

PUBLICATION ORDERING INFORMATION

Literature Fulfillment:

Literature Distribution Center for ON Semiconductor
P.O. Box 5163, Denver, Colorado 80217 USA
Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada
Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada
Email: ONlit@hibbertco.com

N. American Technical Support: 800-282-9855 Toll Free USA/Canada

JAPAN: ON Semiconductor, Japan Customer Focus Center
2-9-1 Kamimeguro, Meguro-ku, Tokyo, Japan 153-0051

Phone: 81-3-5773-3850
Email: r14525@onsemi.com

ON Semiconductor Website: <http://onsemi.com>

For additional information, please contact your local
Sales Representative.