



R10

R10-R

R10S

Features

- Broad range of coil options provide sensitivity ranging from 25 to 750mW.
- Various contacts switch from dry circuit to 7.5 amps.
- Many mounting and termination options.

Contact Data @ 25°C

Arrangements: 1 Form C (SPDT) through 8 Form C (8PDT) See Ordering Information tables for more details regarding availability.

Contact Materials, Styles & Ratings @ +25°C

Contact Code	Contact Material	Contact Style	Coil Codes Available	Contact Ratings		
				Min.	Typ.	Max.
W	Silver-Cadmium Oxide	Single Button	V, Q, S, J	500mA	-	7.5A‡
X	Silver-Cadmium Oxide	Single Button	V, Q, S, J	500mA	-	5A§
Y	Fine Silver	Single Button	All	100mA	2A	3A
Z	Fine Silver	Bifurcated	All	1mA	100mA	2A
P	Gold overlay on Silver	Bifurcated Crossbar	All	Dry Circuit	1mA	3A

Ratings are at 28VDC or 155VAC unless otherwise specified. Total load must not exceed 30A per relay.

‡ Use ungrounded frame for AC loads of 5A or greater. Max.ratings are 7.5A at 115VAC and 4A at 28VDC for coil codes S and J.
§ Use ungrounded frame for AC loads of 5A or greater. Max.ratings are 5A at 115VAC and 3A at 28VDC for coil codes S and J.

UL Horsepower Contact Ratings (Coil Code V Only)

Contact Code	No. of Poles	At 110-120VAC	At 220-240VAC
W	1, 2, 4	1/8 HP (3.8A)	1/6 HP (2.2A)
X	1, 2, 4, 6	1/20 HP (1.5A)	1/10 HP (1.5A)

Expected Mechanical Life: 100 million operations, typical. (Except contact Code W: 1,000,000 operations, typical.)

Typical Expected Life For Resistive Loads @ 25°C

Type	Current	Voltage	Contact Style	Coil Code	Operations††
R10	7.5A	120VAC, 60 Hz.	W	V,S,J	7.5 · 10 ⁴
R10	7.5A	28VDC	W	V	7.5 · 10 ⁴
R10	5.0A	120VAC, 60 Hz.	X	V,S,J	5 · 10 ⁴
R10	5.0A	28VDC	X	V	5 · 10 ⁴
R10	4.0A	28VDC	W	S,J	2 · 10 ⁴
R10	3.0A	28VDC	X	S,J	2 · 10 ⁴
R10	3.0A	28VDC or 120VAC	P	V,S,J	3 · 10 ⁴
R10	2.0A	28VDC	P,Y,Z	V	1.5 · 10 ⁶
R10	2.0A	28VDC	P,Y,Z	S,J	6 · 10 ⁵
R10S	2.0A	28VDC	P,Y,Z	J	5 · 10 ⁵
R10	1.0A	28VDC	P,Y,Z	V,S,J	12 · 10 ⁶
R10	1.0A	28VDC	P,Y,Z	SS,JJ	5 · 10 ⁵
R10S	1.0A	28VDC	P,Y,Z	J	1 · 10 ⁶
R10	500mA	28VDC	P,Y,Z	SS,JJ	5 · 10 ⁶
R10	100mA	28VDC or 120VAC	P,Y,Z	V,S,J	1 · 10 ⁸
R10	100mA	48VDC	P,Z	SS,JJ	5 · 10 ⁶
R10	100mA	6VDC	P	SS,JJ	5 · 10 ⁷
R10S	100mA	28VDC or 120VAC	P,Y,Z	J	1 · 10 ⁶
R10	50mA	6VDC	P,Z	V,S,J	5 · 10 ⁷
R10S	30mA	6VDC	P,Z	J	5 · 10 ⁶
R10	1mA	6VDC	P	SS,JJ	5 · 10 ⁷

†† Relay operated at rated coil voltage or 133% of pick-up current or higher.

Initial Dielectric Strength

Between Open Contacts: 500V rms, for contact codes P and Z.
1,000V rms for contact codes W, X and Y with coil code V.

Between All Other Conductors: 1,000V rms.

Dimensions are shown for reference purposes only.

Dimensions are in inches over (millimeters) unless otherwise specified.

R10 series**General Purpose
Dry Circuit to 7.5 Amp
Multicontact AC or DC Relay**

- R10-E – Clear Dust Cover Version
- R10-R – Sealed, Immersion Cleanable Type
- R10S – Super Sensitive, Logic Compatible

File E29244

File LR15734

Users should thoroughly review the technical data before selecting a product part number. It is recommended that user also seek out the pertinent approvals files of the agencies/laboratories and review them to ensure the product meets the requirements for a given application.

Capacitance

Between Contacts: 2 pf, typ.
Between Contacts and Coil: 2 pf, typ.
Between Coil and Frame: 30 pf, typ.

Initial Insulation Resistance


Between Mutually Insulated Elements: 10¹⁰ ohms @ 25°C, 50% RH. Consult factory for optional acetal resin material rated 10¹² ohms.

Coil Data @ 25°C (also see Coil Data tables)


Voltage: 3 to 115VDC and 6 to 115VAC.
Maximum Coil Power: 2.2 Watts.
Coil Temperature Rise: 30°C per Watt.
Maximum Coil Temperature: 105°C.

Operate Data @ 25°C**R10 Relays (DC Only) Typical Ranges of Operations**

(Curves for reference only. If specific values are required, testing is required.)

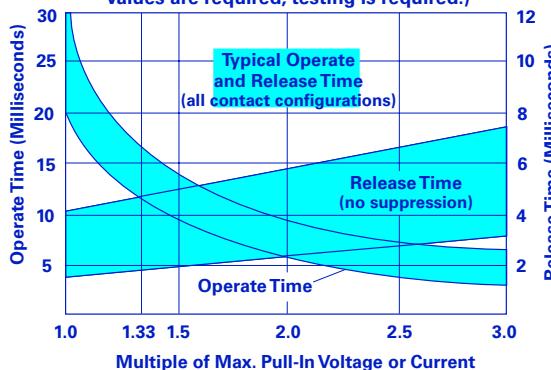**R10 Ultra-Sensitive "SS" and "JJ" Typical Ranges of Operation**

(Curves for reference only. If specific values are required, testing is required.)

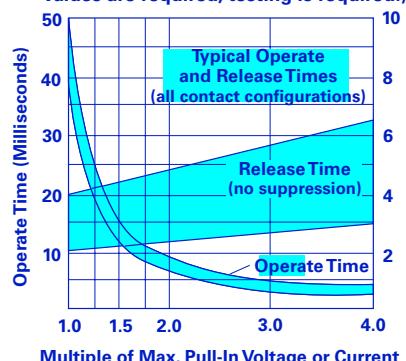**Environmental Data**

Storage Temperature Range: -55°C to +105°C.
Operating Temperature Range: -55°C to +75°C.

Mechanical Data

Terminal Finish: Tin plating standard.
Weight: 0.8 to 1.4 oz. (23 to 40g) approximately.

Specifications and availability subject to change.

www.tycoelectronics.com
Technical support:
Refer to inside back cover.

Coil Data Tables @ 25°COne of the **boldface** resistance or voltage values from a table below is to be inserted in step 6 of the ordering chart on the next page.

V		Standard DC Voltage Adjustment		
		2.2 Watts Maximum Continuous Coil Dissipation @ 25°C		
VDC at 25°C		Coil Resistance at 25°C ± 10% (ohms)		
Nominal	Pick-up (Max.)	1, 2 & 4 Form A, B, C or D Pick-up 500mW	6 Form A, B or C Pick-up 850mW	8 Form A, B or C Pick-up 1000mW
3.0	2.25	10	6	5
5.0	3.75	28	16	14
6.0	4.5	52	25	20
12.0	9.0	185	90	72
24.0	18.0	700	430	350
48.0	36.0	2.5K	1.5K	1.25K
72.0	54.0	5.8K	3.5K	2.8K
115.0	86.0	15.0K	9.0K	8.0K

J		Sensitive DC Current Adjustment				
		Must Operate Current (mA)				
		All Applicable Types Except R10S				
Coil Resistance ±10% (ohms)	2 Form A, B, C or D Pick-up 85mW	4 Form A, B, C or D Pick-up 175mW	6 Form A, B, C or D Pick-up 250mW	8 Form A, B or C Pick-up 400mW	Max. Coil Current (mA)	
1.0K	8.5	13.0	16.0	20.0	45.0	
2.5K	5.8	8.4	10.0	13.0	28.0	
5.0K	4.1	6.2	7.2	9.0	20.0	
10.0K	3.1	4.5	5.0	6.4	14.0	
15.0K	2.6	3.5	4.2	5.3	11.5	
30.0K	1.7	2.5	2.9	3.7	8.3	
R10S Types Only						
Coil Resistance ±10% (ohms)	1 Form C Pick-up 10mW	2 Form C Pick-up 20mW	4 Form C Pick-up 40mW			
500	4.5 (A)	6.3 (A)	9.0			
1.0K	3.2 (A)	4.5	6.5			
2.5K	2.0	2.9 (B)	4.1 (B)			
5.0K	1.4 (B)	2.0	2.9 (C)			
10.0K	1.0	1.4 (C)	2.0			
16.0K	0.8	1.2	1.4			
30.0K	0.6 (C)	0.8	1.2			

(A) Suggested for 5VDC operation.

(B) Suggested for 12VDC operation.

(C) Suggested for 24VDC operation.

Q		Special DC Voltage Adjustment		
1 & 2 Form A, B, C or D		3 & 4 Form A, B, C or D		
Coil Res. @ 25°C ± 10% (ohms)	Pick-up (Max.) @ 25°C (VDC)	Pick-up @ 25°C (mW)	Coil Res. @ 25°C ± 10% (ohms)	Pick-Up @ 25°C (mW)
52	3.1	180	32	450
110	4.5	185	52	340
450	9.2	190	185	380
1.8K	17.4	170	1.0K	295
7.5K	36.2	175	3.2K	300
15.0K	49.5	165	7.5K	325
30.0K	67.5	160	15.0K	300
				115


JJ		Ultra-Sensitive Current Adjustment (1-4 Pole Only)		
		Maximum Pick-Up Current (mA)		
Coil Resistance at 25°C ±10%	1 Form C Pick-Up Power 20mW	2 Form C Pick-Up Power 40mW	3 & 4 Form C Pick-Up Power 80mW	Maximum Continuous Coil Current (mA)
1.0K	4.5	6.5	9.0	45.0
2.5K	2.9	4.1	5.8	28.0
5.0K	2.1	2.9	4.1	20.0
10.0K	1.5	2.0	3.0	14.0
15.0K	1.2	1.7	2.4	11.5
30.0K	0.85	1.2	1.7	8.3

S		Sensitive DC Voltage Adjustment		
		2.2 Watts Maximum Continuous Coil Dissipation @ 25°C		
VDC at 25°C		Coil Resistance at 25°C ± 10% (ohms)		
Nominal	Pick-up (Max.)	1 & 2 Form A, B, C or D Pick-up 100mW	3 & 4 Form A, B, C or D Pick-up 175mW	6 Form A, B or C Pick-up 250mW
3.0	2.25	50	30	20
5.0	3.75	140	80	56
6.0	4.5	200	110	80
12.0	9.0	800	450	320
24.0	18.0	3.2K	1.8K	1.2K
48.0	36.0	13.0K	7.5K	5.2K
72.0	54.0	28.0K	16.0	13.0K
115.0	86.0	50.0K	40.0K	30.0K
				16.0K

Standard AC Operated Relays				
Coil Resistance @ 25°C ± 20% (ohms)		Volts AC @ 25°C		
2 & 4 Form C	6 & 8 Form C	Pick-Up (max.)	Nominal	Maximum Continuous
25	15	5.0	6	7.2
120	90	9.0	12	14.5
500	350	18.0	24	30.0
2.0K	1.4K	36.0	48	60.0
9.0K	7.5K	86.0	115	130.0

Note: Dual coil diode rectified construction.

Typical Coil Inductance

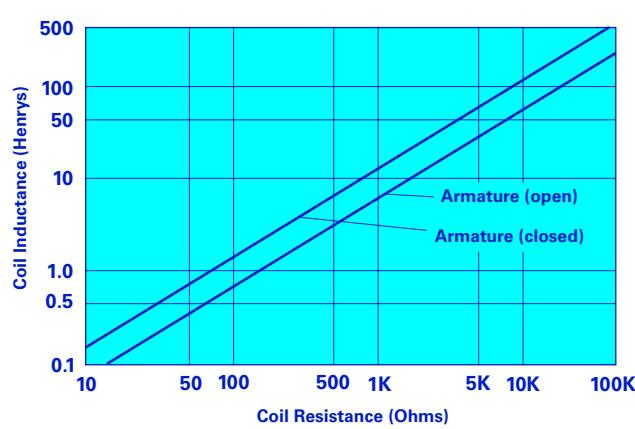


Ordering Information

Typical Part Number ►	R10	-E	1	Y	4	-V700																								
1. Basic Series:																														
R10 = Relay with Form C contacts. R10S = Super sensitive R10 (case and terminals E1 & E2 only, J coil adj. only).																														
2. Case Style:																														
E = Non-sealed polycarbonate cover. R = Immersion cleanable, tape sealed plastic case (R10 only [Form C], terminal code 2 & 9 only [std. PCB]). No ground or stud included. Not available on R10S.																														
3. Terminals & Mounting:																														
1 = Solder/plug-in terminals with #3-48 mounting stud. 2 = Printed circuit terminals (std.) .064" (1.62mm) clearance, 1.25" (31.75mm) seated ht. 6 = Side mounting plate with #6-32 stud, solder/plug-in terminals (#3-48 stud not included). 7 = Narrow (.04" [1.02mm] wide) printed circuit terminals .013" (.33mm) clearance, 1.2" (30.48mm) seated ht. 9 = Non-shouldered, narrow (.04" [1.02mm] wide) printed circuit terminals in a staggered arrangement (1 to 6 poles only).																														
4. Contact Style & Rating:																														
<table border="1"> <thead> <tr> <th>W</th><th>X</th><th>Y</th><th>Z</th><th>P</th></tr> </thead> <tbody> <tr> <td>Single Contact</td><td>Single Contact</td><td>Single Contact</td><td>Bifurcated, Low Level Contacts</td><td>Bifurcated Crossbar, Dry Circuit Contacts</td></tr> <tr> <td colspan="2">V, Q, S & J Coil Adjustment Only</td><td>Typ. 2A Max. 3A Min. 100mA</td><td>Typ. 100mA Max. 2A Min. 1mA</td><td>Typ. 1mA Max. 3A Min. Dry Circuit</td></tr> <tr> <td>R10</td><td>X</td><td>X</td><td>X</td><td>X</td></tr> <tr> <td>R10S</td><td></td><td>X</td><td>X</td><td>X</td></tr> </tbody> </table>						W	X	Y	Z	P	Single Contact	Single Contact	Single Contact	Bifurcated, Low Level Contacts	Bifurcated Crossbar, Dry Circuit Contacts	V, Q, S & J Coil Adjustment Only		Typ. 2A Max. 3A Min. 100mA	Typ. 100mA Max. 2A Min. 1mA	Typ. 1mA Max. 3A Min. Dry Circuit	R10	X	X	X	X	R10S		X	X	X
W	X	Y	Z	P																										
Single Contact	Single Contact	Single Contact	Bifurcated, Low Level Contacts	Bifurcated Crossbar, Dry Circuit Contacts																										
V, Q, S & J Coil Adjustment Only		Typ. 2A Max. 3A Min. 100mA	Typ. 100mA Max. 2A Min. 1mA	Typ. 1mA Max. 3A Min. Dry Circuit																										
R10	X	X	X	X																										
R10S		X	X	X																										
Ratings are at 28VDC or 115VAC. Total load must not exceed 30A per relay. † Use ungrounded frame for AC loads of 5A or greater. Max. ratings are 7.5A at 115VAC and 4A at 28VDC for coil codes S & J. ‡ Use ungrounded frame for AC loads of 5A or greater. Max. ratings are 5A at 115VAC and 3A at 28VDC for coil codes S & J.																														
5. Number of Poles:																														
1 = 1 pole. 2 = 2 pole. 3 = 3 pole. 4 = 4 pole 6 = 6 pole (not available with W contacts). 8 = 8 pole (available on case style E only; not available with W contacts).																														
6. Coil (Refer to Coil Data Tables):																														
AC Voltage (available on R10 only) Specify nominal coil voltage followed by V (example: 24V).			DC Voltage Specify coil adjustment code letter followed by coil resistance (example: V700).																											


Our authorized distributors are more likely to stock the following items for immediate delivery.

R10-E1P2-115V	R10-E1X2-24V	R10-E1Y2-J1.0K	R10-E1Y4-V700	R10-E2P4-V185	R10-E2Y4-V185
R10-E1P2-V700	R10-E1X2-S800	R10-E1Y2-J2.5K	R10-E1Y6-V1.5K	R10-E2P4-V700	R10-E2Y4-V700
R10-E1P4-115V	R10-E1X2-V185	R10-E1Y2-V15.0K	R10-E1Z2-V185	R10-E2W2-V185	R10S-E1Y2-J5.0K
R10-E1P4-V700	R10-E1X2-V700	R10-E1Y2-V185	R10-E1Z2-V700	R10-E2X2-V185	R10S-E2Y1-J1.0K
R10-E1W2-V185	R10-E1X4-115V	R10-E1Y2-V2.5K	R10-E1Z4-V185	R10-E2X2-V700	
R10-E1W2-V700	R10-E1X4-V185	R10-E1Y2-V700	R10-E1Z4-V2.5K	R10-E2X4-V185	
R10-E1W4-V185	R10-E1X4-V2.5K	R10-E1Y4-J10.0K	R10-E1Z4-V700	R10-E2X4-V700	
R10-E1W4-V700	R10-E1X4-V700	R10-E1Y4-V2.5K	R10-E1Z6-V1.5K	R10-E2Y2-V185	
R10-E1X2-115V	R10-E1X6-V430	R10-E1Y4-V52	R10-E1Z6-V430	R10-E2Y2-V700	

Outline Dimensions

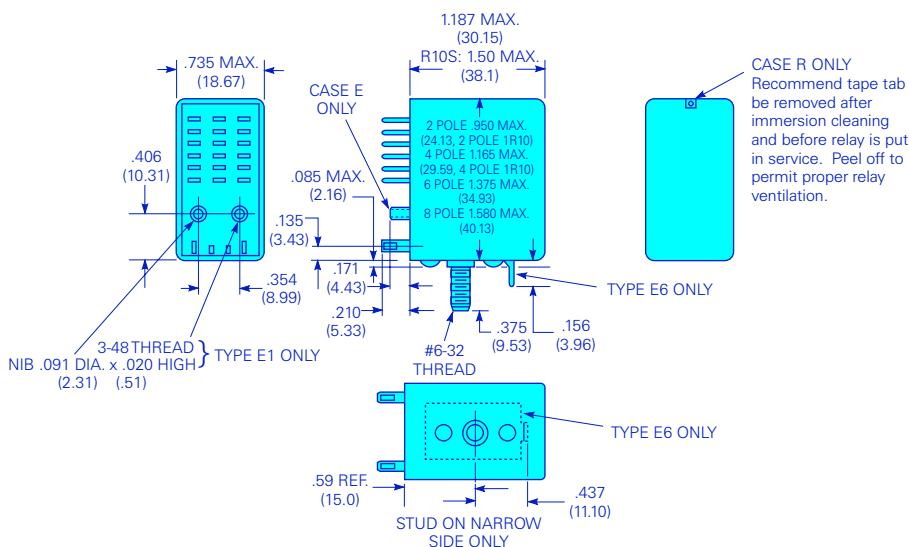


Solder Terminal Dimensions




PC Terminal Dimensions

	A	B	C	D	Arrang.
Type 2	.131	.050	.064	1.251	Inline
Type 7	.131	.040	.013	1.20	Inline
Type 9	.170	.040	.000	1.187	Staggered
Thickness	.012	.012	.012	.013	—




Wiring Diagrams (Bottom Views)

R10 Wiring Diagrams

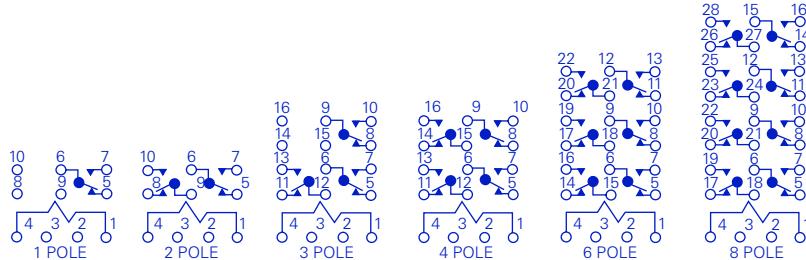


R10-AC Wiring Diagram




Suggested PC Board Layouts (Component Side of Boards)


Terminal Types E2 & R2

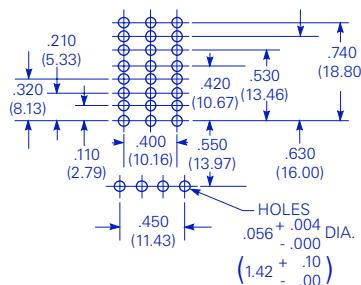


Terminal Types E9 & R9

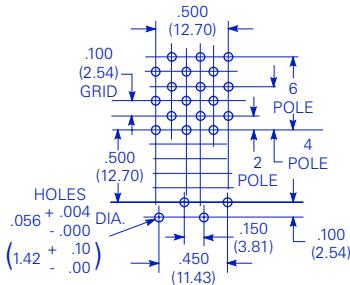

Suggested Panel Cutout For Relay or Socket

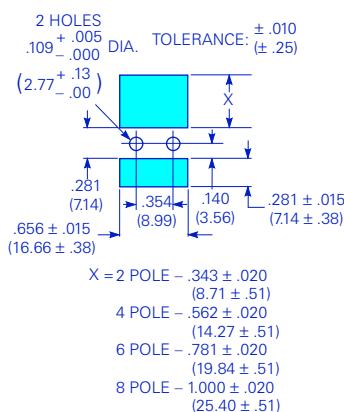

Mounting Hole Layout For Terminal & Mounting Style 6



X = 2 POLE – .343 ± .020 (8.71 ± .51)
4 POLE – .562 ± .020 (14.27 ± .51)
6 POLE – .781 ± .020 (19.84 ± .51)
8 POLE – 1.000 ± .020 (25.40 ± .51)

R10 Socket & Accessory Information



Socket Specifications

Contact Material:

Spring brass, tin-plated.

Body Material:

2 and 4 pole: polyester.

6 and 8 pole: phenolic.

Voltage Drop: 30mV max. @ 10A.

Dielectric Strength: 1,000V rms.

Insulation Resistance: 10⁹ megohms.

Max. Current: 10A.

Solder or PC Terminal Sockets

Rugged, molded socket body retains floating terminals of either solder or printed circuit pin configuration. PC terminal sockets are offered with pins in either 0.1" (2.54mm) grid or in-line arrangement.

Grounding Provisions

Pre-installed on sockets

Not for use at 5A AC and above.

Grounding Strip: Mounting stud of relay contacts grounding strip. Grounding strip is grounded with screw or rivet through round hole in socket.

Strip



Terminal



Caution:

Printed circuit sockets are manufactured with "floating" (loose) terminals. This permits them to align with holes in the circuit board and with the relay terminals. During the mounting and soldering of the socket, vertical float should be eliminated and the terminals seated on the board. (This may be accomplished by inserting a dummy relay in the socket.) Failure to eliminate float may cause fracture of the solder joint or separation of the copper conductor from the printed circuit board when a relay is inserted in the socket after soldering.

Ordering Data – Stock items are boldfaced.

Socket Part No.	No. of Poles	Type of Terminal	Grounding Provision	All tolerances $\pm .010$ ($\pm .25$) unless otherwise noted.	
27E125	2		Strip	Suggested Panel Cutout	
27E126	4		Strip	2 POLE .343 (8.71) 4 POLE .562 (14.27) 6 POLE .781 (19.84) 8 POLE 1.000 (25.40)	
27E127	6		Strip	.281 (7.14) .140 (3.56) .354 (8.99) .656 ± .015 (16.66 ± .38)	
27E162	2		None	2 HOLES .109 DIA. (2.77)	
27E163	4		None	.281 ± .015 (7.14 ± .38)	
27E164	6		None		
27E128	2		Strip	Suggested Board Layout (Component Side)	
27E129	4		Strip	.500 (12.70) 6 POLE .100 (2.54) GRID 8 POLE	
27E130	6		Strip	.500 (12.70) 4 POLE .100 (2.54) 2 POLE	
27E254	8		Strip	.500 (12.70) HOLES .056 + .004 -.000 DIA. (1.42 + .10 -.00)	
27E212	2	PC Stag. .180" long (4.57mm)	None	.150 (3.81) .100 (2.54) HOLE FOR GROUND TERMINAL (IF REQ'D.)	
27E213	4		None		
27E271	6		None		
27E258	8		None		
27E193	2		Terminal	Suggested Board Layout (Component Side)	
27E194	4		Terminal	.400 (10.16) 1.10 (2.79) .320 (8.13) .420 (10.16) .530 (13.46)	
27E636	2	PC Stag. .210" long (5.33mm)	Strip	.210 (5.33) .050 DIA. (1.27) 1 HOLE	
27E637	4		Strip	.150 (3.81) .450 (11.43) .450 (11.43) .550 (13.97) .056 + .004 -.000 DIA. HOLES (1.42 + .10 -.00)	
27E631	2		Strip		
27E632	4		Strip		
27E340	6	PC In-line .180" long (4.57mm)	Strip		
27E342	2		None		
27E629	4		None		
27E630	6		None		
27E338	4		Terminal		
27E633	2	PC In-line .210" long (5.33mm)	Strip		
27E634	4		Strip		
27E635	6		Strip		

Hold Downs For Use With R10 Sockets

Part No.	No. of Poles	Description
20C249	2	Wire Hold Down Spring
20C250	4	Wire Hold Down Spring
20C251	6	Wire Hold Down Spring
20C266	8	Wire Hold Down Spring
20C259	All	Wire Hold Down Strap (PC only)
20C300	2 (R10S)	Hold Down Spring
20C301	4 (R10S)	Hold Down Spring

See following page for additional sockets & accessories.


Hold Down Spring



Hold Down Strap (PC Sockets Only)



Solder & PC Terminal Socket Outline Dimensions

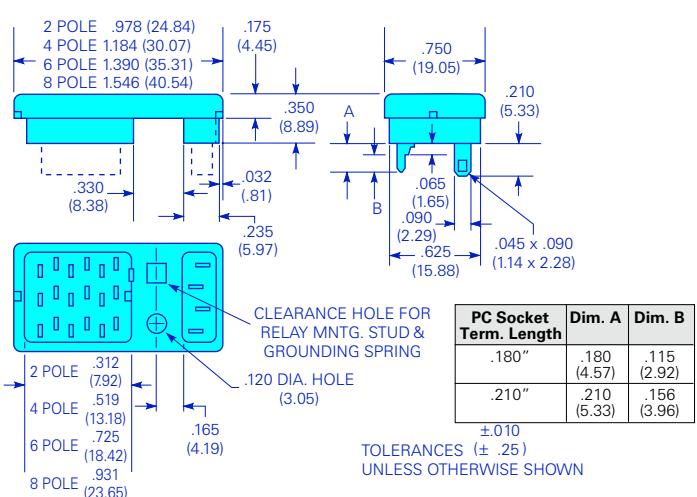


Dimensions are shown for reference purposes only.

Dimensions are in inches over (millimeters) unless otherwise specified.

37D645 – Mounting Strip

Strip of .060" (1.52mm) aluminum contains ten pre-punched, breakaway mounting plates. Each plate accommodates a 2, 4, 6 or 8 pole solder terminal R10 relay or socket to facilitate chassis- or rack mounting.

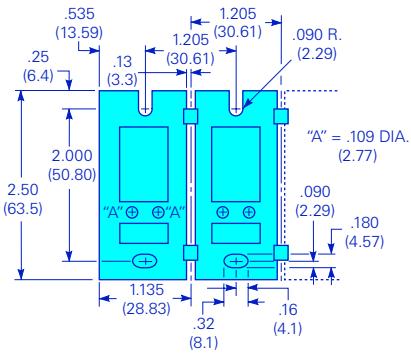

Specifications and availability subject to change.

www.tycoelectronics.com
Technical support:

Refer to inside back cover.


R10 Socket & Accessory Information (Continued)

Ordering Data – Stock items are boldfaced.

Socket Part No.	No. of Poles	Type of Terminal	Grounding Provision
27E317 27E152	2 4	Solder/Bracket	Strip Strip


**Bracket Mount Socket**

Allows solder terminal relay to mount flat on a chassis.

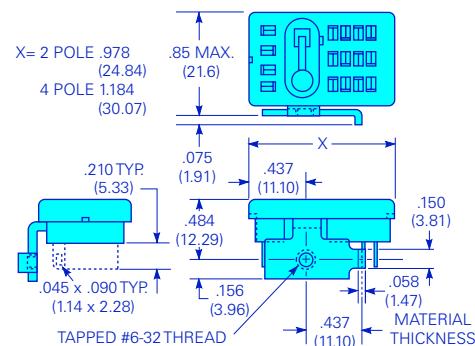**Flange Mount Socket**

Solder terminal socket with tin-plated terminals and grounding strip pre-assembled on .065" (1.65mm) steel mounting plate. Requires only one chassis cutout.






Socket Part No.	No. of Poles	Dim. A Nom.	Dim. B Max.	Dim. C Min.
27E446	2	1.437 (36.50)	1.822 (46.27)	.937 (23.80)
27E447	4	1.687 (42.85)	2.072 (52.63)	1.125 (28.58)
27E448	6	1.875 (47.63)	2.260 (57.40)	1.343 (34.11)

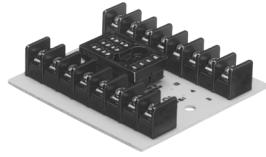**Track Mount Socket**

Provides front wiring, screw terminal connections for R10 family relays. No grounding provision.

Part No.	No. of Poles	Dim. A Nom.	Dim. B Max.	Dim. C Nom.
27E460	2	1.800 (45.72)	2.230 (56.64)	.200 (5.08)
27E461	4	2.125 (53.98)	2.830 (71.88)	.337 (8.56)
27E462	6	2.812 (71.42)	3.830 (97.28)	.494 (12.55)

See preceding page for hold down springs.

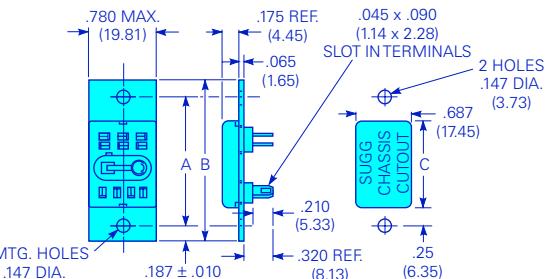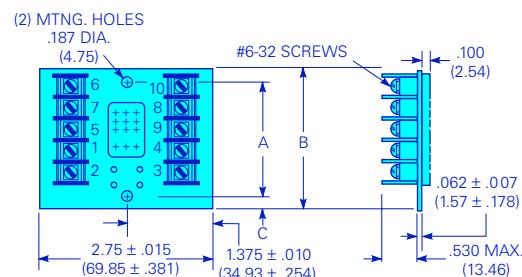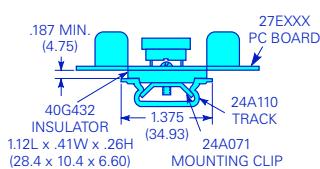**2 Pole Terminal Wiring Code****4 Pole Terminal Wiring Code****6 Pole Terminal Wiring Code****Suggested Track Mounting****Suggested Chassis Mounting**