


Hinged Design with Distinctive Snapping Action

- Quick, superior snap action through hook-type hinge construction.
- Available with 1 or 2 LEDs or without LEDs.
- The hinge button is available in a wide variety of colors (five standard colors).

RoHS Compliant

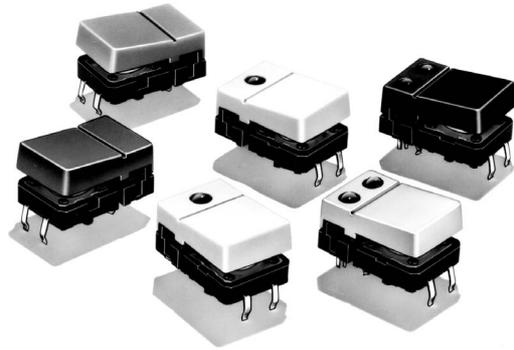

■ List of Models

Color of hinged button	No LED	One LED			Two LEDs (left and right)		
		Red	Yellow	Green	Red/Yellow	Red/Green	Yellow/Green
Ivory	B3J-1000	B3J-2000	B3J-3000	B3J-4000	B3J-5000	B3J-6000	B3J-7000
Black	B3J-1100	B3J-2100	B3J-3100	B3J-4100	B3J-5100	B3J-6100	B3J-7100
Orange	B3J-1200	B3J-2200	B3J-3200	B3J-4200	B3J-5200	B3J-6200	B3J-7200
Yellow	B3J-1300	B3J-2300	B3J-3300	B3J-4300	B3J-5300	B3J-6300	B3J-7300
Blue	B3J-1400	B3J-2400	B3J-3400	B3J-4400	B3J-5400	B3J-6400	B3J-7400

■ Ratings/Characteristics

Ratings	1 to 50 mA, 5 to 24 VDC (resistive load)
Ambient operating temperature	-25°C to +70°C at 60%RH max. (with no icing or condensation)
Ambient operating humidity	35% to 85% (at +5 to +35°C)
Contact form	SPST-NO
Contact resistance	100 mΩ max. (rated: 1 mA, 5 VDC)
Insulation resistance	100 MΩ min. (at 250 VDC)
Dielectric strength	500 VAC, 50/60 Hz for 1 min
Bounce time	5 ms max.
Vibration resistance	Malfunction: 10 to 55 Hz, 1.5-mm double amplitude
Shock resistance	Destruction: 1,000 m/s ² {approx. 100G} max. Malfunction: 100 m/s ² {approx. 10G} max.
Durability	3,000,000 operations min.
Weight	Approx. 1.5 to 1.7 g

■ Operating Characteristics

Operating force (OF)	1.27±0.49 N {130±50 gf}
Releasing force (RF)	0.29 N {30 gf} min.
Pretravel (PT)	0.3 ^{+0.2} / _{-0.1} mm

■ LED Specifications



Item		Red	Yellow	Green
Forward voltage VF	Standard value (V)	2.0	2.0	2.1
Forward current IF	Standard value (mA)	20	20	20
Permissible loss P	Absolute maximum value (mW)	84	84	84
Reverse voltage VR	Absolute maximum value (V)	5	5	5

Note: Since the built-in LED does not contain any limiting resistors, externally connect limiting resistors within the limits shown in the above table.


■ Dimensions (Unit: mm)

Types with no LED


B3J-1□00

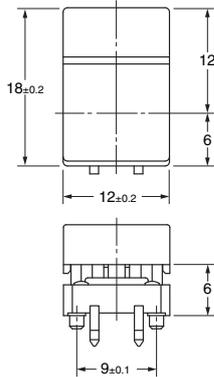


PCB Mounting (Top View)

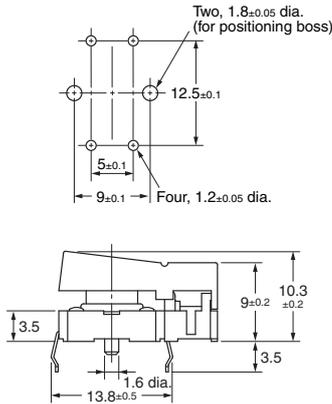

Panel Cutout



Terminal Arrangement / Internal Connections (Top View)





1 LED Types


B3J-2□00

B3J-3□00


B3J-4□00

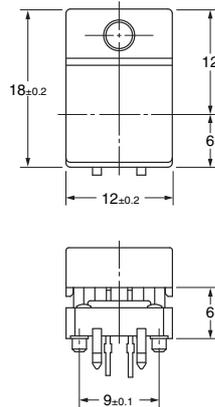


PCB Mounting (Top View)

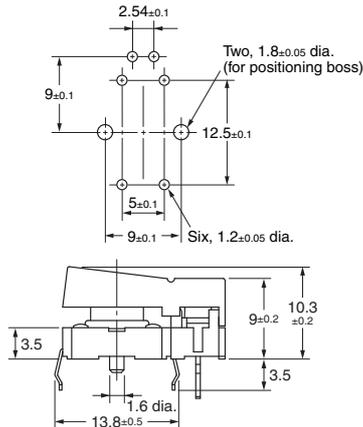

Panel Cutout



Terminal Arrangement / Internal Connections (Top View)





2 LED Types


B3J-5□00

B3J-6□00


B3J-7□00

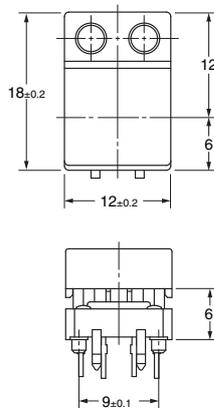


PCB Mounting (Top View)

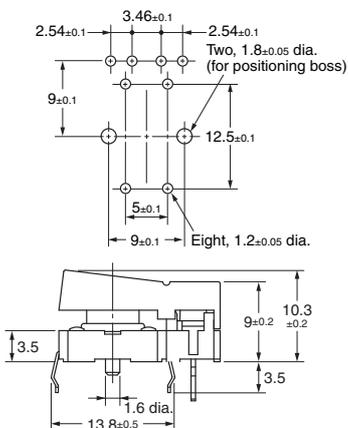

Panel Cutout



Terminal Arrangement / Internal Connections (Top View)



Note: Unless otherwise specified, a tolerance of ±0.4 mm applies to all dimensions.

■ Precautions

Be sure to read the safety precautions common to all Tactile Switches for correct use.

- Application examples provided in this document are for reference only. In actual applications, confirm equipment functions and safety before using the product.
- Consult your OMRON representative before using the product under conditions which are not described in the manual or applying the product to nuclear control systems, railroad systems, aviation systems, vehicles, combustion systems, medical equipment, amusement machines, safety equipment, and other systems or equipment that may have a serious influence on lives and property if used improperly. Make sure that the ratings and performance characteristics of the product provide a margin of safety for the system or equipment, and be sure to provide the system or equipment with double safety mechanisms.

Note: Do not use this document to operate the Unit.

OMRON Corporation

ELECTRONIC AND MECHANICAL COMPONENTS COMPANY

Contact: www.omron.com/ecb

Cat. No. A071-E1-06
0812(0207)(O)

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Omron:

[B3J-2100](#) [B3J-6100](#) [B3J-1000](#) [B3J-1100](#) [B3J-1200](#) [B3J-1300](#) [B3J-1400](#) [B3J-2000](#) [B3J-2200](#) [B3J-2300](#) [B3J-2400](#) [B3J-3000](#) [B3J-3100](#) [B3J-3200](#) [B3J-3300](#) [B3J-3400](#) [B3J-4000](#) [B3J-4100](#) [B3J-4200](#) [B3J-4300](#) [B3J-4400](#) [B3J-5000](#) [B3J-5100](#) [B3J-5400](#) [B3J-6000](#) [B3J-6200](#) [B3J-6300](#) [B3J-6400](#) [B3J-7000](#) [B3J-7100](#) [B3J-7200](#) [B3J-7400](#) [B3J-1600](#) [B3J-2600](#) [B3J-4500](#) [B3J-4600](#)