



MALE FACE VIEW




- 1 - GREEN
- 2 - BLACK
- 3 - RED or WHITE

FIELD-ATTACHABLE	O.D. RANGE
1A3000-34	0.20" - 0.48"

MATING CORDSET	LENGTH
103000A01F060	6FT
103000A01F120	12FT
103000A01F200	20FT
103000A01F300	30FT




7/8" - 16 UN 2A

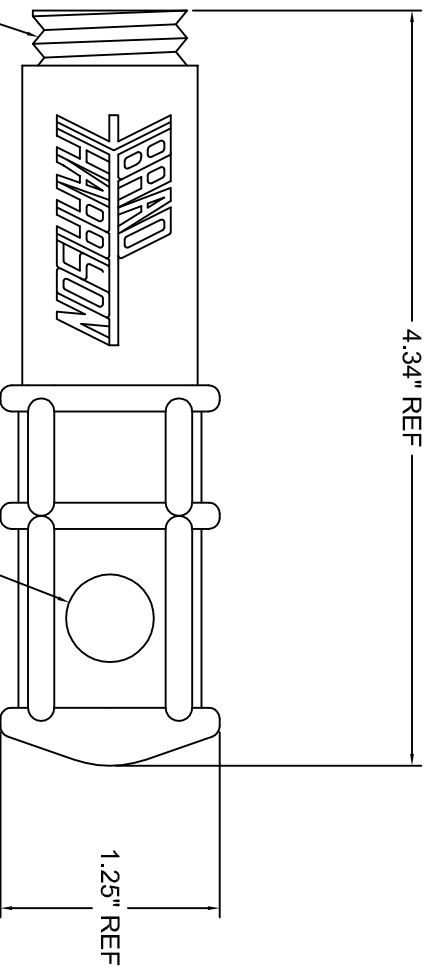

Ø .50" REF

INTERNAL WIRING

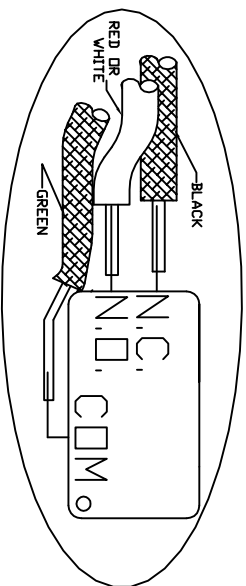

REFERENCE
USE ONLY


NOTES: MATES WITH 3POLE MINI-CHANGE
FEMALE CORDSETS, AND WITH 3POLE
MINI-CHANGE FEMALE FIELD-ATTACHABLE. SEE
TABLE FOR PART NUMBERS.

SPECS:

BODY: YELLOW NYLON / NEOPRENE
MINI-CHANGE INSERT: YELLOW PVC
MINI-CHANGE CONTACTS: GOLD PLATED BRASS

**SWINGER**
LR44136 55503

**LISTED**
SPDT 10 AMP
125/250 VAC SD
1/2 HP

**IND.CONT.EQ.**
708X
TTL

GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		SCALE		DESIGN UNITS		THIRD ANGLE PROJECTION	
mm	INCH	mm	INCH	mm	INCH	mm	INCH	mm	INCH
4 PLACES		4 PLACES		4 PLACES		4 PLACES		4 PLACES	
3 PLACES		3 PLACES		3 PLACES		3 PLACES		3 PLACES	
2 PLACES		2 PLACES		2 PLACES		2 PLACES		2 PLACES	
1 PLACE		1 PLACE		1 PLACE		1 PLACE		1 PLACE	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	
REV		DESCRIPTION		MATERIAL NO.		DOCUMENT		SHEET NO.	
C		1300230003		55503		1 OF 1			
C		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION							